



THE TILE THEORY

Kitchen & Bathroom Slabs Marmi Chiari (Light Marbles)

E-CATALOGUE

Size: 1600mm x 3200mm

Thickness: 12mm & 15mm






Size
160x320cm


Thickness
1.5cm

Surface
Lucidato (Polished)
Lisciare (Matt)


Creativity Beyond imagination




TOPS & KITCHEN




CURVED SURFACE




INTERIOR & DESIGN




FLOORS WALLS & STAIRS




DOORS & SLIDING WALLS



TOPS & BATHROOMS



SHELVES & CONSOLE

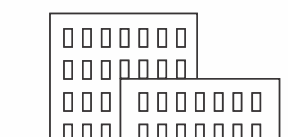

VENTILATED FACADE

Possibilities beyond imagination

Using this new concept that combines light weight and technical performance, it is now possible to create genuine products or installations with the added benefits that come with ceramic technology. The very nature of the material also lets designers apply each of these possibilities in indoor and outdoor environments to develop smooth and curved surfaces.

- ① Invisible
- ② Nero Marquina
- ③ Elegant Grey



Tailor-made Interior Design


Surfaces with high technical performance,
for fully customisable projects.



Comparison Chart

Comparison chart of properties comparing globally available furnishing materials

		ENGINEERED QUARTZ STONE	NATURAL MARBLE & STONE	SOLID SURFACE	WOOD LAMINATES	STEEL
Hygienic surface (Suitable for contact with foodstuffs)	● ● ●	● ● ●	● ●	● ● ●	●	● ● ●
Easy to clean and maintain	● ● ●	● ●	●	●	● ●	●
Non porous surface (water absorption < 0.1% average value)	● ● ●	● ●	●	● ●	●	● ● ●
Resistant to heat and high temperatures	● ● ●	●	● ●	●	●	● ● ●
Suitable for indoor and outdoor applications	● ● ●	●	● ●	●	●	● ● ●
Resistant to staining	● ● ●	● ●	●	● ●	● ●	● ● ●
Resistant to mould and fungi	● ● ●	● ● ●	●	● ● ●	● ●	● ● ●
Resistant to scratches and abrasions	● ● ●	● ●	● ●	●	●	●
Resistant to UV rays, no alteration to colours	● ● ●	● ●	● ●	●	●	● ● ●
Resistant to detergents and Cleaning Products	● ● ●	● ●	●	●	● ●	● ● ●
Resistant to chemicals, acids, alkalis and solvents	● ● ●	● ●	●	● ●	●	● ●
Resistant to deflection	● ● ●	● ●	● ●	● ●	●	● ● ●
Resistant to thermal shock	● ● ●	● ●	● ● ●	● ●	●	● ● ●
Resistant to freezing and defrosting	● ● ●	● ● ●	● ● ●	● ●	●	● ● ●
Resistant to humidity	● ● ●	● ● ●	● ●	●	●	● ● ●
Resistant to breaking strength	● ● ●	● ●	● ●	● ●	●	● ● ●

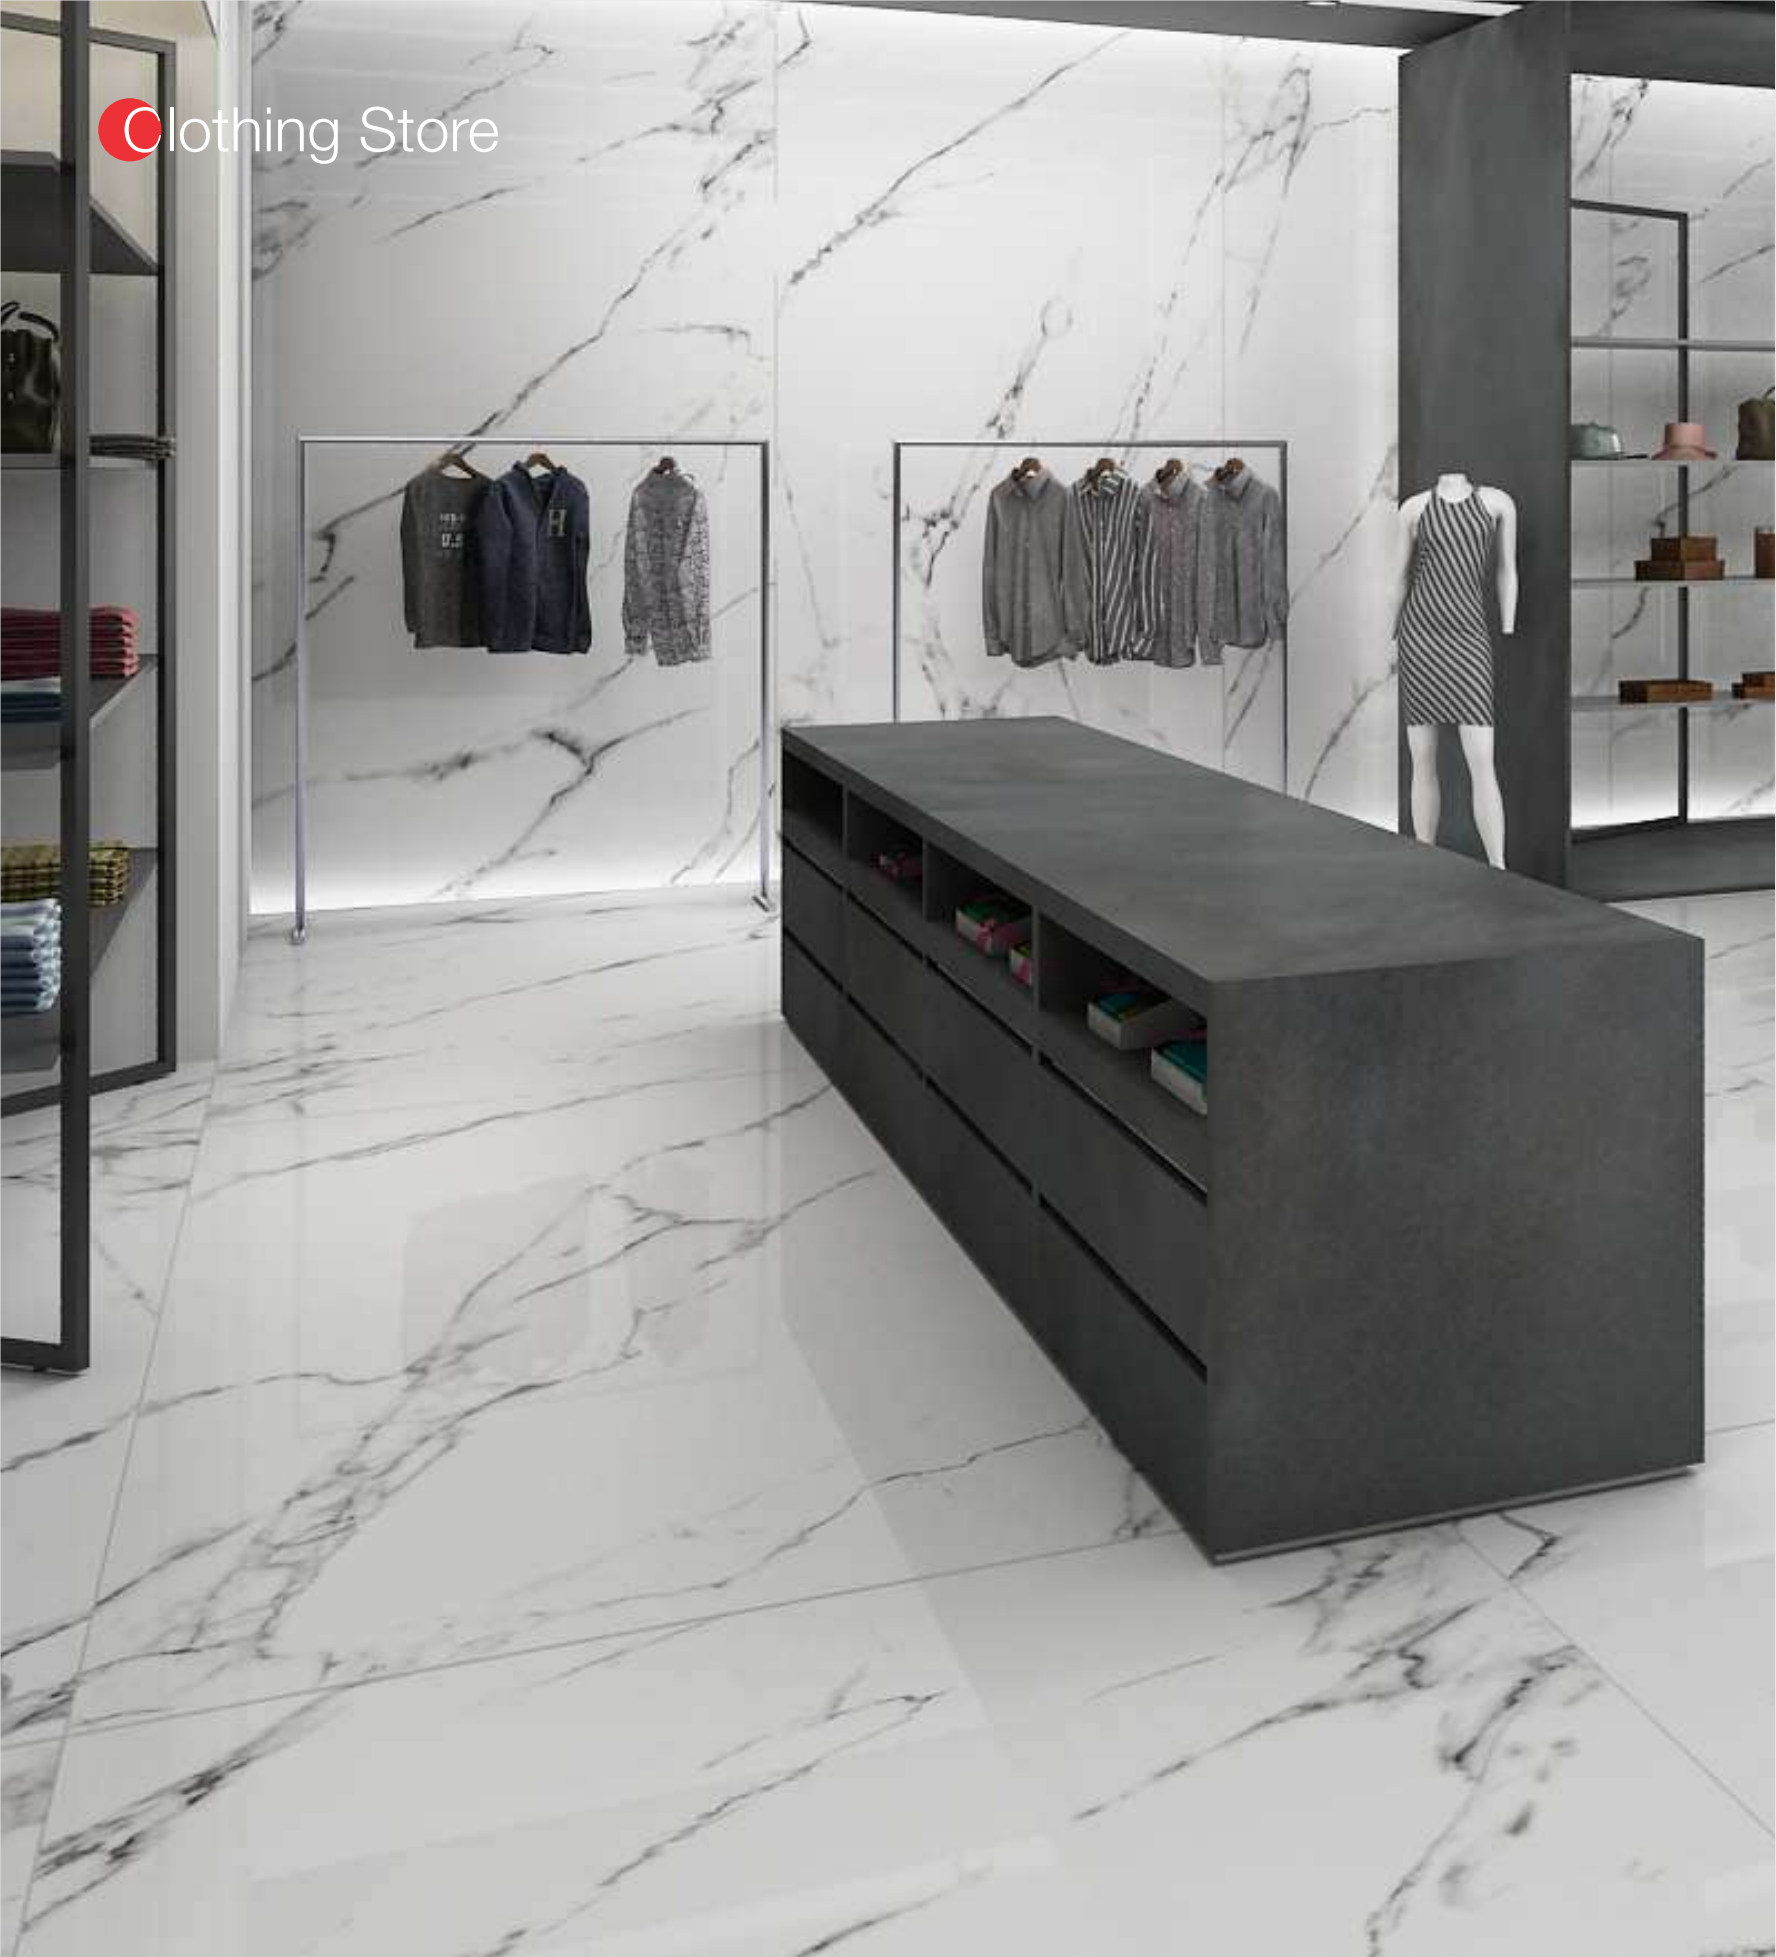


Floor ● Rome 160x320cm Lucidato (Polished) 1.5cm Thickness	Wall ● Rome 160x320cm Lucidato (Polished) 1.5cm Thickness	Furniture Elements ● Acciaio Brunito 160x320cm Lisciare (Matt) 1.2cm Thickness
--	---	--




Random - 3 faces

<i>Design</i>	<i>Surfaces</i>
Rome ••• 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

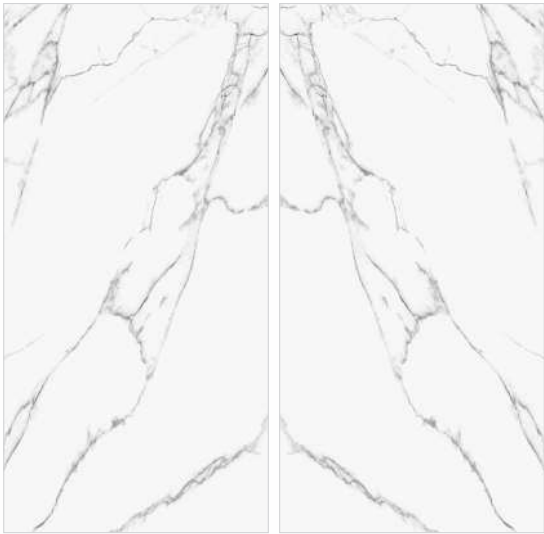

Rome A

Rome B

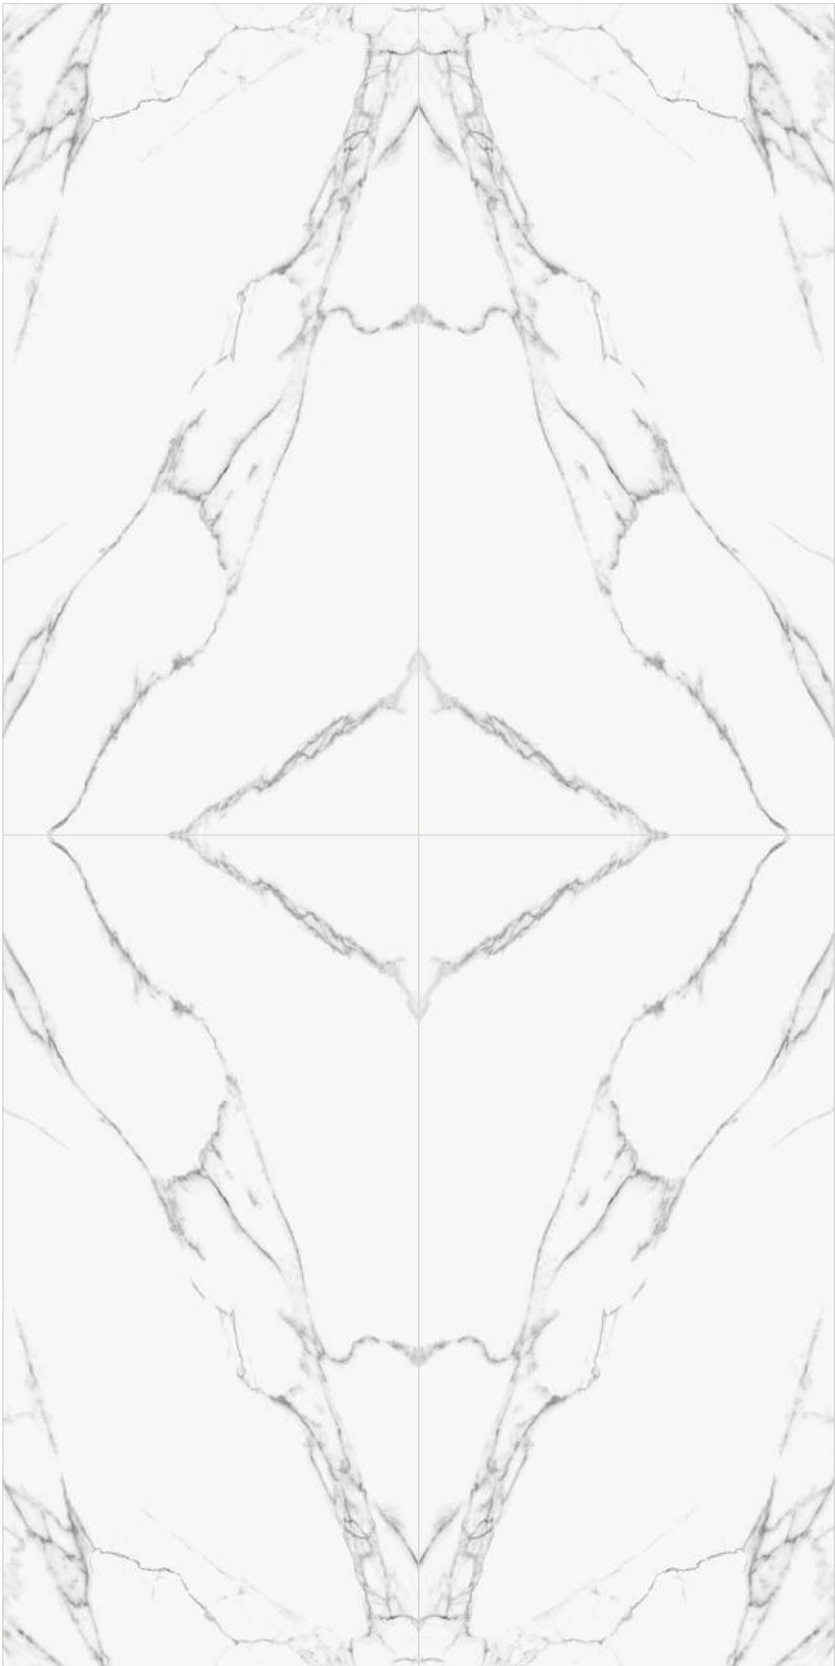

<i>Design</i>	<i>Surfaces</i>
Rome Book Match ••• 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Floor • Calacatta 160x320cm Lucidato (Polished) <u>1.5cm</u> Thickness	Wall • Calacatta 160x320cm Lucidato (Polished) <u>1.5cm</u> Thickness	Furniture Elements • Acciaio Brunito 160x320cm Lisciare (Matt) <u>1.2cm</u> Thickness
---	--	--



<i>Design</i>	<i>Surfaces</i>
Calacatta • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Calacatta A

Calacatta B



Infinite - 4th face


<i>Design</i>	<i>Surfaces</i>
Calacatta Book Match • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



● Floor ● Invisible 160x320cm Lucidato (Polished) Lisciare (Matt) <u>1.5cm</u> Thickness	● Wall ● Elegant Grey 160x320cm Lucidato (Polished) Lisciare (Matt) <u>1.5cm</u> Thickness	● Furniture Elements ● Ocean Black 160x320cm Lisciare (Matt) <u>1.5cm</u> Thickness
---	---	--



<i>Design</i>	<i>Surfaces</i>
Invisible • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

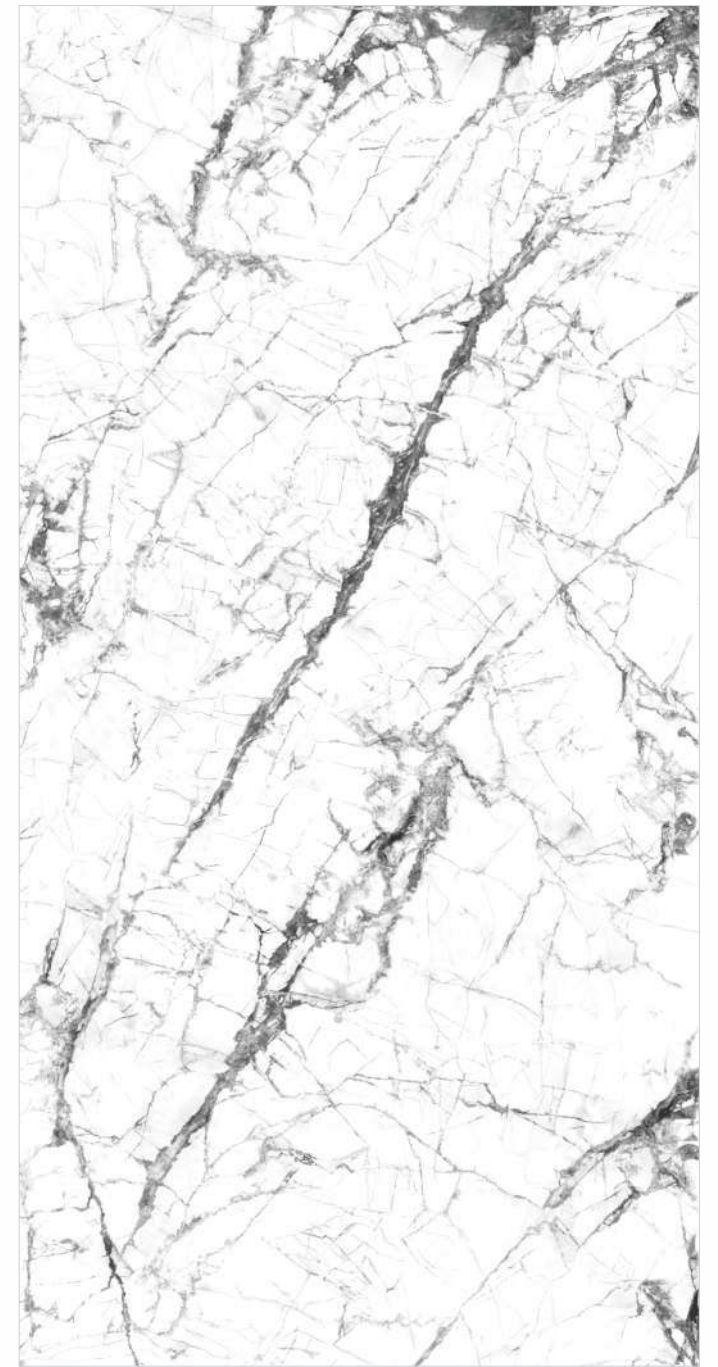

Infinite - 3 faces



Floor • Nero Marquina 160x320cm Lucidato (Polished) 1.5cm Thickness	Furniture Elements • Statuarietto 160x320cm Lucidato (Polished) Lisciare (Matt) 1.5cm Thickness	Furniture Elements-2 • Magistic Grigio 160x320cm Lisciare (Matt) 1.5cm Thickness
--	--	---



Random - 3 faces



<i>Design</i>	<i>Surfaces</i>
Statuarietto ••• 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Floor
• **Calacatta Macchia**
160x320cm
Lucidato (Polished)

1.5cm
Thickness

Platform/Cabinets
• **Calacatta Oro**
160x320cm
Lucidato (Polished)

1.5cm
Thickness

Furniture Elements
• **Ottone**
160x320cm
Lisciare (Matt)

1.2cm
Thickness



<i>Design</i>	<i>Surfaces</i>
Calacatta Oro ● ● ● 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Calacatta
Oro A

Calacatta
Oro B



Infinite - 4th face

<i>Design</i>	<i>Surfaces</i>
Calacatta Oro Book Match ● ● ● 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



<i>Design</i>	<i>Surfaces</i>
Calacatta Macchia • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Calacatta
Macchia A

Calacatta
Macchia B



Infinite - 4th face

<i>Design</i>	<i>Surfaces</i>
Calacatta Macchia Book Match • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	




Calcatta
Borghini A

Calcatta
Borghini B



<i>Design</i>	<i>Surfaces</i>
Calcatta Borghini • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

<i>Design</i>	<i>Surfaces</i>
Calcatta Borghini Book Match • • • 160 x 320 cm - 1.5 cm <i>Series</i>	Lucidato (Polished) Lisciare (Matt)
Marmi Chiari	

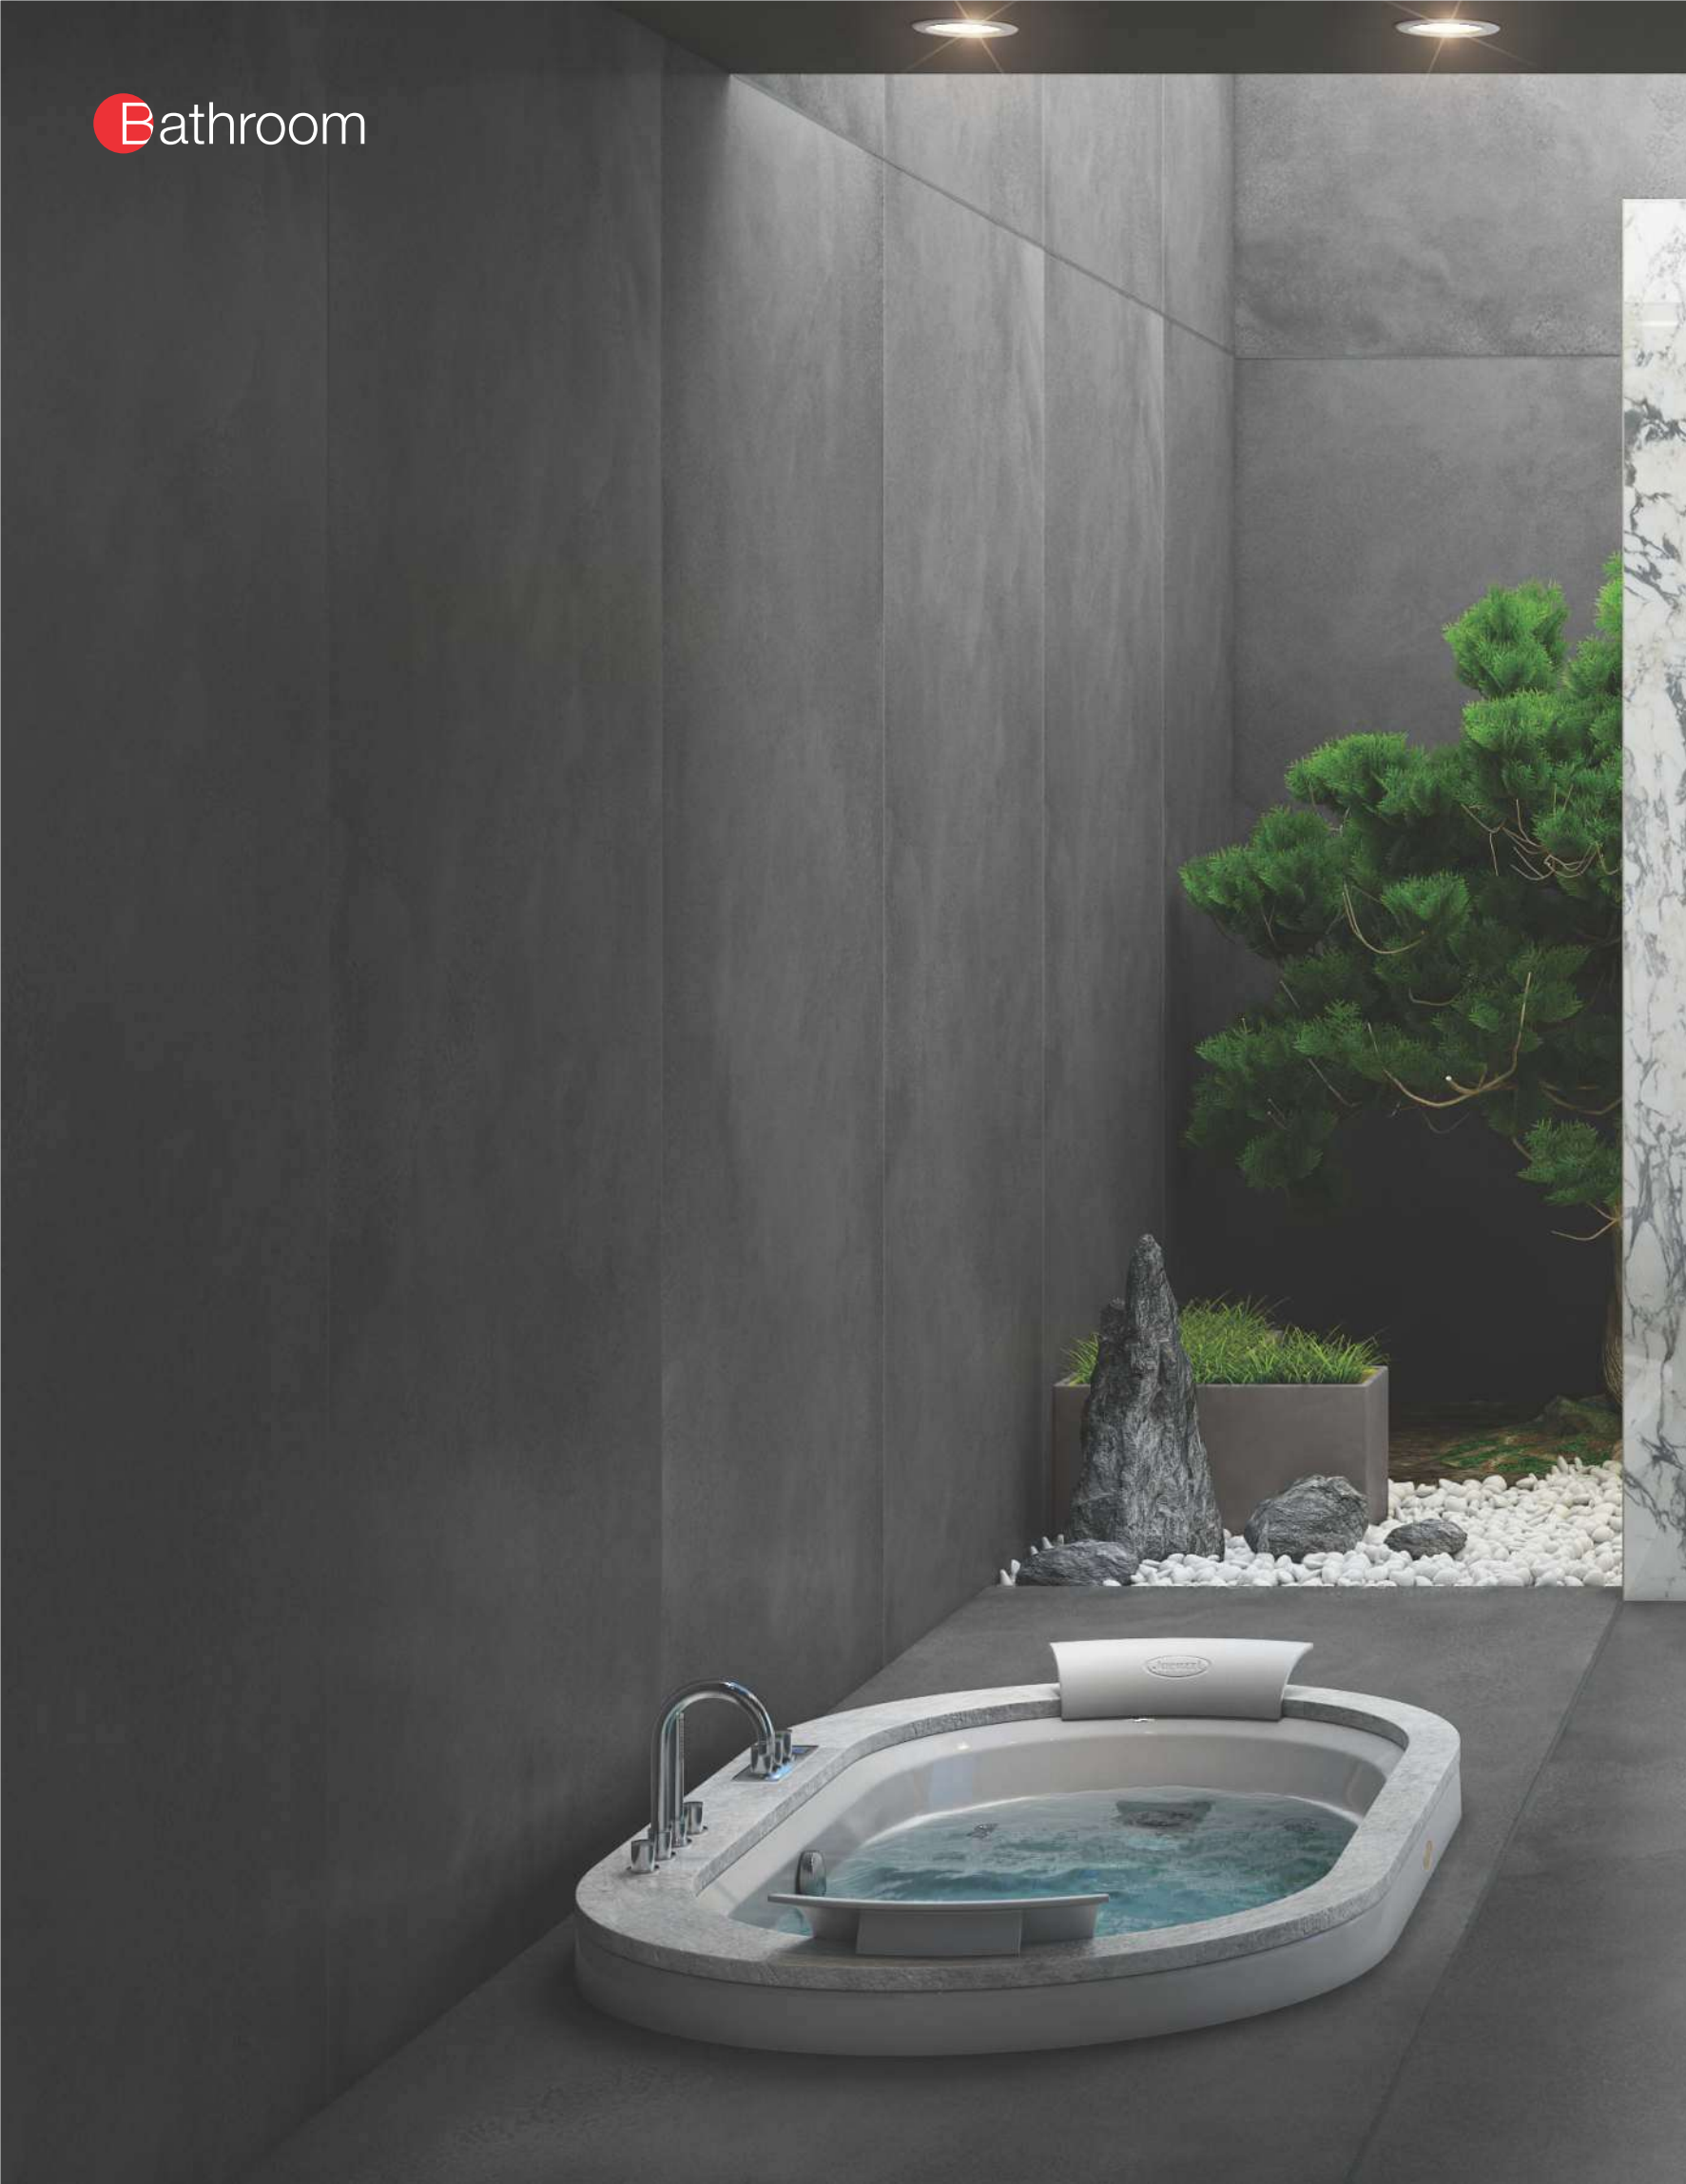

Wall - 1
● **Oxide Fossil**
160x320cm
Lucidato (Polished)

1.5cm
Thickness

Wall - 2
● **Arabescato Book Match**
160x320cm
Lucidato (Polished)

1.5cm
Thickness

Furniture Elements
● **Oxide Fossil**
160x320cm
Lisciare (Matt)

1.5cm
Thickness



Arabescato A

Arabescato B



<i>Design</i>	<i>Surfaces</i>
Arabescato • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

<i>Design</i>	<i>Surfaces</i>
Arabescato Book Match • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Arabescato
Corchia A

Arabescato
Corchia B



<i>Design</i>	<i>Surfaces</i>
Arabescato Corchia • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

<i>Design</i>	<i>Surfaces</i>
Arabescato Corchia Book Match • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Floor	Wall
• Bianco Lasa	• Statuario Venato
160x320cm Lucidato (Polished) Lisciare (Matt)	160x320cm Lucidato (Polished) Lisciare (Matt)
<u>1.5cm</u> Thickness	<u>1.5cm</u> Thickness





<i>Design</i>	<i>Surfaces</i>
Bianco Lasa • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Infinite - 4th face

<i>Design</i>	<i>Surfaces</i>
Statuario Venato • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

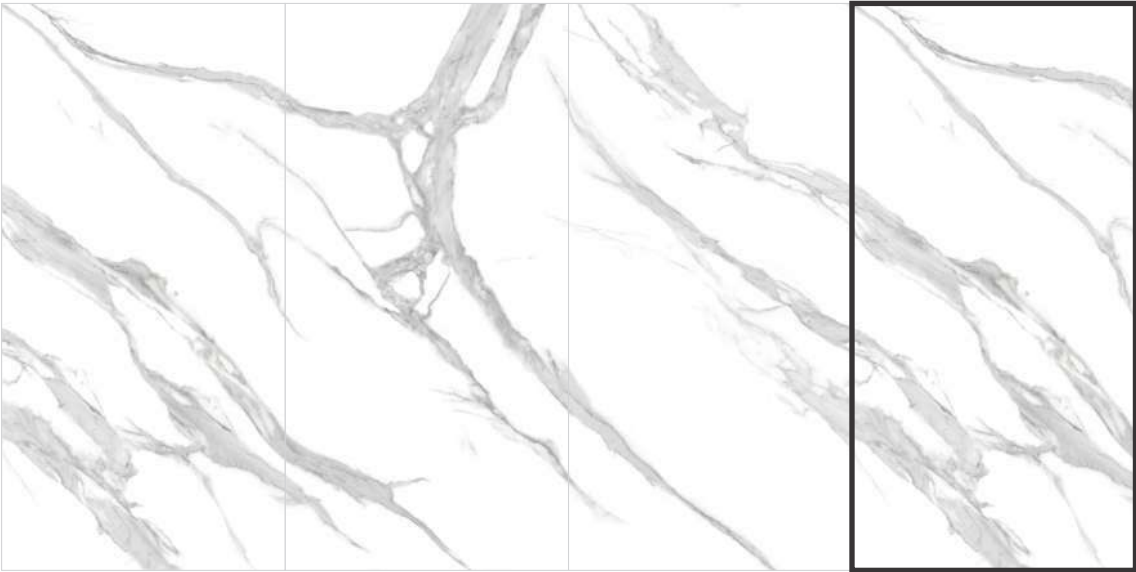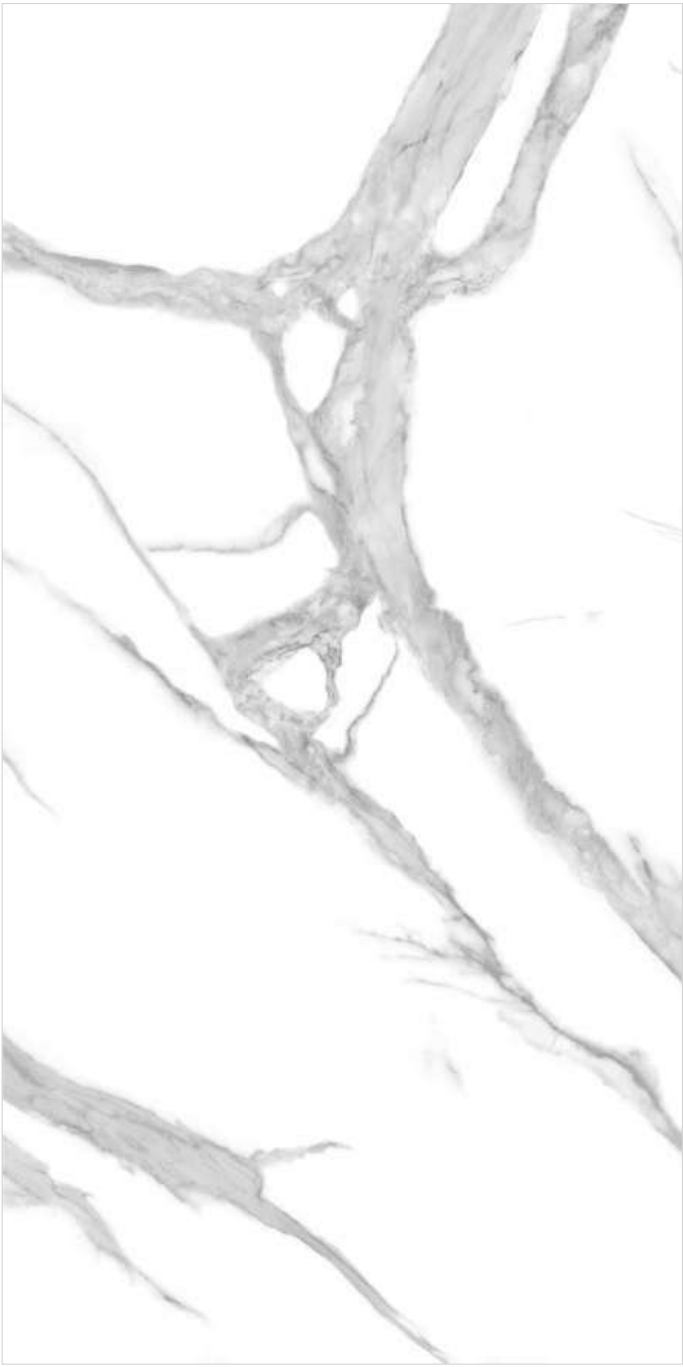

Infinite - 3 faces



Floor
 • **Statuario Gold**
Book Match
 160x320cm
 Lucidato (Polished)
 Lisciare (Matt)
1.5cm
 Thickness



<i>Design</i>	<i>Surfaces</i>
Statuario Gold • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Statuario Gold A

Statuario Gold B



Infinite - 4th face

<i>Design</i>	<i>Surfaces</i>
Statuario Gold Book Match • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	



Floor ● Onice 160x320cm Lucidato (Polished) 1.5cm Thickness	Wall-1 ● Onice Book Match 160x320cm Lucidato (Polished) 1.5cm Thickness	Wall-2 ● Ottone 160x320cm Lisciare (Matt) 1.2cm Thickness
---	---	---



Onice A

Onice B



<i>Design</i>	<i>Surfaces</i>
Onice • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

<i>Design</i>	<i>Surfaces</i>
Onice Book Match • • • 160 x 320 cm - 1.5 cm	Lucidato (Polished) Lisciare (Matt)
<i>Series</i>	
Marmi Chiari	

•••
Technical specifications - furniture industry

Physical And Chemical Properties	Test Method	OUR Lisciare	OUR Lucidato
density	EN 14617-1 ASTM C97	2400 kg/m³ average value	2400 kg/m³ average value
water absorption	ISO 10545 - 3	average value 0.1%	average value 0.1%
bending strength	ISO 10545 - 4	50 MPa average value	50 MPa average value
freeze and thaw resistance	ISO 10545 - 12	resistant	resistant
dry heat resistance	EN 12722 EN 438-2 par.16	5 (no visible effect till 200°C)	5 (no visible effect till 200°C)
chemical resistance	ISO 10545-13	from class A to B	from class A to C
chemical resistance	ASTM C650	resistant (except ink and methylene blue)	resistant (except ink and methylene blue)
cold liquid resistance	EN 12720	5 no visible effect except ink (2)	resistant (except ink and methylene blue)
cleaner product resistance	PTP 53 CATAS	5 no visible effect	resistant (except ink and methylene blue)
abrasion resistance	EN 14617-4	28.0 mm	28.0 mm
dynamic coefficient of function (Section 9.6 - ANSI - A137.1 2012)	DCOF	>0.42 wet.	>0.42 wet.
resistance to domestic chemical and additive for swimming pool	ISO 10545-13	GA	GA
resistance to low concentrations of acid and alkali	ISO 10545-13	GLA (Glossy/Matt)	GLA (Glossy/Matt)
surface quality	ISO 10545-2	at least 95% of the tiles must be free from visible flaw	resistant (except ink and methylene blue)
hygiene properties	Metodo CATAS	excellent (high degree of removal of bacterial cells >99% after cleaning with a biocide-free detergent)	excellent (high degree of removal of bacterial cells >99% after cleaning with a biocide-free detergent) /
resistance to fungi	ASTM G21	no fungal growth	no fungal growth
lead and cadmium given off	ISO 10545-15	0 mg/dm³	0 mg/dm³
VOC emission	UNI EN 16000-9	class A+ french	class A+ french
shock resistance	ISO 4211-4 EN 14617-9	no damage to ball drop 400mm / average value 3 J	no damage to ball drop 400mm / average value 3 J
light resistance	UNI EN 15187	5 no visible effect	5 no visible effect
thermal shock resistance	ISO 10545 - 9	resistant	resistant
resistance to staining	ASTM C1378	resistant (except potassium hydroxide)	resistant (except potassium hydroxide)

•••
Technical specification

Physical And Chemical Properties	Test Method	OUR Lisciare	OUR Lucidato
weight / 3mm 6mm 12mm		average value 7.5 kg/m² average value 14.5 kg/m² average value 28.5 kg/m²	average value 7.5 kg/m² average value 14.5 kg/m² average value 28.5 kg/m²
surface quality / % pof tiles with no visibl flaws	ISO 10545-2	>95%	>95%
water absorption /	ISO 10545-3/ASTM C373	≤0.1%	≤0.1%
breaking strength in N 3mm 6mm 12mm	ISO 10545-4	average value 750N average value 1300N average value 3500N	average value 750N average value 1300N average value 3500N
modulus of rupture in N / mm²	ISO 10545-4	average value 50	average value 50
Mohs scale hardness /	UNI EN 101	max 7	max 5
resistance to deep abrasion /	ISO 10545-6	≤175 mm³	≤175 mm³
coefficient of linear thermal expansion / 10 ⁻⁶ /°C	ISO 10545-8	6.6 average value	6.6 average value
resistance to thermal shock /	ISO 10545-9	resistant	resistant
chemical resistance /	ISO 10545-13	class: from A to B	class: from A to C
stain resistance /	ISO 10545-14	class: from 4 to 5	class: from 2 to 5
resistant to freeze-thaw /	ISO 10545-12	resistant	resistant
fire reaction /	EN 13501 (rev. 2005)	A2 - s1,d0 A1 (decision 96/603/CE as amended)	A2 - s1,d0