



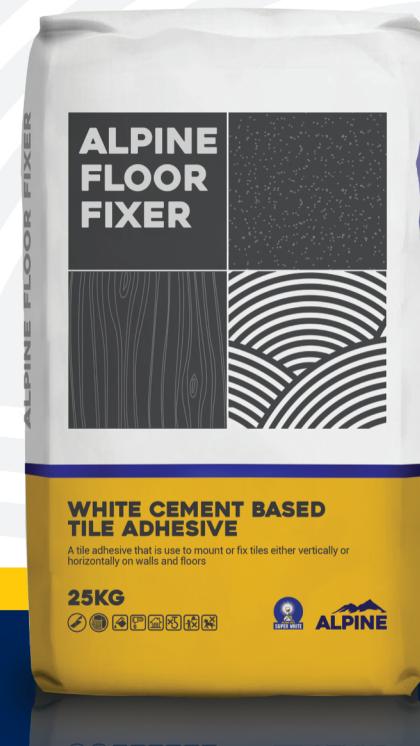

ALPINETM FLOOR FIXER

Tile adhesive

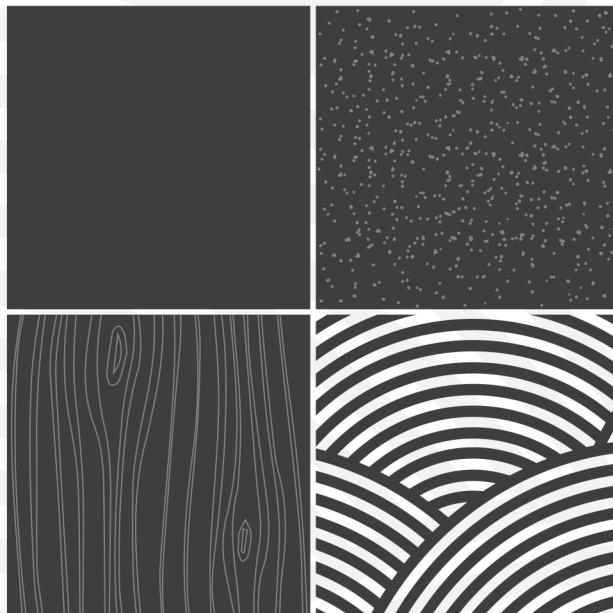

www.krishnamines.com

About Us



Established in 1958, we are a leading private organization in South India with over 50+ years of dedicated experience in mining and processing of Limestone and its auxiliary products. Established primarily as a Mining specialized organization by the company's founders, our purpose is to create an economically responsible mining culture through sustained long term, efficient and environmentally sound mining practices and manufacturing methodology.

To deliver superior products to our customers, we concentrate on development of first class deposits into long term and efficient operations that is further augmented by investments into state of the art manufacturing methodology that is capable of sustained competitive advantage in various industries.


Limestone Mining and processing, Mining services, Mineral micronization & processing, Industrial Lime, AgLime, Slaked Lime Powder, Wallputty, Wall Primer, Aqua Proof Waterproofing compound, Waterproof Wallputty, Tile Adhesive, Retail fuel distributors, Horticulture and Agriculture are some of the group's undertaking.



Alpine Floor Fixer

Alpine Floor Fixer (available in White & Gray Cement variants) is a cementitious adhesive for bonding Floor & Wall Tiles. It is manufactured and processed to maintain a high adhesive strength while minimizing shrinking and improving workability.

We undertake delivery of products to retail outlets and construction projects around the world.

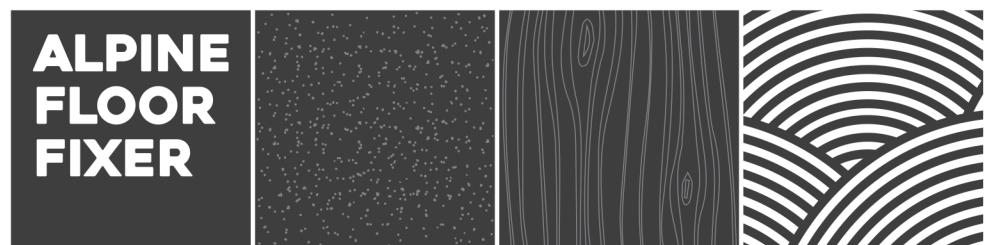

GREY CEMENT BASED

S.NO.	TECHNICAL PARAMETERS	RESULT
1	WHITENESS	35%
2	BRIGHTNESS	30%
3	BULK DENSITY (gm/ml)	1.3 to 1.5
4	PARTICLE SIZE	200 to 250 Micron
5	MAXIMUM THICKNESS (2 Coat)	2.5 mm to 3 mm
6	MIXING RATIO (FLOOR FIXER : WATER)	1 : 0.35 / 0.40 byweight
7	APPLICATION LIFE (AT 30 Degree - C)	1 TO 1.50 Hours
8	SHELF LIFE (from the date of manufacturing)	6 Months

WHITE CEMENT BASED

S.NO.	TECHNICAL PARAMETERS	RESULT
1	WHITENESS	85%
2	BRIGHTNESS	84%
3	BULK DENSITY (gm/ml)	1.3 to 1.5
4	PARTICLE SIZE	200 to 250 Micron
5	MAXIMUM THICKNESS (2 Coat)	2.5 mm to 3 mm
6	MIXING RATIO (FLOOR FIXER : WATER)	1 : 0.35 / 0.40 byweight
7	APPLICATION LIFE (AT 30 Degree - C)	1 TO 1.50 Hours
8	SHELF LIFE (from the date of manufacturing)	6 Months