
LAN communication Test

1. Explain uses of ping command in network?

ping is used to check whether a network is established between two devices either PC's or Laptops.

For example,

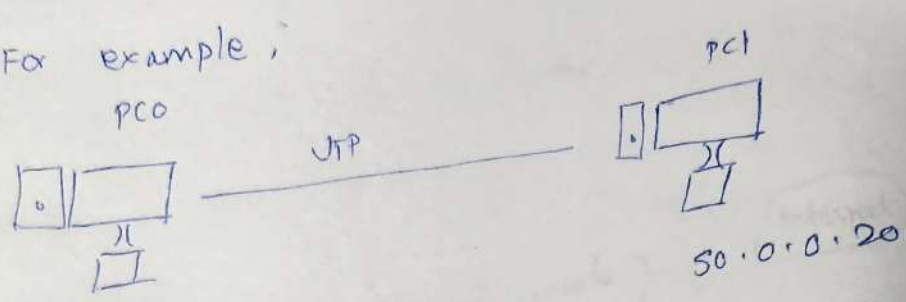

By resolving Ip address of the PC to be in the same network we can use ping <ip address> / <hostname> to check if the PC's are in the same network by sending a dummy data from PC0 to PC1 and PC1 sends the data back to source IP address.


2. Explain netbios protocol?

NetBIOS is an older networking interface that allows applications on computers to communicate with other computers on a local network using names.

3. Explain SMB protocol?

SMB (Server Message Block) is a network protocol that allows computers to access shared files, folders, printers, and other resources over a shared network.

4. Explain ping process from 50.0.0.10 to 50.0.0.20 ?

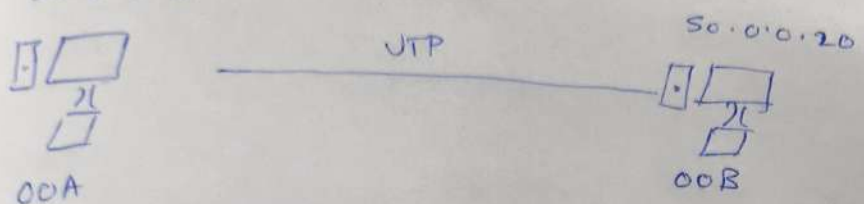

To establish a network between two PC's we use a UTP (unshielded Twisted pair) cable to form a LAN network. To check whether the PC's are connected in the same network, we used to send data from one PC to another PC to check the status of the network. But if the PC's are to be placed in different floors on a company, then can we move on to the respective PC's to check data sharing is done or not. For this type of situation, we use ping command (ping 50.0.0.20). It sends an dummy data to the destination IP address and the destination IP sends back the dummy data to the source IP address. This is what ping command has been used.