


# Parking Assist Kit



SLAP Innovators

## Installation Guide

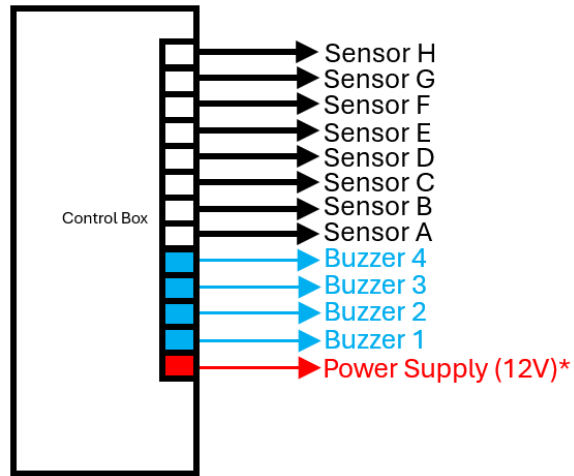

\*Power supply can be connected to

- Battery through toggle switch - Active when toggled
- Reverse lights - Active when reversing

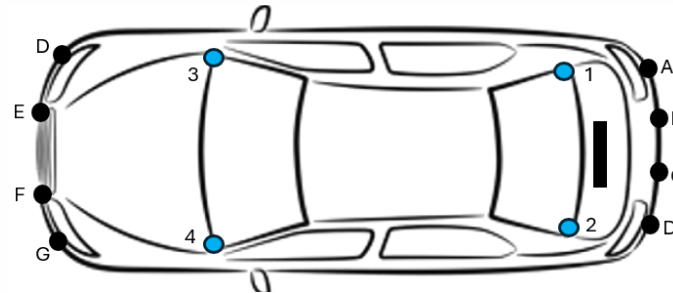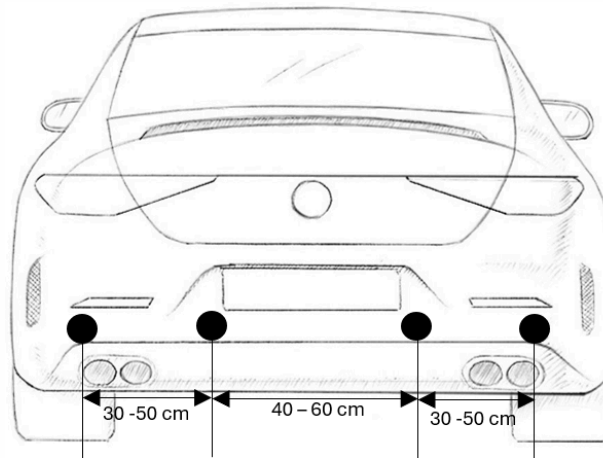

- Sensors should be 40-70 cm above the ground
- Sensors should be spaced between 30 and 60 cm apart from each other
- Before drilling bumper, ensure there is sufficient clearance (approx 25mm will be required)

## Technical Details

Rated Voltage	12V
Operating Voltage	9-16V
Rated current	372 mA
Detecting Range	20-80cm
Ultrasonic Frequency	40kHz

## Warranty Details

- Warranty valid for 6 months from date of purchase
- Any indication of attempt to open control box will void warranty
- Any physical/water damage to control box will void warranty

## Help us save the Planet!

- The control box is fully recyclable. Return control box to SLAP Innovators at end of lifetime for a discount on future purchases!

## Disposal of Circuit Board

- Do Not Dispose of in Trash: This product contains electronic components and should not be discarded with household waste. (contains materials such as lead.)
- Recycle as e-Waste: Please recycle the circuit board at a designated electronic waste (e-waste) recycling facility.
- Environmental Impact: Improper disposal can harm the environment. Recycling recovers valuable materials and reduces pollution.
- Or simply return the PCB along with the control box!