


Documentation technique

Schéma de l'infrastructure réseau

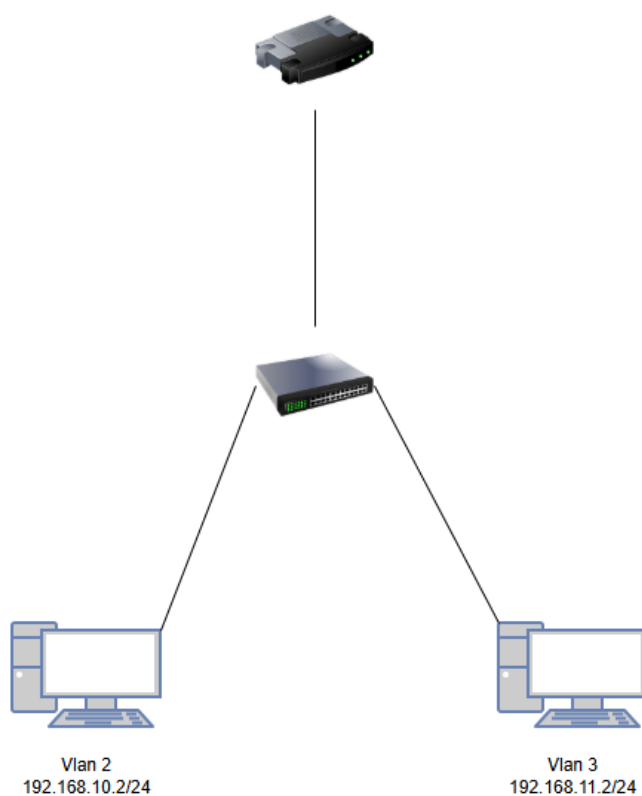

Configuration du switch

enable configure
terminal

Mise en place du lien Trunk :

interface g0/1 switchport
mode trunk

Affectation des ports d'accès :

interface f0/1 switchport
mode access switchport
access vlan 2

interface f0/2 switchport
mode access switchport
access vlan 3

Sauvegarde :

end
write memory

Configuration du routeur

enable configure
terminal

Activation de l'interface physique :

interface g0/0
no shutdown

Création des sous-interfaces logiques :

interface g0/0.2

Encapsulation et marquage :

encapsulation dot1Q 2

Définition des Passerelles (Gateways) :

ip address 192.168.10.254 255.255.255.0

Création des sous-interfaces logiques :

Interface g0/0.3

Encapsulation et marquage :

Encapsulation dot1Q 3

Définition des Passerelles (Gateways) :

ip address 192.168.11.254 255.255.255.0

Sauvegarde :

end
write memory

Table de routage du switch et du routeur

Switch0

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
System Serial number: F1K001020W0C

Cisco Internetwork Operating System Software
IOS (tm) C2950 Software (C2950-I6Q4L2-M), Version 12.1(22)EA4, RELEASE SOFTWARE(fc1)
Copyright (c) 1986-2005 by cisco Systems, Inc.
Compiled Wed 18-May-05 22:31 by jharirba

Press RETURN to get started!


%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch>enable
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#int g 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#int f 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 2
% Access VLAN does not exist. Creating vlan 2
Switch(config-if)#int f 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 3
% Access VLAN does not exist. Creating vlan 3
Switch(config-if)#end
Switch#write memory
%SYS-5-CONFIG_I: Configured from console by console


%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
```

Copy

Paste

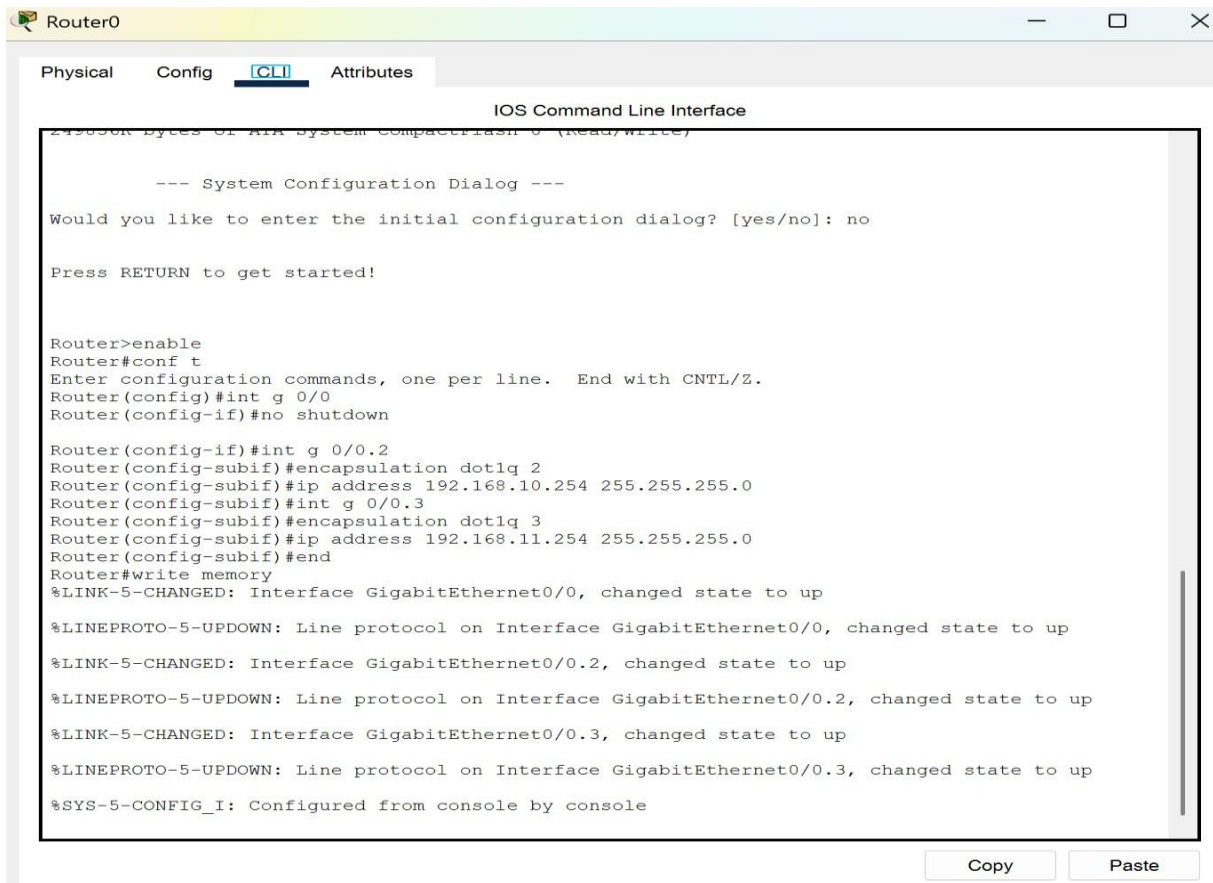

- Configuration des adresses ip :

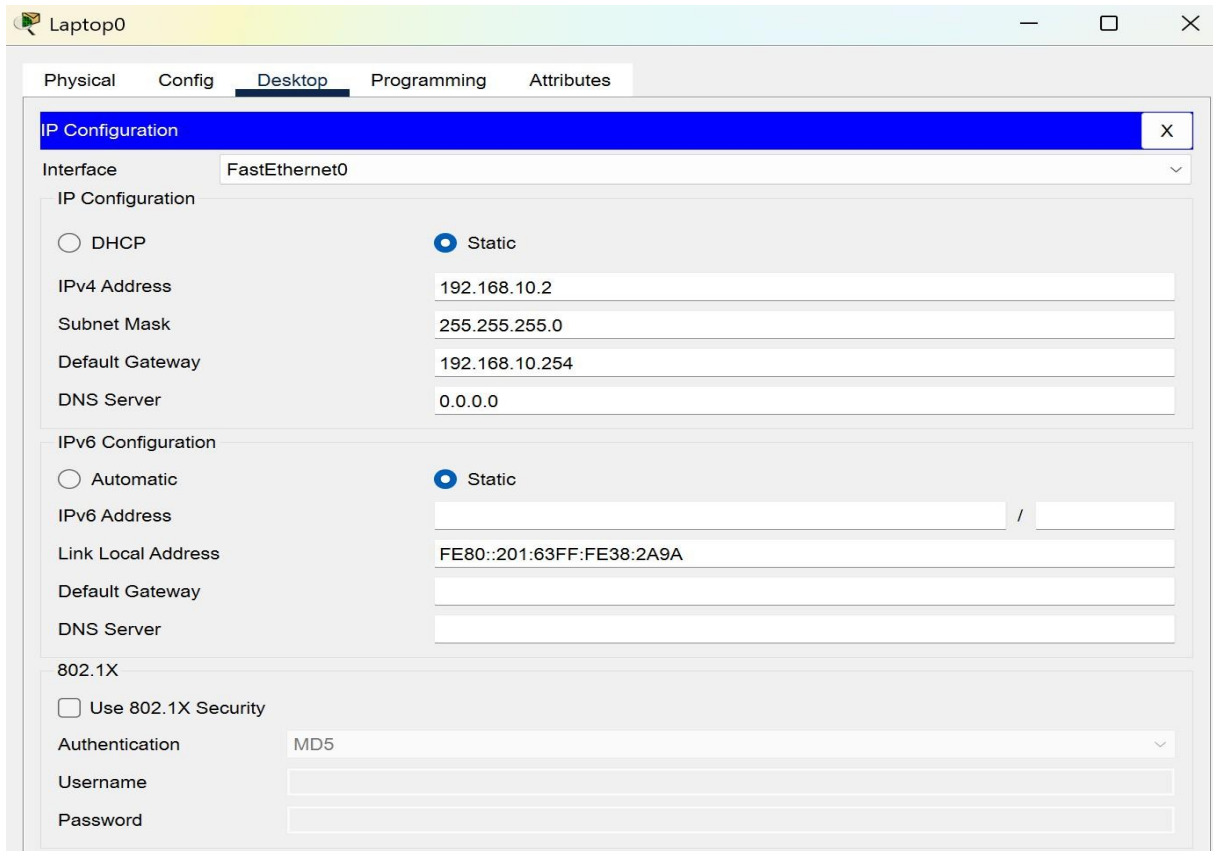

Laptop1

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.11.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.11.254

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2E0:A3FF:FE80:35E7

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

- Tests de connectivité :

Laptop1

Physical Config **Desktop** Programming Attributes

Command Prompt X

```
C:\>
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127
Reply from 192.168.10.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

