


Lab Final
CSE350
Section 1

1.

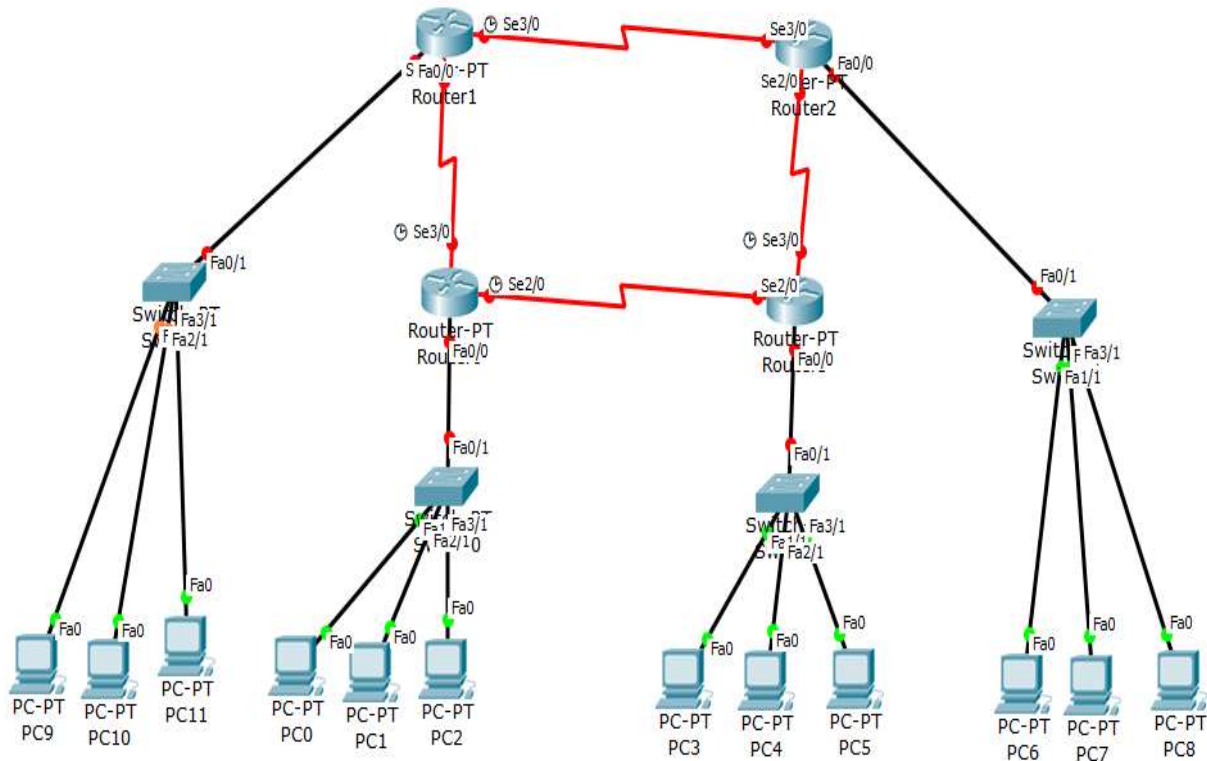

Design a complete network based on the provided diagram using **four routers**. Use only **Class A and Class B IP address** for all network configurations. For host configuration, implement **separate DHCP services** on the required routers so that devices in their respective networks receive IP addresses automatically. Ensure that DHCP is configured only where necessary, depending on the topology. Once the addressing and subnetting plan is completed, configure **static routing** on all four routers to establish full end-to-end connectivity. After routing is properly set up, you must verify the network functionality by performing successful ping tests between **PC11 to PC7** and **PC1 to PC4**.