

Metso:Outotec ScreenCheck

RF - 131200 - MBL PEDRERIA LTDA - F

Preliminary Test Report

Label	Comissionamento com carga CBS-8X20
Creation	4 de fev. de 2025 10:40:53
Last edit	2 de mai. de 2025 17:08:51
Time zone	America/Sao_Paulo
Author	Primo Silva
Sensor	MOSCS20066
Sensor firmware version	3.2.97
ScreenCheck software version	1.6.113-managed
Location	-20,099223 -44,831302

Basic Data

Preliminary Test Report

Machine serial no.	131200
Machine type	RF
Machine owner	MBL PEDRERIA LTDA
Site name	DIVINOPOLIS
Site country	BRASIL
Machine hand of drive	right
Expected speed	890,0 RPM
Weight of machine	12220 kg
Expected counterweight per MV shaft line	70% V180 42Kg.m
Number of decks	3
Top deck media opening	35
Top deck media	rubber
Mid deck media opening	25
Mid deck media	rubber
Bottom deck media opening	12
Bottom deck media	rubber
Application	aggregate
Top feed size	50,0 mm
Feed tonnage	220,0 t/h

Main Spring Heights

Preliminary Test Report

Right feed	309,0	mm
Left feed	309,0	mm
Right discharge	313,0	mm
Left discharge	310,0	mm

Isolation Frame Spring Heights

Preliminary Test Report

Pre-Run Checks

Preliminary Test Report

Adequate clearance provided?	yes	
Lubrication by		Oil
Lubrication specification		Óleo de fábrica
Adequate oil/grease level?	yes	
Quantity of oil?		6-9
Greasing power unit setting		1
Any parts broken, need replaced or are worn beyond reasonable levels?	no	
Is customer happy with screening efficiency?	yes	

Run Checks


Preliminary Test Report

Total operating hours		2 h
Tests with material	yes	
Any hitting noticed during start-up or shutdown?	no	
Rotation of exciter/motor correct?	yes	
Rotation		with flow
Motor frequency		60 Hz
Actual speed	894,4	RPM
Raw data ID		0b86da69

Feed Orbits

Preliminary Test Report

Stroke right	8,27 mm
Stroke left	8,09 mm
Peak g right	3,7 g
Peak g left	3,6 g

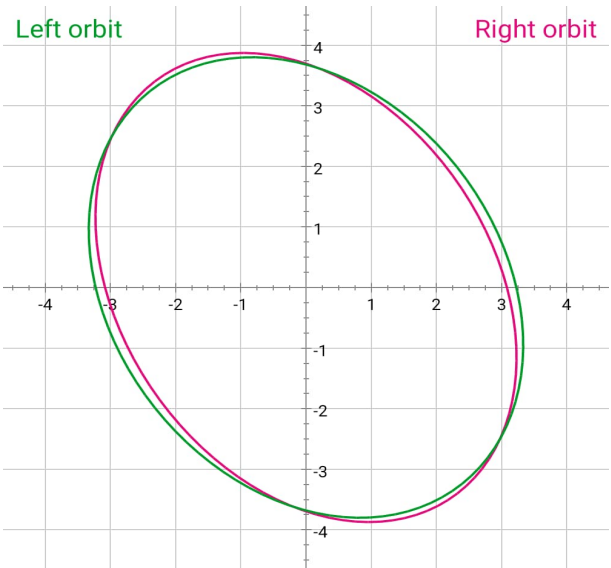


Raw data IDs

8cbfdf21, 628c5822

Mid Orbits

Preliminary Test Report


Stroke right	7,46 mm
Stroke left	7,49 mm
Peak g right	3,4 g
Peak g left	3,4 g

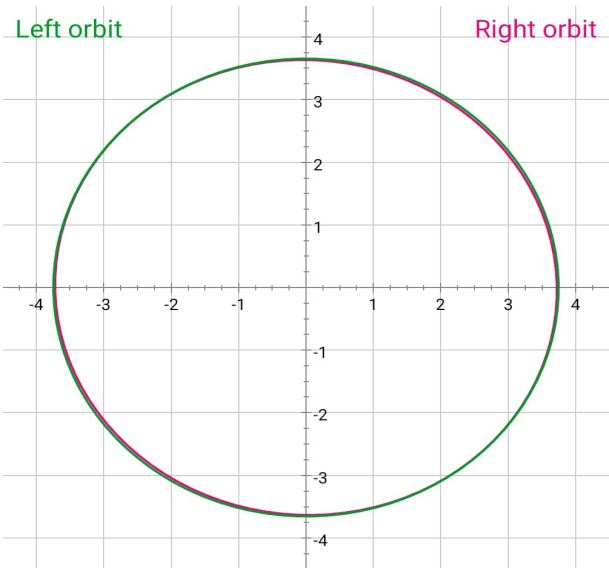

Raw data IDs

fe829cef, bf5e2477

Stroke right	8,45 mm
Stroke left	8,73 mm
Peak g right	3,8 g
Peak g left	3,9 g

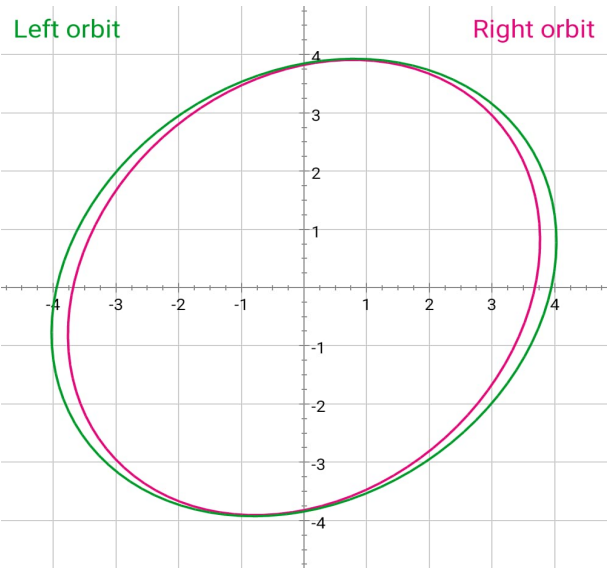

Raw data IDs

3e94600f, 280d551a

Side Plate Displacement Right

Preliminary Test Report

Feed top	0,05	mm
Feed bottom	0,15	mm
Mid top	0,16	mm
Mid bottom	0,09	mm
Discharge top	0,30	mm
Discharge bottom	0,17	mm
Raw data IDs	4278030d, cb17c88e, 36ec7b25, 15f9449b, 086c327a, b9214a6a	

Side Plate Displacement Left

Preliminary Test Report

Feed top	0,20	mm
Feed bottom	0,16	mm
Mid top	0,15	mm
Mid bottom	0,12	mm
Discharge top	0,32	mm
Discharge bottom	0,08	mm
Raw data IDs	501af201, afd12e68, 761697fd, 858d21fe, c1dce060, c18660bf	

Structural Movement Test

Preliminary Test Report

Position		Feed left
Horizontal	14,0	mm/s
Vertical	4,9	mm/s
Transversal	3,2	mm/s
Raw data ID		54dea2a2

Structural Movement Test

Preliminary Test Report

Position		Feed right
Horizontal	10,7	mm/s
Vertical	0,7	mm/s
Transversal	10,1	mm/s
Raw data ID		6b1d3050

Exciter Temperature

Preliminary Test Report

Type of exciters	MV2
Ambient temperature	28,0 °C

Technician Signature

Customer Signature