

Metso:Outotec ScreenCheck

RF - 131200 - MBL PEDREIRA LTDA - F

Preliminary Test Report


Label	Pré comissionamento cbs 8 X 20 TD
Creation	4 de fev. de 2025 10:00:10
Last edit	2 de mai. de 2025 17:07:18
Time zone	America/Sao_Paulo
Author	Primo Silva
Sensor	MOSCS20066
Sensor firmware version	3.2.97
ScreenCheck software version	1.6.113-managed
Location	-20,099033 -44,831108
Notes	Teste completo realizado ante de acionar o motor do equipamento. esse inclui o bimp teste do equipamento

Basic Data

Preliminary Test Report

Machine serial no.	131200
Machine type	RF
Machine owner	MBL PEDREIRA LTDA
Site name	DIVINOPOLIS
Site country	BRASIL
Machine hand of drive	left
Expected speed	890,0 RPM
Weight of machine	12220 kg
Expected counterweight per MV shaft line	70%-V180
Number of decks	3
Top deck media opening	35
Top deck media	rubber
Mid deck media opening	25
Mid deck media	rubber
Bottom deck media opening	12
Bottom deck media	rubber
Application	aggregate
Top feed size	50,0 mm
Feed tonnage	220,0 t/h
Notes	nada a comentar

Number of tests 12 Low signal noise ratio test included

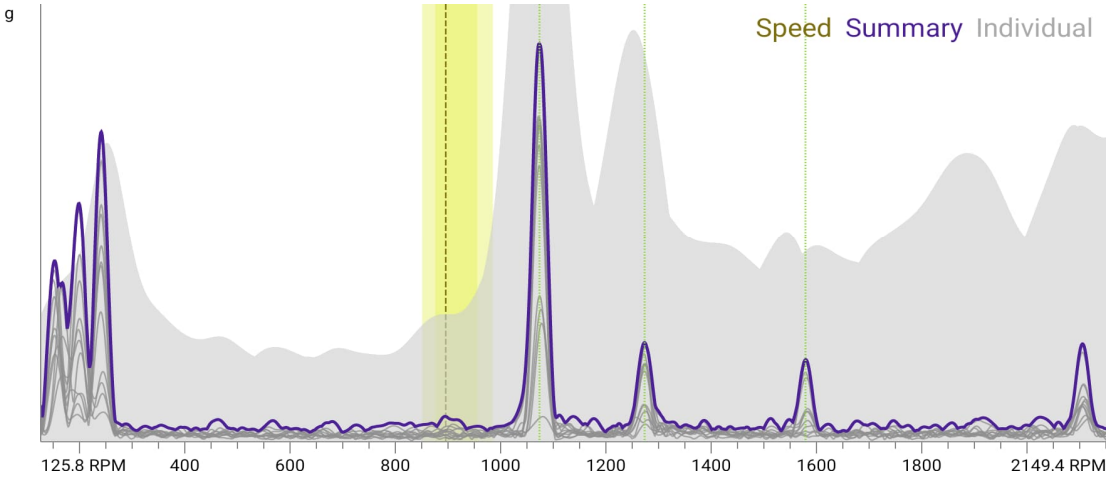

Natural frequencies

1073	RPM
1273	RPM
1579	RPM

Main Spring Heights

Preliminary Test Report

Right feed	309,0	mm
Left feed	313,0	mm
Right discharge	313,0	mm
Left discharge	310,0	mm

Isolation Frame Spring Heights

Preliminary Test Report

Pre-Run Checks

Preliminary Test Report

Adequate clearance provided?	yes	
Lubrication by		Oil
Lubrication specification		óleo de fabrica
Adequate oil/grease level?	yes	
Quantity of oil?		6-9
Greasing power unit setting		1
Any parts broken, need replaced or are worn beyond reasonable levels?	no	
Is customer happy with screening efficiency?	yes	

Run Checks


Preliminary Test Report

Total operating hours		2 h
Tests with material	no	
Any hitting noticed during start-up or shutdown?	no	
Rotation of exciter/motor correct?	yes	
Rotation		with flow
Motor frequency		60 Hz
Actual speed	895,3	RPM
Raw data ID		28def249

Feed Orbits

Preliminary Test Report

Stroke right	8,05 mm
Stroke left	8,08 mm
Peak g right	3,6 g
Peak g left	3,6 g

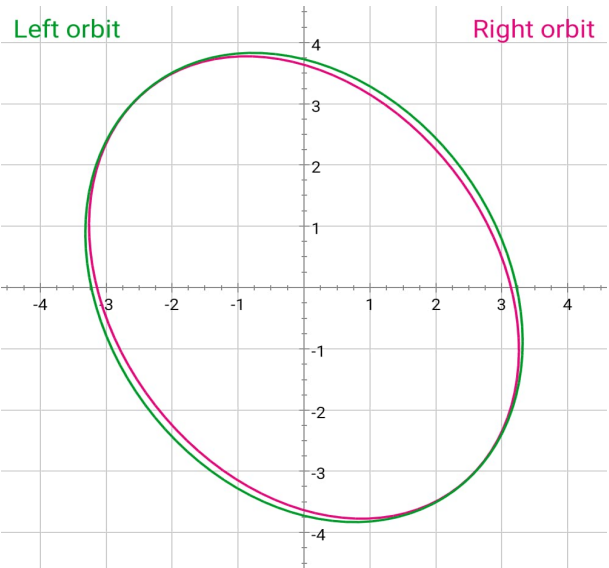


Raw data IDs

763f484b, 2e8f4072

Mid Orbits

Preliminary Test Report

Stroke right	7,46 mm
Stroke left	7,49 mm
Peak g right	3,3 g
Peak g left	3,4 g

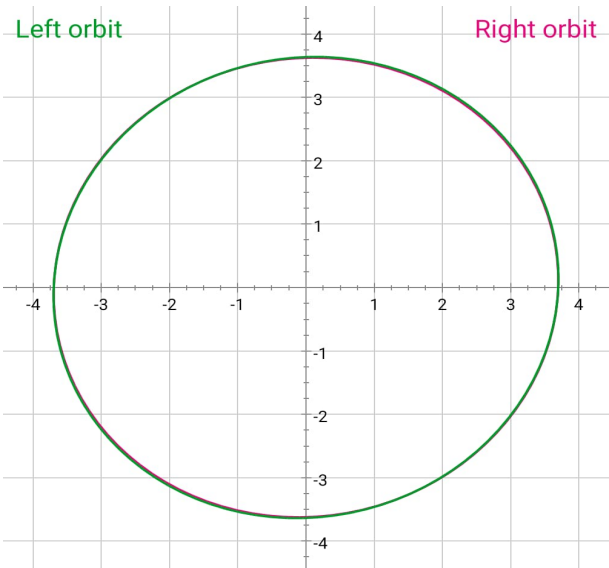


Raw data IDs

d1a71dac, cd93e062

Discharge Orbits

Preliminary Test Report

Stroke right	9,02 mm
Stroke left	8,91 mm
Peak g right	4,1 g
Peak g left	4,0 g

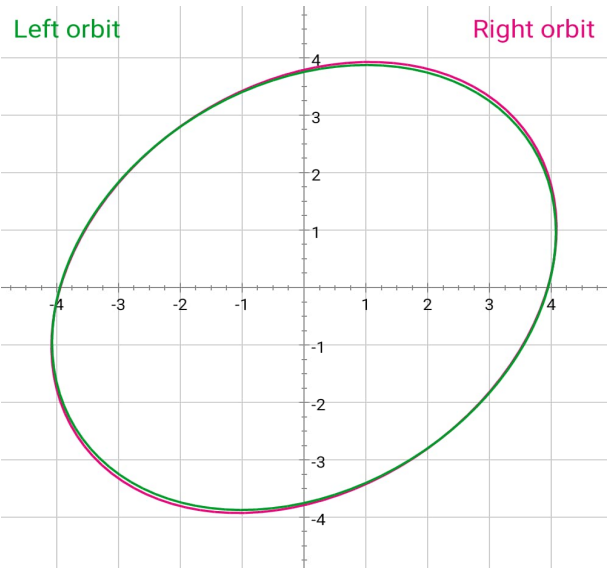

Raw data IDs

d5c31c49, f098098b

Side Plate Displacement Right

Preliminary Test Report

Feed top	0,06	mm
Feed bottom	0,17	mm
Mid top	0,13	mm
Mid bottom	0,07	mm
Discharge top	0,14	mm
Discharge bottom	0,22	mm
Raw data IDs	3813c253, 048eb246, 6796c3ea, 7f1baf44, 925808bf, d4fa13b5	

Side Plate Displacement Left

Preliminary Test Report

Feed top	0,17	mm
Feed bottom	0,16	mm
Mid top	0,07	mm
Mid bottom	0,16	mm
Discharge top	0,23	mm
Discharge bottom	0,12	mm
Raw data IDs	4ca70239, 23d01990, 93b4730c, 11fac0bf, 651ce0d0, 1a03183c	

Structural Movement Test

Preliminary Test Report

Position		Discharge right
Horizontal	5,5	mm/s
Vertical	3,7	mm/s
Transversal	1,5	mm/s
Raw data ID		87061382

Structural Movement Test

Preliminary Test Report

Position		Feed right
Horizontal	8,7	mm/s
Vertical	1,6	mm/s
Transversal	4,4	mm/s
Raw data ID		1c8220c6

Structural Movement Test

Preliminary Test Report

Position		Feed left
Horizontal	14,0	mm/s
Vertical	1,1	mm/s
Transversal	9,4	mm/s
Raw data ID		dcc39e84

Structural Movement Test

Preliminary Test Report

Position		Discharge left
Horizontal	10,8	mm/s
Vertical	4,4	mm/s
Transversal	3,0	mm/s
Raw data ID		837b0b32

Technician Signature

Customer Signature