



General Notes:
1. Arduino and FPGA are connected via I2C BUS




Initial Design		
Sheet: /		
File: CrazyMachine.sch		
Title: E-000-Crazy Machine Overview		
Size: A4	Date: 2020-04-06	Rev: 0
KiCad E.D.A. kicad (5.1.5)-3		Id: 1/6

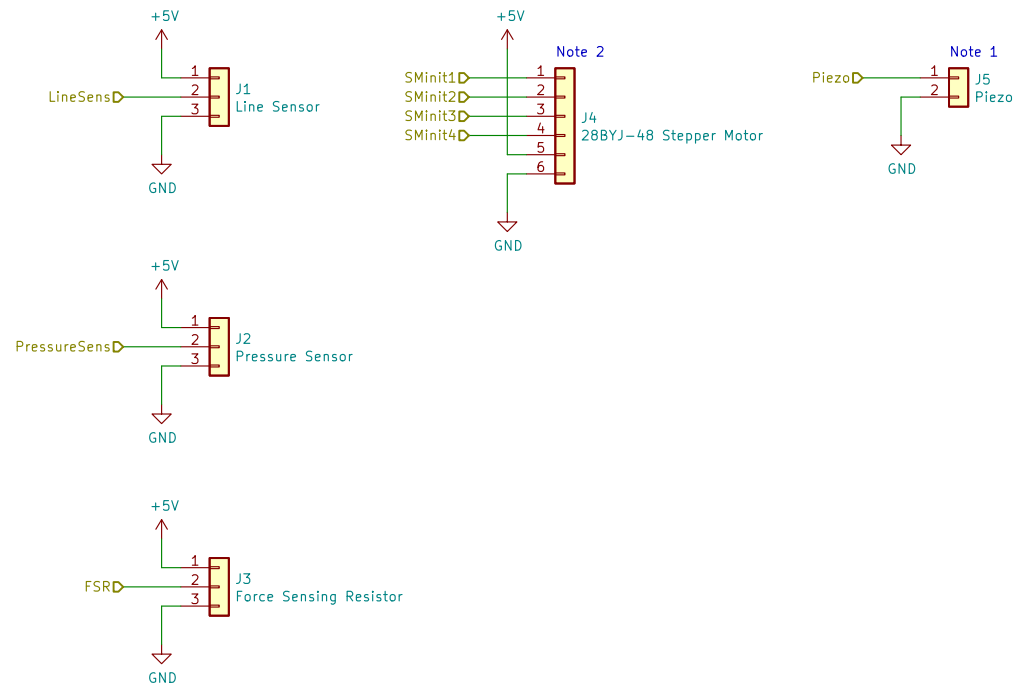

Id: 2/6

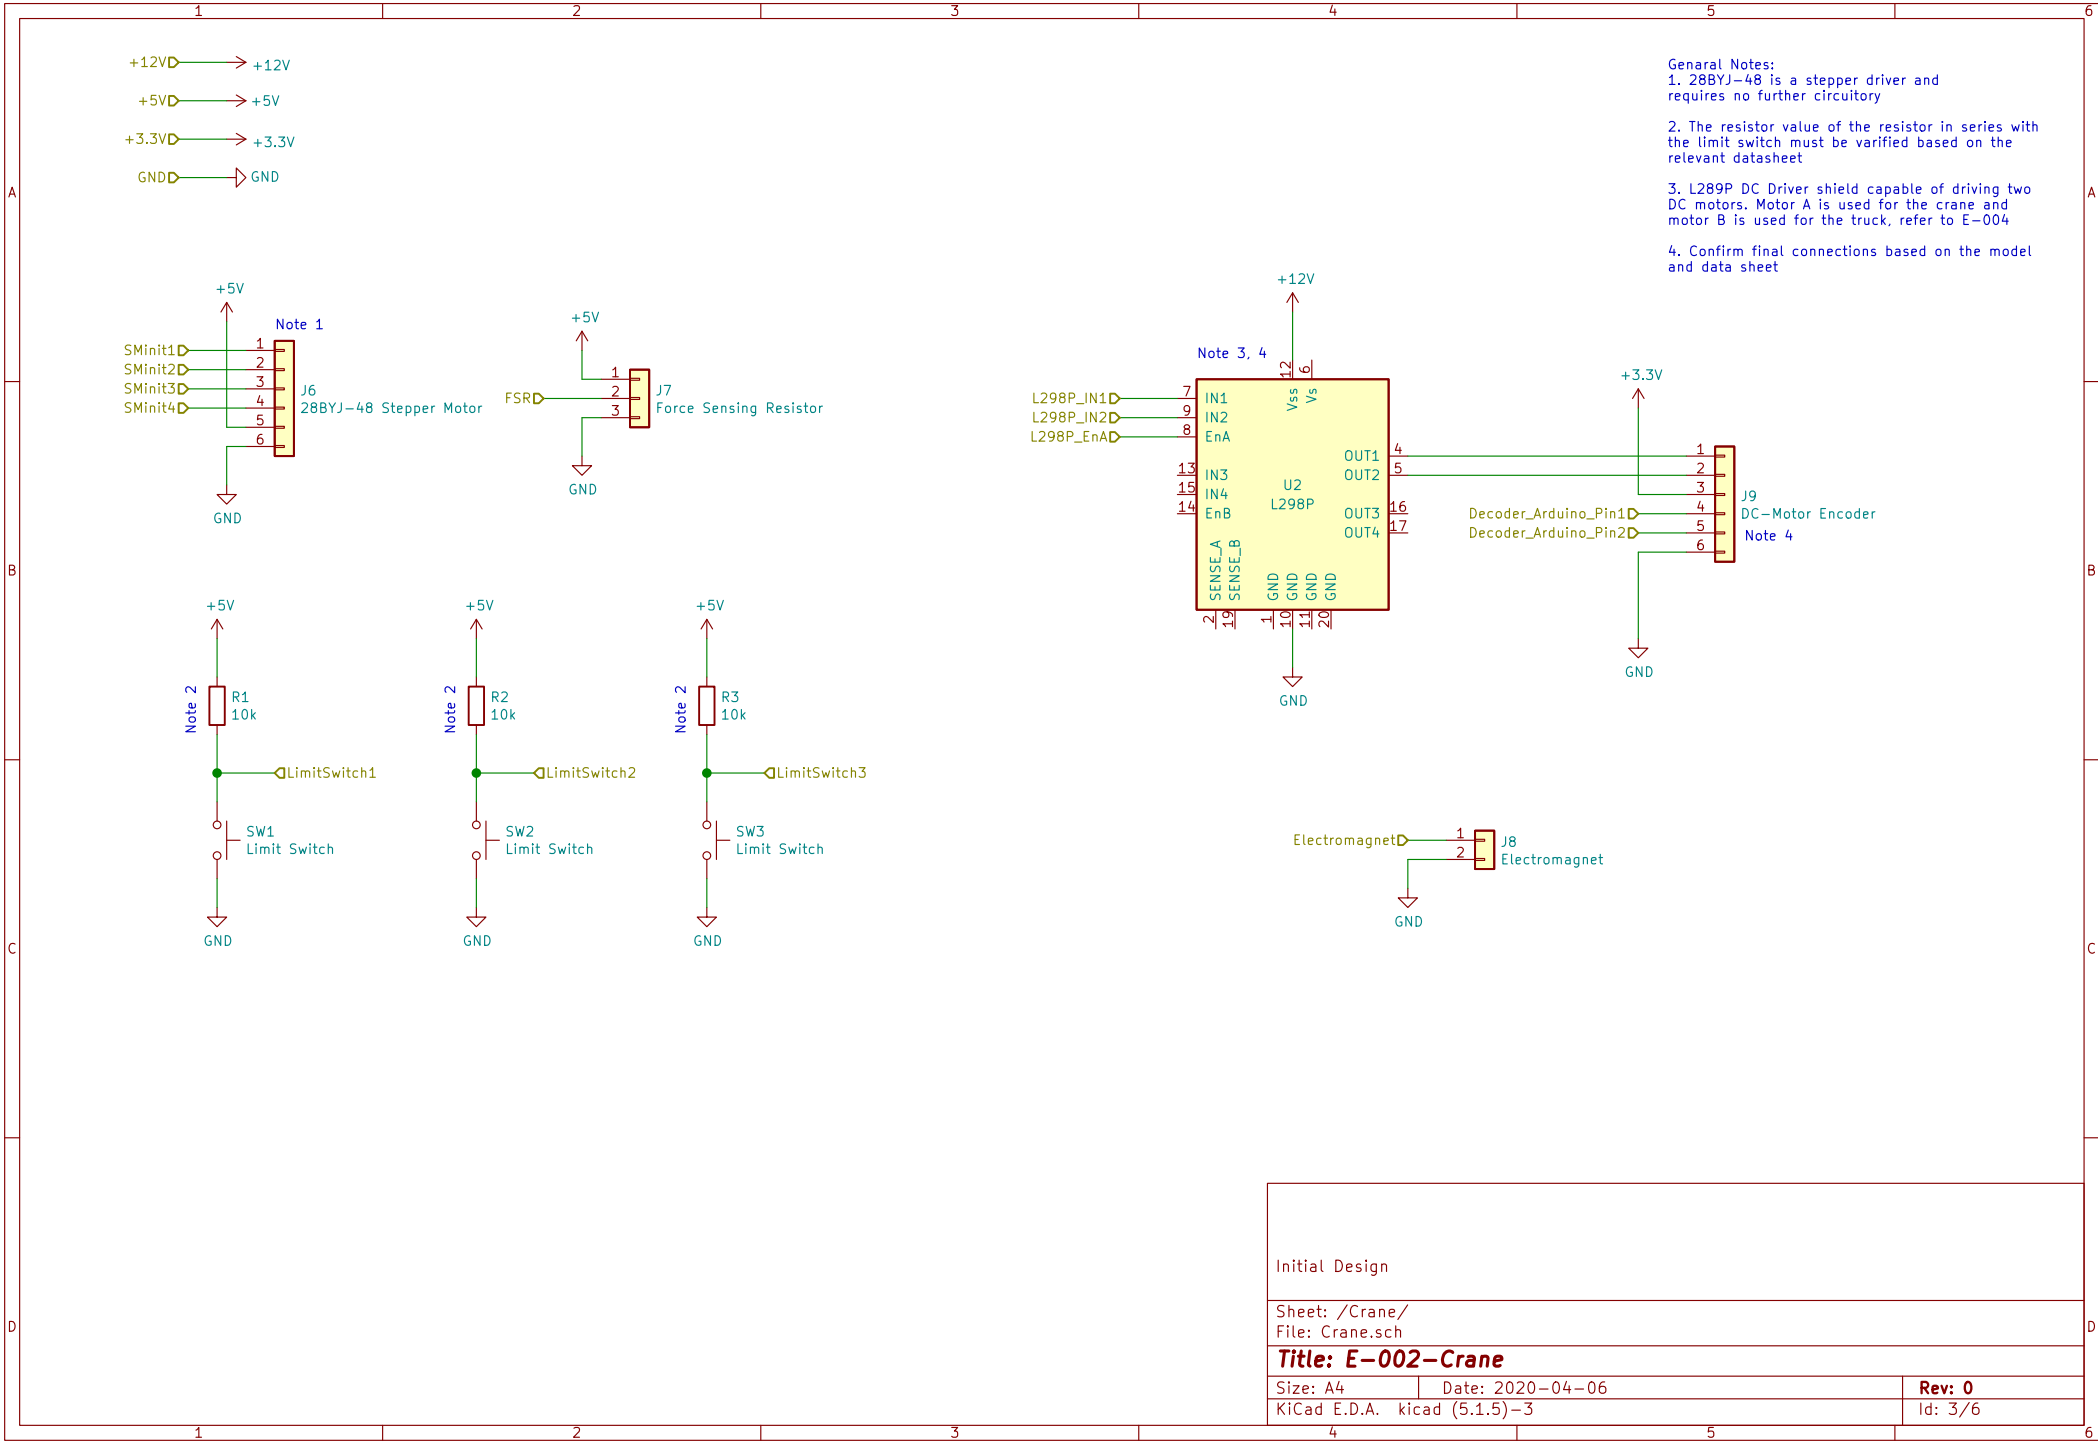

+5V → +5V
GND → GND



Initial Design

Sheet: /Main Container Stack/
File: mainContainerStack.sch


Title: E-003-Main Container Stack


Size: A4 Date: 2020-04-20

KiCad E.D.A. kicad (5.1.5)-3

Rev: 0

Id: 4/6

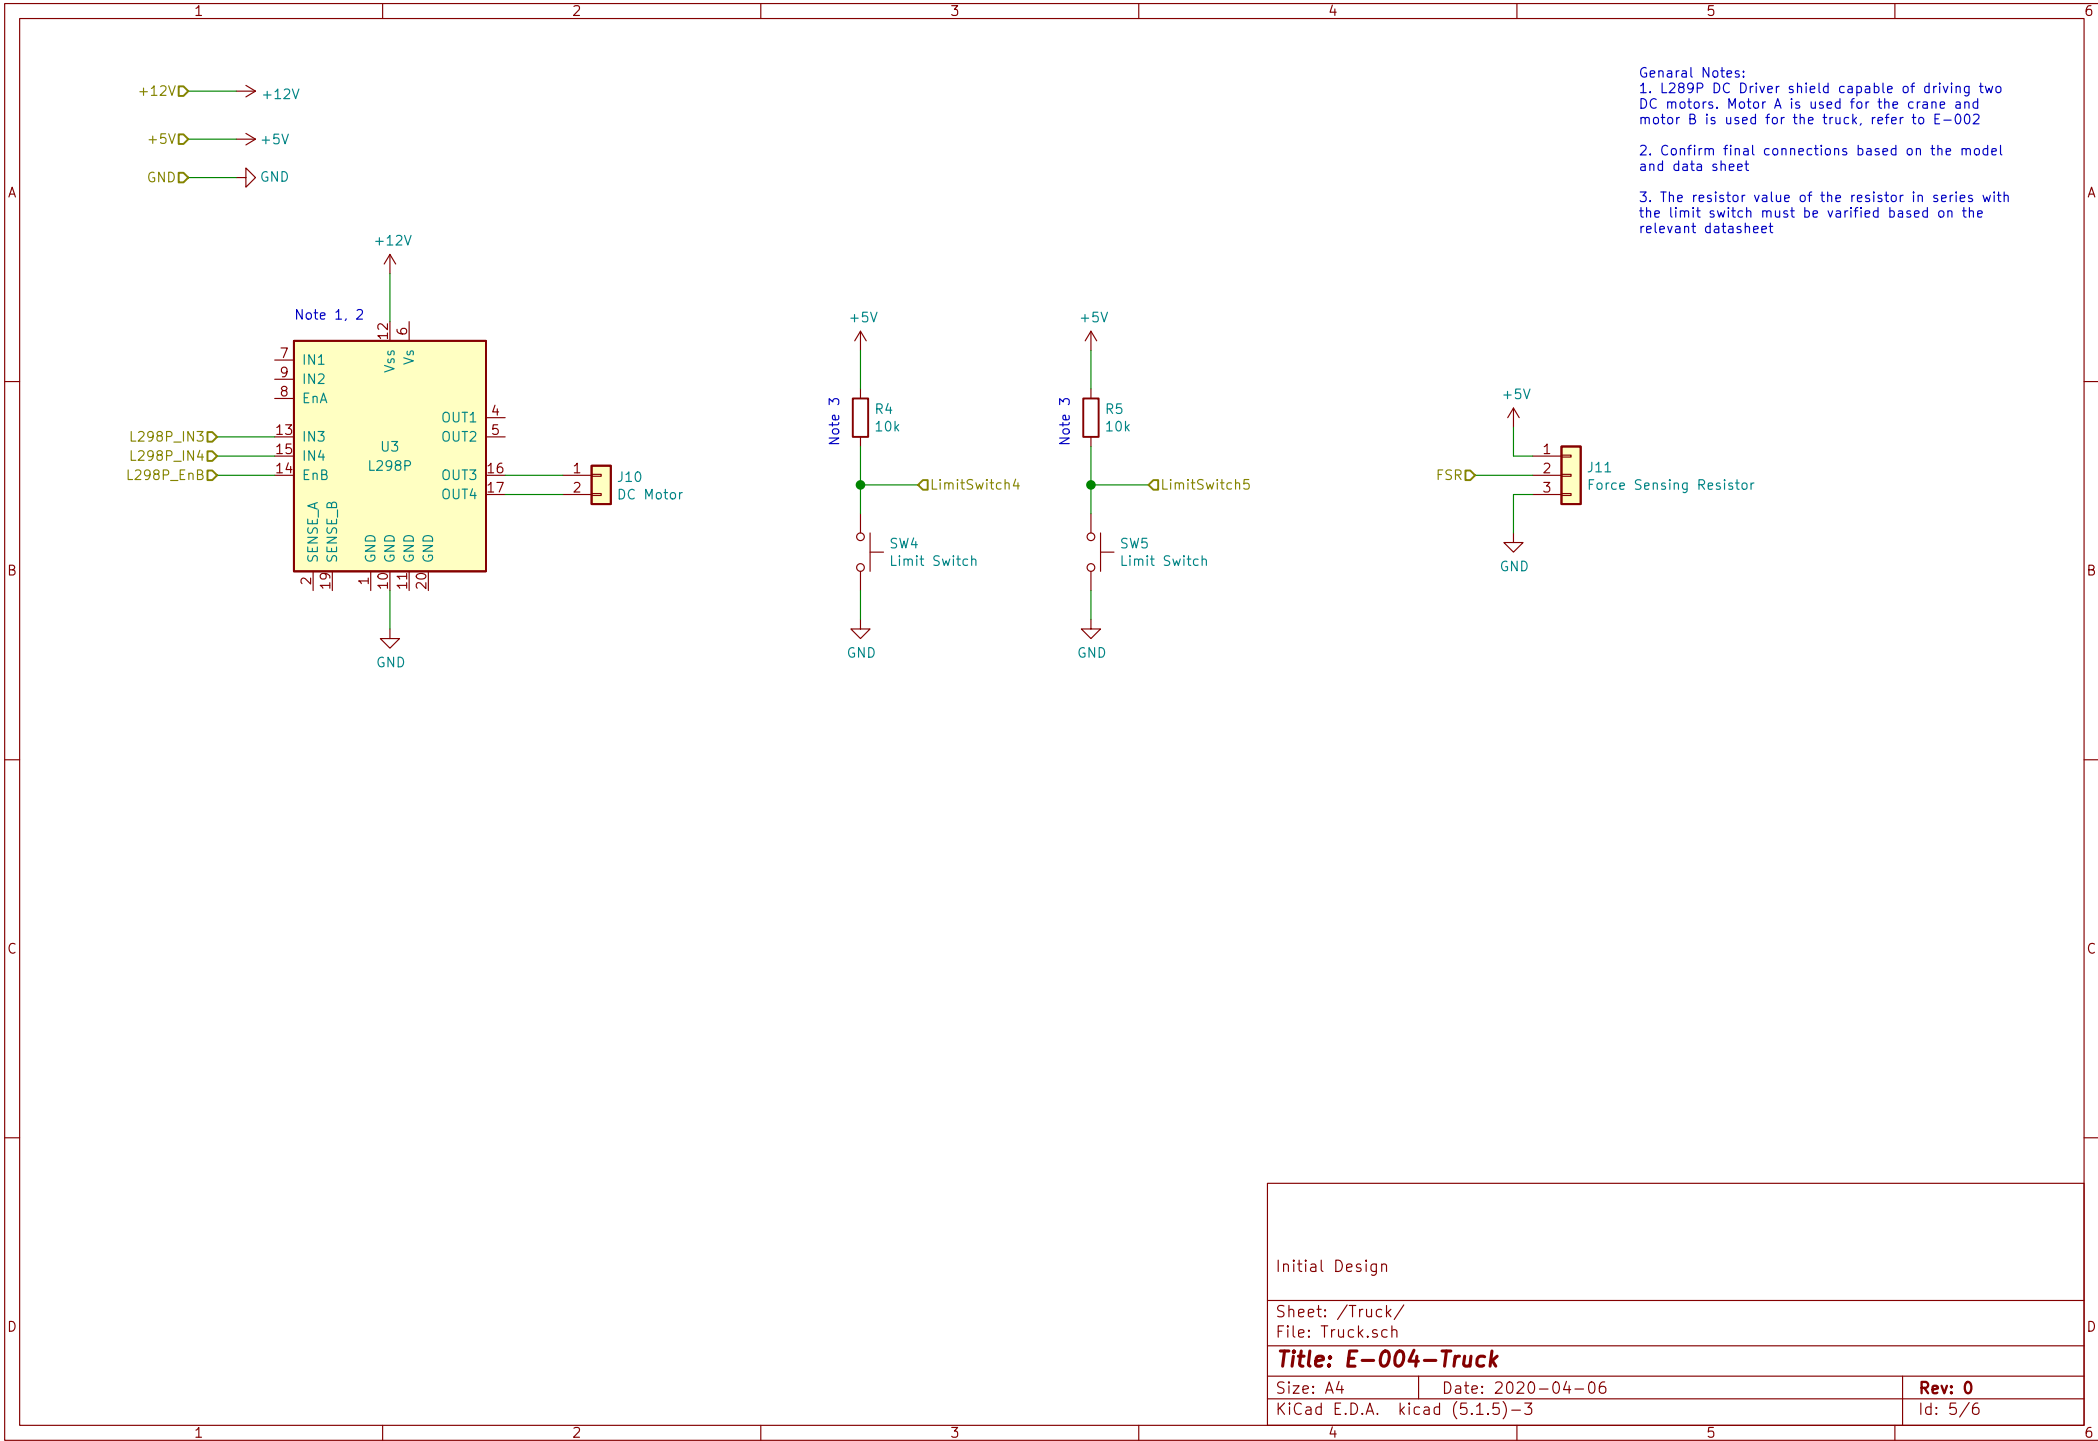

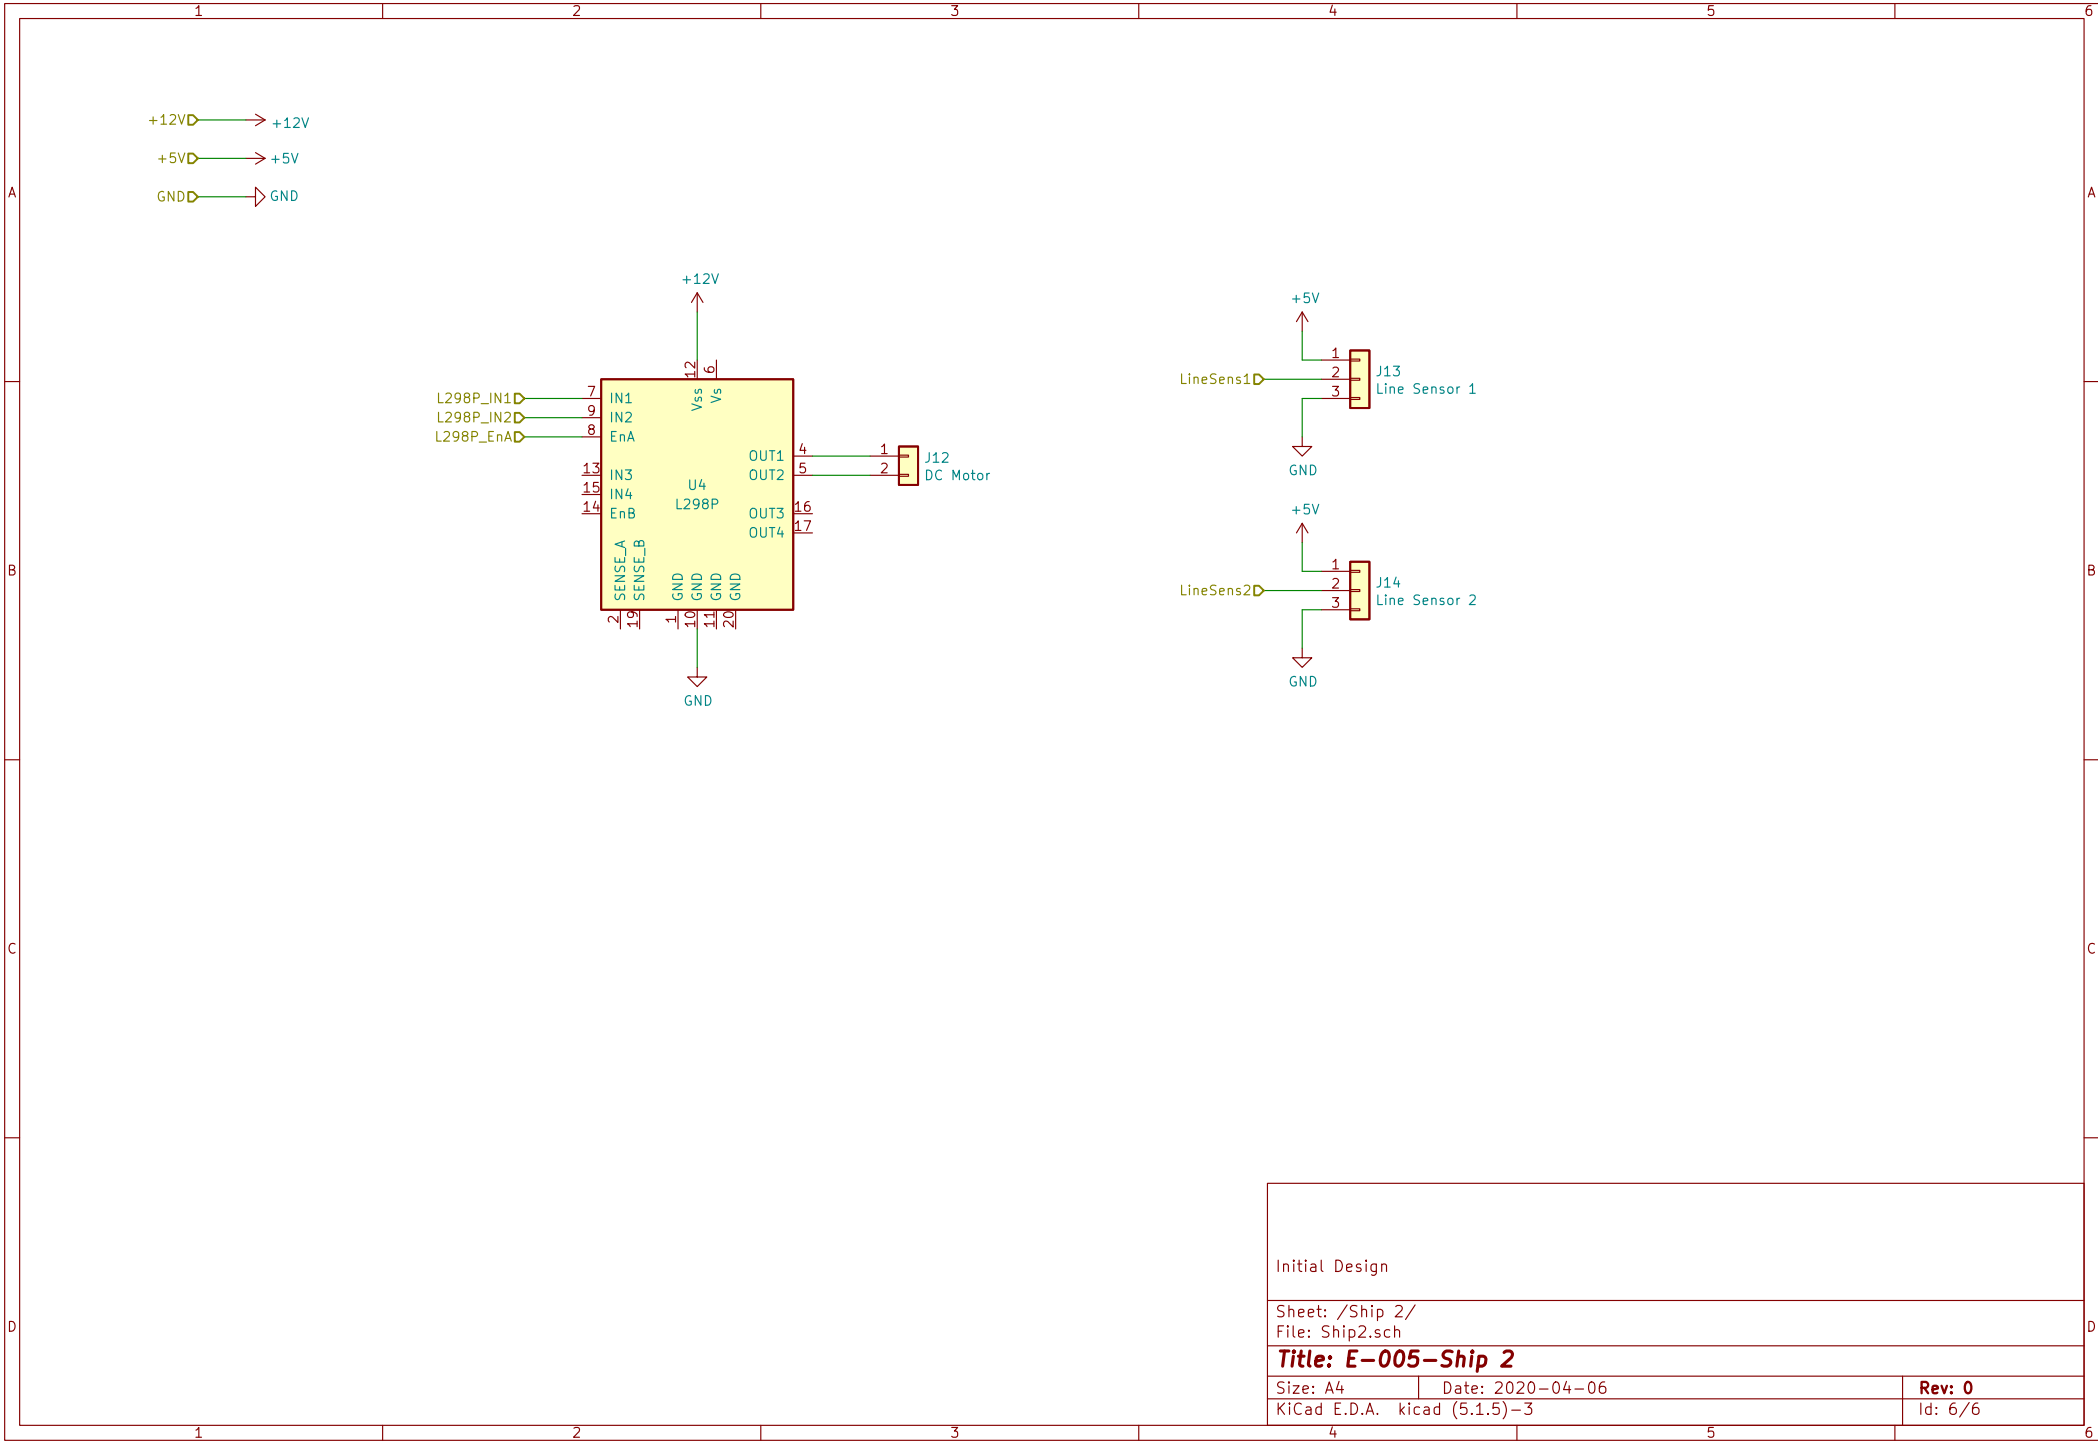

Sheet: /Ship 2/
File: Ship2.sch

Size: A4	Date: 2020-04-06
KiCad E.D.A. kicad (5.1.5)-3	

Rev: 0
Id: 6/6