| Document Title | Specification of CRC Routines |
|---|---|
| Document Owner | AUTOSAR |
| Document Responsibility | AUTOSAR |
| Document Identification No | 016 |
| Document Classification | Standard |

| Document Status | Final |
|---|---|
| Part of AUTOSAR Standard | Classic Platform |
| Part of Standard Release | 4.3.0 |

## Document Change History

| Date | Release | Changed by | Change Description |
|---|---|---|---|
| 2016-11-30 | 4.3.0 | AUTOSAR Release Management | • Introduction of a new CRC-64 for E2E Profile 7<br>• Editorial changes |
| 2015-07-31 | 4.2.2 | AUTOSAR Release Management | • Corrected the magic check for the CRC32 and CRC32P4 |
| 2014-10-31 | 4.2.1 | AUTOSAR Release Management | • Introduction of a new CRC-32 with the polynomial 0xF4ACFB13<br>• Editorial changes |
| 2014-03-31 | 4.1.3 | AUTOSAR Release Management | • CRC32 IEEE 802.3 check values corrected<br>• Editorial changes |
| 2013-10-31 | 4.1.2 | AUTOSAR Release Management | • Editorial changes<br>• Removed chapter(s) on change documentation |
| 2013-03-15 | 4.1.1 | AUTOSAR Administration | • New examples on how to use CRC routines and clarifications concern-ing CCITT standard<br>• Removal of debugging concept |
| 2011-12-22 | 4.0.3 | AUTOSAR Administration | • The GetVersionInfo API is always available |
| 2010-09-30 | 3.1.5 | AUTOSAR Administration | • New parameter added to APIs in or-der to chain CRC computations.<br>• CRC check values corrected and checked values better explained.<br>• CRC magic check added. |

| Document Change History | | | |
|---|---|---|---|
| **Date** | **Release** | **Changed by** | **Change Description** |
| 2010-02-02 | 3.1.4 | AUTOSAR Administration | • Introduction of a new CRC-8 with the polynomial 2Fh<br>• CRC-8 is now compliant to SAE J1850<br>• Legal disclaimer revised |
| 2008-08-13 | 3.1.1 | AUTOSAR Administration | • Separated CRC requirements from Memory Services Requirements<br>• CRC8 management added |
| 2008-02-01 | 3.0.2 | AUTOSAR Administration | • Separated CRC requirements from Memory Services Requirements<br>• CRC8 management added |
| 2007-12-21 | 3.0.1 | AUTOSAR Administration | • Document meta information extended<br>• Small layout adaptations made |
| 2007-01-24 | 2.1.15 | AUTOSAR Administration | • “Advice for users” revised<br>• “Revision Information” added |
| 2006-11-28 | 2.1.1 | AUTOSAR Administration | • Crc_CalculateCRC16 and Crc_CalculateCRC32 APIs, Crc_DataPtr parameter : void pointer changed to uint8 pointer<br>• Legal disclaimer revised |
| 2006-05-16 | 2.0 | AUTOSAR Administration | • Document structure adapted to common Release 2.0 SWS Template.<br>• UML model introduction<br>• Requirements traceability update<br>• Reentrancy at calculating CRC with hardware support |
| 2005-05-31 | 1.0 | AUTOSAR Administration | • Initial Release |

## Disclaimer



## Advice for users

AUTOSAR specifications may contain exemplary items (exemplary reference models, "use cases", and/or references to exemplary technical solutions, devices, processes or software).

Any such exemplary items are contained in the specifications for illustration purposes only, and they themselves are not part of the AUTOSAR Standard. Neither their presence in such specifications, nor any later documentation of AUTOSAR conformance of products actually implementing such exemplary items, imply that intellectual property rights covering such exemplary items are licensed under the same rules as applicable to the AUTOSAR Standard.

# Table of Contents

# 1 Introduction and functional overview

This specification specifies the functionality, API and the configuration of the AUTOSAR Basic Software module CRC.

The CRC library contains the following routines for CRC calculation:

- CRC8: SAEJ1850
- CRC8H2F: CRC8 0x2F polynomial
- CRC16
- CRC32
- CRC32P4: CRC32 0x1F4ACFB13 polynomial
- CRC64: CRC-64-ECMA

For all routines (CRC8, CRC8H2F, CRC16, CRC32, CRC32P4 and CRC64), the following calculation methods are possible:

- Table based calculation:
  Fast execution, but larger code size (ROM table)
- Runtime calculation:
  Slower execution, but small code size (no ROM table)
- Hardware supported CRC calculation (device specific):
  Fast execution, less CPU time

All routines are re-entrant and can be used by multiple applications at the same time. Hardware supported CRC calculation may be supported by some devices in the future.

# 2 Acronyms and abbreviations

Acronyms and abbreviations, which have a local scope and therefore are not contained in the AUTOSAR glossary, must appear in a local glossary.

| ***Abbreviation / Acronym:*** | ***Description:*** |
|---|---|
| CRC | Cyclic Redundancy Check |
| ALU | Arithmetic Logic Unit |

# 3 Related documentation

## 3.1 Input documents

[1] List of Basic Software Modules,
AUTOSAR_TR_BSWModuleList.pdf

[2] Layered Software Architecture,
AUTOSAR_EXP_LayeredSoftwareArchitecture.pdf

[3] General Requirements on Basic Software Modules,
AUTOSAR_SRS_BSWGeneral.pdf

[4] Requirements on Libraries,
AUTOSAR_SRS_Libraries.pdf

[5] Specification of ECU Configuration,
AUTOSAR_TPS_ECUConfiguration.pdf

[6] A Painless Guide To CRC Error Detection Algorithms, Ross N. Williams

[7] Basic Software Module Description Template,
AUTOSAR_TPS_BSWModuleDescriptionTemplate.pdf

[8] Specification of Platform Types,
AUTOSAR_SWS_PlatformTypes.pdf

[9] Specification of Standard Types,
AUTOSAR_SWS_StandardTypes.pdf

[10] Specification of C Implementation Rules,
AUTOSAR_TR_CImplementationRules.pdf

## 3.2 Related standards and norms

[11] SAE-J1850 8-bit CRC

[12] CCITT-FALSE 16-bit CRC. Refer to:

ITU-T Recommendation X.25 (10/96) (Previously “CCITT Recommendation”)
SERIES X: DATA NETWORKS AND OPEN SYSTEM COMMUNICATION
Public data networks – Interfaces
Interface between Data Terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in the packet mode and connected to public data networks by dedicated circuit

Section 2.2.7.4 "Frame Check Sequence (FCS) field" and Appendix I "Examples of data link layer transmitted bit patterns by the DCE and the DTE"

http://www.itu.int/rec/dologin_pub.asp?lang=e&id=T-REC-X.25-199610-I!!PDF-E&type=items

[13] IEEE 802.3 Ethernet 32-bit CRC

[14] “32-Bit Cyclic Redundancy Codes for Internet Applications” [Koopman 2002]

[15] Wikipedia.org – listing of CRCs, including CRC-64-ECMA
https://en.wikipedia.org/wiki/Cyclic_redundancy_check

# 4 Constraints and assumptions

## 4.1 Limitations

No known limitations.

## 4.2 Applicability to car domains

No restrictions.

# 5 Dependencies to other modules

## 5.1 File structure

**[SWS_Crc_00024]** ⌈The Crc module shall provide the following files:

- C file `Crc_xxx.c` containing parts of CRC code
- An API interface `Crc.h` providing the function prototypes to access the library CRC functions
- A header file `Crc_Cfg.h` providing specific parameters for the CRC.

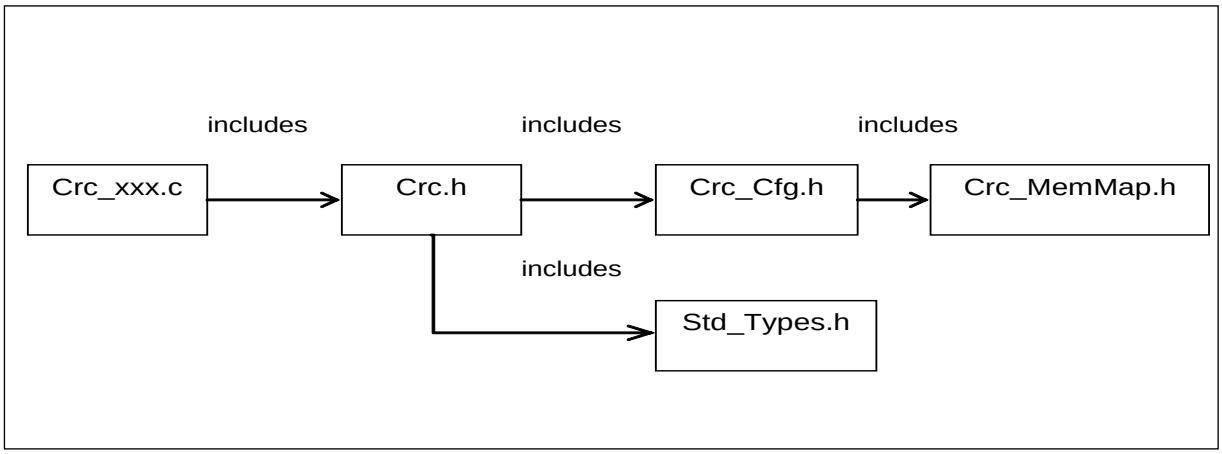


**Figure 1: File structure**

⌋()

**[SWS_Crc_00022]** ⌈The Crc module shall comply with the following include file structure:

- `Crc.h` shall include `Crc_Cfg.h`, `Std_Types.h` and `Crc_MemMap.h`
- `Crc_xxx.c` shall include `Crc.h`⌋( )

**[SWS_Crc_00023]** ⌈Users of the Crc module (e.g. NVRAM Manager) shall only include `Crc.h`⌋()

# 6 Requirements traceability

| Requirement | Description | Satisfied by |
|---|---|---|
| SRS_BSW_00005 | Modules of the µC Abstraction Layer (MCAL) may not have hard coded horizontal interfaces | SWS_Crc_00051 |
| SRS_BSW_00006 | The source code of software modules above the µC Abstraction Layer (MCAL) shall not be processor and compiler dependent. | SWS_Crc_00051 |
| SRS_BSW_00007 | All Basic SW Modules written in C language shall conform to the MISRA C 2012 Standard. | SWS_Crc_00051 |
| SRS_BSW_00009 | All Basic SW Modules shall be documented according to a common standard. | SWS_Crc_00051 |
| SRS_BSW_00010 | The memory consumption of all Basic SW Modules shall be documented for a defined configuration for all supported platforms. | SWS_Crc_00051 |
| SRS_BSW_00101 | The Basic Software Module shall be able to initialize variables and hardware in a separate initialization function | SWS_Crc_00051 |
| SRS_BSW_00160 | Configuration files of AUTOSAR Basic SW module shall be readable for human beings | SWS_Crc_00051 |
| SRS_BSW_00161 | The AUTOSAR Basic Software shall provide a microcontroller abstraction layer which provides a standardized interface to higher software layers | SWS_Crc_00051 |
| SRS_BSW_00162 | The AUTOSAR Basic Software shall provide a hardware abstraction layer | SWS_Crc_00051 |
| SRS_BSW_00164 | The Implementation of interrupt service routines shall be done by the Operating System, complex drivers or modules | SWS_Crc_00051 |
| SRS_BSW_00168 | SW components shall be tested by a function defined in a common API in the Basis-SW | SWS_Crc_00051 |
| SRS_BSW_00170 | The AUTOSAR SW Components shall provide information about their dependency from faults, signal qualities, driver demands | SWS_Crc_00051 |
| SRS_BSW_00172 | The scheduling strategy that is built inside the Basic Software Modules shall be compatible with the strategy used in the system | SWS_Crc_00051 |
| SRS_BSW_00302 | All AUTOSAR Basic Software Modules shall only export information needed by other modules | SWS_Crc_00051 |
| SRS_BSW_00304 | All AUTOSAR Basic Software Modules shall use the following data types instead of native C data types | SWS_Crc_00051 |

| | | |
|---|---|---|
| SRS_BSW_00305 | Data types naming convention | SWS_Crc_00051 |
| SRS_BSW_00306 | AUTOSAR Basic Software Modules shall be compiler and platform independent | SWS_Crc_00051 |
| SRS_BSW_00307 | Global variables naming convention | SWS_Crc_00051 |
| SRS_BSW_00308 | AUTOSAR Basic Software Modules shall not define global data in their header files, but in the C file | SWS_Crc_00051 |
| SRS_BSW_00309 | All AUTOSAR Basic Software Modules shall indicate all global data with read-only purposes by explicitly assigning the const keyword | SWS_Crc_00051 |
| SRS_BSW_00312 | Shared code shall be reentrant | SWS_Crc_00051 |
| SRS_BSW_00314 | All internal driver modules shall separate the interrupt frame definition from the service routine | SWS_Crc_00051 |
| SRS_BSW_00321 | The version numbers of AUTOSAR Basic Software Modules shall be enumerated according specific rules | SWS_Crc_00051 |
| SRS_BSW_00323 | All AUTOSAR Basic Software Modules shall check passed API parameters for validity | SWS_Crc_00051 |
| SRS_BSW_00325 | The runtime of interrupt service routines and functions that are running in interrupt context shall be kept short | SWS_Crc_00051 |
| SRS_BSW_00327 | Error values naming convention | SWS_Crc_00051 |
| SRS_BSW_00328 | All AUTOSAR Basic Software Modules shall avoid the duplication of code | SWS_Crc_00051 |
| SRS_BSW_00330 | It shall be allowed to use macros instead of functions where source code is used and runtime is critical | SWS_Crc_00051 |
| SRS_BSW_00331 | All Basic Software Modules shall strictly separate error and status information | SWS_Crc_00051 |
| SRS_BSW_00333 | For each callback function it shall be specified if it is called from interrupt context or not | SWS_Crc_00051 |
| SRS_BSW_00334 | All Basic Software Modules shall provide an XML file that contains the meta data | SWS_Crc_00051 |
| SRS_BSW_00335 | Status values naming convention | SWS_Crc_00051 |
| SRS_BSW_00336 | Basic SW module shall be able to shutdown | SWS_Crc_00051 |
| SRS_BSW_00337 | Classification of development errors | SWS_Crc_00051 |
| SRS_BSW_00339 | Reporting of production relevant error status | SWS_Crc_00051 |
| SRS_BSW_00341 | Module documentation shall contains all needed informations | SWS_Crc_00051 |
| SRS_BSW_00342 | It shall be possible to create an AUTOSAR ECU out of modules provided as source code and modules provided as object code, even mixed | SWS_Crc_00051 |

| | | |
|---|---|---|
| SRS_BSW_00343 | The unit of time for specification and configuration of Basic SW modules shall be preferably in physical time unit | SWS_Crc_00051 |
| SRS_BSW_00344 | BSW Modules shall support link-time configuration | SWS_Crc_00051 |
| SRS_BSW_00347 | A Naming seperation of different instances of BSW drivers shall be in place | SWS_Crc_00051 |
| SRS_BSW_00348 | All AUTOSAR standard types and constants shall be placed and organized in a standard type header file | SWS_Crc_00051 |
| SRS_BSW_00350 | All AUTOSAR Basic Software Modules shall allow the enabling/disabling of detection and reporting of development errors. | SWS_Crc_00051 |
| SRS_BSW_00353 | All integer type definitions of target and compiler specific scope shall be placed and organized in a single type header | SWS_Crc_00051 |
| SRS_BSW_00358 | The return type of init() functions implemented by AUTOSAR Basic Software Modules shall be void | SWS_Crc_00051 |
| SRS_BSW_00359 | All AUTOSAR Basic Software Modules callback functions shall avoid return types other than void if possible | SWS_Crc_00051 |
| SRS_BSW_00360 | AUTOSAR Basic Software Modules callback functions are allowed to have parameters | SWS_Crc_00051 |
| SRS_BSW_00361 | All mappings of not standardized keywords of compiler specific scope shall be placed and organized in a compiler specific type and keyword header | SWS_Crc_00051 |
| SRS_BSW_00369 | All AUTOSAR Basic Software Modules shall not return specific development error codes via the API | SWS_Crc_00051 |
| SRS_BSW_00371 | The passing of function pointers as API parameter is forbidden for all AUTOSAR Basic Software Modules | SWS_Crc_00051 |
| SRS_BSW_00373 | The main processing function of each AUTOSAR Basic Software Module shall be named according the defined convention | SWS_Crc_00051 |
| SRS_BSW_00375 | Basic Software Modules shall report wake-up reasons | SWS_Crc_00051 |
| SRS_BSW_00378 | AUTOSAR shall provide a boolean type | SWS_Crc_00051 |
| SRS_BSW_00383 | The Basic Software Module specifications shall specify which other configuration files from other modules they use at least in the description | SWS_Crc_00051 |
| SRS_BSW_00384 | The Basic Software Module specifications shall specify at least in the description which other modules they require | SWS_Crc_00051 |
| SRS_BSW_00385 | List possible error notifications | SWS_Crc_00051 |

| | | |
|---|---|---|
| SRS_BSW_00386 | The BSW shall specify the configuration for detecting an error | SWS_Crc_00051 |
| SRS_BSW_00388 | Containers shall be used to group configuration parameters that are defined for the same object | SWS_Crc_00051 |
| SRS_BSW_00389 | Containers shall have names | SWS_Crc_00051 |
| SRS_BSW_00395 | The Basic Software Module specifications shall list all configuration parameter dependencies | SWS_Crc_00051 |
| SRS_BSW_00398 | The link-time configuration is achieved on object code basis in the stage after compiling and before linking | SWS_Crc_00051 |
| SRS_BSW_00399 | Parameter-sets shall be located in a separate segment and shall be loaded after the code | SWS_Crc_00051 |
| SRS_BSW_00400 | Parameter shall be selected from multiple sets of parameters after code has been loaded and started | SWS_Crc_00051 |
| SRS_BSW_00401 | Documentation of multiple instances of configuration parameters shall be available | SWS_Crc_00051 |
| SRS_BSW_00404 | BSW Modules shall support post-build configuration | SWS_Crc_00051 |
| SRS_BSW_00405 | BSW Modules shall support multiple configuration sets | SWS_Crc_00051 |
| SRS_BSW_00406 | A static status variable denoting if a BSW module is initialized shall be initialized with value 0 before any APIs of the BSW module is called | SWS_Crc_00051 |
| SRS_BSW_00407 | Each BSW module shall provide a function to read out the version information of a dedicated module implementation | SWS_Crc_00011, SWS_Crc_00017 |
| SRS_BSW_00409 | All production code error ID symbols are defined by the Dem module and shall be retrieved by the other BSW modules from Dem configuration | SWS_Crc_00051 |
| SRS_BSW_00410 | Compiler switches shall have defined values | SWS_Crc_00051 |
| SRS_BSW_00411 | All AUTOSAR Basic Software Modules shall apply a naming rule for enabling/disabling the existence of the API | SWS_Crc_00011, SWS_Crc_00017 |
| SRS_BSW_00412 | References to c-configuration parameters shall be placed into a separate h-file | SWS_Crc_00051 |
| SRS_BSW_00414 | Init functions shall have a pointer to a configuration structure as single parameter | SWS_Crc_00051 |
| SRS_BSW_00415 | Interfaces which are provided exclusively for one module shall be separated into a dedicated header file | SWS_Crc_00051 |
| SRS_BSW_00416 | The sequence of modules to be initialized | SWS_Crc_00051 |

| | | |
|---|---|---|
| | shall be configurable | |
| SRS_BSW_00417 | Software which is not part of the SW-C shall report error events only after the DEM is fully operational. | SWS_Crc_00051 |
| SRS_BSW_00422 | Pre-de-bouncing of error status information is done within the DEM | SWS_Crc_00051 |
| SRS_BSW_00423 | BSW modules with AUTOSAR interfaces shall be describable with the means of the SW-C Template | SWS_Crc_00051 |
| SRS_BSW_00424 | BSW module main processing functions shall not be allowed to enter a wait state | SWS_Crc_00051 |
| SRS_BSW_00425 | The BSW module description template shall provide means to model the defined trigger conditions of schedulable objects | SWS_Crc_00051 |
| SRS_BSW_00427 | ISR functions shall be defined and documented in the BSW module description template | SWS_Crc_00051 |
| SRS_BSW_00428 | A BSW module shall state if its main processing function(s) has to be executed in a specific order or sequence | SWS_Crc_00051 |
| SRS_BSW_00429 | BSW modules shall be only allowed to use OS objects and/or related OS services | SWS_Crc_00051 |
| SRS_BSW_00432 | Modules should have separate main processing functions for read/receive and write/transmit data path | SWS_Crc_00051 |
| SRS_BSW_00433 | Main processing functions are only allowed to be called from task bodies provided by the BSW Scheduler | SWS_Crc_00051 |
| SRS_LIBS_08518 | The CRC Library shall provide different calculation methods, optimizing either performance or memory usage | SWS_Crc_00065 |
| SRS_LIBS_08525 | The CRC library shall support the standard generator polynomials | SWS_Crc_00002, SWS_Crc_00003, SWS_Crc_00056, SWS_Crc_00057, SWS_Crc_00062, SWS_Crc_00063, SWS_Crc_00064 |
| SRS_LIBS_08526 | The CRC Library shall support current standards of CRC calculation | SWS_Crc_00065 |

# 7 Functional specification

## 7.1 Basic Concepts of CRC Codes

### 7.1.1 Mathematical Description

Let D be a bitwise representation of data with a total number of n bit, i.e.

$D = (dn-1, dn-2, dn-3, \ldots , d1, d0),$

with $d_0, d_1, \ldots = 0b, 1b$. The corresponding *Redundant Code* C is represented by n+k bit as

$C = (D, R) = (d_{n-1}, d_{n-2}, d_{n-3}, \ldots , d_2, d_1, d_0, r_{k-1}, \ldots , r_2, r_1, r_0)$

with $r_0, r_1, \ldots$ = 0b,1b and R = ($r_{k-1}, \ldots , r_2, r_1, r_0$ ) The code is simply a concatenation of the data and the redundant part. (For our application, we will chose k = 16, 32 and n as a multiple of 16 resp. 32).

CRC-Algorithms are related to *polynomials* with coefficients in the finite *field of two element*, using arithmetic operations ⊕ and * according to the following tables.

The ⊕ operation is identified as the binary operation *exclusive-or*, that is usually available in the ALU of any CPU.

| *⊕* | *0b* | *1b* |
|---|---|---|
| *0b* | 0b | 1b |
| *1b* | 1b | 0b |

| * | *0b* | *1b* |
|---|---|---|
| *0b* | 0b | 0b |
| *1b* | 0b | 1b |

For simplicity, we will write ab instead of a*b

We introduce some examples for *polynomials* with coefficients in the *field of two elements* and give the simplified notation of it.

(ex. 1) $p_1(X) = 1b\ X^3 + 0b\ X^2 + 1b\ X^1 + 0b\ X^0 = X^3 + X$

(ex. 2) $p_2(X) = 1b\ X^2 + 1b\ X^1 + 1b\ X^0 = X^2 + X^1 + 1b$

Any code word, represented by n+k bit can be mapped to a polynomial of order n+k-1 with coefficients in the field of two elements. We use the intuitive mapping of the bits i.e.

$C(X) = d_{n-1}X^{k+n-1} + d_{n-2}X^{k+n-2} + \ldots + d_2X^{k+2} + d_1X^{k+1} + d_0\ X^k$
$+ r_{k-1}X^{k-1} + r_{k-2}Xk^{-2} + \ldots r_1\ X + r_0$

$C(X) = X^k(d_{n-1}X^{n-1} + d_{n-2}X^{n-2} + \ldots + d_2X^2 + d_1X^1 + d_0)$
**$+ r_{k-1}X^{k-1} + r_{k-2}Xk^{-2} + \ldots r_1\ X + r_0$**

**$C(X) = X^k D(X) \oplus R(X)$**

This mapping is one-to-one.

A certain space $CRC_G$ of *Cyclic Redundant Code Polynomials* is defined to be a multiple of a given *Generator Polynomial* $G(X) = X^k + g_{k-1} X^{k-1} + g_{k-2} X^{k-2} + \ldots + g_2 X^2 + g_1 X + g_0$. By definition, for any code polynomial C(X) in $CRC_G$ there is a polynomial M(X) with

$$C(X) = G(X)\ M(X).$$

For a fixed irreducible (i.e. prime-) polynomial G(X), the mapping M(X) → C(X) is one-to-one. Now, how are data of a given codeword verified? This is basically a division of polynomials, using the *Euclidian Algorithm*. In practice, we are not interested in M(X), but in the *remainder* of the division, C(X) mod G(X). For a correct code word C, this remainder has to be *zero,* C(X) mod G(X) = 0. If this is not the case – there is an error in the codeword. Given G(X) has some additional algebraic properties, one can determine the error-location and correct the codeword.

Calculating the code word from the data can also be done with the Euclidian Algorithm. For a given data polynomial $D(x) = d_{n-1}X^{n-1} + d_{n-2}X^{n-2} + \ldots + d_1X^1 + d_0$ and the corresponding code polynomial C(X) we have

$$C(X) = X^k D(X) \oplus R(X) = M(X)\ G(X)$$

Performing the operation "mod G(X)" on both sides, one obtains

$$0 = C(X) \bmod G(X) = [X^k D(X)] \bmod G(X) \oplus R(X) \bmod G(X) \quad (*)$$

We denote that the order of the Polynomial R(X) is less than the order of G(X), so the modulo division gives zero with remainder R(X):

$$R(X) \bmod G(X) = R(X).$$

For polynomial R(X) with coefficients in the finite field with two elements we have the remarkable property R(X) + R(X) = 0. If we add R(X) on both sides of equation (*) we obtain

$$R(X) = X^k D(X) \bmod G(X).$$

The important implication is that the redundant part of the requested code can be determined by using the Euclidian Algorithm for polynomials. At present, any CRC calculation method is a more or less sophisticated variation of this basic algorithm.

Up to this point, the propositions on CRC Codes are summarized as follows:

1. The construction principle of CRC Codes is based on polynomials with coefficients in the finite field of two elements. The ⊕ operation of this field is identical to the binary operation "xor" (exclusive or)
2. There is a natural mapping of bit-sequences into this space of polynomials.

3. Both calculation and verification of the CRC code polynomial is based on division modulo a given generator polynomial.
4. This generator polynomial has to have certain algebraic properties in order to achieve error-detection and eventually error-correction.

### 7.1.2 Euclidian Algorithm for Binary Polynomials and Bit-Sequences

Given a Polynomial $P_n(X) = p_nX^n + p_{n-1}X^{n-1} + \ldots + p_2X^2 + p_1X + p_0$ with coefficients in the finite field of two elements. Let $Q(X) = X^k + q_{k-1}X^{k-1} + q_{k-2}X^{k-2} + \ldots + q_2X^2 + q_1X + q_0$ be another polynomial of exact order k>0. Let $R_n(X)$ be the remainder of the polynomial division of maximum order k-1 and $M_n(X)$ corresponding so that

$R_n(X) \oplus M_n(X)\, Q(X) = P_n(X)$.

**Euclidian Algorithm - Recursive**

(Termination of recursion)
If n < k, then choose $R_n(X) = P_n(X)$ and $M_n = 0$.

(Recursion n+1 → n)
Let $P_{n+1}(X)$ be of maximum order n+1.
If n+1>= k calculate $P_n(X) = P_{n+1}(X) - p_{n+1}\, Q(X)\, X^{n-k+1}$. This polynomial is of maximum order n. Then

$$P_{n+1}(X) \bmod Q(X) = P_n(X) \bmod Q(X).$$

**Proof of recursion**

Choose $R_{n+1}(X) = P_{n+1}(X) \bmod Q(X)$ and $M_{n+1}(X)$ so that

$$R_{n+1}(X) \oplus M_{n+1}(X)\, Q(X) = P_{n+1}(X).$$

Then $R_{n+1}(X) - R_n(X) = P_{n+1}(X) - M_{n+1}(X)\, Q(X) - P_n(X) \oplus M_n(X)\, Q(X)$.

With $P_{n+1}(X) - P_n(X) = p_{n+1}\, Q(X)\, X^{n-k+1}$ we obtain

$R_{n+1}(X) - R_n(X) = p_{n+1}\, Q(X)\, X^{n-k+1} + M_n(X)\, Q(X) - M_{n+1}(X)\, Q(X)$

$R_{n+1}(X) - R_n(X) = Q(X)\, [p_{n+1}\, X^{n-k+1} + M_n(X) - M_{n+1}(X)]$

On the left side, there is a polynomial of maximum order k-1. On the right side Q(X) is of exact order k. This implies that both sides are trivial and equal to zero. One obtains

$R_{n+1}(X) = R_n(X)$ (1)
$M_{n+1}(X) = M_n(X) + p_{n+1}\, X^{n-k+1}$ (2)

(end of proof)

**Example**

$P(X) = P_4(X) = X^4 + X^2 + X + 1b$; $Q(X) = X^2 + X + 1b$; n = 4; k = 2
$P_3(X) = X^4 + X^2 + X + 1b - 1b(X^2 + X + 1b)\ X^2 = X^3 + X + 1b.$
$P_2(X) = X^3 + X + 1b - 1b\ X\ (X^2 + X + 1b) = X^2 + 1b.$
$P_1(X) = X^2 + 1 - 1b\ (X^2 + X + 1) = X$
$R(X) = P(X) \bmod Q(X) = R_1(X) = P_1(X) = X.$

### 7.1.3 CRC calculation, Variations and Parameter

Based on the Euclidian Algorithm, some variations have been developed in order to improve the calculation performance. All these variations do not improve the capability to detect or correct errors – the so-called Hamming Distance of the resulting code is determined only by the generator polynomial. Variations simply optimize for different implementing ALUs.

CRC-Calculation methods are characterized as follows:

1. Rule for Mapping of Data to a bit sequence ($d_{n-1}$, $d_{n-2}$, $d_{n-3}$, … , $d_1$, $d_0$) and the corresponding data polynomial D(X) (standard or reflected data).
2. Generator polynomial G(X)
3. Start value and corresponding Polynomial S(X)
4. Appendix A(X), also called XOR-value for modifying the final result.
5. Rule for mapping the resulting CRC-remainder R(X) to codeword. (Standard or reflected data)

The calculation itself is organized in the following steps

- Map Data to D(X)
- Perform Euclidian Algorithm on $X^k\ D(X) + X^{n-k-1}\ S(X) + A(X)$ and determine $R(X) = [\ X^k\ D(X) + X^{n-k-1}\ S(X) + A(X)] \bmod G(X)$
- Map D(X), R(X) to codeword

## 7.2 Standard parameters

This section gives a rough overview on the standard parameters that are commonly used for 8-bit, 16-bit and 32-bit CRC calculation.

- CRC result width: Defines the result data width of the CRC calculation.
- Polynomial: Defines the generator polynomial which is used for the CRC algorithm.
- Initial value: Defines the start condition for the CRC algorithm.
- Input data reflected: Defines whether the bits of each input byte are

reflected before being processed (see definition below).

- Result data reflected: Similar to “Input data reflected” this parameter defines whether the bits of the CRC result are reflected (see definition below). The result is reflected over 8-bit for a CRC8, over 16-bit for a CRC16 and over 32-bit for a CRC32.
- XOR value: This Value is XORed to the final register value before the value is returned as the official checksum.
- Check: This field is a check value that can be used as a weak validator of implementations of the algorithm. The field contains the checksum obtained when the ASCII values '1' '2' '3' '4' '5' '6' '7' '8' '9' corresponding to values 31h 32h 33h 34h 35h 36h 37h 38h 39h is fed through the specified algorithm.
- Magic check: The CRC checking process calculates the CRC over the entire data block, including the CRC result. An error-free data block will always result in the unique constant polynomial (magic check) - representing the CRC-result XORed with 'XOR value'- regardless of the data block content.

Example of magic check: calculation of SAE-J1850 CRC8 (see detailed parameters in SWS_Crc_00030) over data bytes 00h 00h 00h 00h:

- CRC generation: CRC over 00h 00h 00h 00h, start value FFh:
  - CRC-result = 59h
- CRC check: CRC over 00h 00h 00h 00h 59h, start value FFh:
  - CRC-result = 3Bh
  - Magic check = CRC-result XORed with ‘XOR value’:
    C4h = 3Bh xor FFh

Data reflection: It is a reflection on a bit basis where data bits are written in the reverse order. The formula is:

$$reflect_n(x) = \sum_{i=0}^{n-1} x_i \times 2^{n-i-1}$$

where $x$ is the data and $n$ the number of data bits.

E.g. The reflection$_8$ of $2D_{16}$ ($n$ =8) ($00101101_2$) is $B4_{16}$ ($10110100_2$)

The reflection$_{16}$ of $12345678_{16}$ ($n$ =16) (0001 0010 0011 0100 0101 0110 0111 $1000_2$) is $1E6A2C48_{16}$ (0001 1110 0110 1010 0010 1100 0100 $1000_2$).

The reflection$_{32}$ of 123456789ABCDEF0 ($n$ =32) (0001 0010 0011 0100 0101 0110 0111 1000 1001 1010 1011 1100 1101 1110 1111 0000$_2$) is 0F7B3D591E6A2C48$_{16}$ (0000 1111 0111 1011 0011 1101 0101 1001 0001 1110 0110 1010 0010 1100 0100 1000$_2$).

The reflection$_8$ of 123456789ABCDEF0 ($n$ =8) (0001 0010 0011 0100 0101 0110 0111 1000 1001 1010 1011 1100 1101 1110 1111 0000$_2$) is 84C2A6E195D3B7F0$_{16}$ (1000 0100 1100 0010 1010 0110 1110 0001 1001 0101 1101 0011 1011 0111 1111 0000$_2$).

### 7.2.1 8-bit CRC calculation

#### 7.2.1.1 8-bit SAE J1850 CRC Calculation

**[SWS_Crc_00030]** ⌈The Crc_CalculateCRC8() function of the CRC module shall implement the CRC8 routine based on the SAE-J1850 CRC8 Standard:

| | |
|---|---|
| CRC result width: | 8 bits |
| Polynomial: | 1Dh |
| Initial value: | FFh |
| Input data reflected: | No |
| Result data reflected: | No |
| XOR value: | FFh |
| Check: | 4Bh |
| Magic check: | C4h |

⌋ ( )

**[SWS_Crc_00052]** ⌈ The Crc_CalculateCRC8() function of the CRC module shall provide the following CRC results:

| Data bytes (hexadecimal) | | | | | | | | | CRC |
|---|---|---|---|---|---|---|---|---|---|
| 00 | 00 | 00 | 00 | | | | | | 59 |
| F2 | 01 | 83 | | | | | | | 37 |
| 0F | AA | 00 | 55 | | | | | | 79 |
| 00 | FF | 55 | 11 | | | | | | B8 |
| 33 | 22 | 55 | AA | BB | CC | DD | EE | FF | CB |
| 92 | 6B | 55 | | | | | | | 8C |
| FF | FF | FF | FF | | | | | | 74 |

⌋ ()

#### 7.2.1.2 8-bit 0x2F polynomial CRC Calculation

**[SWS_Crc_00042]** ⌈The Crc_CalculateCRC8H2F() function of the CRC module shall implement the CRC8 routine based on the generator polynomial 0x2F:

| | |
|---|---|
| CRC result width: | 8 bits |
| Polynomial: | 2Fh |
| Initial value: | FFh |
| Input data reflected: | No |
| Result data reflected: | No |
| XOR value: | FFh |
| Check: | DFh |
| Magic check: | 42h |

⌋ ( )

**[SWS_Crc_00053]** ⌈ The Crc_CalculateCRC8H2F() function of the CRC module shall provide the following CRC results:

| Data bytes (hexadecimal) | | | | | | | | | CRC |
|---|---|---|---|---|---|---|---|---|---|
| 00 | 00 | 00 | 00 | | | | | | 12 |
| F2 | 01 | 83 | | | | | | | C2 |
| 0F | AA | 00 | 55 | | | | | | C6 |
| 00 | FF | 55 | 11 | | | | | | 77 |
| 33 | 22 | 55 | AA | BB | CC | DD | EE | FF | 11 |
| 92 | 6B | 55 | | | | | | | 33 |
| FF | FF | FF | FF | | | | | | 6C |

⌋ ()

### 7.2.2 16-bit CRC calculation

#### 7.2.2.1 16-bit CCITT-FALSE CRC16

**[SWS_Crc_00002]** ⌈The CRC module shall implement the CRC16 routine based on the CCITT-FALSE CRC16 Standard:
Note concerning the standard document [8]:
The computed FCS is equal to CRC16 XOR FFFFh when the frame is built (first complement of the CCITT-FALSE CRC16).
For the verification, the CRC16 (CCITT-FALSE) is computed on the same data + FCS, and the resulting value is always 1D0Fh.
Note that, if during the verification, the check would have been done on data + CRC16 (i.e. FCS XOR FFFFh) the resulting value would have been 0000h that is the CCITT-FALSE magic check.

| | |
|---|---|
| CRC result width: | 16 bits |
| Polynomial: | 1021h |
| Initial value: | FFFFh |
| Input data reflected: | No |

| | |
|---|---|
| Result data reflected: | No |
| XOR value: | 0000h |
| Check: | 29B1h |
| Magic check: | 0000h |

⌋ (SRS_LIBS_08525)

**[SWS_Crc_00054]** ⌈ The Crc_CalculateCRC16() function of the CRC module shall provide the following CRC results:

| Data bytes (hexadecimal) | | | | | | | | | CRC |
|---|---|---|---|---|---|---|---|---|---|
| 00 | 00 | 00 | 00 | | | | | | 84C0 |
| F2 | 01 | 83 | | | | | | | D374 |
| 0F | AA | 00 | 55 | | | | | | 2023 |
| 00 | FF | 55 | 11 | | | | | | B8F9 |
| 33 | 22 | 55 | AA | BB | CC | DD | EE | FF | F53F |
| 92 | 6B | 55 | | | | | | | 0745 |
| FF | FF | FF | FF | | | | | | 1D0F |

⌋ ()

### 7.2.3 32-bit CRC calculation

#### 7.2.3.1 32-bit Ethernet CRC Calculation

**[SWS_Crc_00003]** ⌈The CRC module shall implement the CRC32 routine based on the IEEE-802.3 CRC32 Ethernet Standard:

| | |
|---|---|
| CRC result width: | 32 bits |
| Polynomial: | 04C11DB7h |
| Initial value: | FFFFFFFFh |
| Input data reflected: | Yes |
| Result data reflected: | Yes |
| XOR value: | FFFFFFFFh |
| Check: | CBF43926h |
| Magic check*: | DEBB20E3h |

***Important note:** To match the magic check value, the CRC must be appended in little endian format, i.e. low significant byte first. This is due to the reflections of the input and the result.⌋ (SRS_LIBS_08525)

**[SWS_Crc_00055]** [ The Crc_CalculateCRC32() function of the CRC module shall provide the following CRC results:

| Data bytes (hexadecimal) | | | | | | | | | CRC |
|---|---|---|---|---|---|---|---|---|---|
| 00 | 00 | 00 | 00 | | | | | | 2144DF1C |
| F2 | 01 | 83 | | | | | | | 24AB9D77 |
| 0F | AA | 00 | 55 | | | | | | B6C9B287 |
| 00 | FF | 55 | 11 | | | | | | 32A06212 |
| 33 | 22 | 55 | AA | BB | CC | DD | EE | FF | B0AE863D |
| 92 | 6B | 55 | | | | | | | 9CDEA29B |
| FF | FF | FF | FF | | | | | | FFFFFFFF |

] ()

### 7.2.3.2 32-bit 0xF4ACFB13 polynomial CRC calculation

This 32-bit CRC function is described in [14]. It has an advantage with respect to the Ethernet CRC – it has a Hamming Distance of 6 up to 4kB.

[SWS_Crc_00056][ The CRC module shall implement the CRC32 routine using the 0x1'F4'AC'FB'13 (0xF4'AC'FB'13) polynomial:

| | |
|---|---|
| CRC result width: | 32 bits |
| Polynomial: | F4'AC'FB'13h |
| Initial value: | FFFFFFFFh |
| Input data reflected: | Yes |
| Result data reflected: | Yes |
| XOR value: | FFFFFFFFh |
| Check: | 16'97'D0'6Ah |
| Magic check*: | 90'4C'DD'BFh |
| Hamming distance: | 6, up to 4096 bytes (including CRC) |

***Important note:** To match the magic check value, the CRC must be appended in little endian format, i.e. low significant byte first. This is due to the reflections of the input and the result.
] (SRS_LIBS_08525)

There are three notations for encoding the polynomial, so to clarify, all three notations are shown:

| | | |
|---|---|---|
| 1 | Polynomial as binary | 0001`1111`0100`1010`1100`1111`1011`0001`0011 |
| 2 | Normal representation with high bit | 01'F4'AC'FB'13h |
| 3 | Normal representation | F4'AC'FB'13h |
| 4 | Reversed reciprocal representation (=Koopman representation) | FA'56'7D'89h |

Notes:

1. Normal representation with high bit = hex representation of polynomial as binary
2. Normal representation with high bit = Koopman representation * 2 + 1

[SWS_Crc_00057] ⌈ The Crc_CalculateCRC32P4() function of the CRC module shall provide the following CRC results:

| Data bytes (hexadecimal) | | | | | | | | | CRC |
|---|---|---|---|---|---|---|---|---|---|
| 00 | 00 | 00 | 00 | | | | | | 6FB32240h |
| F2 | 01 | 83 | | | | | | | 4F721A25h |
| 0F | AA | 00 | 55 | | | | | | 20662DF8h |
| 00 | FF | 55 | 11 | | | | | | 9BD7996Eh |
| 33 | 22 | 55 | AA | BB | CC | DD | EE | FF | A65A343Dh |
| 92 | 6B | 55 | | | | | | | EE688A78h |
| FF | FF | FF | FF | | | | | | FFFFFFFFh |

⌋ ( SRS_LIBS_08525)

### 7.2.4 64-bit CRC calculation

#### 7.2.4.1 64-bit ECMA polynomial CRC calculation

This 62-bit CRC function is described in [15]. It has a good hamming distance of 4, for long data (see below).

**[SWS_Crc_00062]**⌈ The CRC module shall implement the CRC64 routine using the 0x1’42’F0’E1’EB’A9’EA’36’93 (0x42’F0’E1’EB’A9’EA’36’93) polynomial:

| | |
|---|---|
| CRC result width: | 64 bits |
| Polynomial: | 42’F0’E1’EB’A9’EA’36’93h |
| Initial value: | FFFFFFFFFFFFFFFFh |
| Input data reflected: | Yes |
| Result data reflected: | Yes |
| XOR value: | FFFFFFFFFFFFFFFFh |
| Check: | 99’5D’C9’BB’DF’19’39’FAh |
| Magic check*: | 49’95’8C’9A’BD’7D’35’3Fh |
| Hamming distance: | 4, up to almost 8 GB |

***Important note:** To match the magic check value, the CRC must be appended in little endian format, i.e. low significant byte first. This is due to the reflections of the input and the result.
⌋ (SRS_LIBS_08525)

There are three notations for encoding the polynomial, so to clarify, all three notations are shown:

| | | |
|---|---|---|
| 1 | Polynomial as binary | 0001’0100’0010’1111’0000’1110’0001’1110’1011’1010’1001’1110’1010’0011’0110’1001’0011 |

| | | |
|---|---|---|
| 2 | Normal representation with high bit | 01’42’F0’E1’EB’A9’EA’36’93h |
| 3 | Normal representation | 42’F0’E1’EB’A9’EA’36’93h |
| 4 | Reversed reciprocal representation (=Koopman representation) | A1’78’70’F5’D4’F5’1B’49h |

Notes:

1. Normal representation with high bit = hex representation of polynomial as binary
2. Normal representation with high bit = Koopman representation * 2 + 1

**[SWS_Crc_00063]** ⌈ The Crc_CalculateCRC64() function of the CRC module shall provide the following CRC results:

| Data bytes (hexadecimal) | | | | | | | | | CRC |
|---|---|---|---|---|---|---|---|---|---|
| 00 | 00 | 00 | 00 | | | | | | F4A586351E1B9F4Bh |
| F2 | 01 | 83 | | | | | | | 319C27668164F1C6h |
| 0F | AA | 00 | 55 | | | | | | 54C5D0F7667C1575h |
| 00 | FF | 55 | 11 | | | | | | A63822BE7E0704E6h |
| 33 | 22 | 55 | AA | BB | CC | DD | EE | FF | 701ECEB219A8E5D5h |
| 92 | 6B | 55 | | | | | | | 5FAA96A9B59F3E4Eh |
| FF | FF | FF | FF | | | | | | FFFFFFFF00000000h |

⌋ ( SRS_LIBS_08525)

## 7.3 General behavior

Data blocks are passed to the CRC routines using the parameters “start address”, “size” and “start value”. The return value is the CRC result.

## 7.4 Error classification

The CRC library functions do not provide any error classification. CRC recalculation and comparison must be done by each module in the upper layer (e.g. NVRAM Manager).

## 7.5 Error detection

The CRC library functions do not provide any error detection mechanism.

## 7.6 Error notification

The CRC library functions do not provide any error notification.

## 7.7 Version check

For details, refer to the chapter 5.1.8 “Version Check” in SWS_BSWGeneral.

## 7.8 Debugging concept

None

# 8 API specification

## 8.1 Imported types

In this chapter, all types included from the following files are listed:

**[SWS_Crc_00018]** ⌈

| *Module* | *Imported Type* |
|---|---|
| Std_Types | Std_VersionInfoType |

⌋ ()

## 8.2 Type definitions

None.

## 8.3 Function definitions

**[SWS_Crc_00013]** ⌈If CRC routines are to be used as a library, the CRC modules' implementer shall develop the CRC module in a way that only those parts of the CRC code that are used by other modules are linked into the final binary.⌋ ( )

**[SWS_Crc_00014]** ⌈The CRC function (with parameter *Crc_IsFirstCall* = TRUE) shall do the following operations:

1. As 'Initial value' of the CRC computation, uses the attribute 'Initial value' of the polynomial:
   `Crc = PolynomialInitVal`
2. If the attribute 'Input data reflected' of the polynomial is TRUE, then reflects input data (byte per byte) obtained via parameters *Crc_DataPtr* and *Crc_Length*:
   $Data = reflect_{8}\ (Data)$ *(in the case 'Input data reflected' is TRUE)*
3. Compute the CRC over the data, the last CRC and the CRC polynomial:
   `Crc = f(Data, Crc, Polynomial)`
4. Execute the XOR operation between crc and 'XOR value' of the polynomial:
   `Crc = Crc ^ PolynomialXorVal`
5. If the attribute 'Result data reflected' of the polynomial is TRUE, then reflect the CRC (over 8, 16 or 32 bits, depending on the CRC size):
   $Crc = reflect_{Crc\ size}\ (Crc)$ *(in the case 'Result data reflected' is TRUE)*
6. The CRC is returned:
   `return Crc`

Steps 2 and 3 are performed as long as data are available

⌋ ( )

**[SWS_Crc_00041]** ⌈ The CRC function (with parameter *Crc_IsFirstCall* = FALSE) shall do the following operations:

1. As 'Initial value' of the CRC computation, uses the parameter Crc_StartValueX (where X is 8, 8H2F, 16, 32, P4 or 64) that should be the CRC result of the last call. The result is then XORed with 'XOR value' and reflected if 'Result data reflected' of the polynomial is TRUE:
   `Crc = Crc_StartValueX ^ PolynomialXorVal`
   $Crc = reflect_{Crc\ size}\ (Crc)$ *(in the case 'Result data reflected' is TRUE)*

Steps 2 to 6 are identical to **[SWS_Crc_00014]** .⌋ ()

Usage of CRC functions:
For the first or the unique call the user of a CRC function shall:

1. give a pointer to the data (*Crc_DataPtr*)
2. give the number of bytes of data (*Crc_Length*)
3. give the *Crc_StartValueX* parameter a don't care value (the initialization value is known by the chosen algorithm)
4. give the *Crc_IsFirstCall* parameter the value TRUE to inform the library that it is the first or unique call
5. call the CRC function
6. get the CRC

For the subsequent calls the user has to:

1. give a pointer to the data (*Crc_DataPtr*)
2. give the number of bytes of data (*Crc_Length*)
3. give the *Crc_StartValueX* parameter (X is 8, 8H2F, 16, 32, P4 or 64) the CRC result of the previous call
4. give the *Crc_IsFirstCall* parameter the value FALSE to inform the library that it is not the first call
5. call the CRC function
6. get the CRC

Example 1: calculation of CRC8: calculation of CRC8 SAEJ1850, over one of test patterns defined by SAE J1850 specification (00h, FFh, 55h, 11h results with CRC B8h)

- If done in one step:

```
uint8 Array[4] = {0x00, 0xFF, 0x55, 0x11};
uint8 ignored_val = 0x001; /* any value, it is ignored */

uint8 resultSAE = Crc_CalculateCRC8(&Array[0], 4, ignored_val, TRUE);
```

resultSAE shall be equal to B8h

- If done in several steps:

```
uint8 Array[4] = {0x00, 0xFF, 0x55, 0x11};
uint8 ignored_val = 0x001; /* any value, it is ignored */

uint8 resultSAE = Crc_CalculateCRC8(&Array[0], 2, ignored_val,
 TRUE);
resultSAE = Crc_CalculateCRC8(&Array[2], 1, resultSAE, FALSE);
resultSAE = Crc_CalculateCRC8(&Array[3], 1, resultSAE, FALSE);
```

resultSAE shall be also equal to B8h

Example 2: calculation of CRC8: calculation of that is *not* compatible with SAE J1850, but it is compatible with AUTOSAR releases before R4.0:

- If done in one step:

```
uint8 Array[4] = {0x00, 0xFF, 0x55, 0x11};

/* The first call also gets IsFirstCall set to FALSE, and 0xFF as
start value, which is immediately XORed with 0xFF by CalculateCRC8,
resulting with start value equal to 0x00. */
uint8 resultRel3 = Crc_CalculateCRC8(&Array[0], 4, 0xFF, FALSE);

/* The last XORing must be negated by the caller, to come to 0x00 XOR
value. */
resultRel3 = resultR3 ^ 0xFF;
```

resultRel3 contains the same value as computed by AUTOSAR R3.2 CRC8.

- If done in several steps:

```
uint8 Array[4] = {0x00, 0xFF, 0x55, 0x11};

/* The first call also gets IsFirstCall set to FALSE, and 0xFF as
start value, which is immediately XORed with 0xFF by CalculateCRC8,
resulting with start value equal to 0x00. */
uint8 resultRel3 = Crc_CalculateCRC8(&Array[0], 2, 0xFF, FALSE);

resultRel3 = Crc_CalculateCRC8(&Array[2], 1, resultRel3,FALSE);
resultRel3 = Crc_CalculateCRC8(&Array[3], 1, resultRel3, FALSE);

/* The last XORing must be negated by the caller, to come to 0x00 XOR
value. */
resultRel3 = resultR3 ^ 0xFF;
```

resultRel3 contains also the same value as computed by AUTOSAR R3.2 CRC8.

Example 3: calculation of CRC32 Ethernet Standard (see detailed parameters in SWS_Crc_00003) over data bytes 01h 02h 03h 04h 05h 06h 07h 08h:

- In one function call, CRC over 01h 02h 03h 04h 05h 06h 07h 08h, start value FFFFFFFFh:
  - CRC-result = 3FCA88C5h (final value)
- In two function calls:
  - CRC over 01h 02h 03h 04h, start value FFFFFFFFh:

- CRC-result of first call = B63CFBCDh (intermediate value)
- CRC over 05h 06h 07h 08h, start value: B63CFBCDh xor *XOR value* (FFFFFFFFh) = 49C30432h and after reflection: 4C20C392h
  - CRC-result of final call = 3FCA88C5h (final value)

The following C-code example shows that the caller modifies the start value by using the previous result (without any rework) and indicates that it is no more the first call:

```
InterResult = Crc_CalculateCRC32(&Array12345678[0], 4, 0xFFFFFFFF, TRUE);
result = Crc_CalculateCRC32(&Array12345678[4], 4, InterResult, FALSE);
```

### 8.3.1 8-bit CRC Calculation

#### 8.3.1.1 8-bit SAE J1850 CRC Calculation

**[SWS_Crc_00031]** ⌈

| | | |
|---|---|---|
| ***Service name:*** | Crc_CalculateCRC8 | |
| ***Syntax:*** | `uint8 Crc_CalculateCRC8(`<br>`  const uint8* Crc_DataPtr,`<br>`  uint32 Crc_Length,`<br>`  uint8 Crc_StartValue8,`<br>`  boolean Crc_IsFirstCall`<br>`)` | |
| ***Service ID[hex]:*** | 0x01 | |
| ***Sync/Async:*** | Synchronous | |
| ***Reentrancy:*** | Reentrant | |
| ***Parameters (in):*** | Crc_DataPtr | Pointer to start address of data block to be calculated. |
| | Crc_Length | Length of data block to be calculated in bytes. |
| | Crc_StartValue8 | Start value when the algorithm starts. |
| | Crc_IsFirstCall | TRUE: First call in a sequence or individual CRC calculation; start from initial value, ignore Crc_StartValue8.<br>FALSE: Subsequent call in a call sequence; Crc_StartValue8 is interpreted to be the return value of the previous function call. |
| ***Parameters (in-out):*** | None | |
| ***Parameters (out):*** | None | |
| ***Return value:*** | uint8 | 8 bit result of CRC calculation. |
| ***Description:*** | This service makes a CRC8 calculation on Crc_Length data bytes, with SAE J1850 parameters | |

⌋ ()

**[SWS_Crc_00032]** ⌈The function `Crc_CalculateCRC8` shall perform a CRC8 calculation on `Crc_Length` data bytes, pointed to by `Crc_DataPtr`, with the starting value of `Crc_StartValue8`. ⌋ ( )

**[SWS_Crc_00033]** ⌈If the CRC calculation within the function `Crc_CalculateCRC8` is performed by hardware, then the CRC module's implementer shall ensure reentrancy of this function by implementing a (software based) locking mechanism. ⌋ ( )

Note: If large data blocks have to be calculated (>32 bytes, depending on performance of processor platform), the table based calculation method should be configured for the function `Crc_CalculateCRC8` in order to decrease the calculation time.

The function `Crc_CalculateCRC8` requires specification of configuration parameters defined in ECUC_Crc_00006.

#### 8.3.1.2 8-bit 0x2F polynomial CRC Calculation

**[SWS_Crc_00043]** ⌈

| | | |
|---|---|---|
| ***Service name:*** | Crc_CalculateCRC8H2F | |
| ***Syntax:*** | `uint8 Crc_CalculateCRC8H2F(`<br>`  const uint8* Crc_DataPtr,`<br>`  uint32 Crc_Length,`<br>`  uint8 Crc_StartValue8H2F,`<br>`  boolean Crc_IsFirstCall`<br>`)` | |
| ***Service ID[hex]:*** | 0x05 | |
| ***Sync/Async:*** | Synchronous | |
| ***Reentrancy:*** | Reentrant | |
| ***Parameters (in):*** | Crc_DataPtr | Pointer to start address of data block to be calculated. |
| | Crc_Length | Length of data block to be calculated in bytes. |
| | Crc_StartValue8H2F | Start value when the algorithm starts. |
| | Crc_IsFirstCall | TRUE: First call in a sequence or individual CRC calculation; start from initial value, ignore Crc_StartValue8H2F.<br>FALSE: Subsequent call in a call sequence; Crc_StartValue8H2F is interpreted to be the return value of the previous function call. |
| ***Parameters (in-out):*** | None | |
| ***Parameters (out):*** | None | |
| ***Return value:*** | uint8 | 8 bit result of CRC calculation. |
| ***Description:*** | This service makes a CRC8 calculation with the Polynomial 0x2F on Crc_Length | |

⌋ ()

**[SWS_Crc_00044]** ⌈The function `Crc_CalculateCRC8H2F` shall perform a CRC8 calculation with the polynomial 0x2F on `Crc_Length` data bytes, pointed to by `Crc_DataPtr`, with the starting value of `Crc_StartValue8H2F`. ⌋ ()

**[SWS_Crc_00045]** ⌈If the CRC calculation within the function `Crc_CalculateCRC8H2F` is performed by hardware, then the CRC module's implementer shall ensure reentrancy of this function by implementing a (software based) locking mechanism. ⌋ ()

Note: If large data blocks have to be calculated (>32 bytes, depending on performance of processor platform), the table based calculation method should be configured for the function `Crc_CalculateCRC8H2F` in order to decrease the calculation time.

The function `Crc_CalculateCRC8H2F` requires specification of configuration parameters defined ECUC_Crc_00006.

### 8.3.2 16-bit CRC Calculation

#### 8.3.2.1 16-bit CCITT-FALSE CRC16

**[SWS_Crc_00019]** ⌈

| | | |
|---|---|---|
| ***Service name:*** | Crc_CalculateCRC16 | |
| ***Syntax:*** | `uint16 Crc_CalculateCRC16(`<br>`  const uint8* Crc_DataPtr,`<br>`  uint32 Crc_Length,`<br>`  uint16 Crc_StartValue16,`<br>`  boolean Crc_IsFirstCall`<br>`)` | |
| ***Service ID[hex]:*** | 0x02 | |
| ***Sync/Async:*** | Synchronous | |
| ***Reentrancy:*** | Reentrant | |
| ***Parameters (in):*** | Crc_DataPtr | Pointer to start address of data block to be calculated. |
| | Crc_Length | Length of data block to be calculated in bytes. |
| | Crc_StartValue16 | Start value when the algorithm starts. |
| | Crc_IsFirstCall | TRUE: First call in a sequence or individual CRC calculation; start from initial value, ignore Crc_StartValue16.<br>FALSE: Subsequent call in a call sequence; Crc_StartValue16 is interpreted to be the return value of the previous function call. |
| ***Parameters (in-out):*** | None | |
| ***Parameters (out):*** | None | |
| ***Return value:*** | uint16 | 16 bit result of CRC calculation. |
| ***Description:*** | This service makes a CRC16 calculation on Crc_Length data bytes. | |

⌋ ()

**[SWS_Crc_00015]** ⌈The function `Crc_CalculateCRC16` shall perform a CRC16 calculation on `Crc_Length` data bytes, pointed to by `Crc_DataPtr`, with the starting value of `Crc_StartValue16.` ⌋ ( )

**[SWS_Crc_00009]** ⌈If the CRC calculation within the function `Crc_CalculateCRC16` is performed by hardware, then the CRC module's implementer shall ensure reentrancy of this function by implementing a (software based) locking mechanism. ⌋ ( )

Note: If large data blocks have to be calculated (>32 bytes, depending on performance of processor platform), the table based calculation method should be configured for the function `Crc_CalculateCRC16` in order to decrease the calculation time.

The function `Crc_CalculateCRC16` requires specification of configuration parameters defined in ECUC_Crc_00006.

### 8.3.3 32-bit CRC Calculation

#### 8.3.3.1 32-bit Ethernet CRC Calculation

**[SWS_Crc_00020]** ⌈

| | | |
|---|---|---|
| ***Service name:*** | Crc_CalculateCRC32 | |
| ***Syntax:*** | `uint32 Crc_CalculateCRC32(`<br>`  const uint8* Crc_DataPtr,`<br>`  uint32 Crc_Length,`<br>`  uint32 Crc_StartValue32,`<br>`  boolean Crc_IsFirstCall`<br>`)` | |
| ***Service ID[hex]:*** | 0x03 | |
| ***Sync/Async:*** | Synchronous | |
| ***Reentrancy:*** | Reentrant | |
| ***Parameters (in):*** | Crc_DataPtr | Pointer to start address of data block to be calculated. |
| | Crc_Length | Length of data block to be calculated in bytes. |
| | Crc_StartValue32 | Start value when the algorithm starts. |
| | Crc_IsFirstCall | TRUE: First call in a sequence or individual CRC calculation; start from initial value, ignore Crc_StartValue32.<br>FALSE: Subsequent call in a call sequence; Crc_StartValue32 is interpreted to be the return value of the previous function call. |
| ***Parameters (in-out):*** | None | |
| ***Parameters (out):*** | None | |
| ***Return value:*** | uint32 | 32 bit result of CRC calculation. |
| ***Description:*** | This service makes a CRC32 calculation on Crc_Length data bytes. | |

⌋ ()

**[SWS_Crc_00016]** ⌈The function `Crc_CalculateCRC32` shall perform a CRC32 calculation on `Crc_Length` data bytes, pointed to by `Crc_DataPtr`, with the starting value of `Crc_StartValue32`.⌋ ( )

**[SWS_Crc_00010]** ⌈If the CRC calculation within the function `Crc_CalculateCRC32` is performed by hardware, then the CRC module's implementer shall ensure reentrancy of this function by implementing a (software based) locking mechanism.⌋ ( )

Note: If large data blocks have to be calculated (>32 bytes, depending on performance of processor platform), the table based calculation method should be configured for the function `Crc_CalculateCRC32` in order to decrease the calculation time.

The function `Crc_CalculateCRC32` requires specification of configuration parameters defined in ECUC_Crc_00006.

#### 8.3.3.2 32-bit 0xF4ACFB13 polynomial CRC calculation

**[SWS_Crc_00058]** ⌈

| | | |
|---|---|---|
| ***Service name:*** | Crc_CalculateCRC32P4 | |
| ***Syntax:*** | `uint32 Crc_CalculateCRC32P4(`<br>`  const uint8* Crc_DataPtr,`<br>`  uint32 Crc_Length,`<br>`  uint32 Crc_StartValue32,`<br>`  boolean Crc_IsFirstCall`<br>`)` | |
| ***Service ID[hex]:*** | 0x06 | |
| ***Sync/Async:*** | Synchronous | |
| ***Reentrancy:*** | Reentrant | |
| ***Parameters (in):*** | Crc_DataPtr | Pointer to start address of data block to be calculated. |
| | Crc_Length | Length of data block to be calculated in bytes. |
| | Crc_StartValue32 | Start value when the algorithm starts. |
| | Crc_IsFirstCall | TRUE: First call in a sequence or individual CRC calculation; start from initial value, ignore Crc_StartValue32.<br>FALSE: Subsequent call in a call sequence; Crc_StartValue32 is interpreted to be the return value of the previous function call. |
| ***Parameters (in-out):*** | None | |
| ***Parameters (out):*** | None | |
| ***Return value:*** | uint32 | 32 bit result of CRC calculation. |
| ***Description:*** | This service makes a CRC32 calculation on Crc_Length data bytes, using the polynomial 0xF4ACFB13.<br><br>This CRC routine is used by E2E Profile 4. | |

⌋ ()

**[SWS_Crc_00059]**⌈ The function `Crc_CalculateCRC32P4` shall perform a CRC32 calculation using polynomial 0xF4ACFB13 on `Crc_Length` data bytes, pointed to by `Crc_DataPtr`, with the starting value of `Crc_StartValue32`.⌋ ()

**[SWS_Crc_00060]** ⌈ If the CRC calculation within the function `Crc_CalculateCRC32P4` is performed by hardware, then the CRC module's implementer shall ensure reentrancy of this function by implementing a (software based) locking mechanism.⌋ ()

Note: If large data blocks have to be calculated (>32 bytes, depending on performance of processor platform), the (1) hardware supported CRC calculation or (2) table based calculation method, should be configured for the function `Crc_CalculateCRC32P4` in order to decrease the calculation time.
The function `Crc_CalculateCRC32P4` requires specification of configuration parameters defined in ECUC_Crc_00006.

### 8.3.4 64-bit CRC Calculation

#### 8.3.4.1 64-bit 0x42F0E1EBA9EA3693 polynomial CRC calculation

**[SWS_Crc_00061]** ⌈

| | | |
|---|---|---|
| ***Service name:*** | Crc_CalculateCRC64 | |
| ***Syntax:*** | `uint64 Crc_CalculateCRC64(`<br>`  const uint8* Crc_DataPtr,`<br>`  uint32 Crc_Length,`<br>`  uint64 Crc_StartValue64,`<br>`  boolean Crc_IsFirstCall`<br>`)` | |
| ***Service ID[hex]:*** | 0x07 | |
| ***Sync/Async:*** | Synchronous | |
| ***Reentrancy:*** | Reentrant | |
| ***Parameters (in):*** | Crc_DataPtr | Pointer to start address of data block to be calculated. |
| | Crc_Length | Length of data block to be calculated in bytes. |
| | Crc_StartValue64 | Start value when the algorithm starts. |
| | Crc_IsFirstCall | TRUE: First call in a sequence or individual CRC calculation; start from initial value, ignore Crc_StartValue64.<br>FALSE: Subsequent call in a call sequence; Crc_StartValue64 is interpreted to be the return value of the previous function call. |
| ***Parameters (in-out):*** | None | |
| ***Parameters (out):*** | None | |
| ***Return value:*** | uint64 | 64 bit result of CRC calculation. |
| ***Description:*** | This service makes a CRC64 calculation on Crc_Length data bytes, using the polynomial 0x42F0E1EBA9EA3693.<br><br>This CRC routine is used by E2E Profile 7. | |

⌋ ()

**[SWS_Crc_00064]**⌈ The function `Crc_CalculateCRC64` shall perform a CRC64 calculation using polynomial 0x42F0E1EBA9EA3693 on `Crc_Length` data bytes, pointed to by `Crc_DataPtr`, with the starting value of `Crc_StartValue64`.⌋ (SRS_LIBS_08525)

**[SWS_Crc_00065]** ⌈ If the CRC calculation within the function `Crc_CalculateCRC64` is performed by hardware, then the CRC module's implementer shall ensure reentrancy of this function by implementing a (software based) locking mechanism.⌋ (SRS_LIBS_08518, SRS_LIBS_08526)

Note: If large data blocks have to be calculated (>64 bytes, depending on performance of processor platform), the (1) hardware supported CRC calculation or (2) table based calculation method, should be configured for the function `Crc_CalculateCRC64` in order to decrease the calculation time.
The function `Crc_CalculateCRC64` requires specification of configuration parameters defined in ECUC_Crc_00006.

### 8.3.5 Crc_GetVersionInfo

**[SWS_Crc_00021]** ⌈

| | | |
|---|---|---|
| ***Service name:*** | Crc_GetVersionInfo | |
| ***Syntax:*** | `void Crc_GetVersionInfo( Std_VersionInfoType* Versioninfo )` | |
| ***Service ID[hex]:*** | 0x04 | |
| ***Sync/Async:*** | Synchronous | |
| ***Reentrancy:*** | Reentrant | |
| ***Parameters (in):*** | None | |
| ***Parameters (in-out):*** | None | |
| ***Parameters (out):*** | Versioninfo | Pointer to where to store the version information of this module. |
| ***Return value:*** | None | |
| ***Description:*** | This service returns the version information of this module. | |

⌋ ()

**[SWS_Crc_00011]** ⌈The function `Crc_GetVersionInfo` shall return the version information of the CRC module. The version information includes:

- Module Id
- Vendor Id
- Vendor specific version numbers (SRS_BSW_00407). ⌋ (SRS_BSW_00407, SRS_BSW_00411)

**[SWS_Crc_00017]** ⌈If source code for caller and callee of the function Crc_GetVersionInfo is available, the CRC module should realize this function as a macro, defined in the modules header file. ⌋ (SRS_BSW_00407, SRS_BSW_00411)

## 8.4 Call-back notifications

None.

## 8.5 Scheduled functions

This chapter lists all functions called directly by the Basic Software Module Scheduler.

The Crc module does not have scheduled functions.

## 8.6 Expected Interfaces

In this chapter, all interfaces required from other modules are listed.

### 8.6.1 Mandatory Interfaces

None

### 8.6.2 Optional Interfaces

None.

### 8.6.3 Configurable interfaces

None.

# 9 Sequence diagrams

## 9.1 Crc_CalculateCRC8()

The following diagram shows the synchronous function call `Crc_CalculateCRC8`.

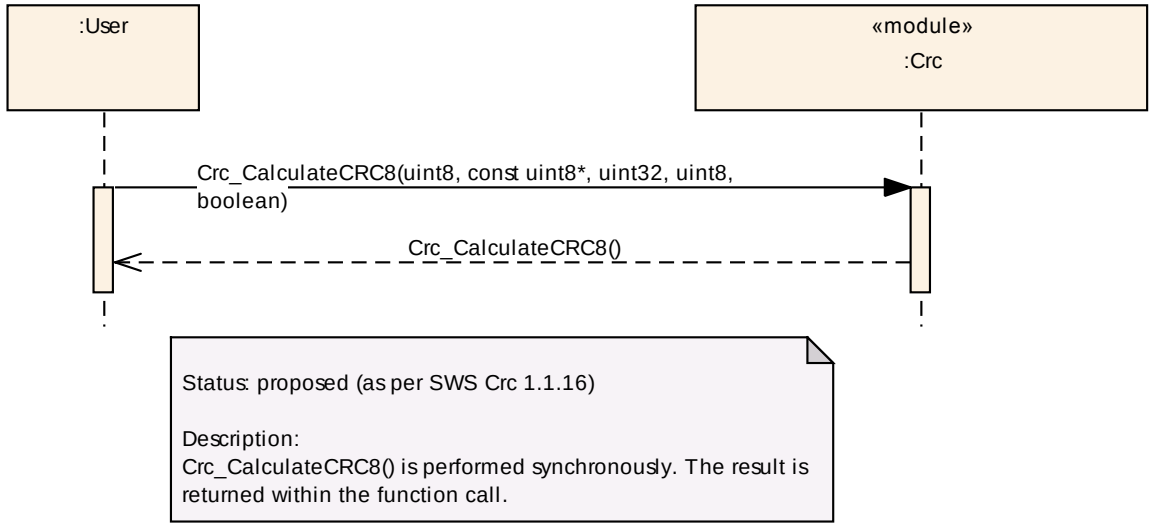


## 9.2 Crc_CalculateCRC8H2F()

The following diagram shows the synchronous function call `Crc_CalculateCRC8H2F`.

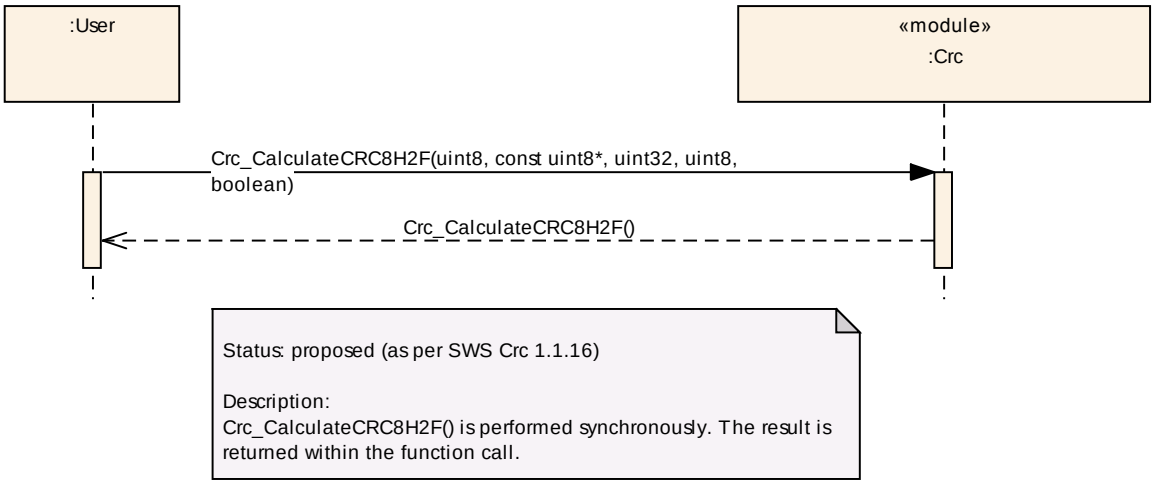

## 9.3 Crc_CalculateCRC16()

The following diagram shows the synchronous function call `Crc_CalculateCRC16`.

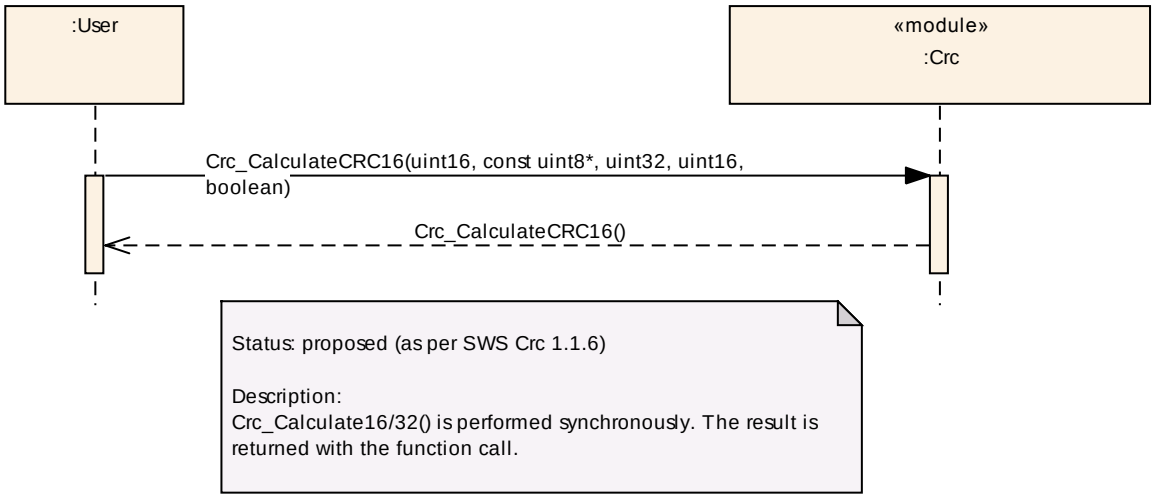


## 9.4 Crc_CalculateCRC32()

The following diagram shows the synchronous function call `Crc_CalculateCRC32`.

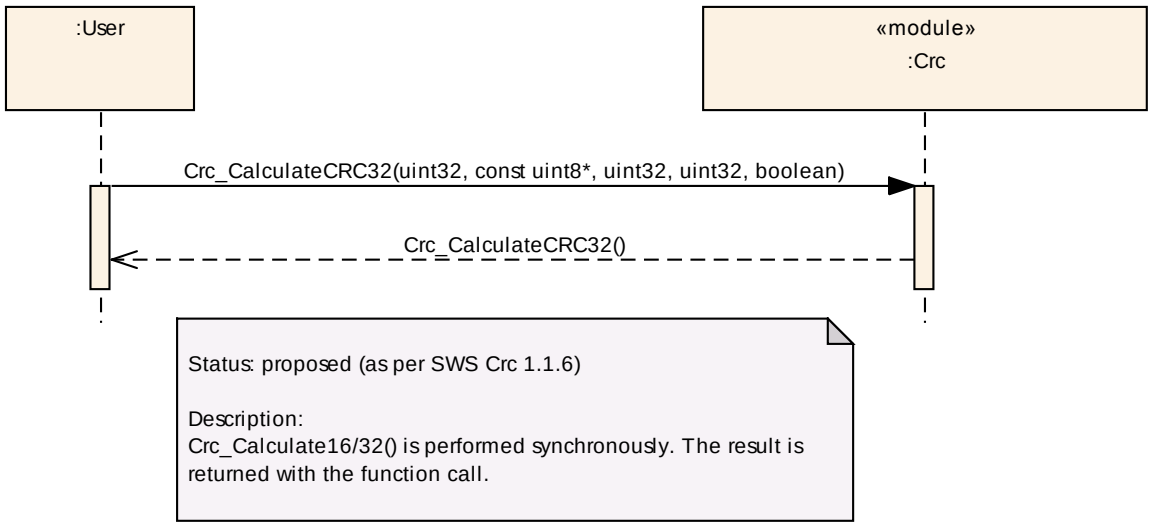

## 9.5 Crc_CalculateCRC32P4()

The following diagram shows the synchronous function call `Crc_CalculateCRC32P4`.

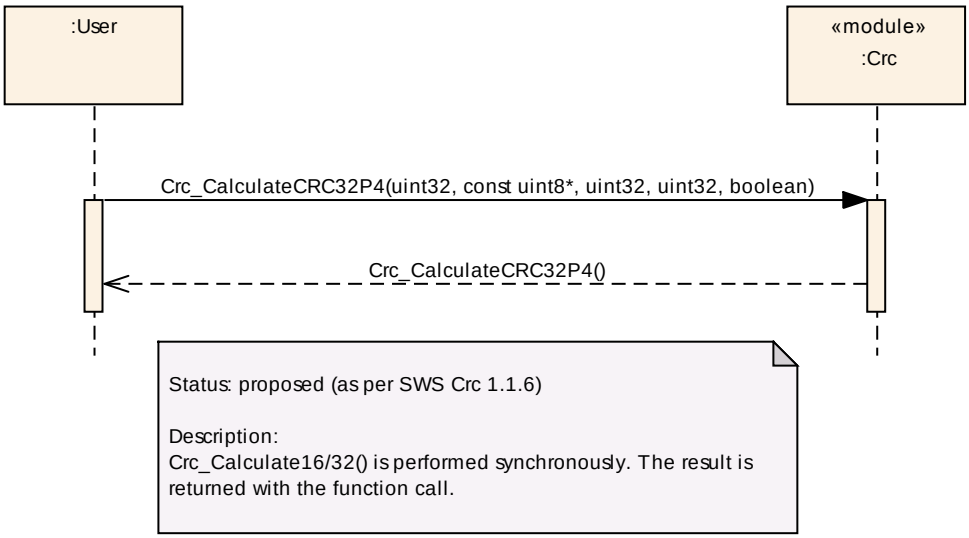


## 9.6 Crc_CalculateCRC64()

The following diagram shows the synchronous function call `Crc_CalculateCRC64`.

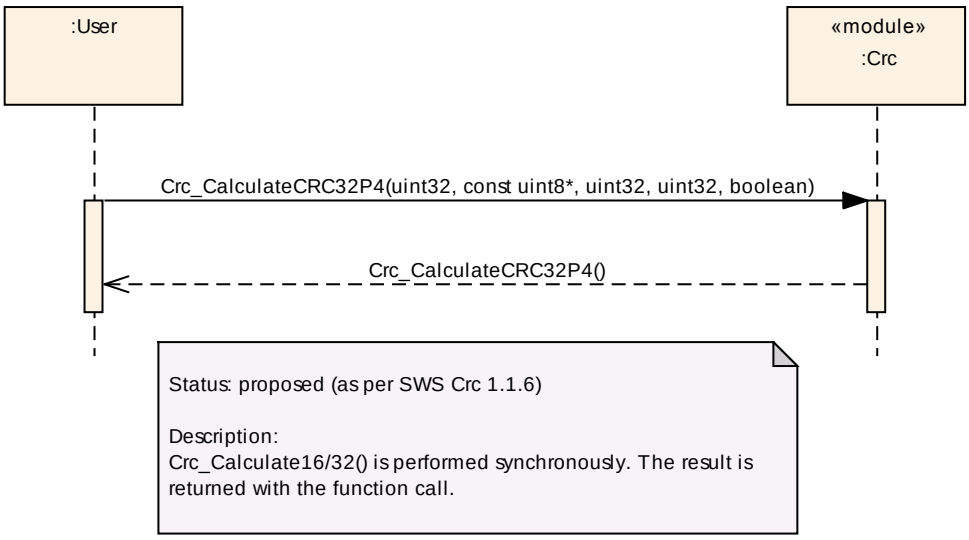

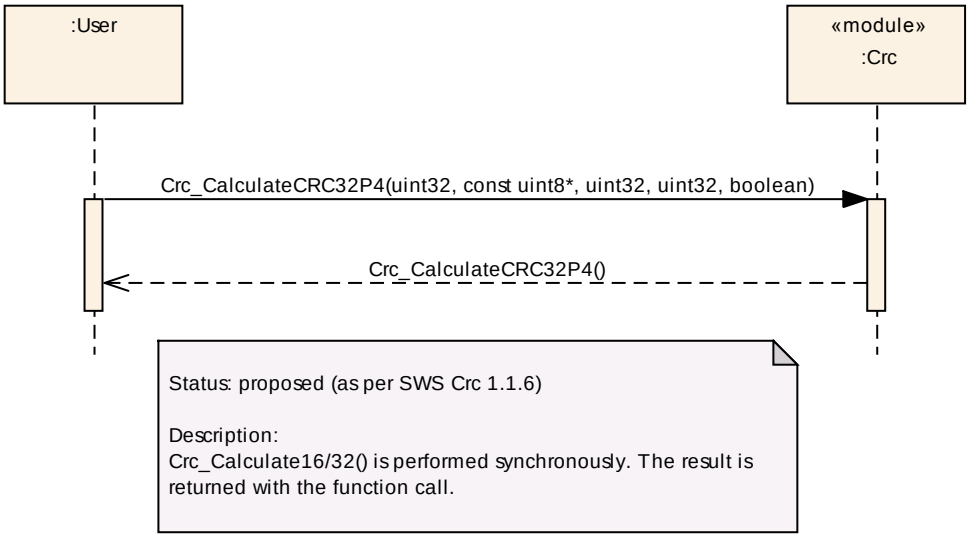
:User
«module»
:Crc
Crc_CalculateCRC32P4(uint32, const uint8*, uint32, uint32, boolean)
Crc_CalculateCRC32P4()
Status: proposed (as per SWS Crc 1.1.6)
Description:
Crc_Calculate16/32() is performed synchronously. The result is returned with the function call.

# 10 Configuration specification

## 10.1 How to read this chapter

In addition to this section, it is highly recommended to read the documents:

- AUTOSAR Layered Architecture [2]
- AUTOSAR ECU Configuration Specification [5]:
  This document describes the AUTOSAR configuration methodology and the AUTOSAR configuration metamodel in detail.

The following is only a short survey of the topic and it will not replace the ECU Configuration Specification document.

### 10.1.1 Configuration and configuration parameters

Configuration parameters define the variability of the generic part(s) of an implementation of a module. This means that only generic or configurable module implementation can be adapted to the environment (software/hardware) in use during system and/or ECU configuration.

The configuration of parameters can be achieved at different times during the software process: before compile time, before link time or after build time. In the following, the term “configuration class” (of a parameter) shall be used in order to refer to a specific configuration point in time.

### 10.1.2 Containers

Containers structure the set of configuration parameters. This means:

- *all* configuration parameters are kept in containers.
- (sub-) containers can reference (sub-) containers. It is possible to assign a multiplicity to these references. The multiplicity then defines the possible number of instances of the contained parameters.

## 10.2 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters are described in Chapters 7 and Chapter 8.

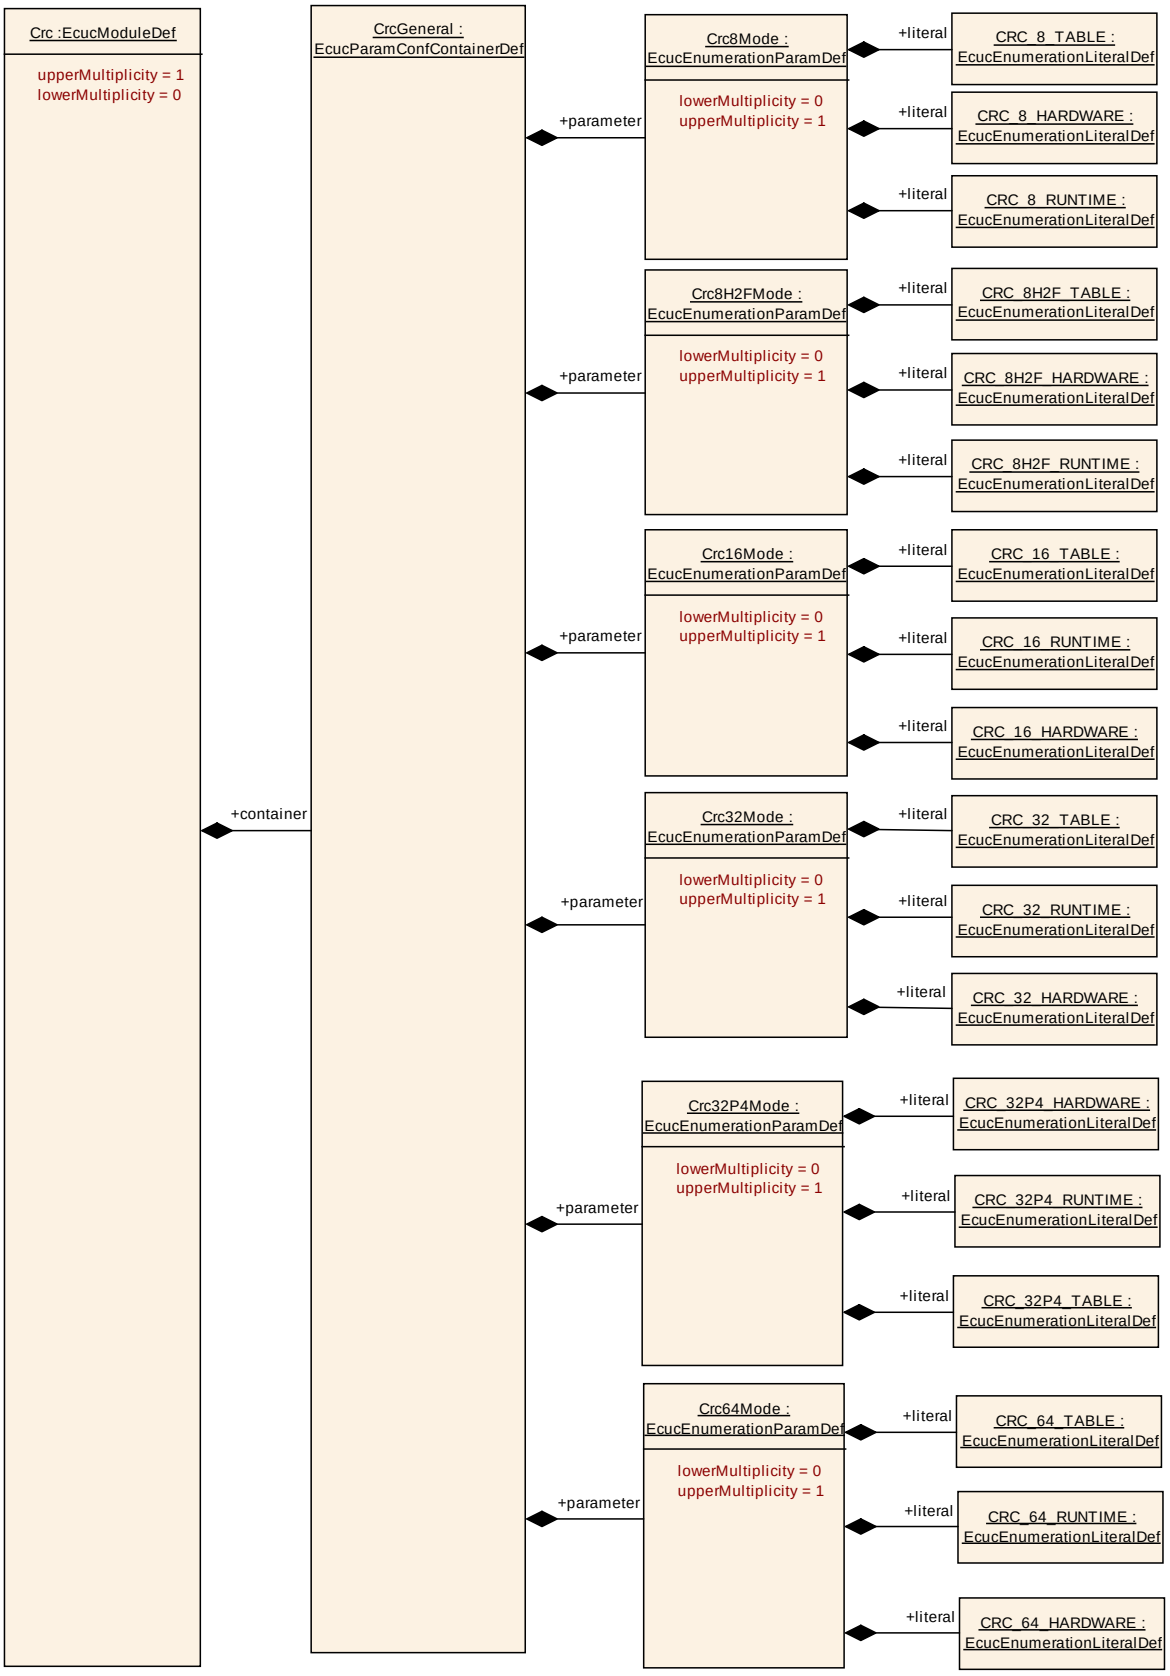
Crc :EcucModuleDef
upperMultiplicity = 1
lowerMultiplicity = 0
+container
CrcGeneral :
EcucParamConfContainerDef
+parameter
Crc8Mode :
EcucEnumerationParamDef
lowerMultiplicity = 0
upperMultiplicity = 1
+literal
CRC_8_TABLE :
EcucEnumerationLiteralDef
+literal
CRC_8_HARDWARE :
EcucEnumerationLiteralDef
+literal
CRC_8_RUNTIME :
EcucEnumerationLiteralDef
+parameter
Crc8H2FMode :
EcucEnumerationParamDef
lowerMultiplicity = 0
upperMultiplicity = 1
+literal
CRC_8H2F_TABLE :
EcucEnumerationLiteralDef
+literal
CRC_8H2F_HARDWARE :
EcucEnumerationLiteralDef
+literal
CRC_8H2F_RUNTIME :
EcucEnumerationLiteralDef
+parameter
Crc16Mode :
EcucEnumerationParamDef
lowerMultiplicity = 0
upperMultiplicity = 1
+literal
CRC_16_TABLE :
EcucEnumerationLiteralDef
+literal
CRC_16_RUNTIME :
EcucEnumerationLiteralDef
+literal
CRC_16_HARDWARE :
EcucEnumerationLiteralDef
+parameter
Crc32Mode :
EcucEnumerationParamDef
lowerMultiplicity = 0
upperMultiplicity = 1
+literal
CRC_32_TABLE :
EcucEnumerationLiteralDef
+literal
CRC_32_RUNTIME :
EcucEnumerationLiteralDef
+literal
CRC_32_HARDWARE :
EcucEnumerationLiteralDef
+parameter
Crc32P4Mode :
EcucEnumerationParamDef
lowerMultiplicity = 0
upperMultiplicity = 1
+literal
CRC_32P4_HARDWARE :
EcucEnumerationLiteralDef
+literal
CRC_32P4_RUNTIME :
EcucEnumerationLiteralDef
+literal
CRC_32P4_TABLE :
EcucEnumerationLiteralDef
+parameter
Crc64Mode :
EcucEnumerationParamDef
lowerMultiplicity = 0
upperMultiplicity = 1
+literal
CRC_64_TABLE :
EcucEnumerationLiteralDef
+literal
CRC_64_RUNTIME :
EcucEnumerationLiteralDef
+literal
CRC_64_HARDWARE :
EcucEnumerationLiteralDef

### 10.2.1 Crc

| | |
|---|---|
| ***SWS Item*** | **ECUC_Crc_00033 :** |
| ***Module Name*** | *Crc* |
| ***Module Description*** | Configuration of the Crc (Crc routines) module. |
| ***Post-Build Variant Support*** | false |
| ***Supported Config Variants*** | VARIANT-PRE-COMPILE |

| ***Included Containers*** | | |
|---|---|---|
| ***Container Name*** | ***Multiplicity*** | ***Scope / Dependency*** |
| CrcGeneral | 1 | General configuration of CRC module |

### 10.2.2 CrcGeneral

| | |
|---|---|
| ***SWS Item*** | **ECUC_Crc_00006 :** |
| ***Container Name*** | CrcGeneral |
| ***Description*** | General configuration of CRC module |
| ***Configuration Parameters*** | |

| | | | |
|---|---|---|---|
| ***SWS Item*** | **ECUC_Crc_00025 :** | | |
| ***Name*** | Crc16Mode | | |
| ***Description*** | Switch to select one of the available CRC 16-bit (CCITT) calculation methods | | |
| ***Multiplicity*** | 0..1 | | |
| ***Type*** | EcucEnumerationParamDef | | |
| ***Range*** | CRC_16_HARDWARE | hardware based CRC16 calculation | |
| | CRC_16_RUNTIME | runtime based CRC16 calculation | |
| | CRC_16_TABLE | table based CRC16 calculation (default selection) | |
| ***Post-Build Variant Multiplicity*** | false | | |
| ***Post-Build Variant Value*** | false | | |
| ***Multiplicity Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Value Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Scope / Dependency*** | scope: local | | |

| | | | |
|---|---|---|---|
| ***SWS Item*** | **ECUC_Crc_00026 :** | | |
| ***Name*** | Crc32Mode | | |
| ***Description*** | Switch to select one of the available CRC 32-bit (IEEE-802.3 CRC32 Ethernet Standard) calculation methods | | |
| ***Multiplicity*** | 0..1 | | |
| ***Type*** | EcucEnumerationParamDef | | |
| ***Range*** | CRC_32_HARDWARE | hardware based CRC32 calculation | |
| | CRC_32_RUNTIME | runtime based CRC32 calculation | |
| | CRC_32_TABLE | table based CRC32 calculation (default selection) | |
| ***Post-Build Variant Multiplicity*** | false | | |
| ***Post-Build Variant Value*** | false | | |
| ***Multiplicity Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |

| | | | |
|---|---|---|---|
| | ***Post-build time*** | -- | |
| ***Value Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Scope / Dependency*** | scope: local | | |

| | | | |
|---|---|---|---|
| ***SWS Item*** | **ECUC_Crc_00032 :** | | |
| ***Name*** | Crc32P4Mode | | |
| ***Description*** | Switch to select one of the available CRC 32-bit E2E Profile 4 calculation methods. | | |
| ***Multiplicity*** | 0..1 | | |
| ***Type*** | EcucEnumerationParamDef | | |
| ***Range*** | CRC_32P4_HARDWARE | hardware based CRC32P4 calculation | |
| | CRC_32P4_RUNTIME | runtime based CRC32P4 calculation | |
| | CRC_32P4_TABLE | table based CRC32P4 calculation (default selection) | |
| ***Post-Build Variant Multiplicity*** | false | | |
| ***Post-Build Variant Value*** | false | | |
| ***Multiplicity Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Value Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Scope / Dependency*** | scope: local | | |

| | | | |
|---|---|---|---|
| ***SWS Item*** | **ECUC_Crc_00034 :** | | |
| ***Name*** | Crc64Mode | | |
| ***Description*** | Switch to select one of the available CRC 64-bit calculation methods. | | |
| ***Multiplicity*** | 0..1 | | |
| ***Type*** | EcucEnumerationParamDef | | |
| ***Range*** | CRC_64_HARDWARE | hardware based CRC64 calculation | |
| | CRC_64_RUNTIME | runtime based CRC64 calculation | |
| | CRC_64_TABLE | table based CRC64 calculation (default selection) | |
| ***Post-Build Variant Multiplicity*** | false | | |
| ***Post-Build Variant Value*** | false | | |
| ***Multiplicity Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Value Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Scope / Dependency*** | scope: local | | |

| | |
|---|---|
| ***SWS Item*** | **ECUC_Crc_00031 :** |
| ***Name*** | Crc8H2FMode |
| ***Description*** | Switch to select one of the available CRC 8-bit (2Fh polynomial) calculation methods |

| | | | |
|---|---|---|---|
| ***Multiplicity*** | 0..1 | | |
| ***Type*** | EcucEnumerationParamDef | | |
| ***Range*** | CRC_8H2F_HARDWARE | hardware based CRC8H2F calculation | |
| | CRC_8H2F_RUNTIME | runtime based CRC8H2F calculation | |
| | CRC_8H2F_TABLE | table based CRC8H2F calculation (default selection) | |
| ***Post-Build Variant Multiplicity*** | false | | |
| ***Post-Build Variant Value*** | false | | |
| ***Multiplicity Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Value Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Scope / Dependency*** | scope: local | | |

| | | | |
|---|---|---|---|
| ***SWS Item*** | **ECUC_Crc_00030 :** | | |
| ***Name*** | Crc8Mode | | |
| ***Description*** | Switch to select one of the available CRC 8-bit (SAE J1850) calculation methods | | |
| ***Multiplicity*** | 0..1 | | |
| ***Type*** | EcucEnumerationParamDef | | |
| ***Range*** | CRC_8_HARDWARE | hardware based CRC8 calculation | |
| | CRC_8_RUNTIME | runtime based CRC8 calculation | |
| | CRC_8_TABLE | table based CRC8 calculation (default selection) | |
| ***Post-Build Variant Multiplicity*** | false | | |
| ***Post-Build Variant Value*** | false | | |
| ***Multiplicity Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Value Configuration Class*** | ***Pre-compile time*** | X | All Variants |
| | ***Link time*** | -- | |
| | ***Post-build time*** | -- | |
| ***Scope / Dependency*** | scope: local | | |

| |
|---|
| ***No Included Containers*** |

## 10.3 Published Information

**[SWS_Crc_00050]** ⌈The standardized common published parameters as required by SRS_BSW_00402 in the SRS General on Basic Software Modules [3] shall be published within the header file of this module and need to be provided in the BSW ModuleDescription. The according module abbreviation can be found in the List of Basic Software Modules [1].⌋ ( )

Additional module-specific published parameters are listed below if applicable.

| ***SWS Item*** | **[SWS_Crc_00048]** | |
|---|---|---|
| ***Information elements*** | | |
| ***Information element name*** | ***Type / Range*** | ***Information element description*** |
| CRC_VENDOR_ID | #define/ uint16 | Vendor ID of the dedicated implementation of this module according to the AUTOSAR vendor list |
| CRC_MODULE_ID | #define/ uint16 | Module ID of this module from Module List |
| CRC_AR_RELEASE_MAJOR_VERSION | #define/ uint8 | Major version number of AUTOSAR release on which the appropriate implementation is based on. |
| CRC_AR_RELEASE_MINOR_VERSION | #define/ uint8 | Minor version number of AUTOSAR release on which the appropriate implementation is based on. |
| CRC_AR_RELEASE_REVISION_VERSION | #define/ uint8 | Patch level version number of AUTOSAR release on which the appropriate implementation is based on. |
| CRC_SW_MAJOR_VERSION | #define/ uint8 | Major version number of the vendor specific implementation of the module. The numbering is vendor specific. |
| CRC_SW_MINOR_VERSION | #define/ uint8 | Minor version number of the vendor specific implementation of the module. The numbering is vendor specific. |
| CRC_SW_PATCH_VERSION | #define/ uint8 | Patch level version number of the vendor specific implementation of the module. The numbering is vendor specific. |

# 11 Not applicable requirements

**[SWS_Crc_00051]** ⌈ These requirements are not applicable to this specification. ⌋ (SRS_BSW_00344, SRS_BSW_00404, SRS_BSW_00405, SRS_BSW_00170, SRS_BSW_00412, SRS_BSW_00383, SRS_BSW_00384, SRS_BSW_00388, SRS_BSW_00389, SRS_BSW_00395, SRS_BSW_00398, SRS_BSW_00399, SRS_BSW_00400, SRS_BSW_00401, SRS_BSW_00375, SRS_BSW_00101, SRS_BSW_00416, SRS_BSW_00406, SRS_BSW_00168, SRS_BSW_00423, SRS_BSW_00424, SRS_BSW_00425, SRS_BSW_00427, SRS_BSW_00428, SRS_BSW_00429, SRS_BSW_00432, SRS_BSW_00433, SRS_BSW_00336, SRS_BSW_00337, SRS_BSW_00369, SRS_BSW_00339, SRS_BSW_00422, SRS_BSW_00417, SRS_BSW_00323, SRS_BSW_00409, SRS_BSW_00385, SRS_BSW_00386, SRS_BSW_00161, SRS_BSW_00162, SRS_BSW_00005, SRS_BSW_00415, SRS_BSW_00164, SRS_BSW_00325, SRS_BSW_00342, SRS_BSW_00343, SRS_BSW_00160, SRS_BSW_00007, SRS_BSW_00347, SRS_BSW_00305, SRS_BSW_00307, SRS_BSW_00373, SRS_BSW_00327, SRS_BSW_00335, SRS_BSW_00350, SRS_BSW_00410, SRS_BSW_00314, SRS_BSW_00348, SRS_BSW_00353, SRS_BSW_00361, SRS_BSW_00302, SRS_BSW_00328, SRS_BSW_00312, SRS_BSW_00006, SRS_BSW_00304, SRS_BSW_00378, SRS_BSW_00306, SRS_BSW_00308, SRS_BSW_00309, SRS_BSW_00371, SRS_BSW_00358, SRS_BSW_00414, SRS_BSW_00359, SRS_BSW_00360, SRS_BSW_00330, SRS_BSW_00331, SRS_BSW_00009, SRS_BSW_00172, SRS_BSW_00010, SRS_BSW_00333, SRS_BSW_00321, SRS_BSW_00341, SRS_BSW_00334)