Content heavily adapted from Russ Tedrake

Feedback Control

Sanjiban Choudhury

TAs: Matthew Rockett, Gilwoo Lee, Matt Schmittle

Estimate state

Plan a sequence of motions

Control robot to follow plan

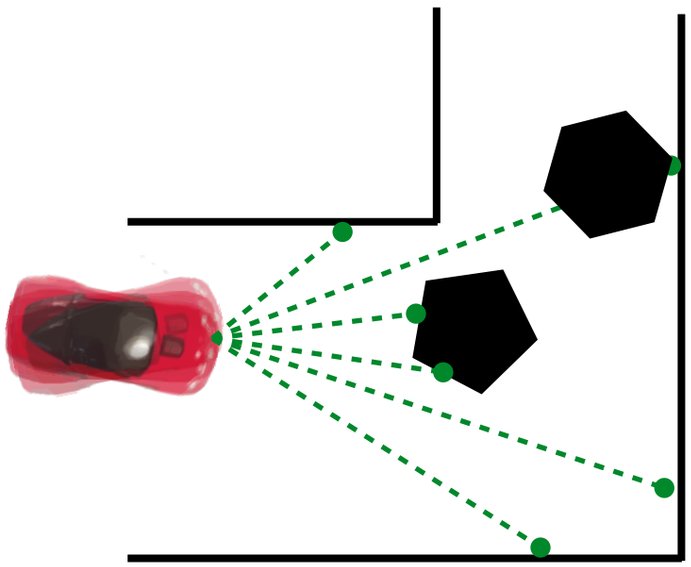

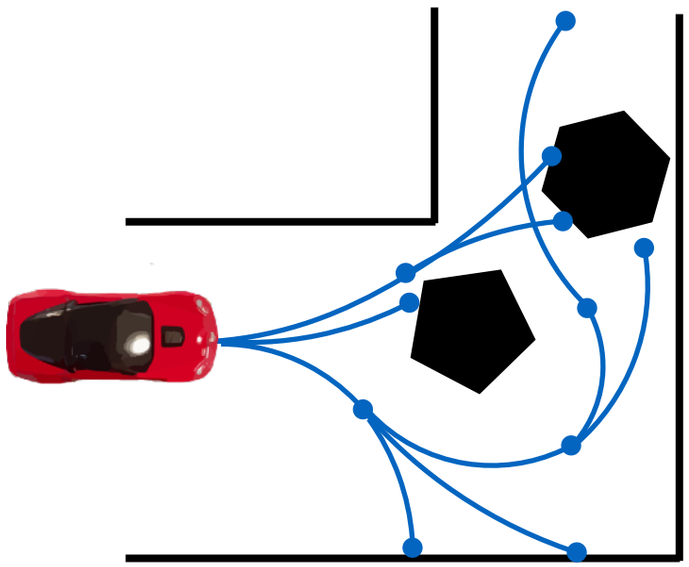

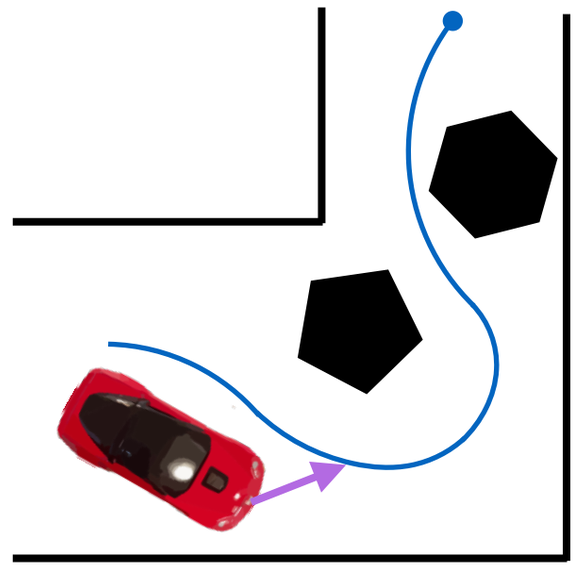

From perception to control ...

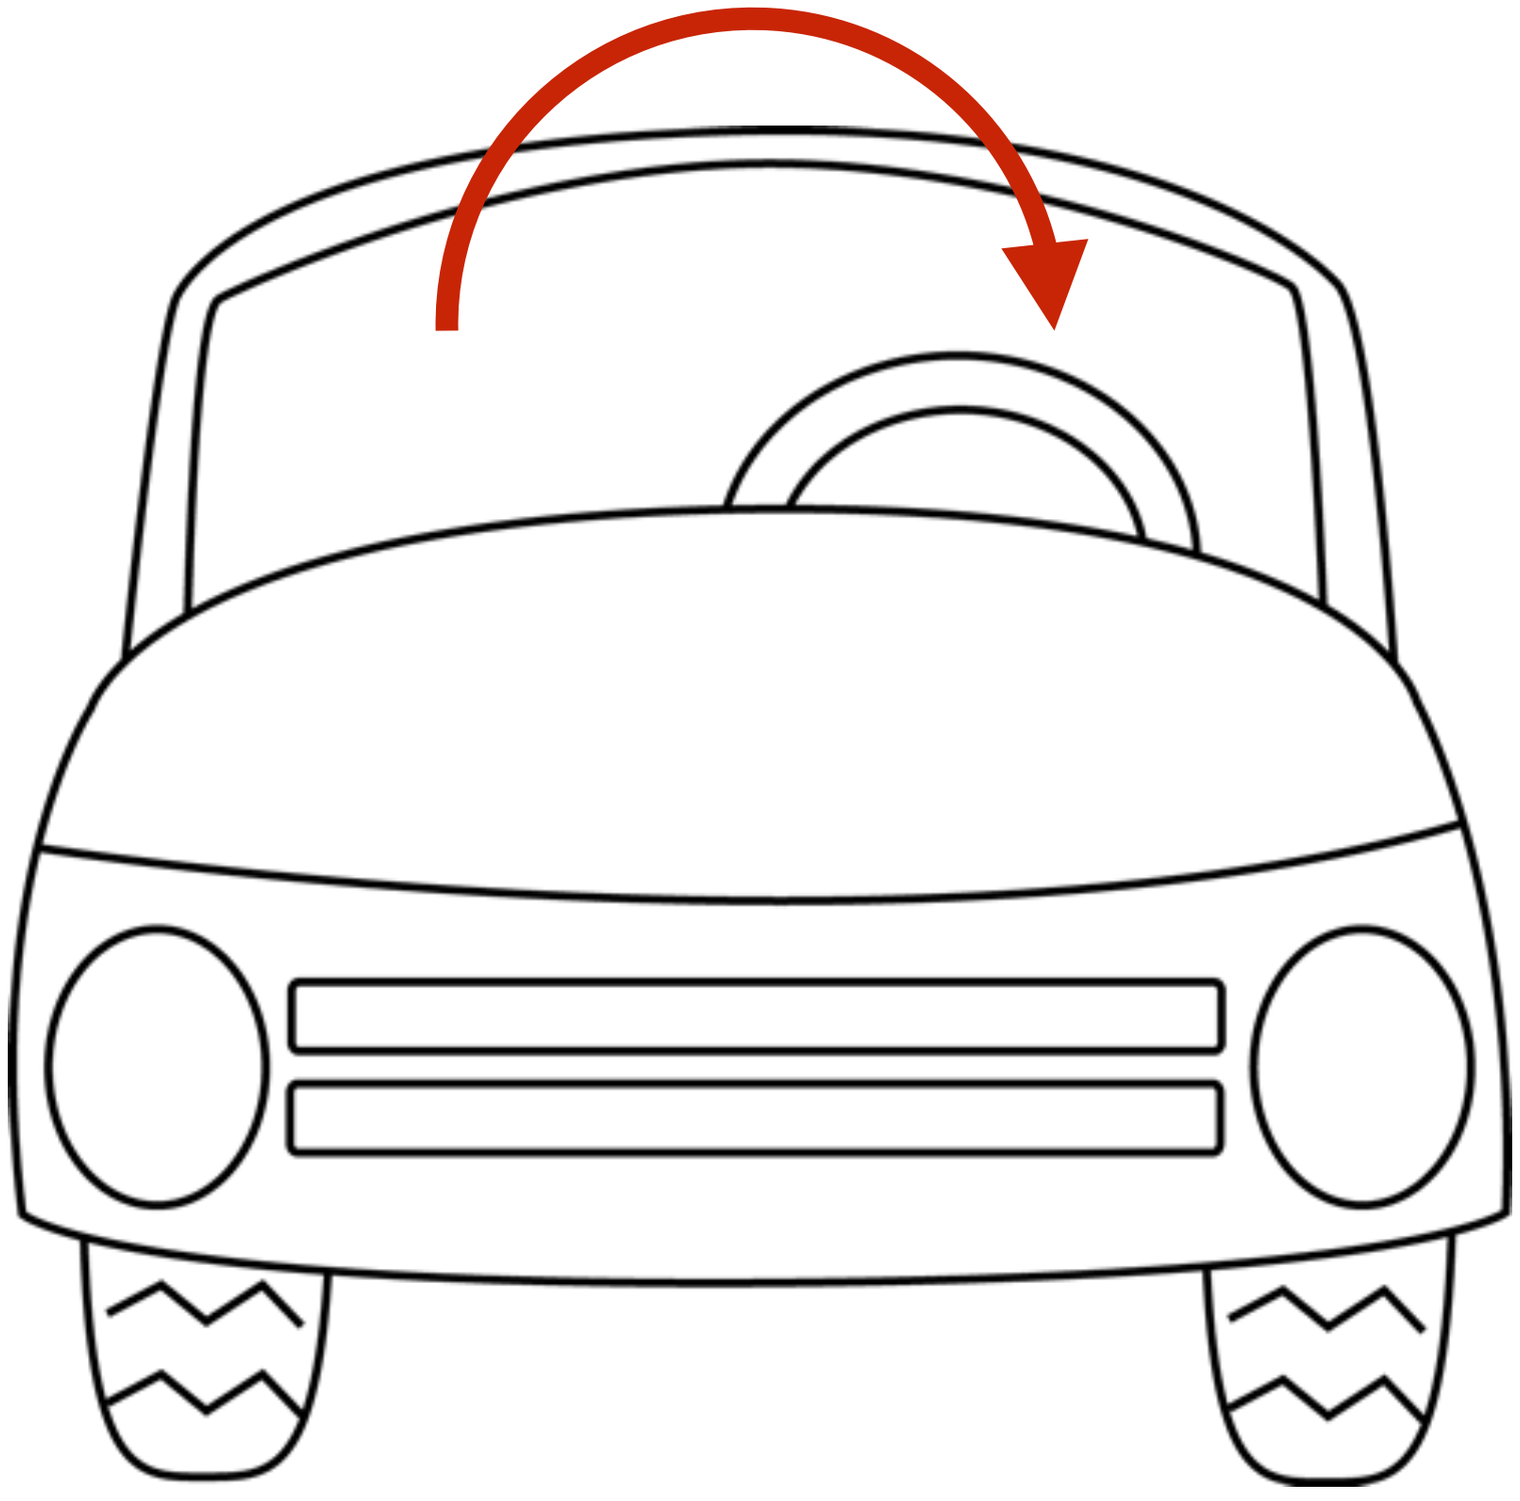

When I think about control ...

https://www.youtube.com/watch?v=WNR4MqG45pk

When I think about control ...

https://www.youtube.com/watch?v=WNR4MqG45pk

Today's objective

1. Introduce terms and definitions in feedback control

2. Go through challenges in current control research

The control framework

Say we want to get the car to hit a sequence of poses

The control framework

Say we want to get the car to hit a sequence of poses

t_0, x_0, y_0, θ_0

The control framework

Say we want to get the car to hit a sequence of poses

t_0, x_0, y_0, θ_0

t_1, x_1, y_1, θ_1

The control framework

Say we want to get the car to hit a sequence of poses

t_0, x_0, y_0, θ_0

t_1, x_1, y_1, θ_1

t_2, x_2, y_2, θ_2

The control framework

Say we want to get the car to hit a sequence of poses

t_3, x_3, y_3, θ_3

t_0, x_0, y_0, θ_0

t_1, x_1, y_1, θ_1

t_2, x_2, y_2, θ_2

The control framework

Say we want to get the car to hit a sequence of poses

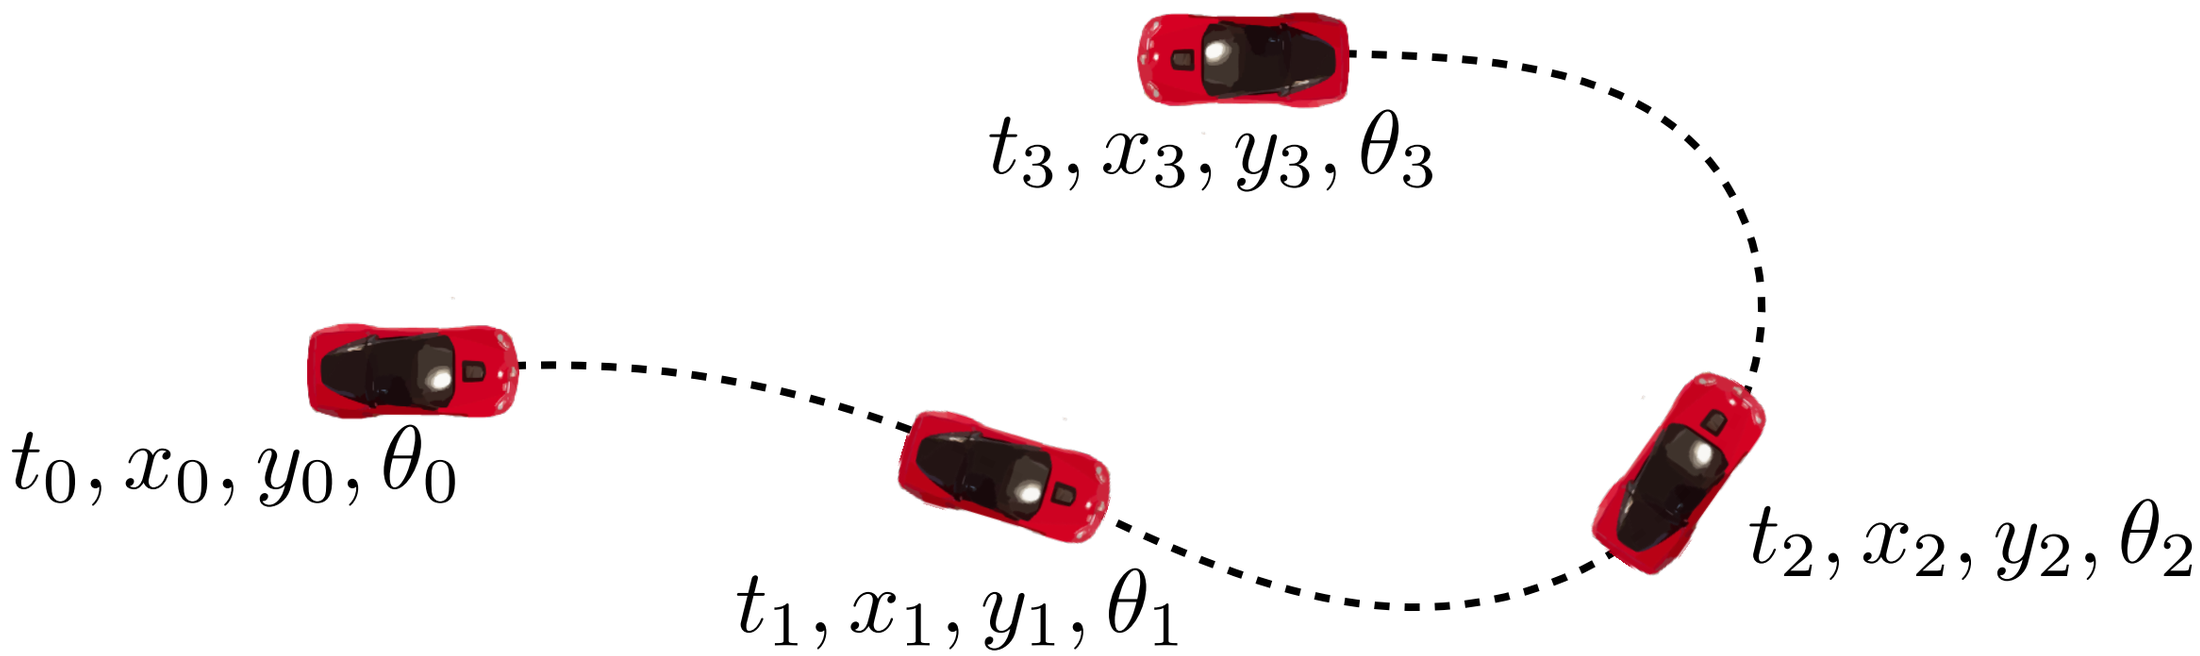

Can express this as wanting to track a reference trajectory

$$x(t), y(t), \theta(t)$$

The control framework

Let's say we want to track a reference trajectory

$$x(t), y(t), \theta(t)$$

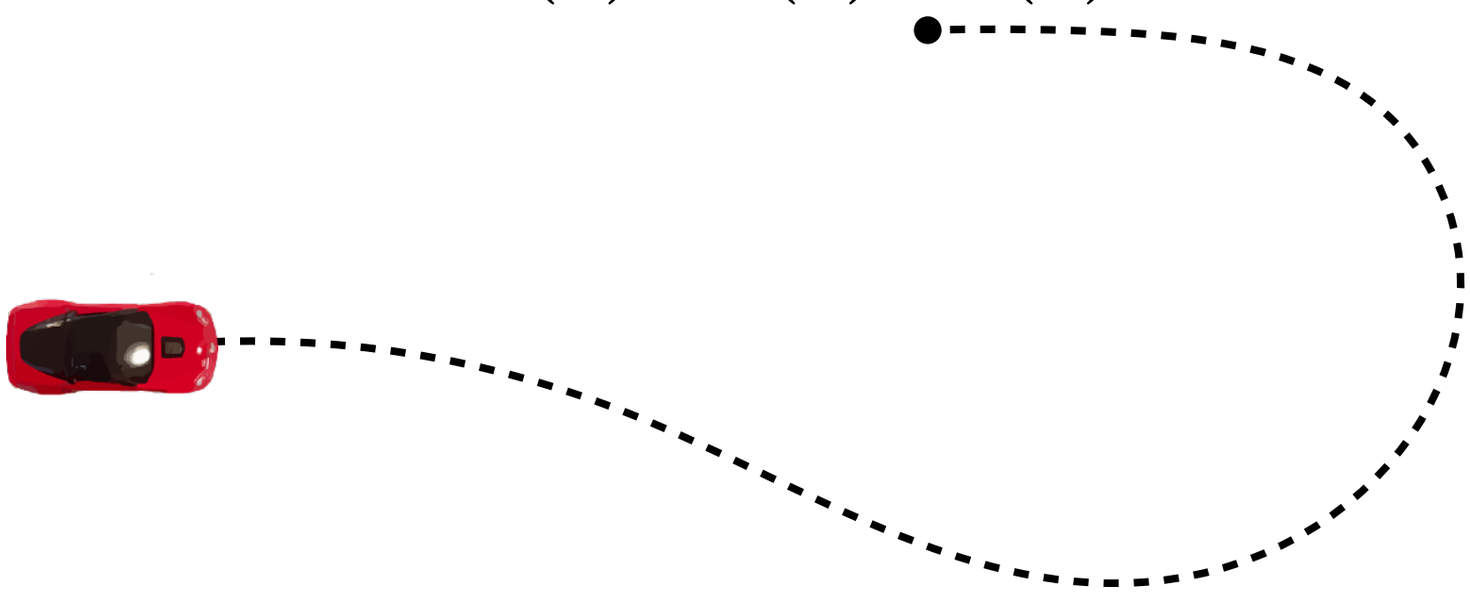

Objective: Figure out a control trajectory $u(t)$ to achieve this

In our case, we will focus on steering angle $\delta(t)$ as control input

Why do we need feedback?

Why do we need feedback?

Let's say we want to track a reference trajectory

$$x(t), y(t), \theta(t)$$

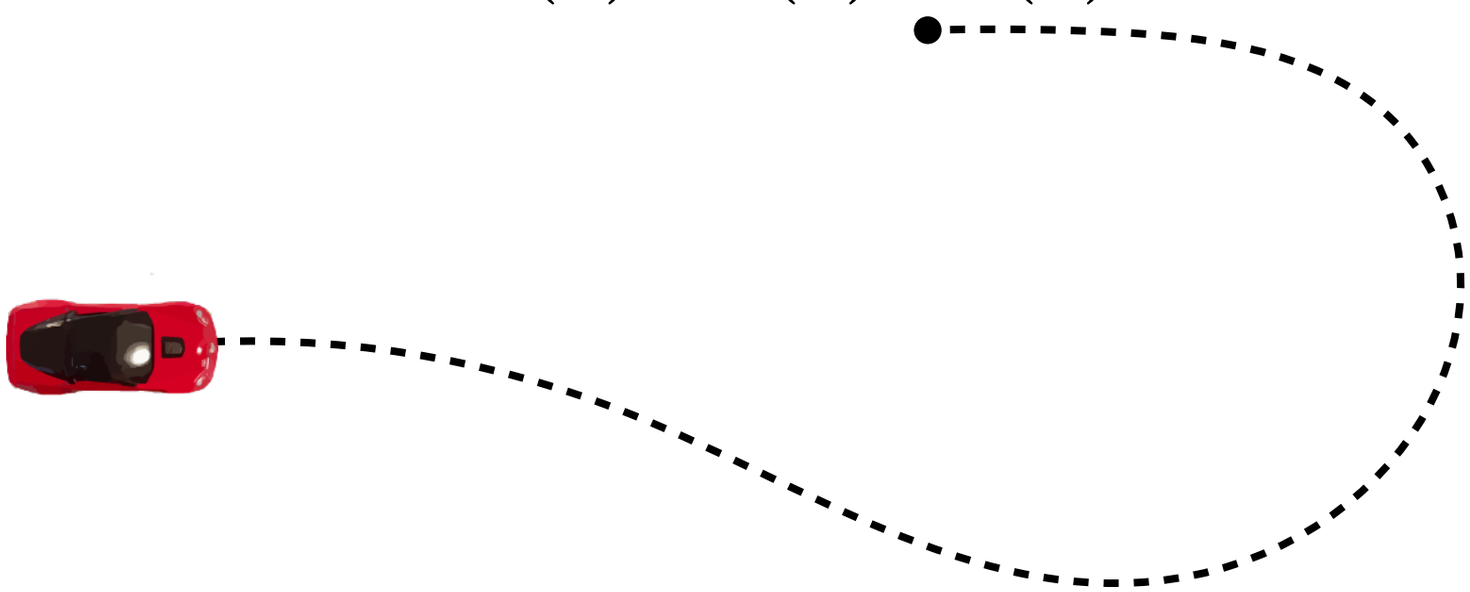

What if we send out steering angles $\delta(t)$ obtained from kinematic car model?

Why do we need feedback?

Let's say we want to track a reference trajectory

$$x(t), y(t), \theta(t)$$

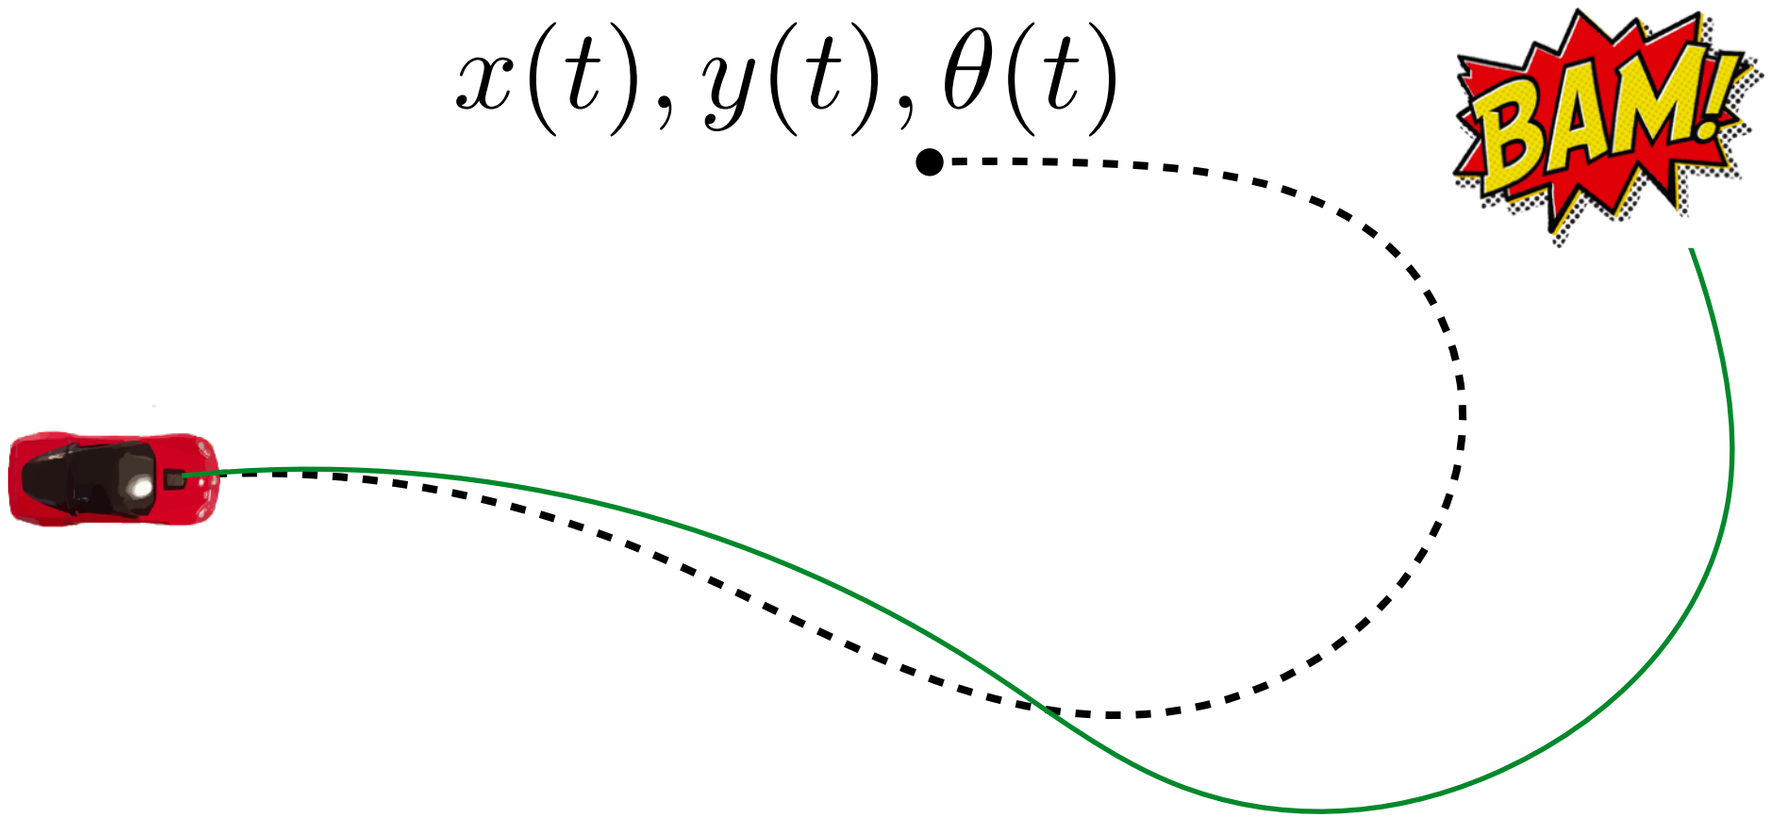

What if we send out steering angles $\delta(t)$ obtained from kinematic car model?

Open loop control leads to accumulating errors!

Underlying principle of feedback control:

Measure error between reference and state.

Minimize this error.

Measure error and minimize it

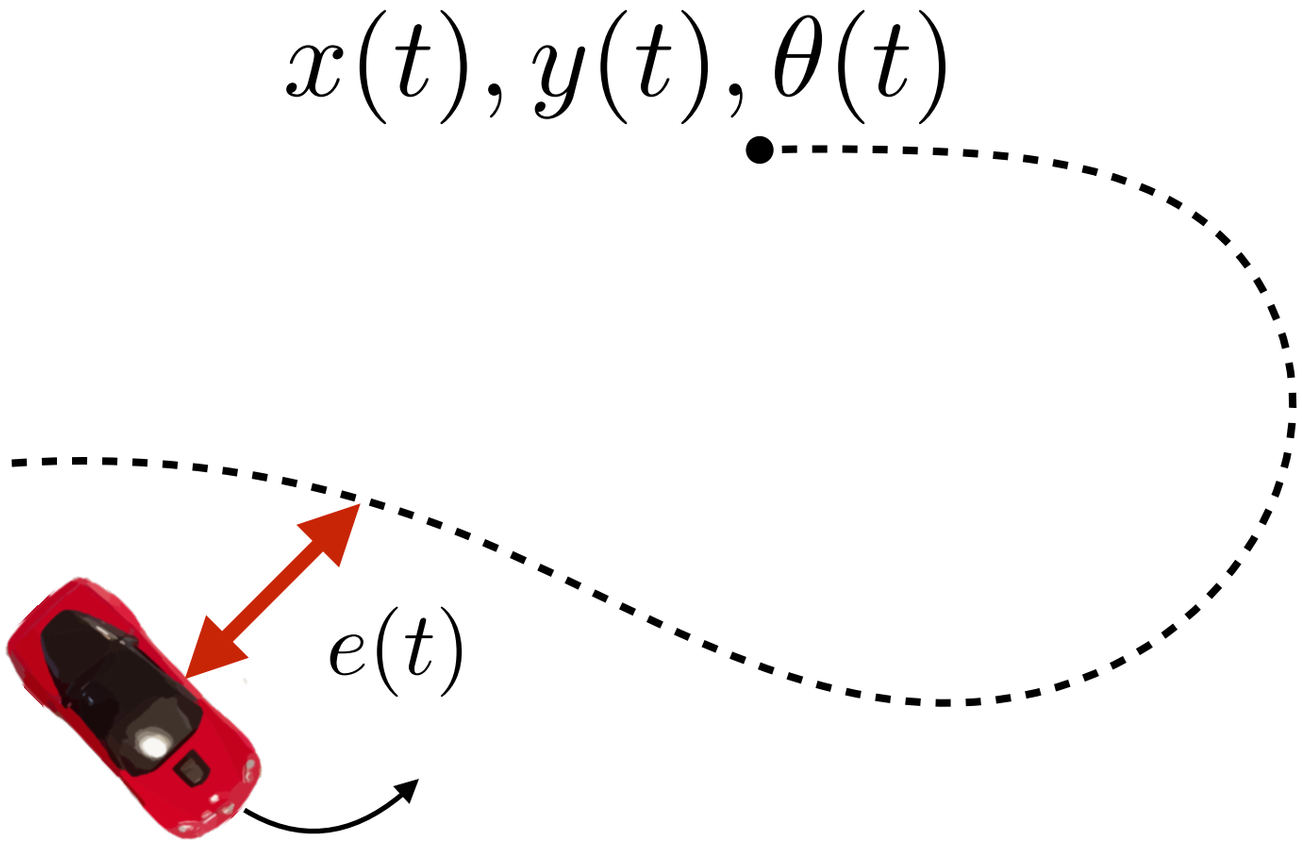

Error between state and reference

Measure error and minimize it

$x(t), y(t), \theta(t)$

Error between state and reference

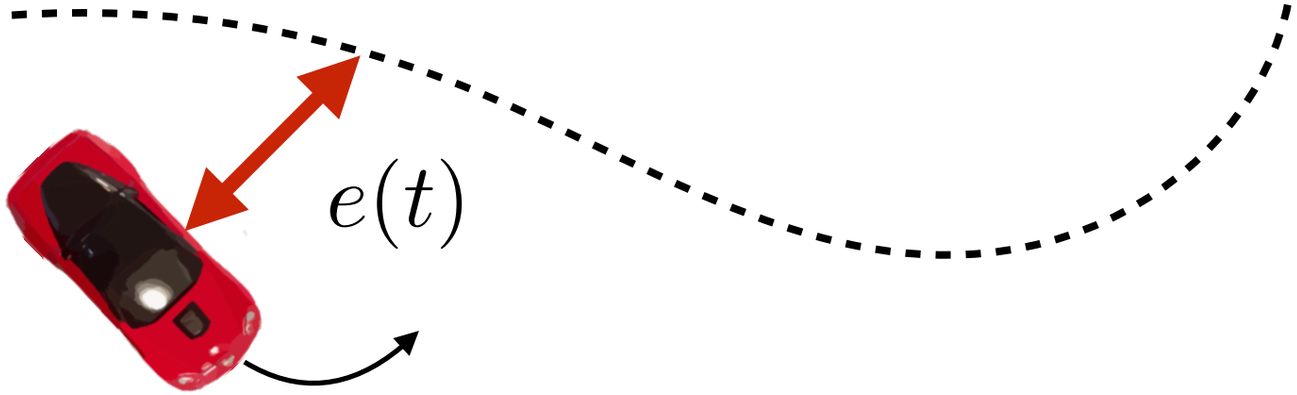

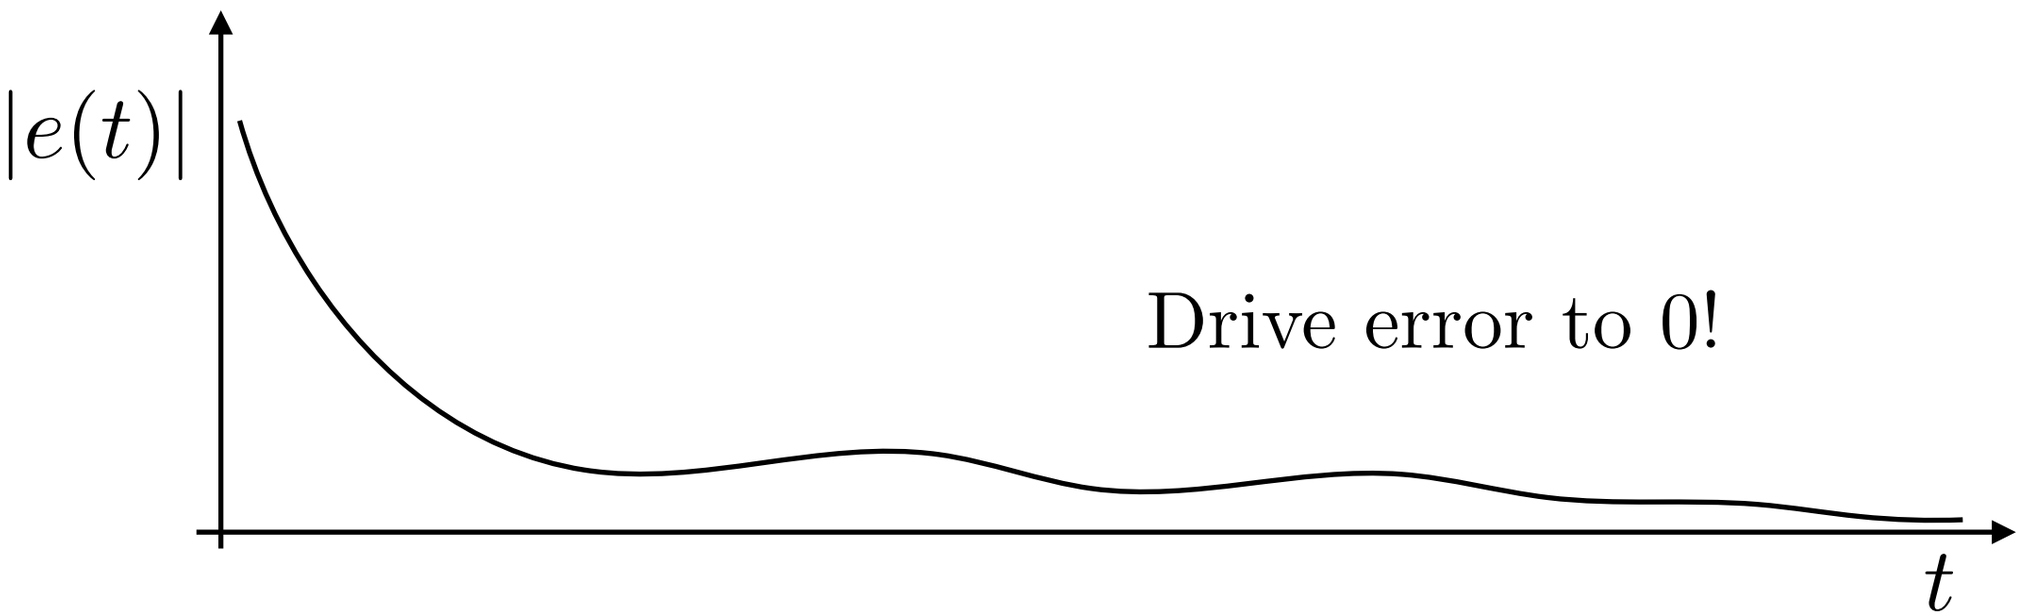

Useful to think of control laws as vector fields

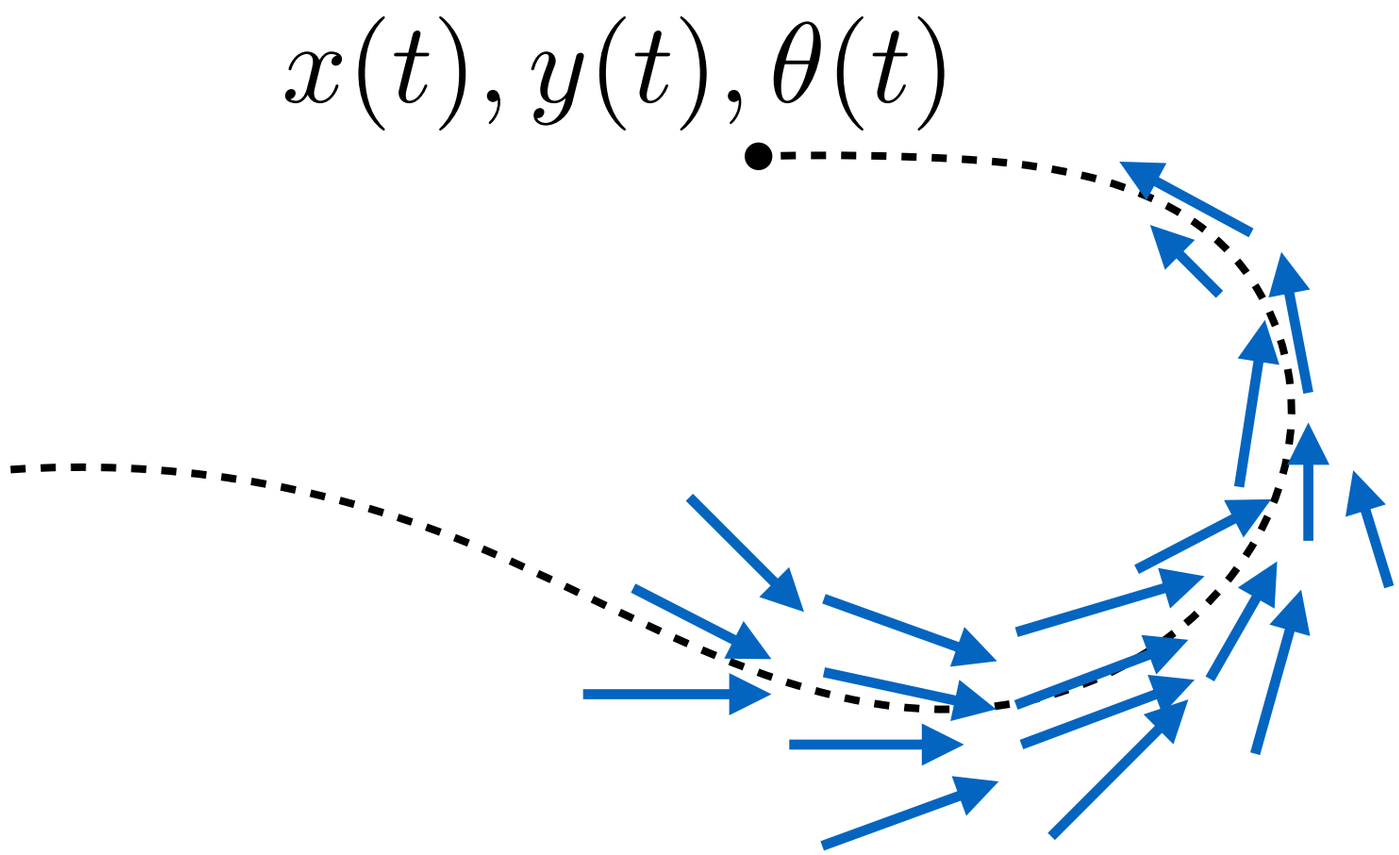

Is this still a research problem?

Industrial robots hard at work

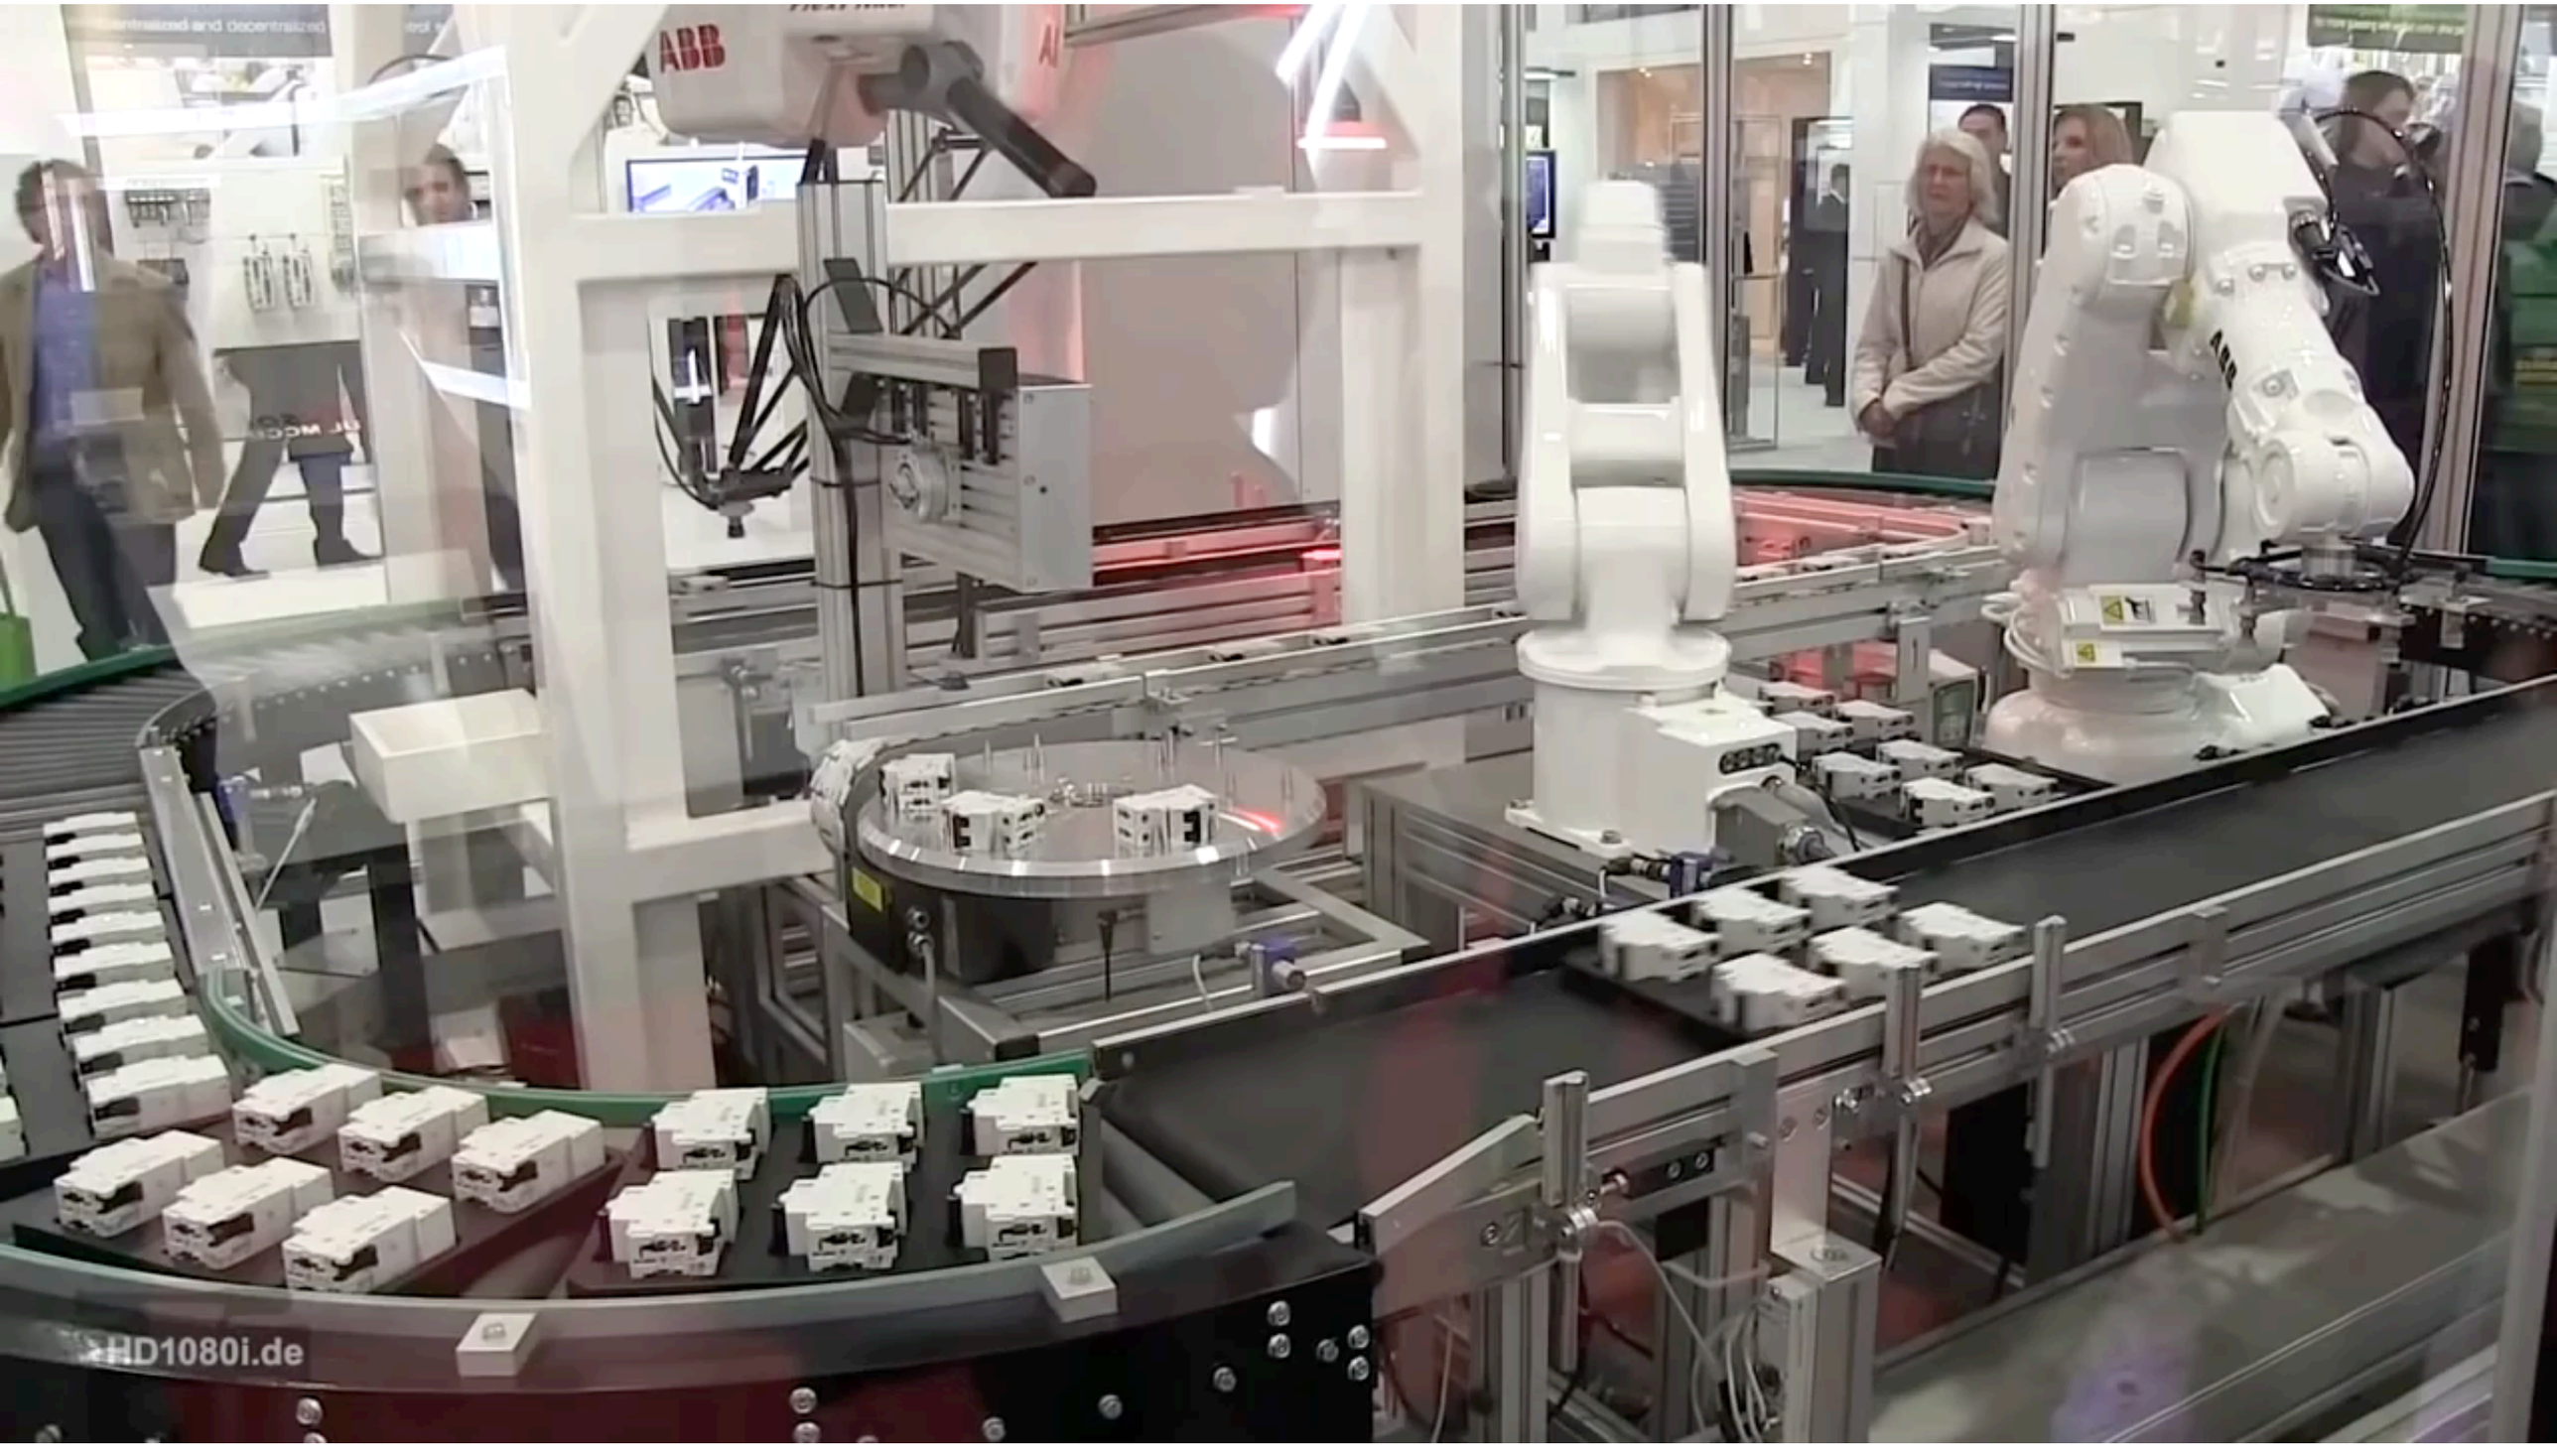

https://www.youtube.com/watch?v=J_8OnDsQVZE&t=315s

Industrial robots hard at work

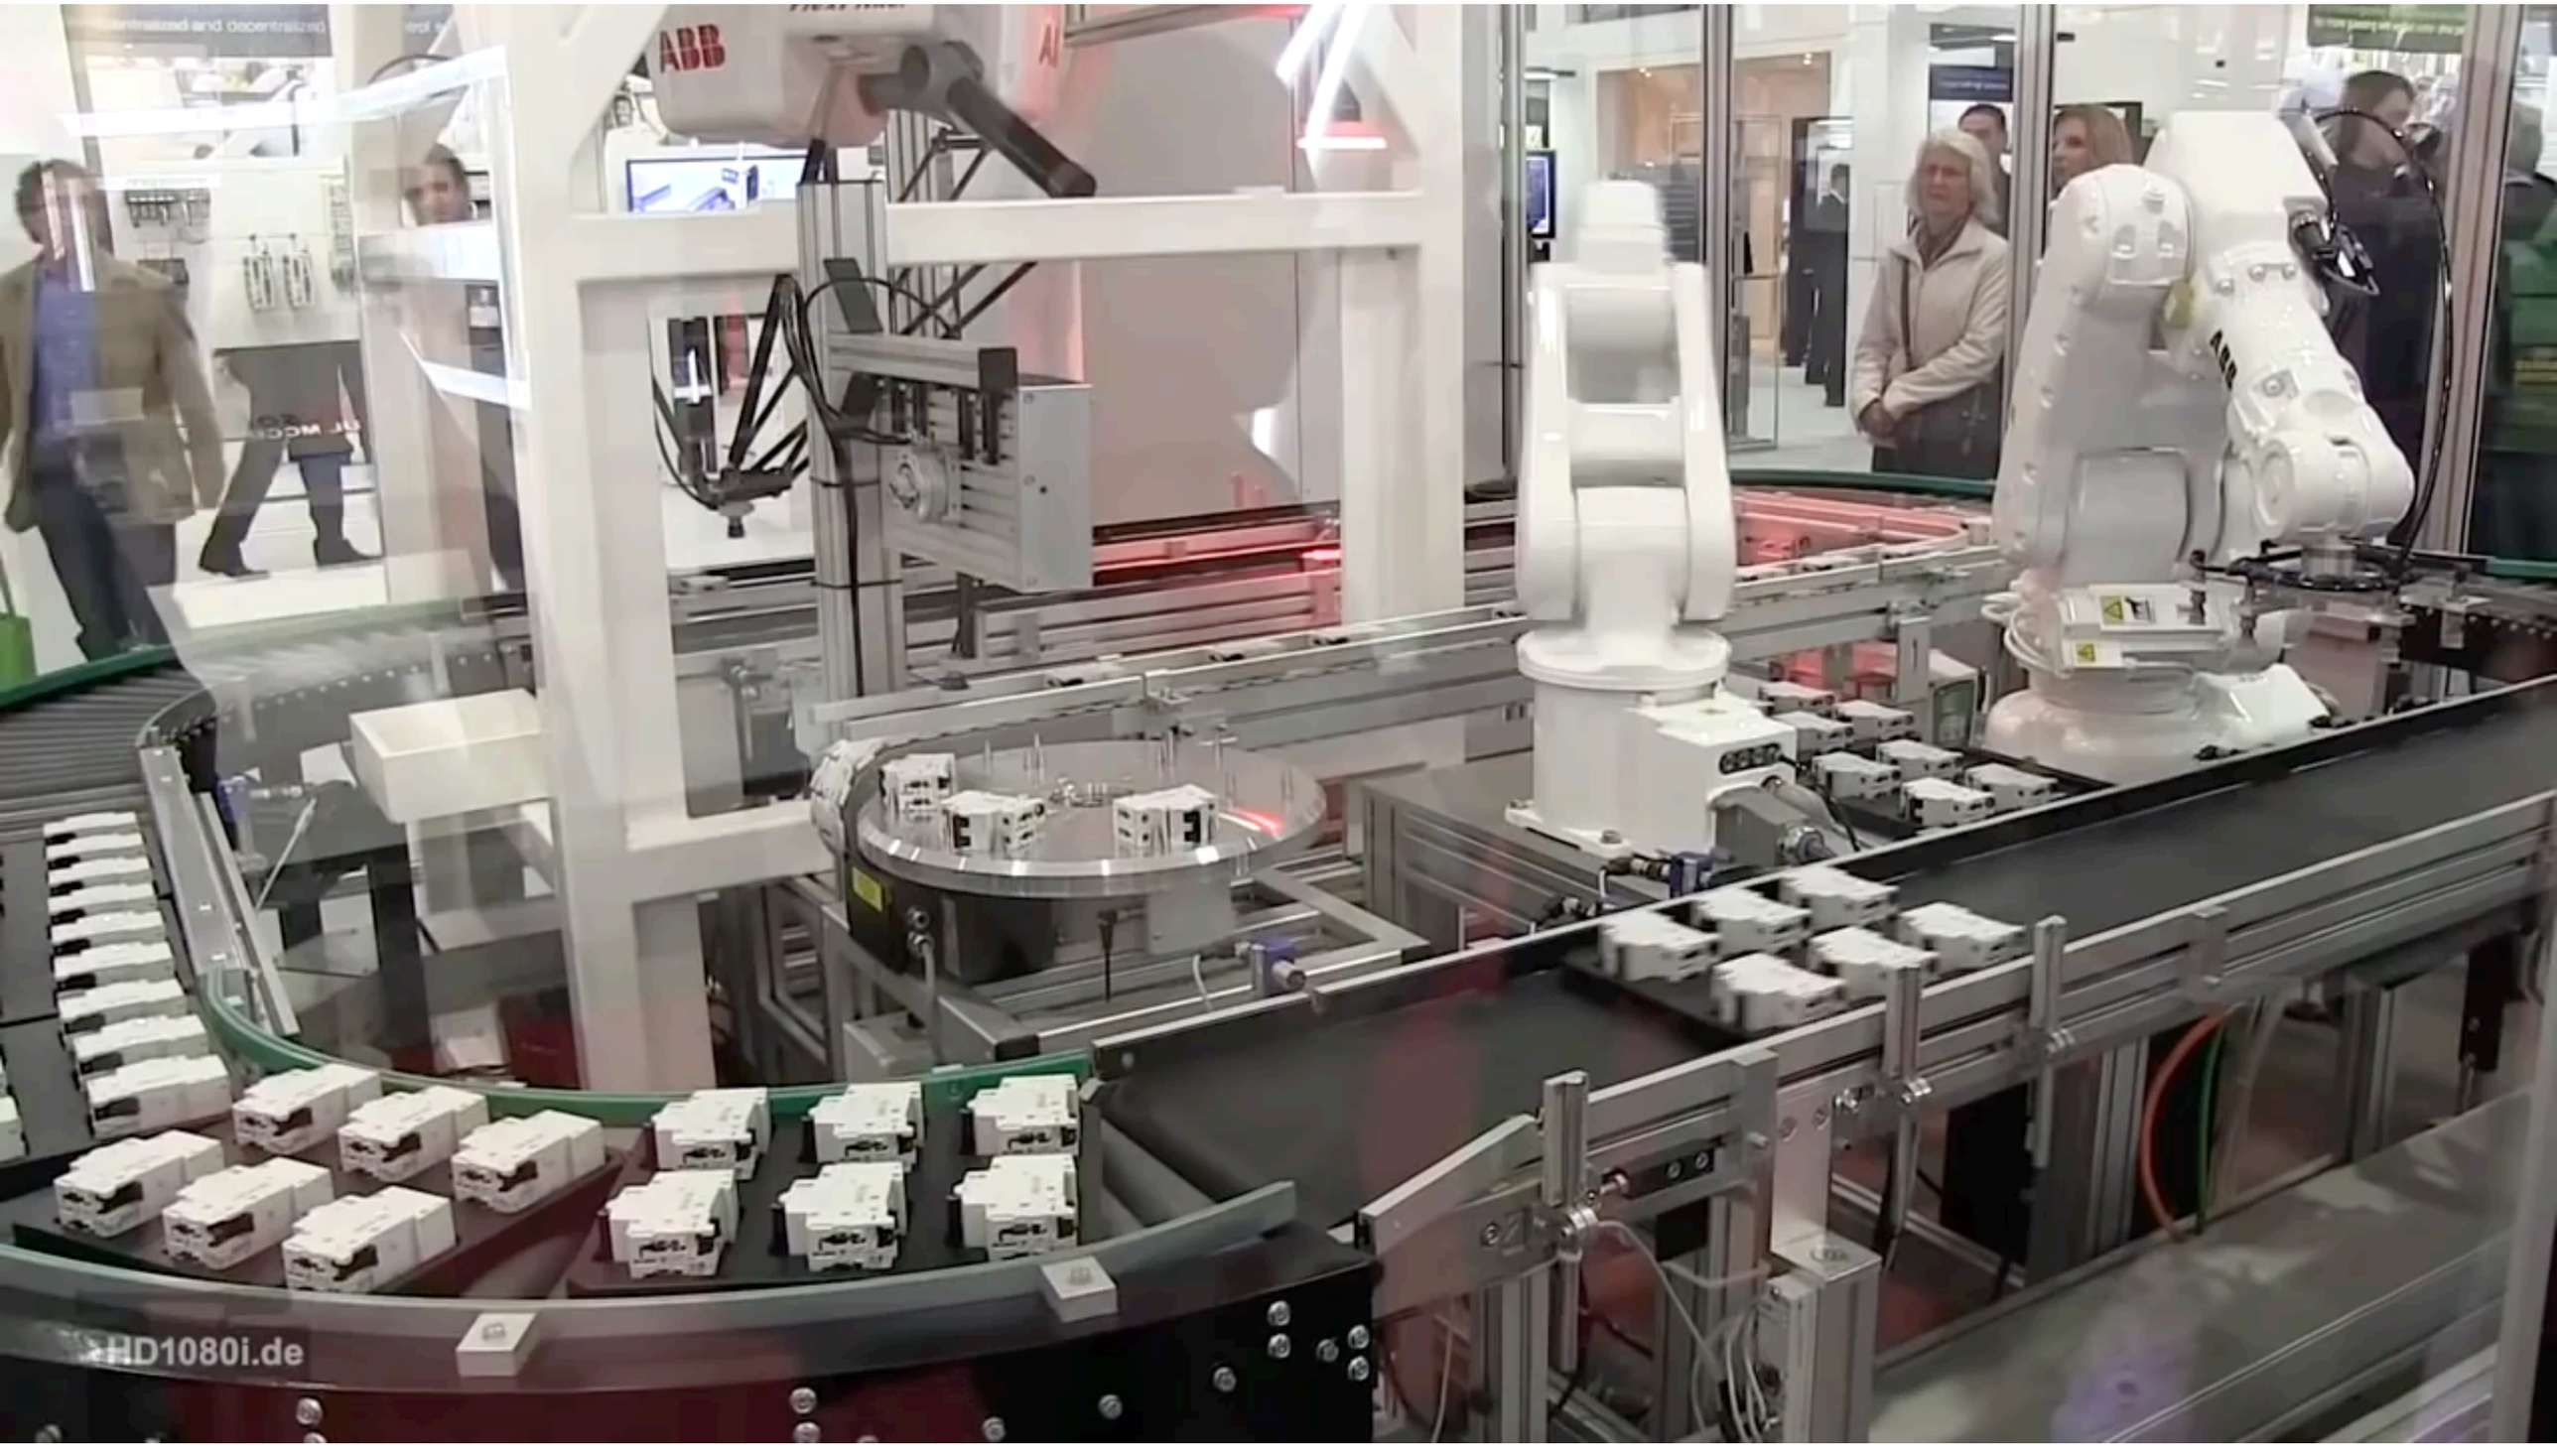

https://www.youtube.com/watch?v=J_8OnDsQVZE&t=315s

Assumptions made by such controllers

Assumptions made by such controllers

1. Fully actuated: There exists an inverse mapping from reference to control actions

$$\sigma(t) \rightarrow u(t)$$

Assumptions made by such controllers

1. Fully actuated: There exists an inverse mapping from reference to control actions

$$\sigma(t) \rightarrow u(t)$$

2. Almost no execution error or state estimation error

Assumptions made by such controllers

1. Fully actuated: There exists an inverse mapping from reference to control actions

$$\sigma(t) \rightarrow u(t)$$

2. Almost no execution error or state estimation error

3. Enough control authority to clamp down errors / overcome disturbances

Instead, what are harder problems we want to think about?

The Atlas robot hard at ... play?

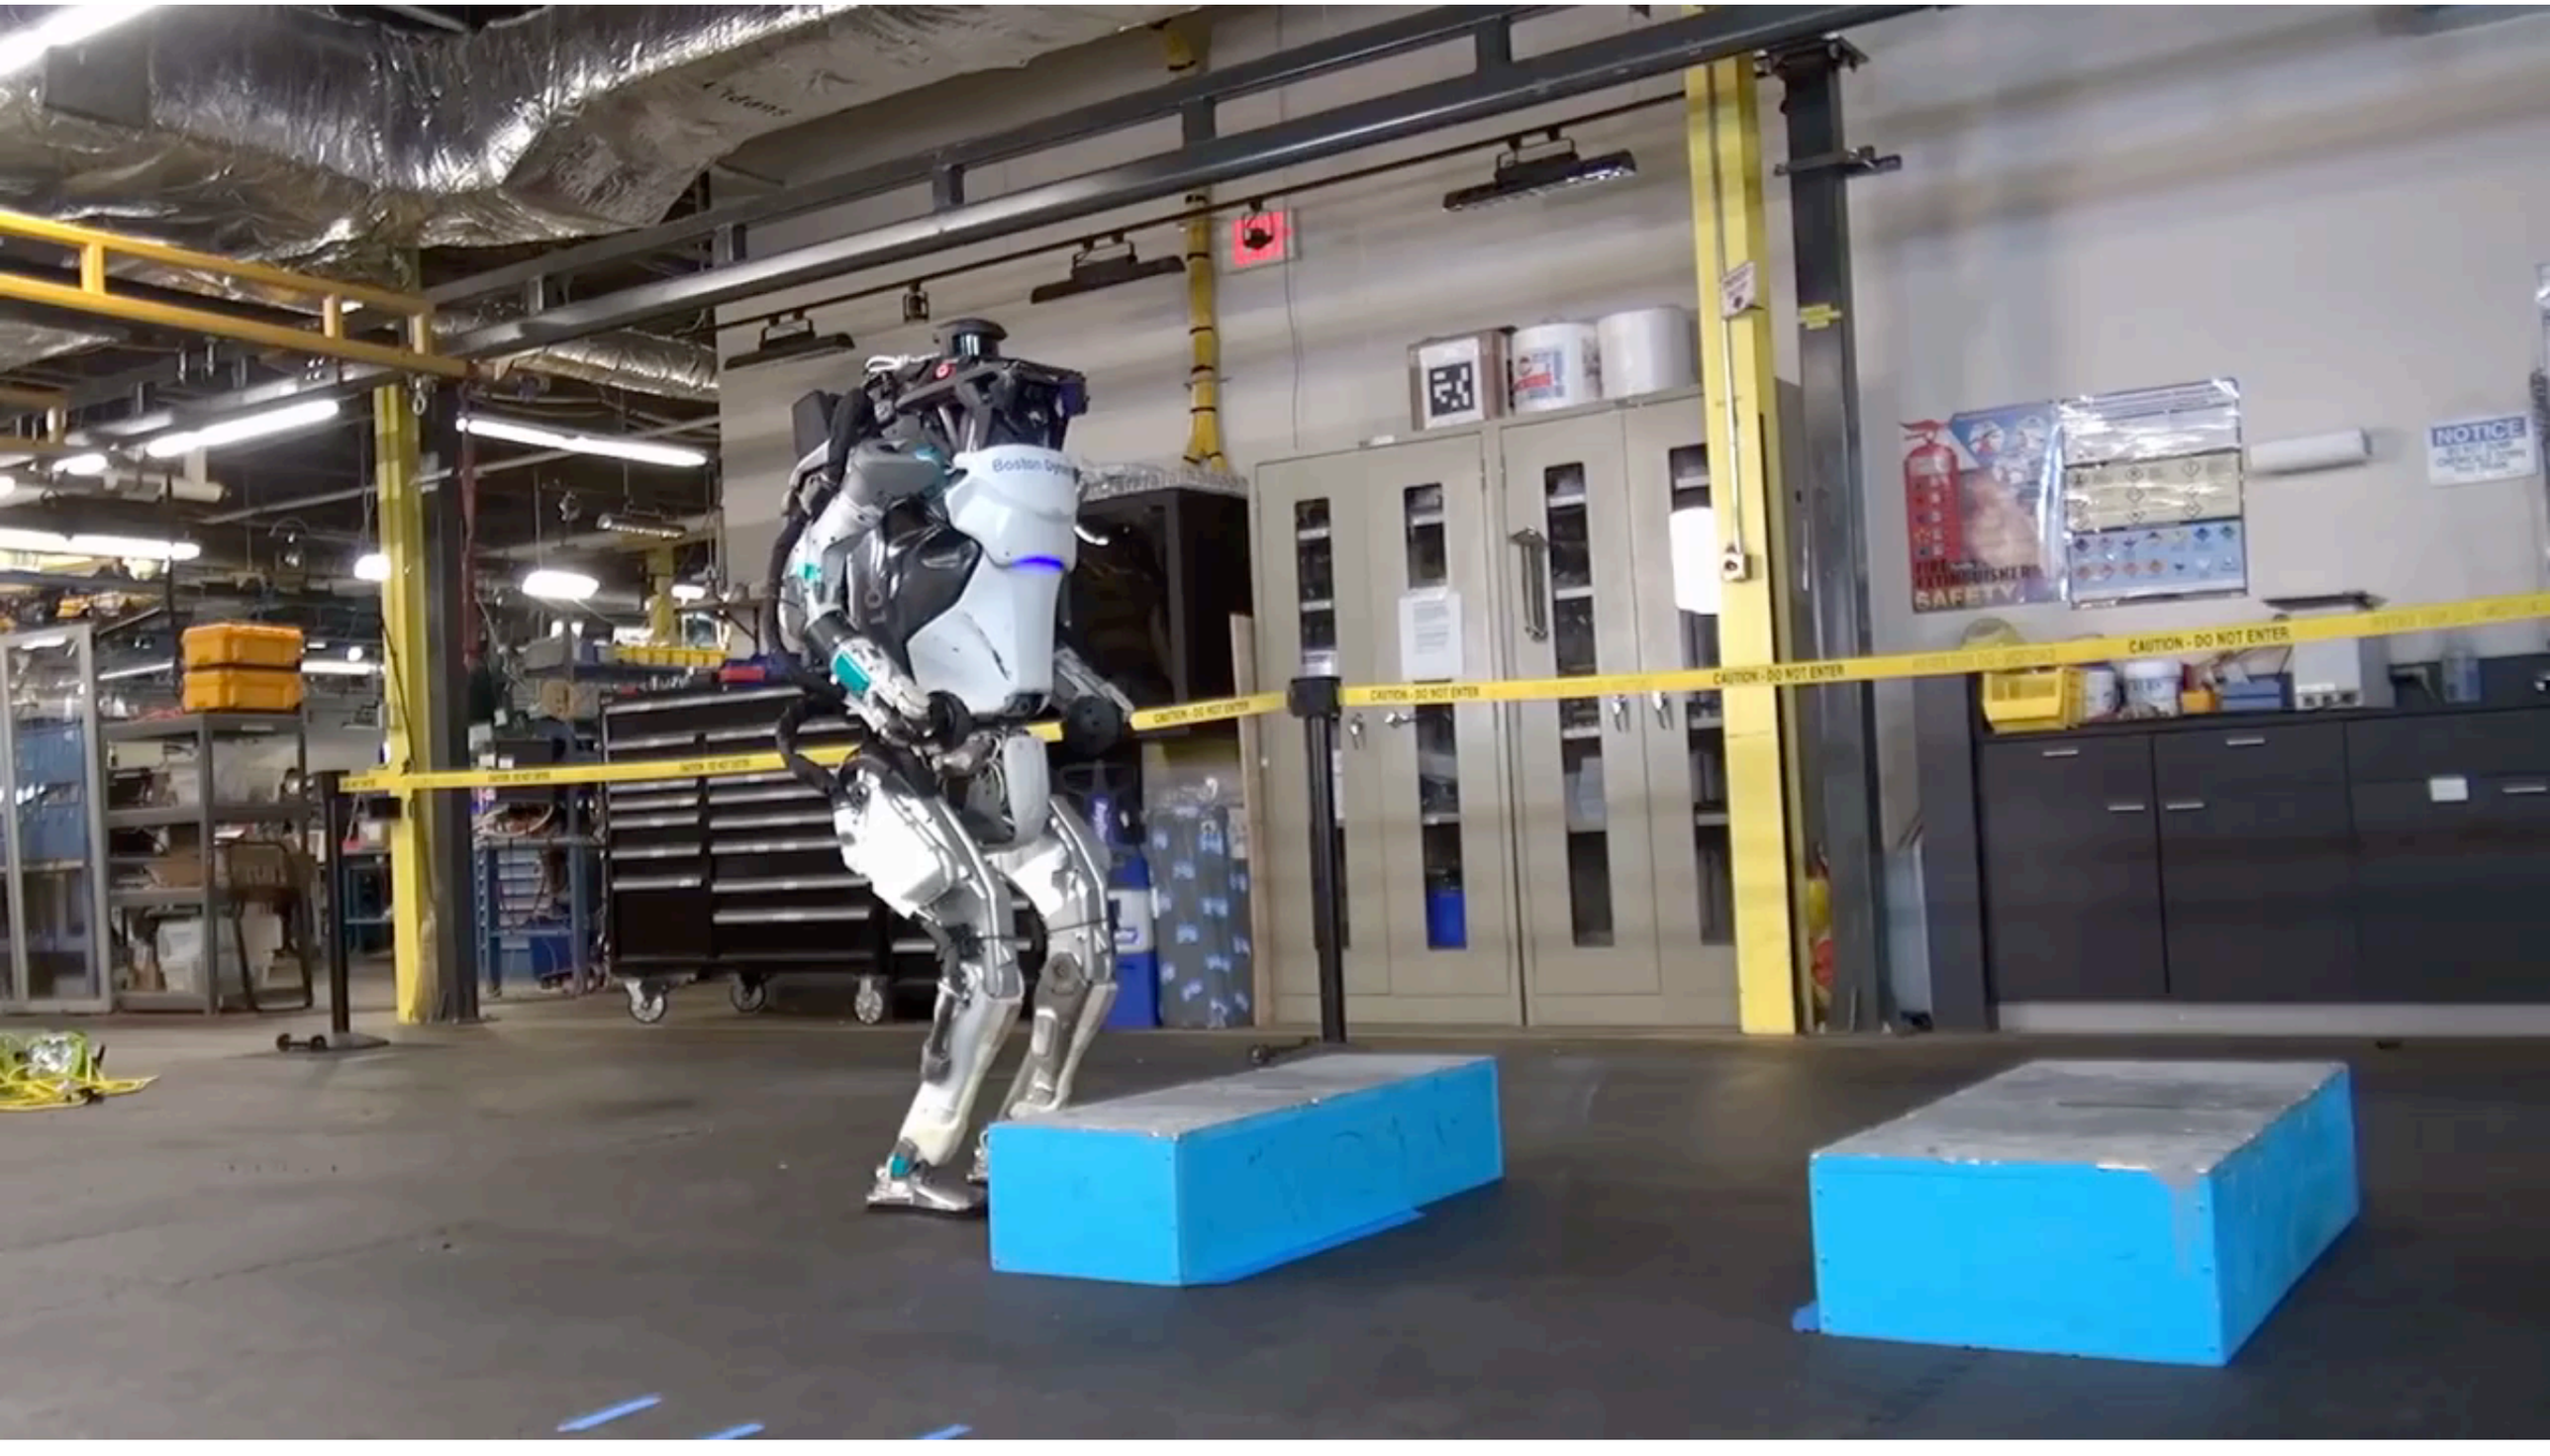

https://www.youtube.com/watch?v=fRj34o4hN4I

The Atlas robot hard at ... play?

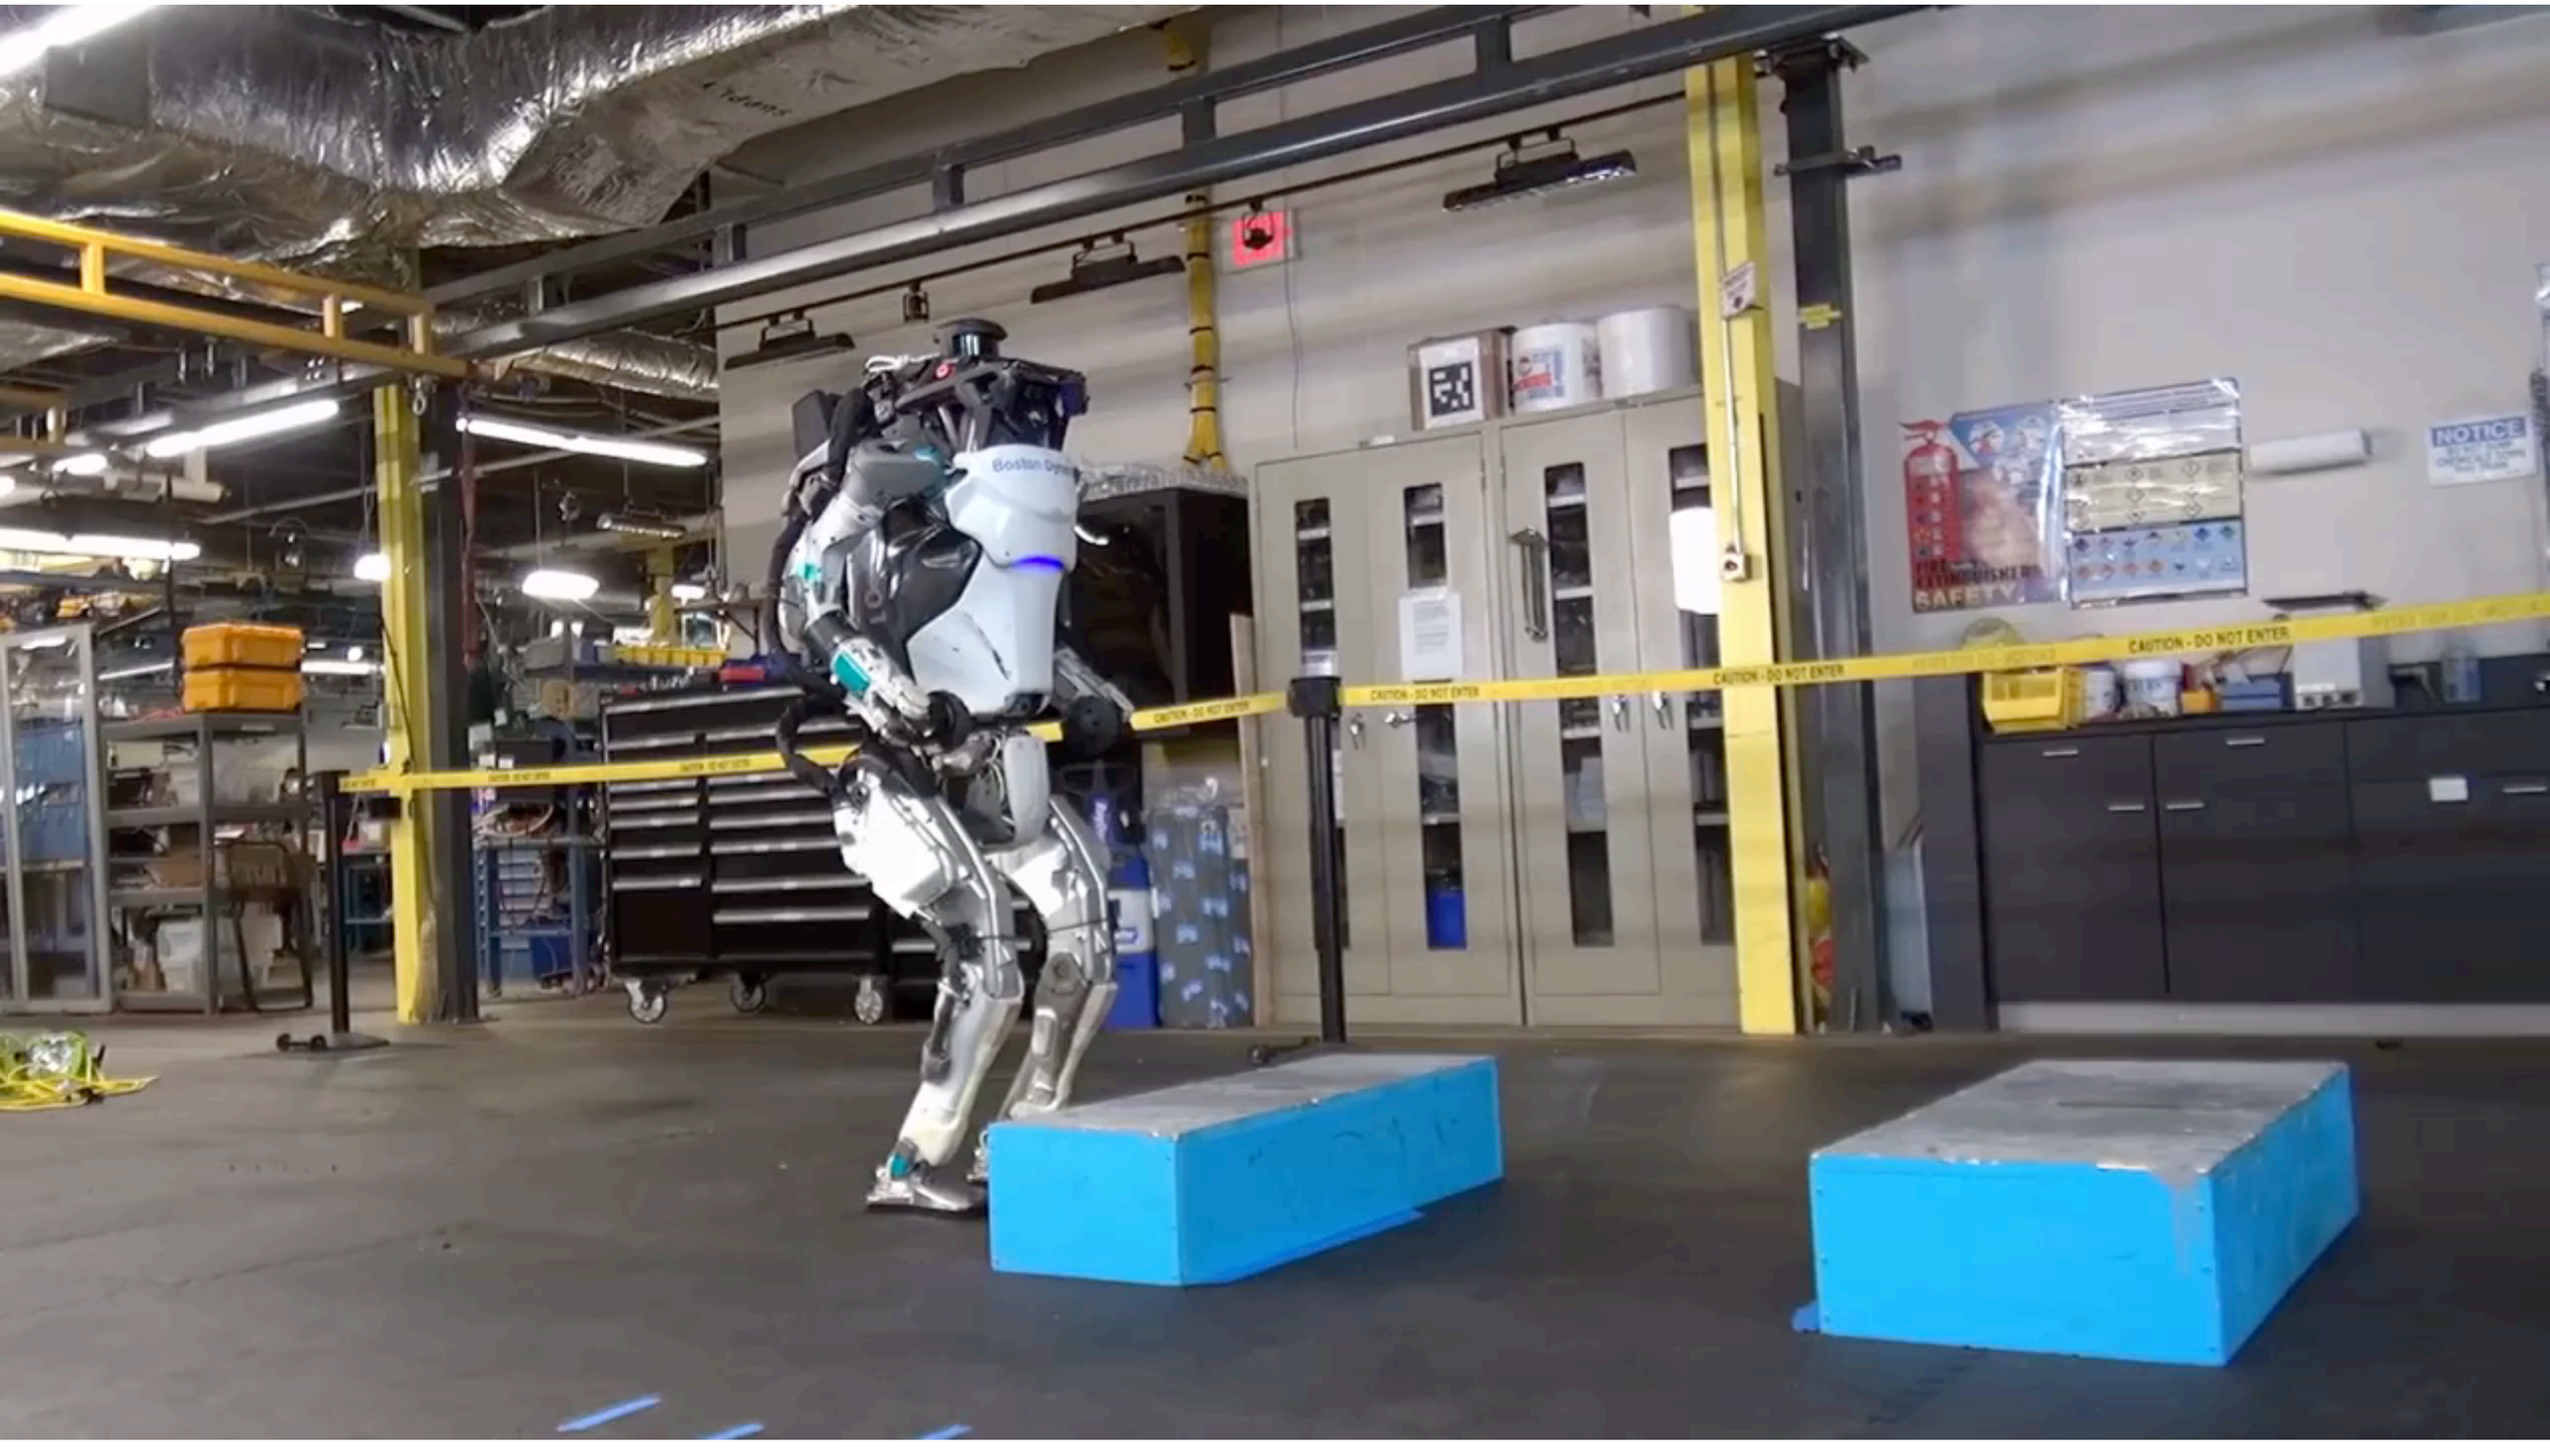

https://www.youtube.com/watch?v=fRj34o4hN4I

Why is this a hard problem?

Challenge 1: Underactuated systems

Fully actuated: There exists a inverse mapping from reference to control actions

$$\sigma(t) \quad u(t)$$

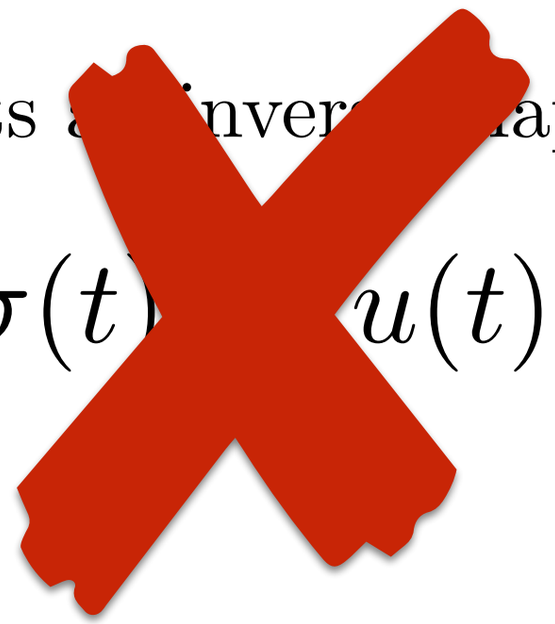

We don't have full authority to move the system along arbitrary trajectories

Challenge 1: Underactuated systems

What affects the error between robot state and reference?

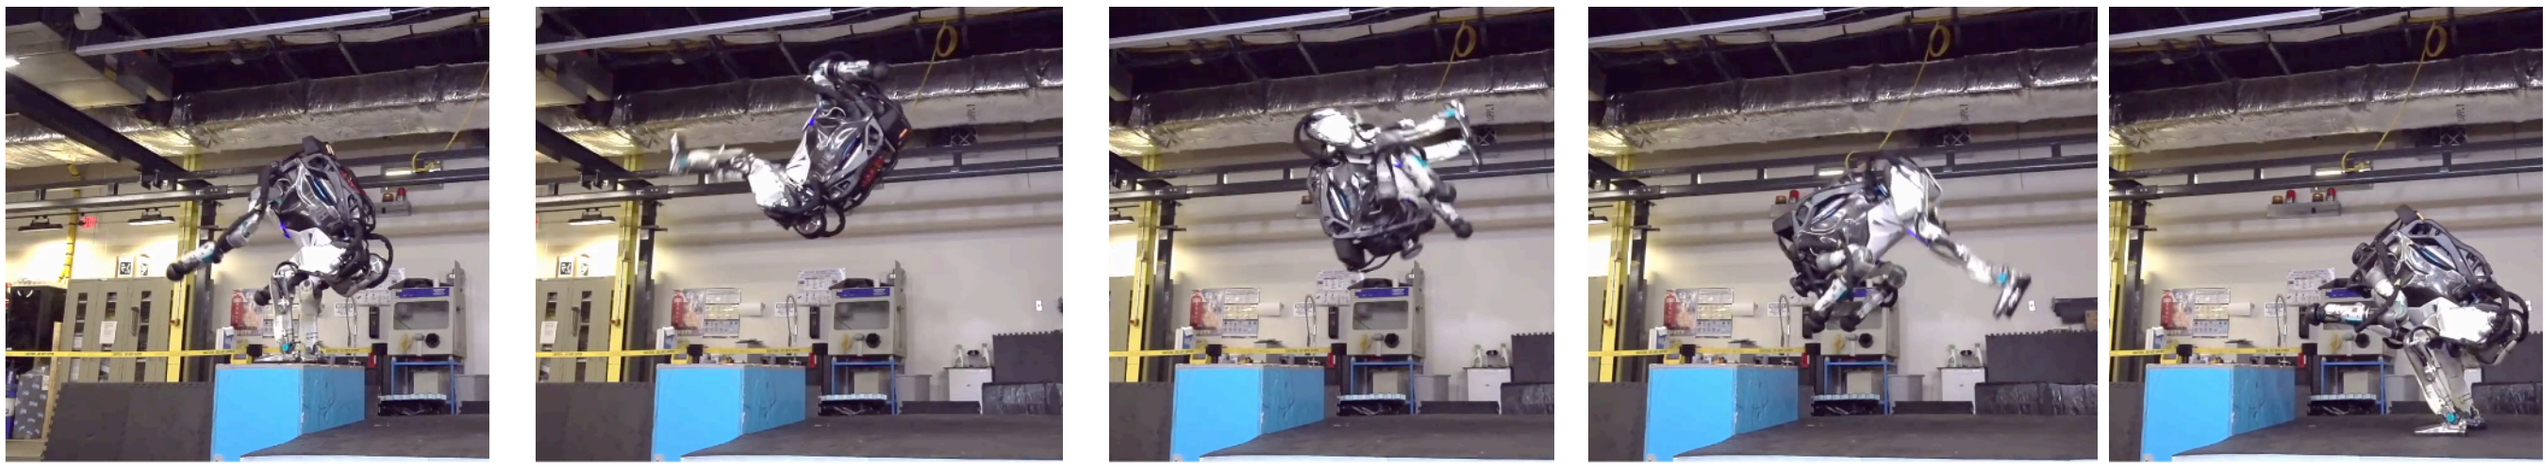

Challenge 1: Underactuated systems

What affects the error between robot state and reference?

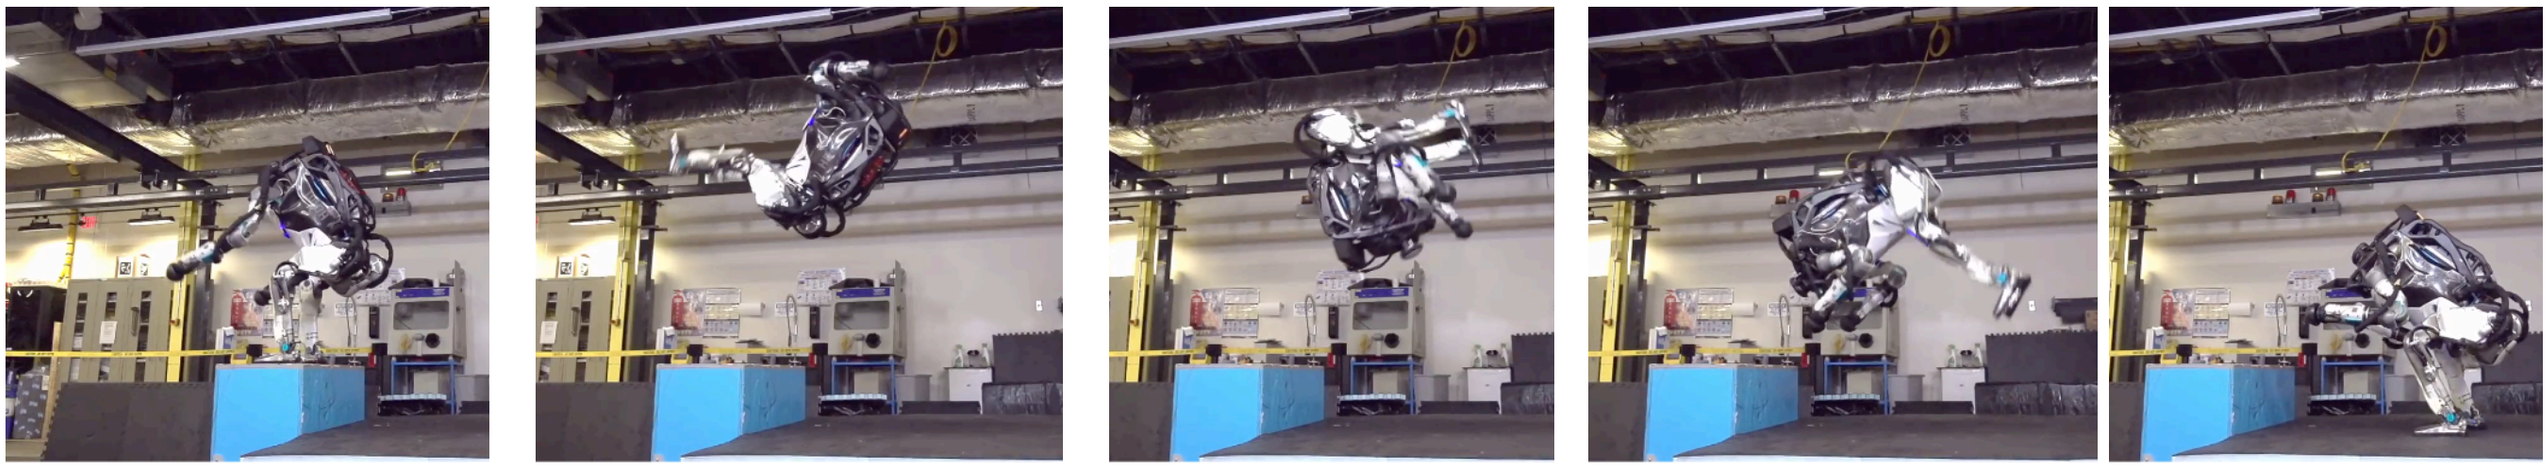

Some initial motor thrust ...

Challenge 1: Underactuated systems

What affects the error between robot state and reference?

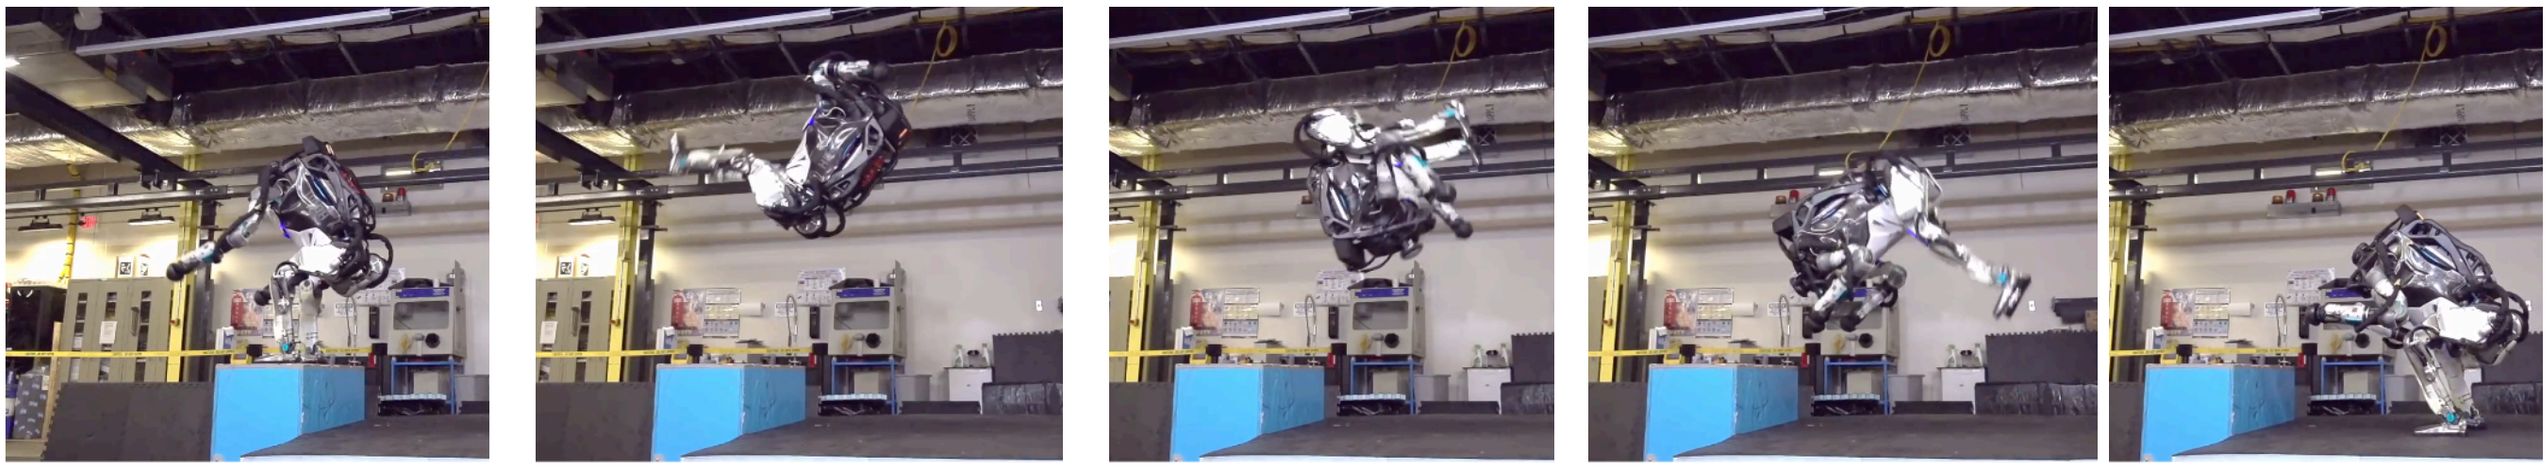

Some initial motor thrust ...

Whole lot of gravity!

Challenge 1: Underactuated systems

What affects the error between robot state and reference?

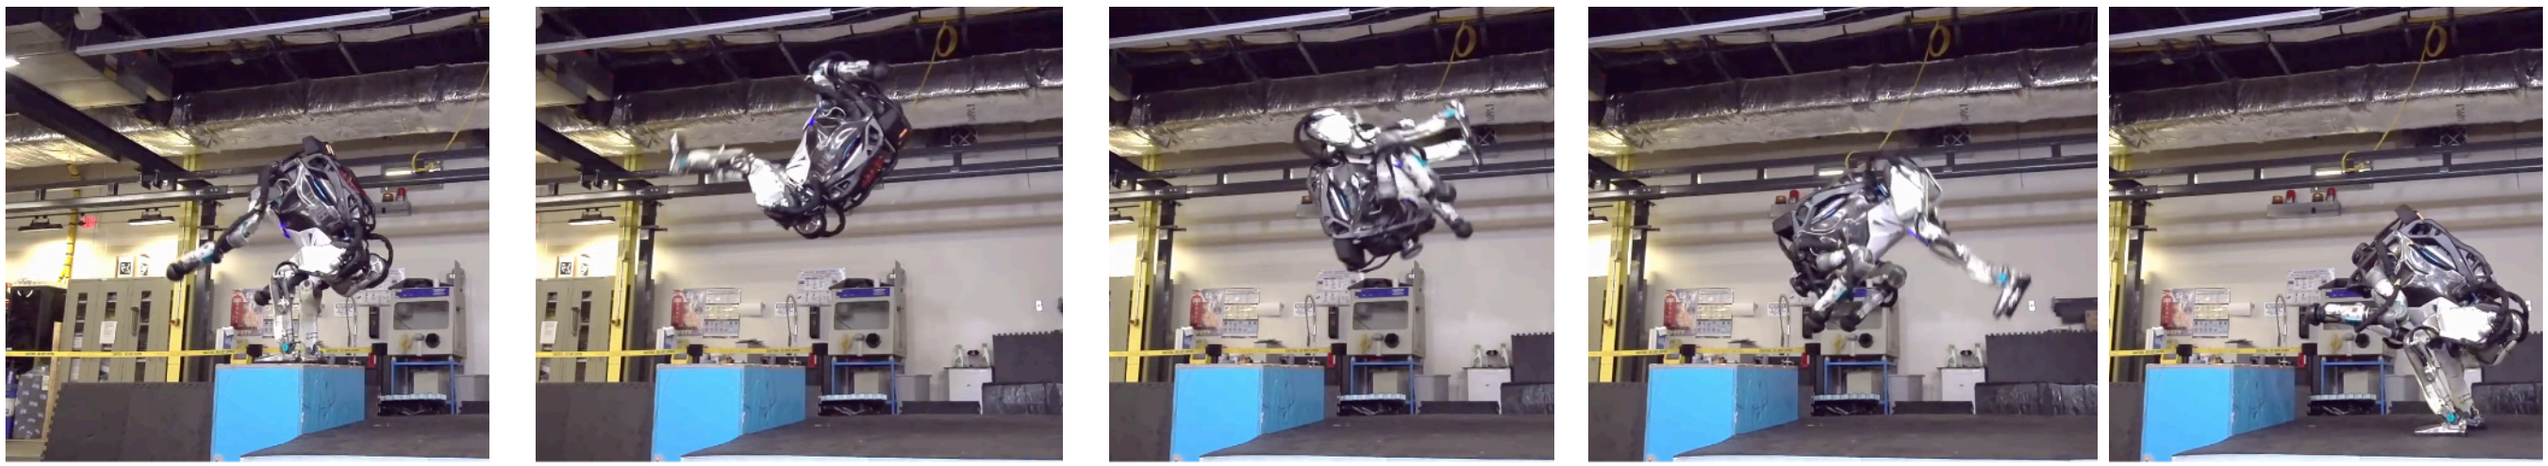

Some initial motor thrust ...

Whole lot of gravity!

Whole lot of momentum!

Challenge 1: Underactuated systems

What affects the error between robot state and reference?

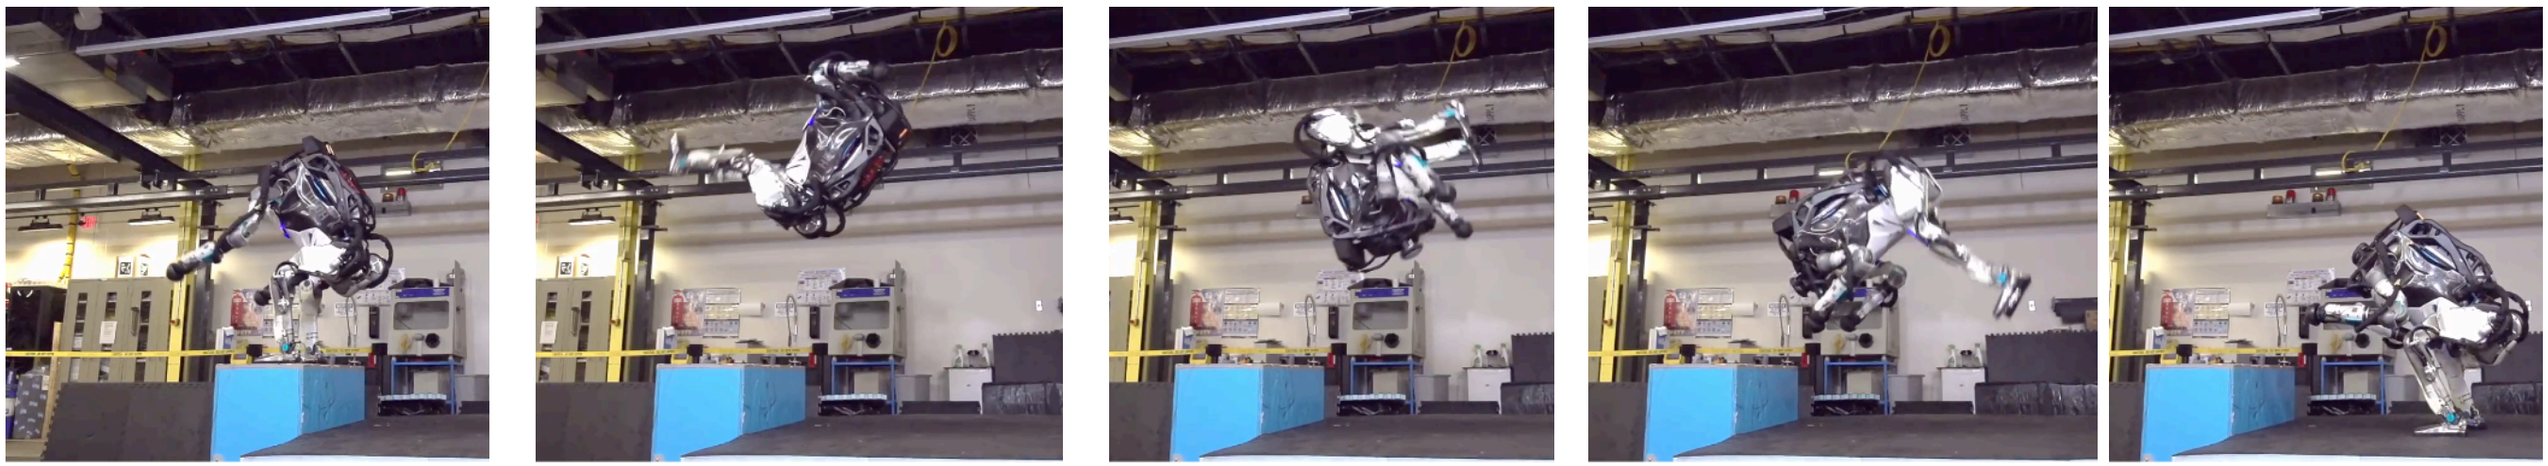

Some initial motor thrust ...

Whole lot of gravity!

Whole lot of momentum!

... some precise control adjustments

Myth: Control is a battle with nature!

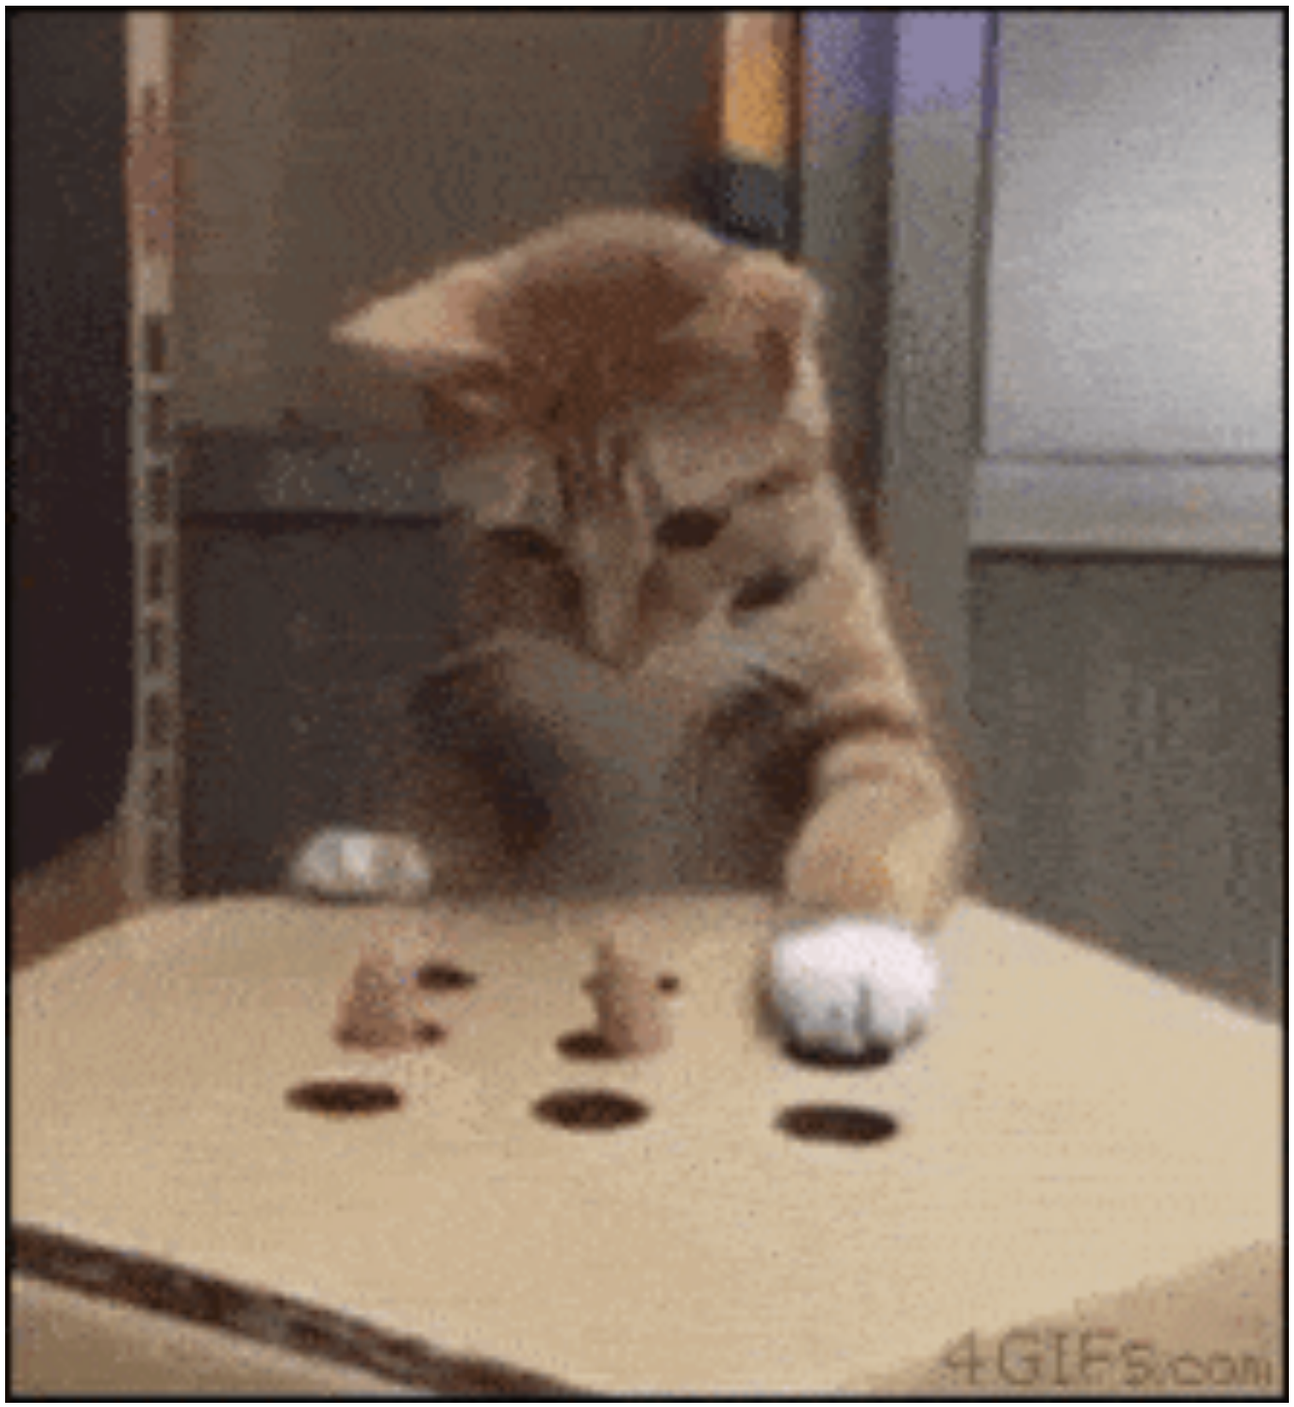

Is control like playing whack-a-mole with error terms??

Myth: Control is a battle with nature!

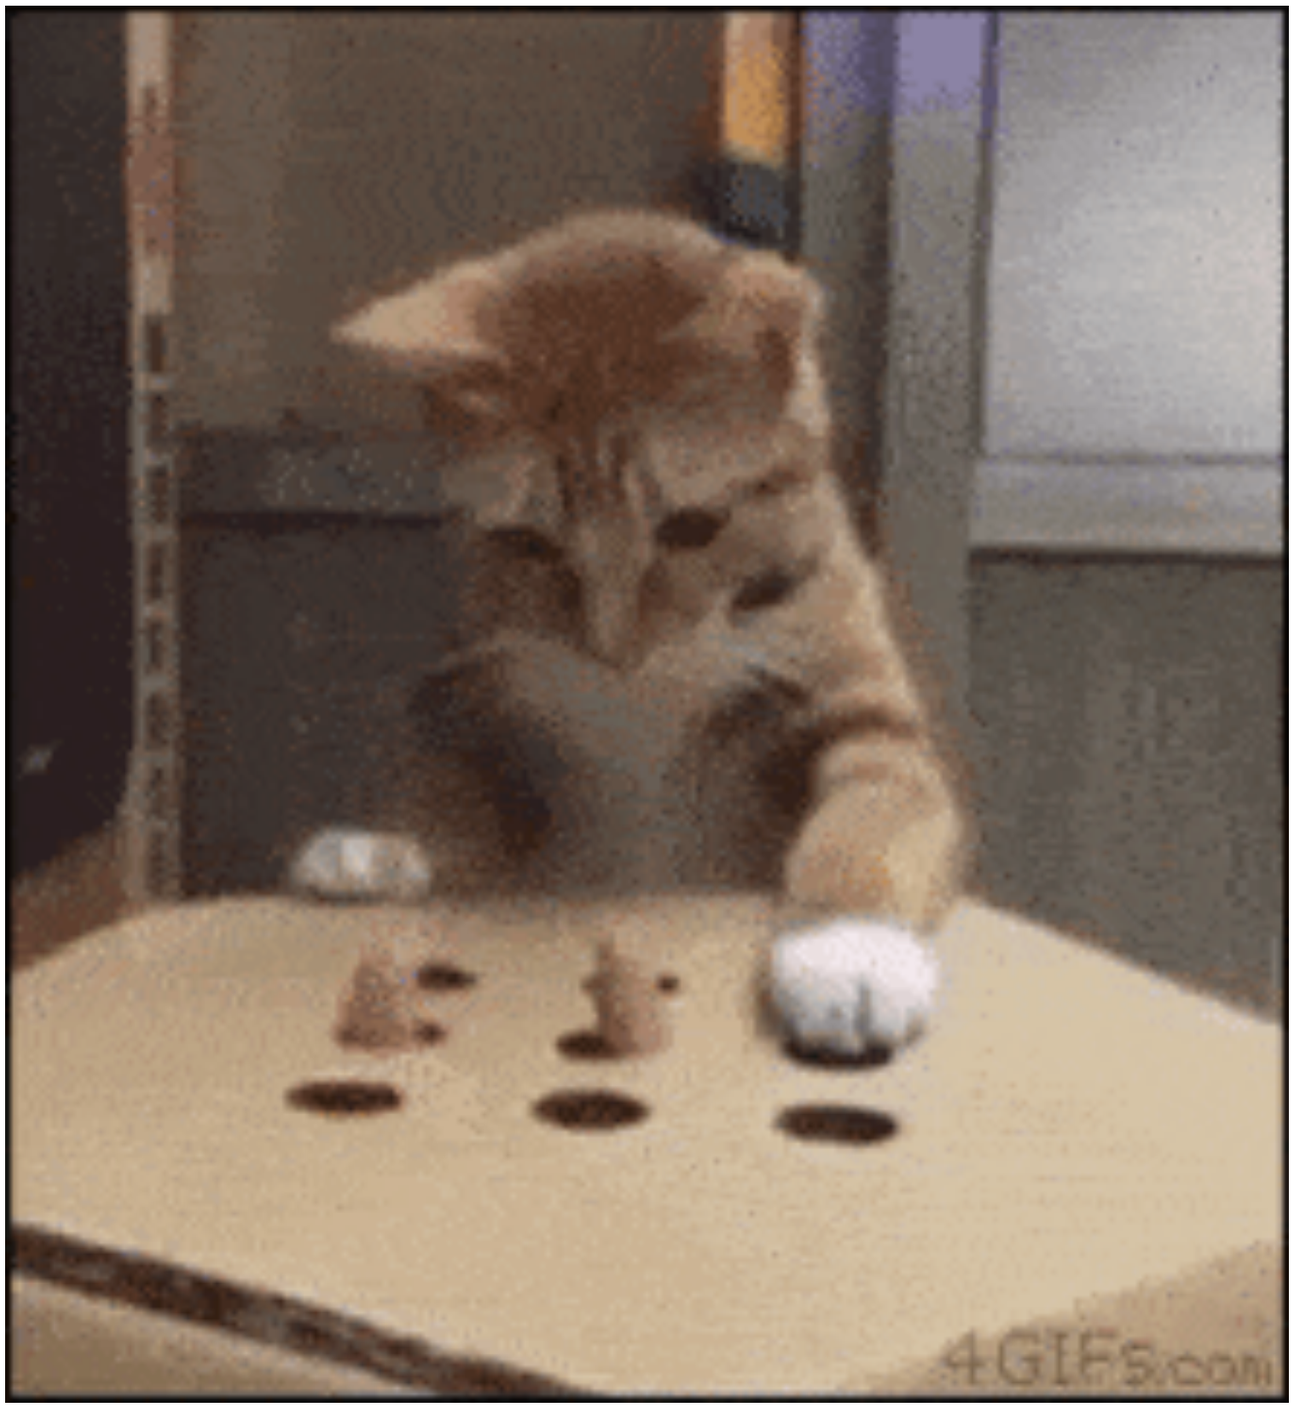

Is control like playing whack-a-mole with error terms??

Embrace dynamics instead of fighting it

State-of-the-art humanoid
(at the time)

Honda, 1996

Passive walker
(no motors, powered by gravity!)

Steven H. Collins, Martijn Wisse, and Andy Ruina, 2001

Which one looks more natural? Which one consumes less energy?

Embrace dynamics instead of fighting it

State-of-the-art humanoid
(at the time)

Honda, 1996

Passive walker
(no motors, powered by gravity!)

Steven H. Collins, Martijn Wisse, and Andy Ruina, 2001

Which one looks more natural? Which one consumes less energy?

Question:

If we know the model of our robot, can't we solve a ginormous optimization to figure out control ...?

Doing backflips with a helicopter

Redbull Eurocopter BO-105 https://www.youtube.com/watch?v=RGu45s1_QPU

Doing backflips with a helicopter

Redbull Eurocopter BO-105 https://www.youtube.com/watch?v=RGu45s1_QPU

And just what is this model ?!?

Nothing countering gravity!

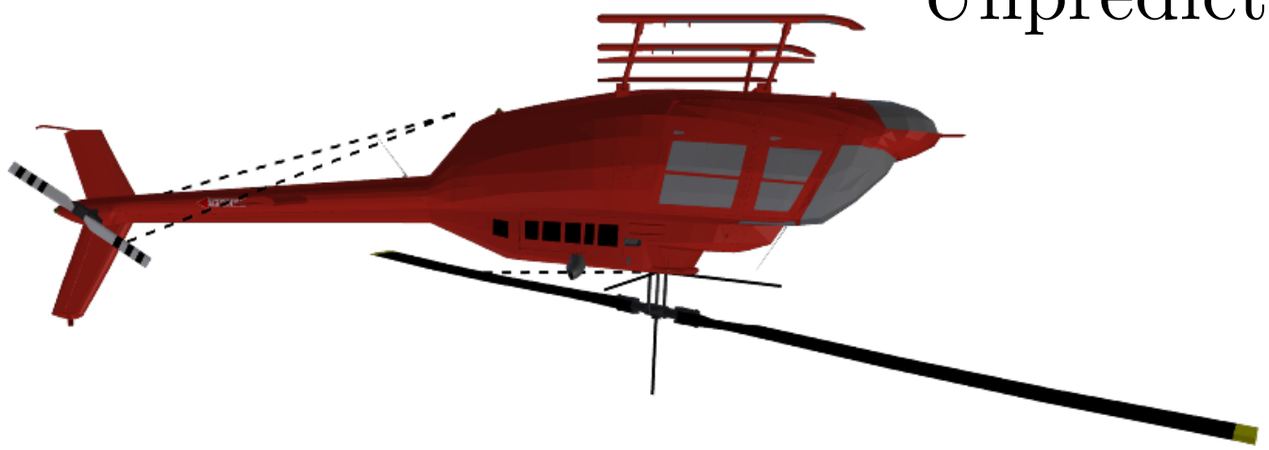

Unpredictable drag forces!

Chaotic vortex around blades!

Hopeless to assume we know exactly how the helicopter will behave upside down...

Challenge 2: Choose good closed-loop models

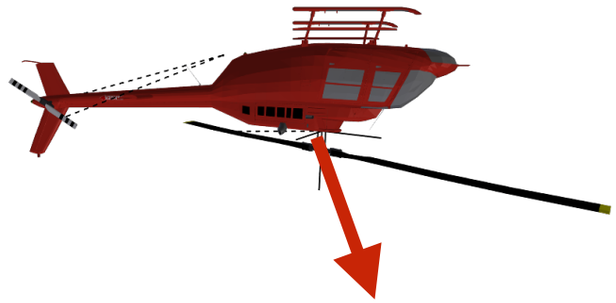

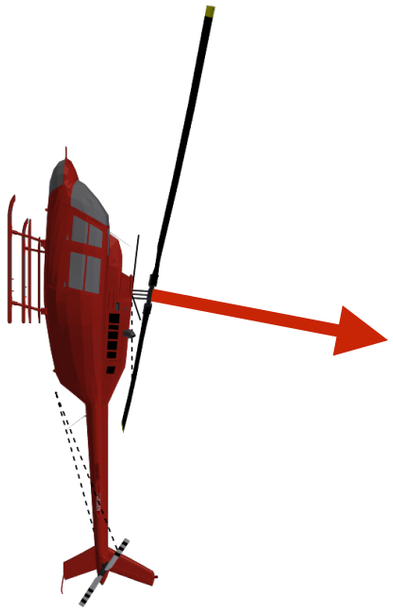

Closed-loop system =
Point mass
with a planar
thrust vector

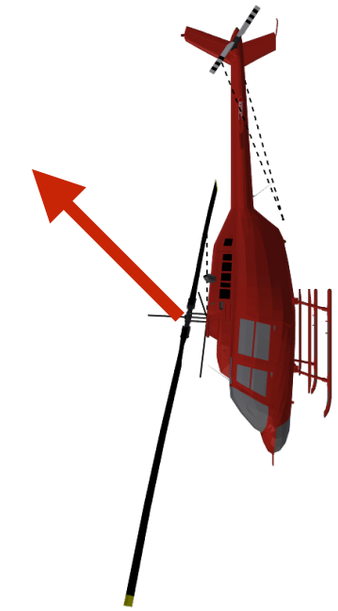

Chaotic dynamics + Feedback control law = Well-behaved system

Trotting quadruped = biped = one-leg

Quadruped

Biped

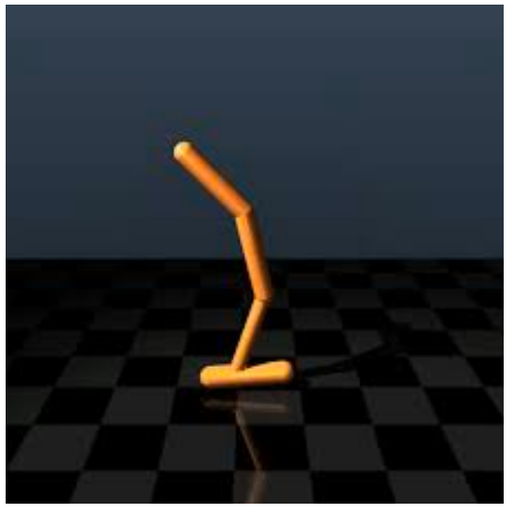

One-leg

Marc Raibert showed how these closed loop system are equivalent

Question:

Is this all offline? Can I pre-compute a bunch of controllers once and call it a day?

Figure 8s while drifting

Stanford's MARTY

https://www.youtube.com/watch?v=nTK56vPb8Zo

Figure 8s while drifting

Stanford's MARTY

https://www.youtube.com/watch?v=nTK56vPb8Zo

Challenge 3: Model changing on the fly!

Run real-time estimators for wheel characteristics

Need control laws for all possible model parameters

Other challenges for mobile robot control

1. Unexpected obstacle avoidance

(Lab 2!)

2. Noisy state estimation

(Lab 2 + bimodal estimate from PF)

3. Controllers that guarantee safety

Enough with the motivation ...

Let's start writing some controllers

A generic template for a controller

1. Get a reference path / trajectory to track

2. Pick a point on the reference

3. Compute error to reference point

4. Compute control law to minimize error

Step 1: Get a reference

Reference can be a time-parameterized trajectory

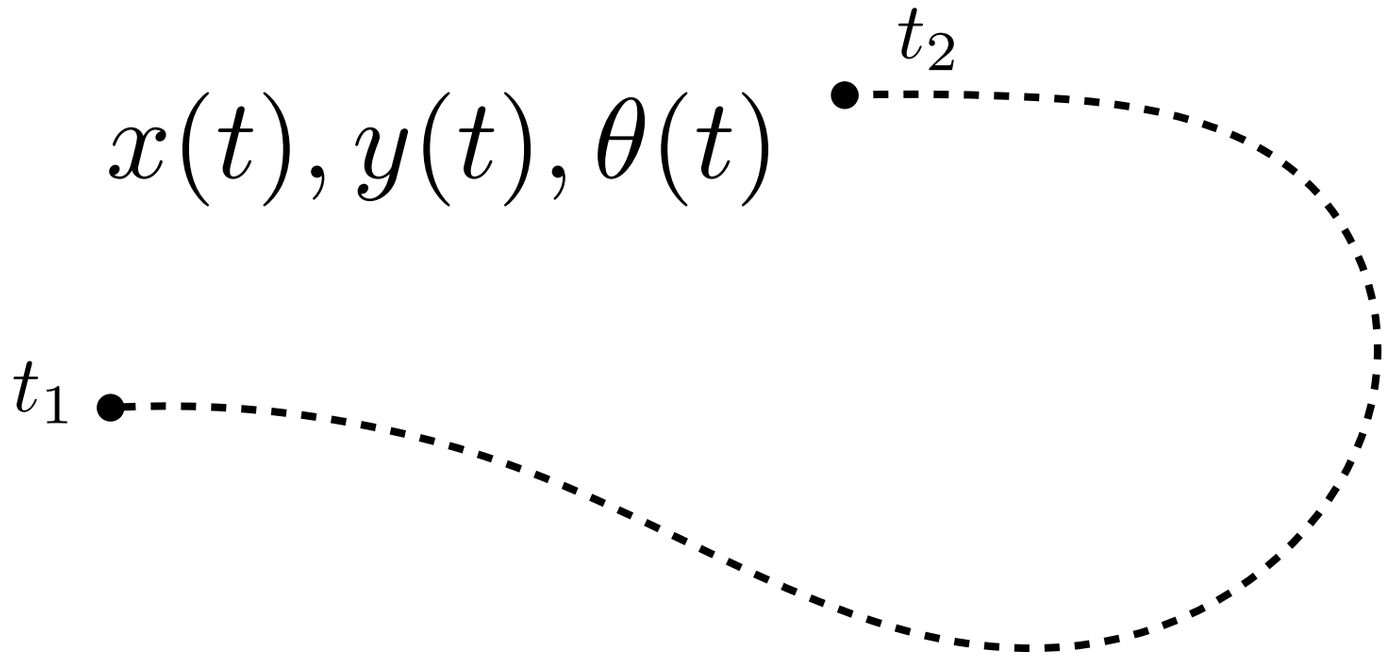

The time index refers to a desired pose we want the system to achieve at a given time

Pro: Useful if we want the robot to respect time constraints

Con: Sometimes we care only about deviation from reference

Step 1: Get a reference

Reference can be a index-parameterized path

$$x(\tau), y(\tau), \theta(\tau), v(\tau)$$

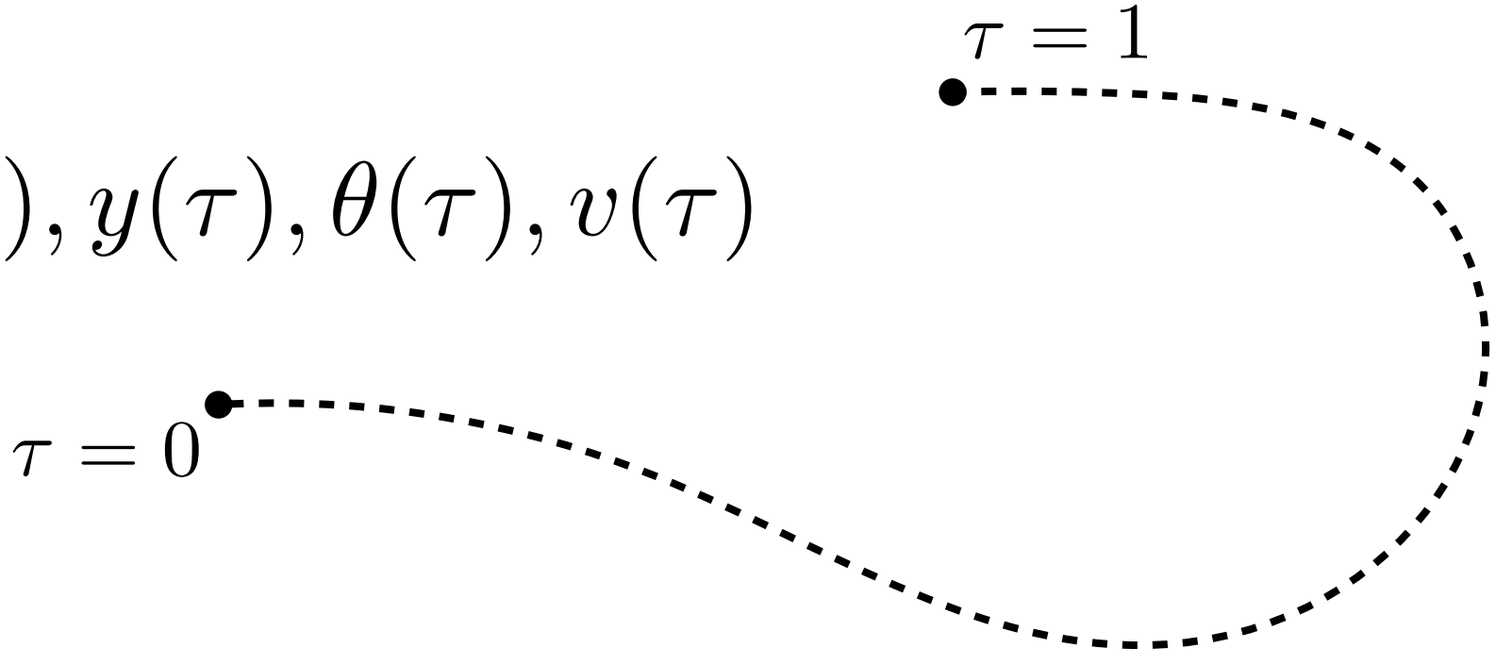

The index is simply a way to access the path; there is no notion of time

Pro: Useful for conveying the shape you want the robot to follow

Con: Can't control when robot will reach a point

Step 2: Pick a point on the reference

Pick a reference point on the trajectory / path

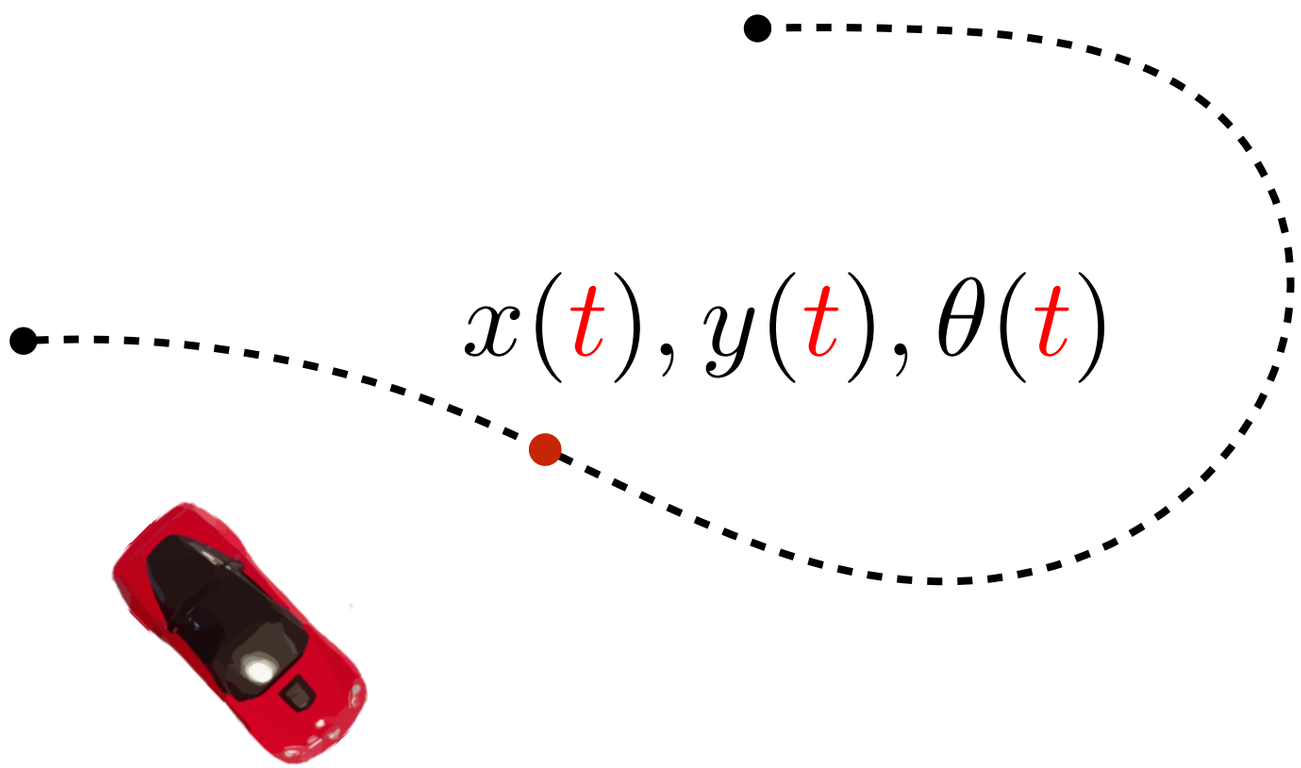

If we are using a time-parameterized trajectory,
the current time is the natural reference

Question: When is this a bad idea?

Step 2: Pick a point on the reference

Pick a reference point on the trajectory / path

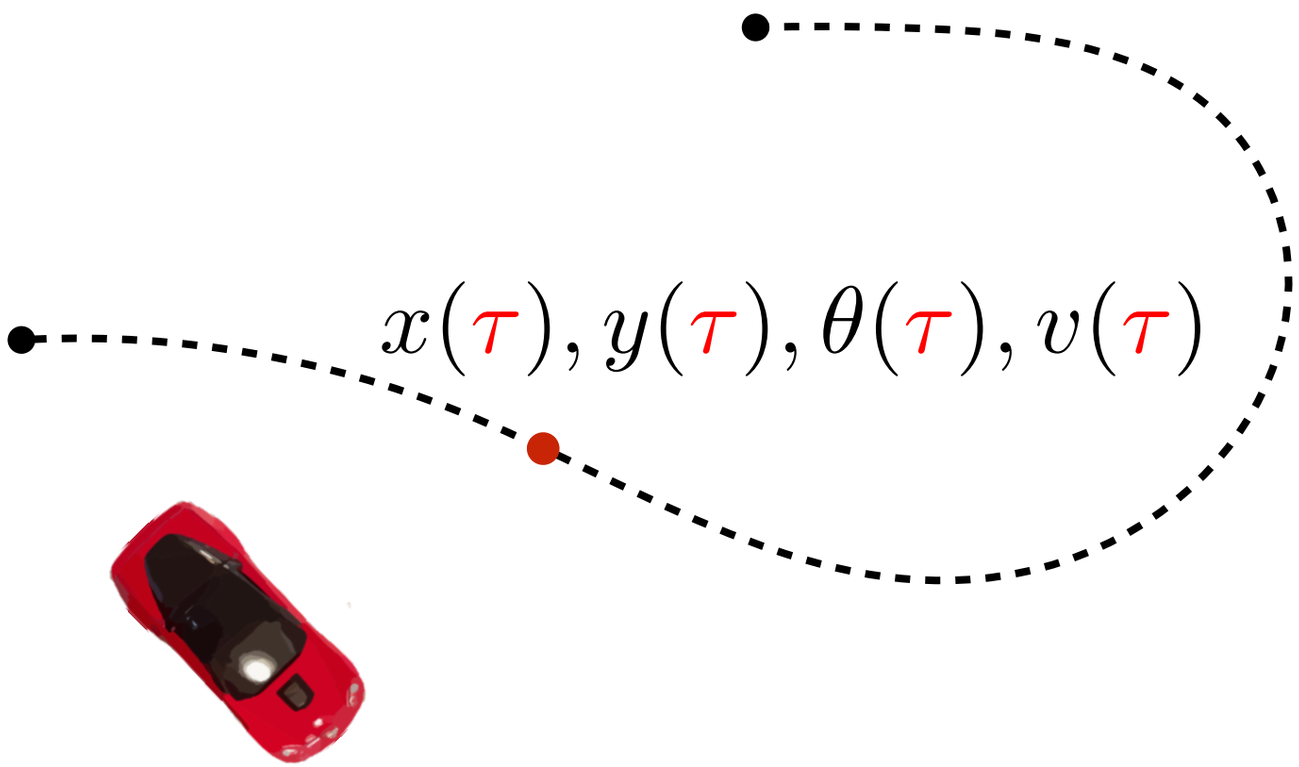

If we are using a index-parameterized trajectory,
there are multiple options

Step 2: Pick a point on the reference

Option 1: Pick the closest point on the path

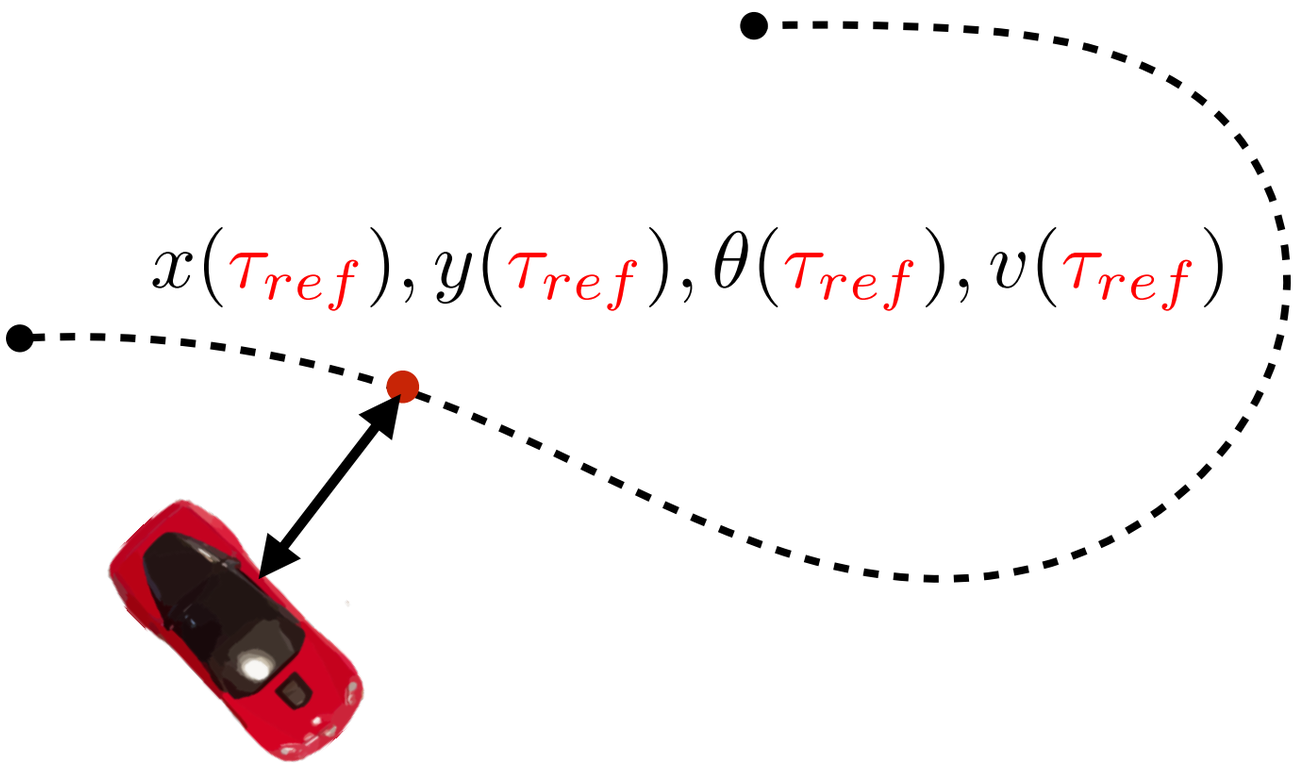

$$\tau_{ref} = \arg\min_{\tau} || \begin{bmatrix} x & y \end{bmatrix}^T - \begin{bmatrix} x(\tau) & y(\tau) \end{bmatrix}^T ||$$

Question: When is this a bad idea?

Step 2: Pick a point on the reference

Option 2: Pick a lookahead point on the path

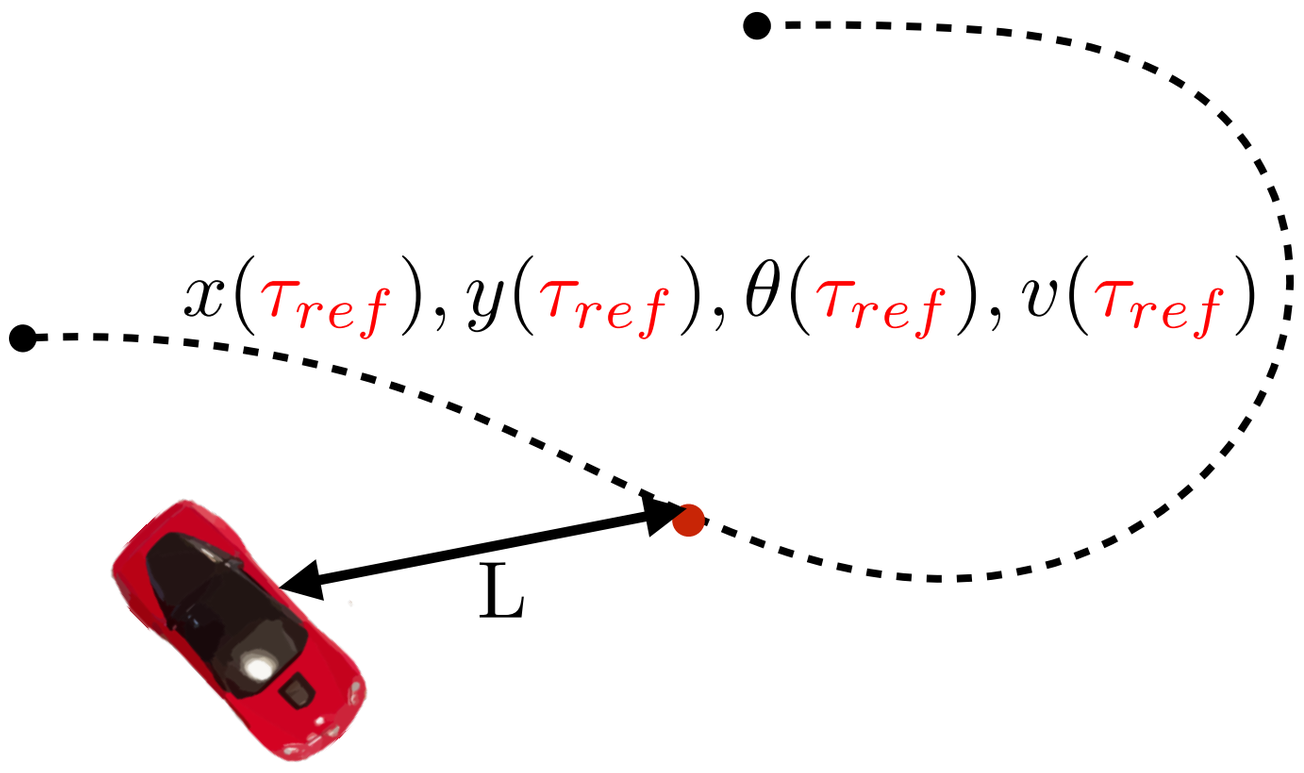

$$|| \begin{bmatrix} x & y \end{bmatrix}^T - \begin{bmatrix} x(\tau_{ref}) & y(\tau_{ref}) \end{bmatrix}^T || = L$$

Question: What happens when L is too big?

Step 3: Compute error to reference point

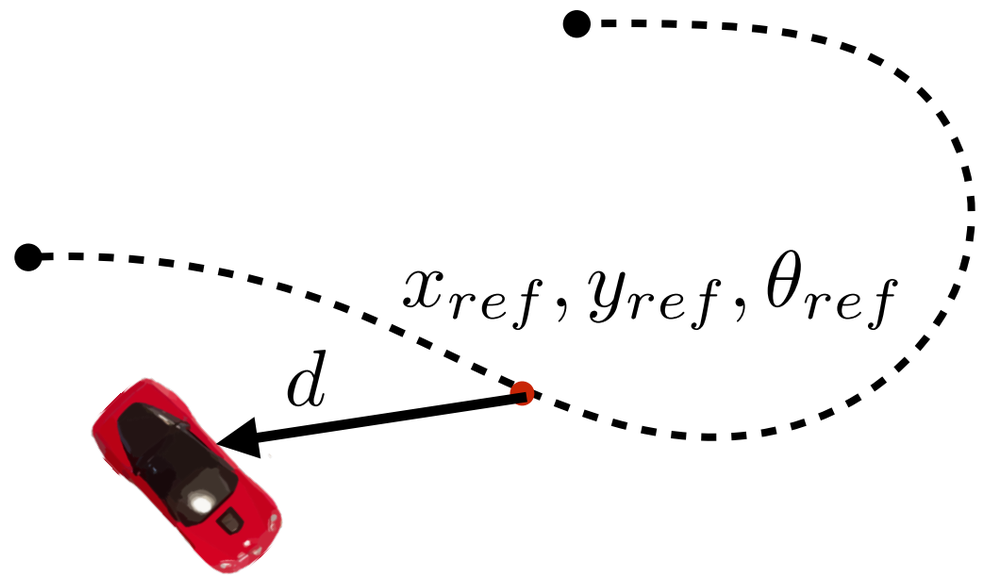

Step 3: Compute error to reference point

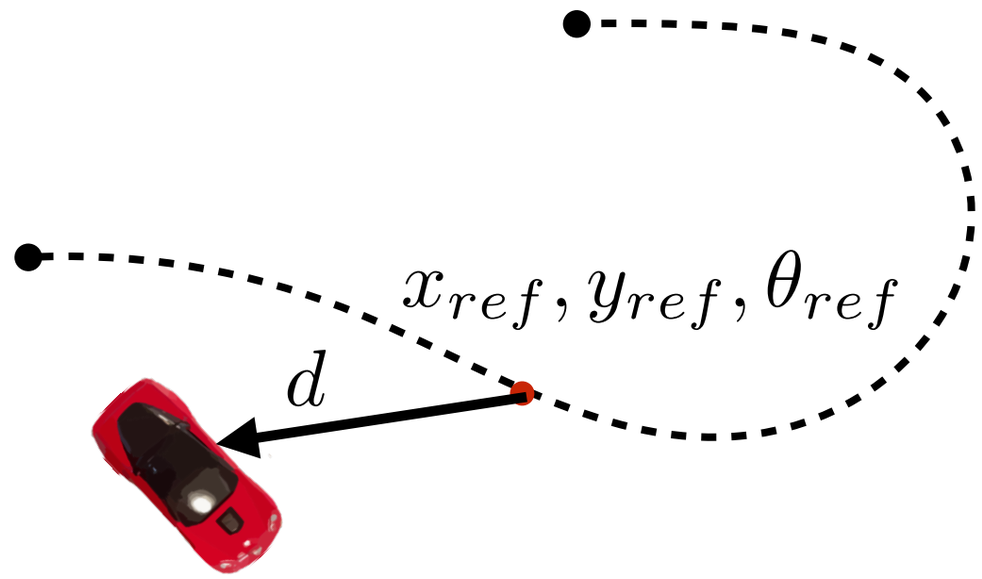

1. Define error vector

$$d = \begin{bmatrix} x \\ y \end{bmatrix} - \begin{bmatrix} x_{ref} \\ y_{ref} \end{bmatrix}$$

Step 3: Compute error to reference point

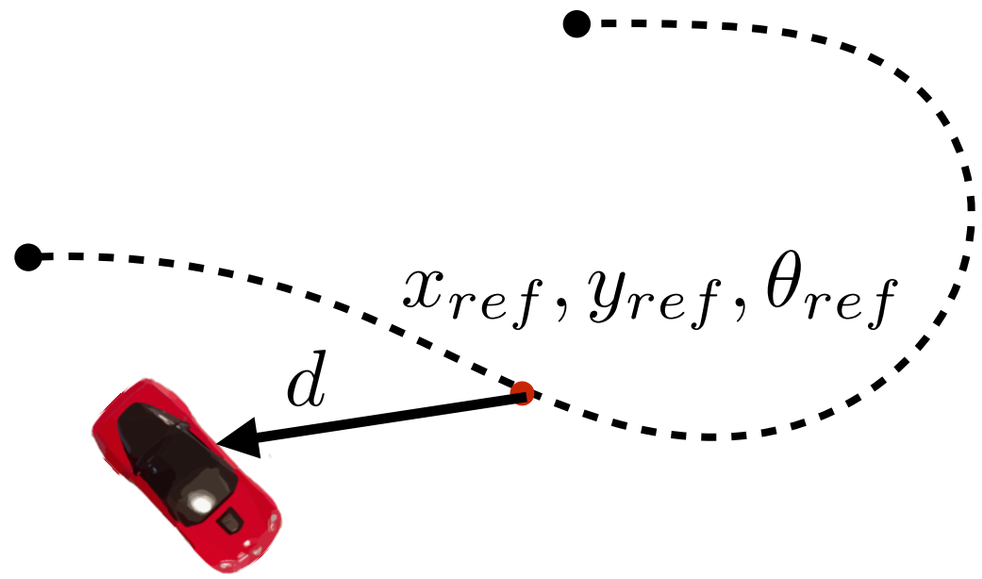

1. Define error vector

$$d = \begin{bmatrix} x \\ y \end{bmatrix} - \begin{bmatrix} x_{ref} \\ y_{ref} \end{bmatrix}$$

2. Rotate error vector to be in the reference frame

$$e = R^T(\theta_{ref}) \left(\begin{bmatrix} x \\ y \end{bmatrix} - \begin{bmatrix} x_{ref} \\ y_{ref} \end{bmatrix} \right)$$

Step 3: Compute error to reference point

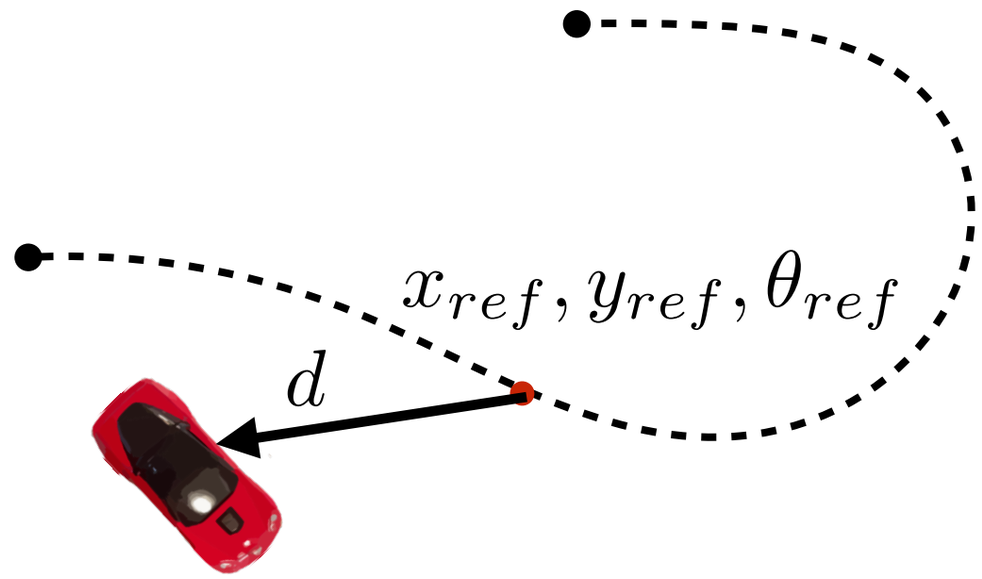

1. Define error vector

$$d = \begin{bmatrix} x \\ y \end{bmatrix} - \begin{bmatrix} x_{ref} \\ y_{ref} \end{bmatrix}$$

2. Rotate error vector to be in the reference frame

$$e = R^T(\theta_{ref}) \left(\begin{bmatrix} x \\ y \end{bmatrix} - \begin{bmatrix} x_{ref} \\ y_{ref} \end{bmatrix} \right)$$

$$e = \begin{bmatrix} \cos(\theta_{ref}) & \sin(\theta_{ref}) \\ -\sin(\theta_{ref}) & \cos(\theta_{ref}) \end{bmatrix} \left(\begin{bmatrix} x \\ y \end{bmatrix} - \begin{bmatrix} x_{ref} \\ y_{ref} \end{bmatrix} \right)$$

Step 3: Compute error to reference point

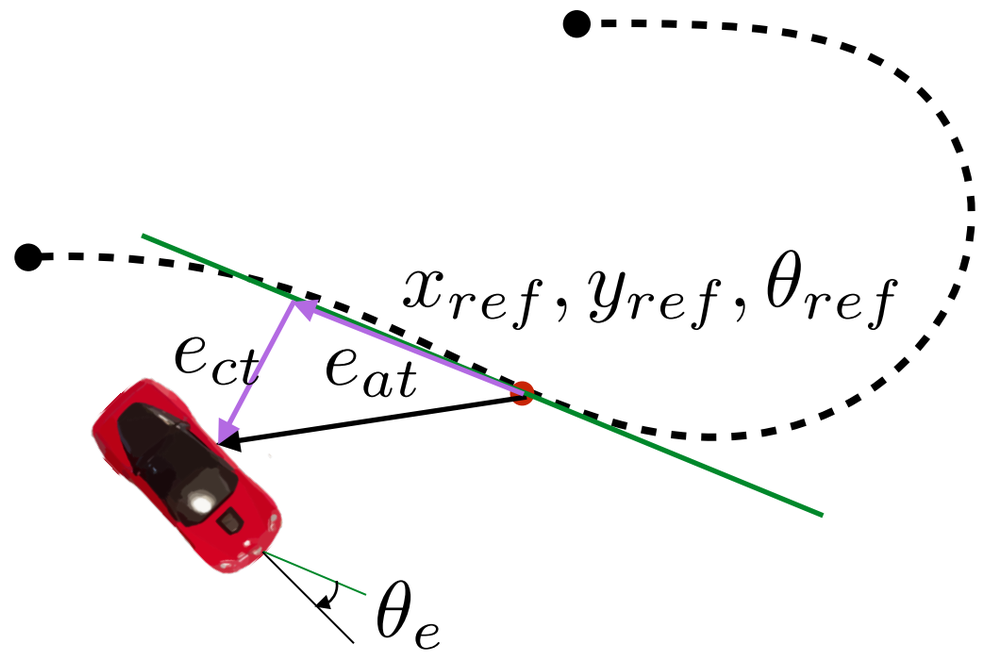

Step 3: Compute error to reference point

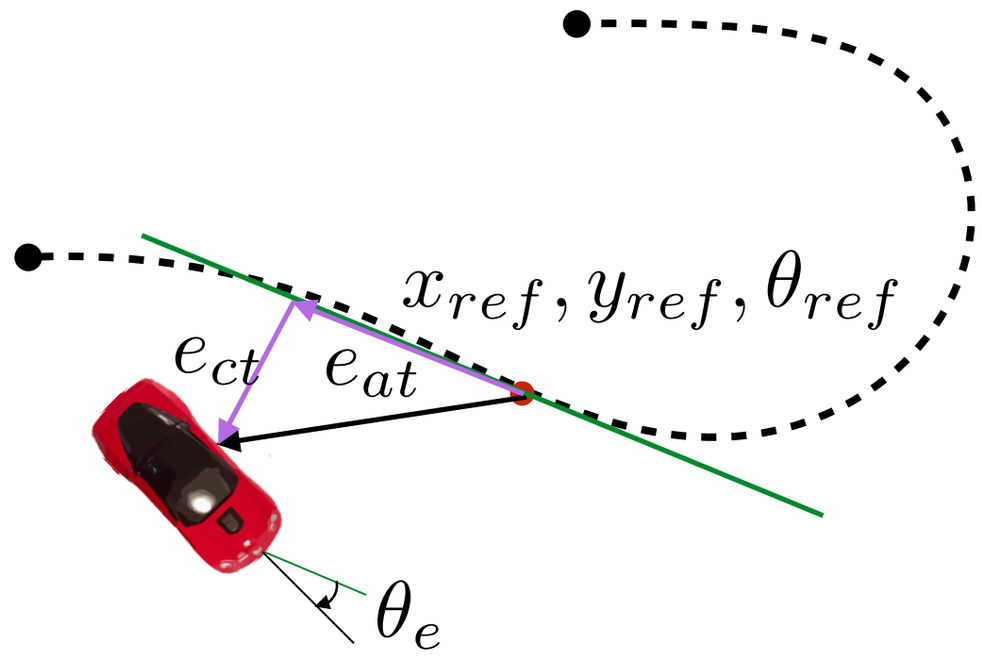

Error has two components: along-track and cross-track

$$e = \begin{bmatrix} e_{at} \\ e_{ct} \end{bmatrix} \begin{matrix} \text{(along track)} \\ \text{(cross track)} \end{matrix}$$

Step 3: Compute error to reference point

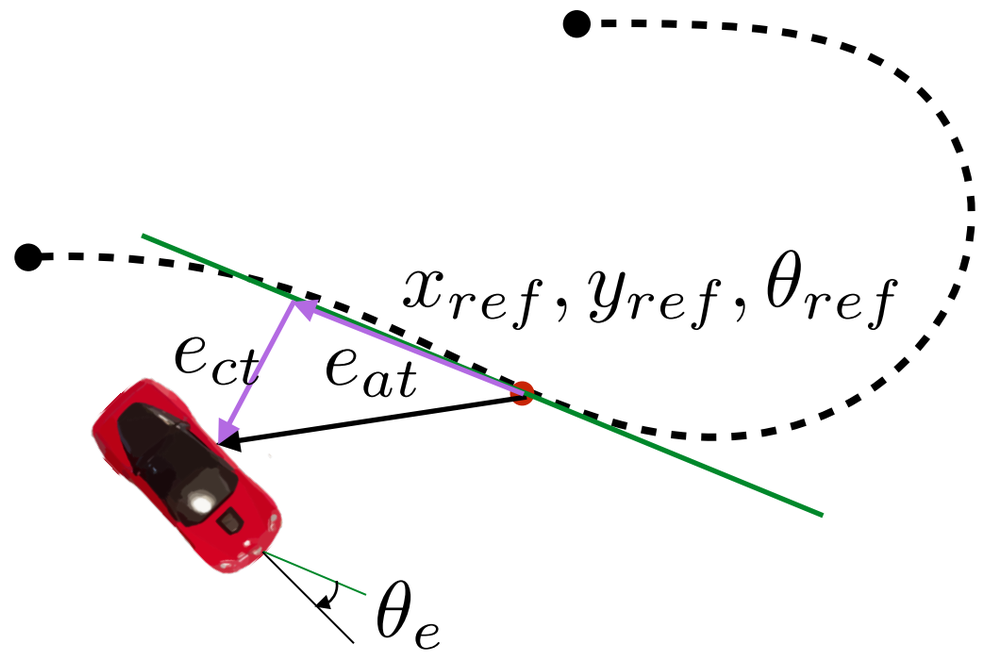

Error has two components: along-track and cross-track

$$e = \begin{bmatrix} e_{at} \\ e_{ct} \end{bmatrix} \begin{matrix} \text{(along track)} \\ \text{(cross track)} \end{matrix}$$

$$\theta_e = \theta - \theta_{ref} \quad \text{(heading error)}$$

Let's consider only the cross track error for now

Step 3: Compute error to reference point

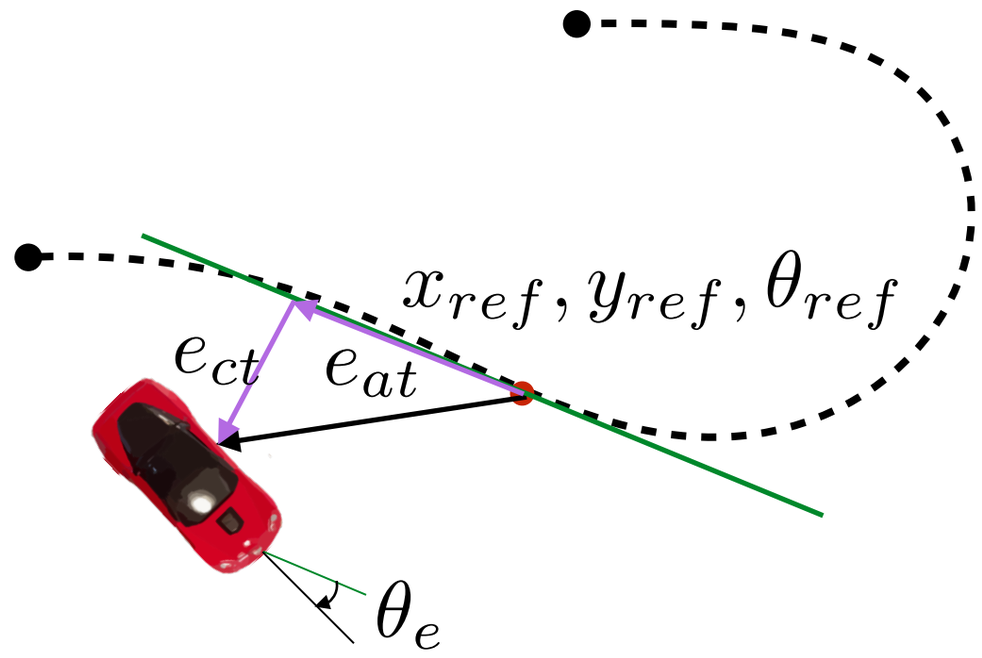

Cross-track error

$$e_{ct} = -\sin(\theta_{ref})(x - x_{ref}) + \cos(\theta_{ref})(y - y_{ref})$$

$$= V \sin(\theta_e)$$

Step 3: Compute error to reference point

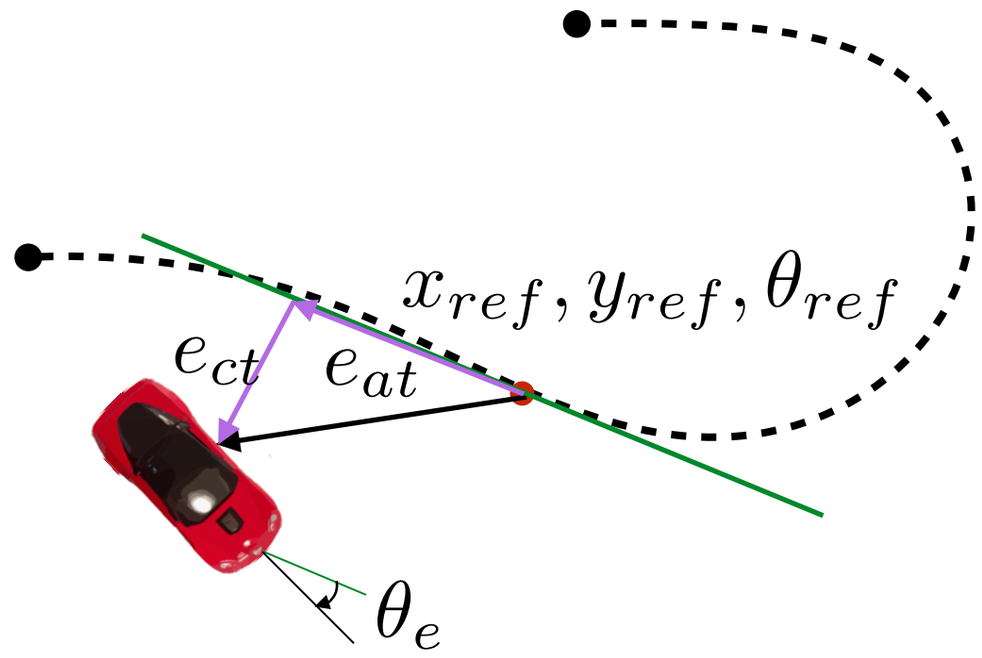

Cross-track error

$$e_{ct} = -\sin(\theta_{ref})(x - x_{ref}) + \cos(\theta_{ref})(y - y_{ref})$$

Derivative of cross-track error

$$\begin{aligned}\dot{e}_{ct} &= -\sin(\theta_{ref})\dot{x} + \cos(\theta_{ref})\dot{y} \\ &= -\sin(\theta_{ref})V\cos(\theta) + \cos(\theta_{ref})V\sin(\theta) \\ &= V\sin(\theta - \theta_{ref}) = V\sin(\theta_e)\end{aligned}$$

Step 4: Compute control law

Compute control action based on instantaneous error

$$u = K(\mathbf{x}, e)$$

control — state — error

(steering angle, speed)

Step 4: Compute control law

Compute control action based on instantaneous error

$$u = K(\mathbf{x}, e)$$

control — state — error

(steering angle, speed)

Apply control action, robot moves a bit, compute new error, repeat

Step 4: Compute control law

Compute control action based on instantaneous error

$$u = K(\mathbf{x}, e)$$

control — state — error

(steering angle, speed)

Apply control action, robot moves a bit, compute new error, repeat

Different laws have different trade-offs

We assume that control speed is set to be equal to reference speed

Hence control = steering angle

Different control laws

1. Bang-bang control

2. PID control

3. Pure-pursuit control

4. Lyapunov control

5. Linear Quadratic Regulator (LQR)

6. Model Predictive Control (MPC)