CPSC 441
Computer Networks

Majid Ghaderi
Department of Computer Science
University of Calgary

Chapter 3: Transport Layer

our goals:

- understand principles behind transport layer services:
  - multiplexing, demultiplexing
  - reliable data transfer
  - congestion control
- learn about Internet transport layer protocols:
  - UDP: connectionless transport
  - TCP: connection-oriented reliable transport

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- connection management

3.7 TCP congestion control

Transport services and protocols

- provide *logical communication* between app processes running on different hosts
- transport protocols run in end systems
  - send side: breaks app messages into *segments*, passes to network layer
  - rcv side: reassembles segments into messages, passes to app layer
- more than one transport protocol available to apps
  - Internet: TCP and UDP

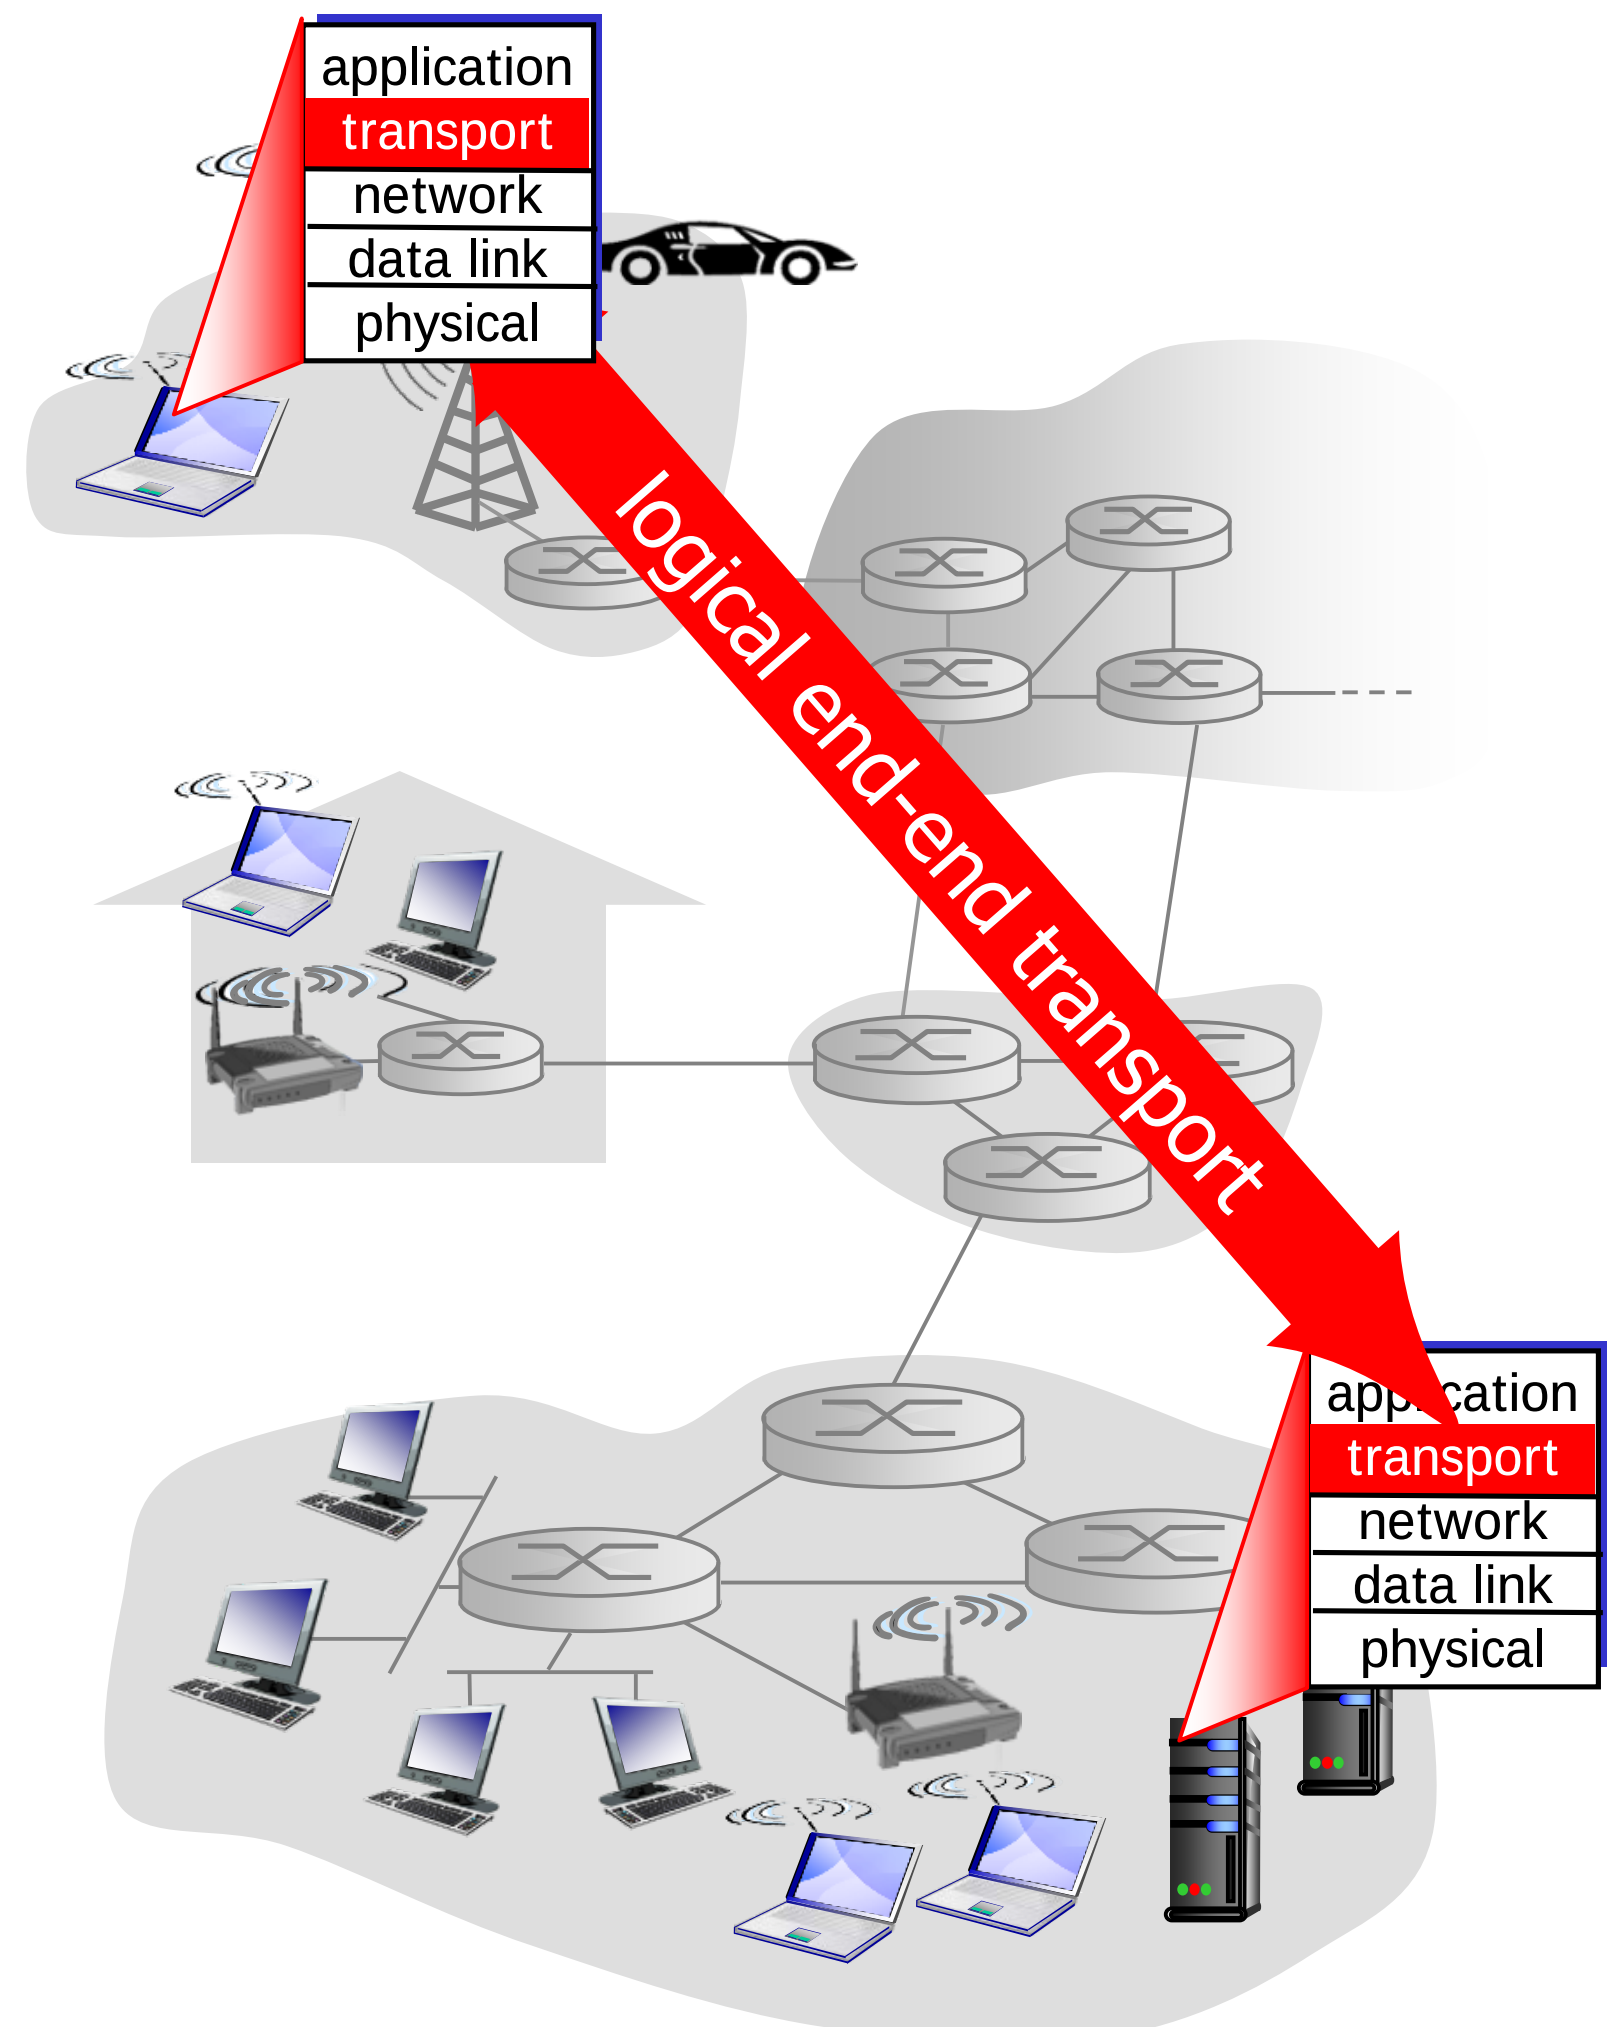

Transport vs. network layer

- *network layer:* logical communication between hosts
- *transport layer:* logical communication between processes
  - relies on, enhances, network layer services

Internet transport-layer protocols

- reliable, in-order delivery (TCP)
  - congestion control
  - flow control
  - connection setup
- unreliable, unordered delivery: UDP
  - no-frills extension of "best-effort" IP
- services not available:
  - delay guarantees
  - bandwidth guarantees

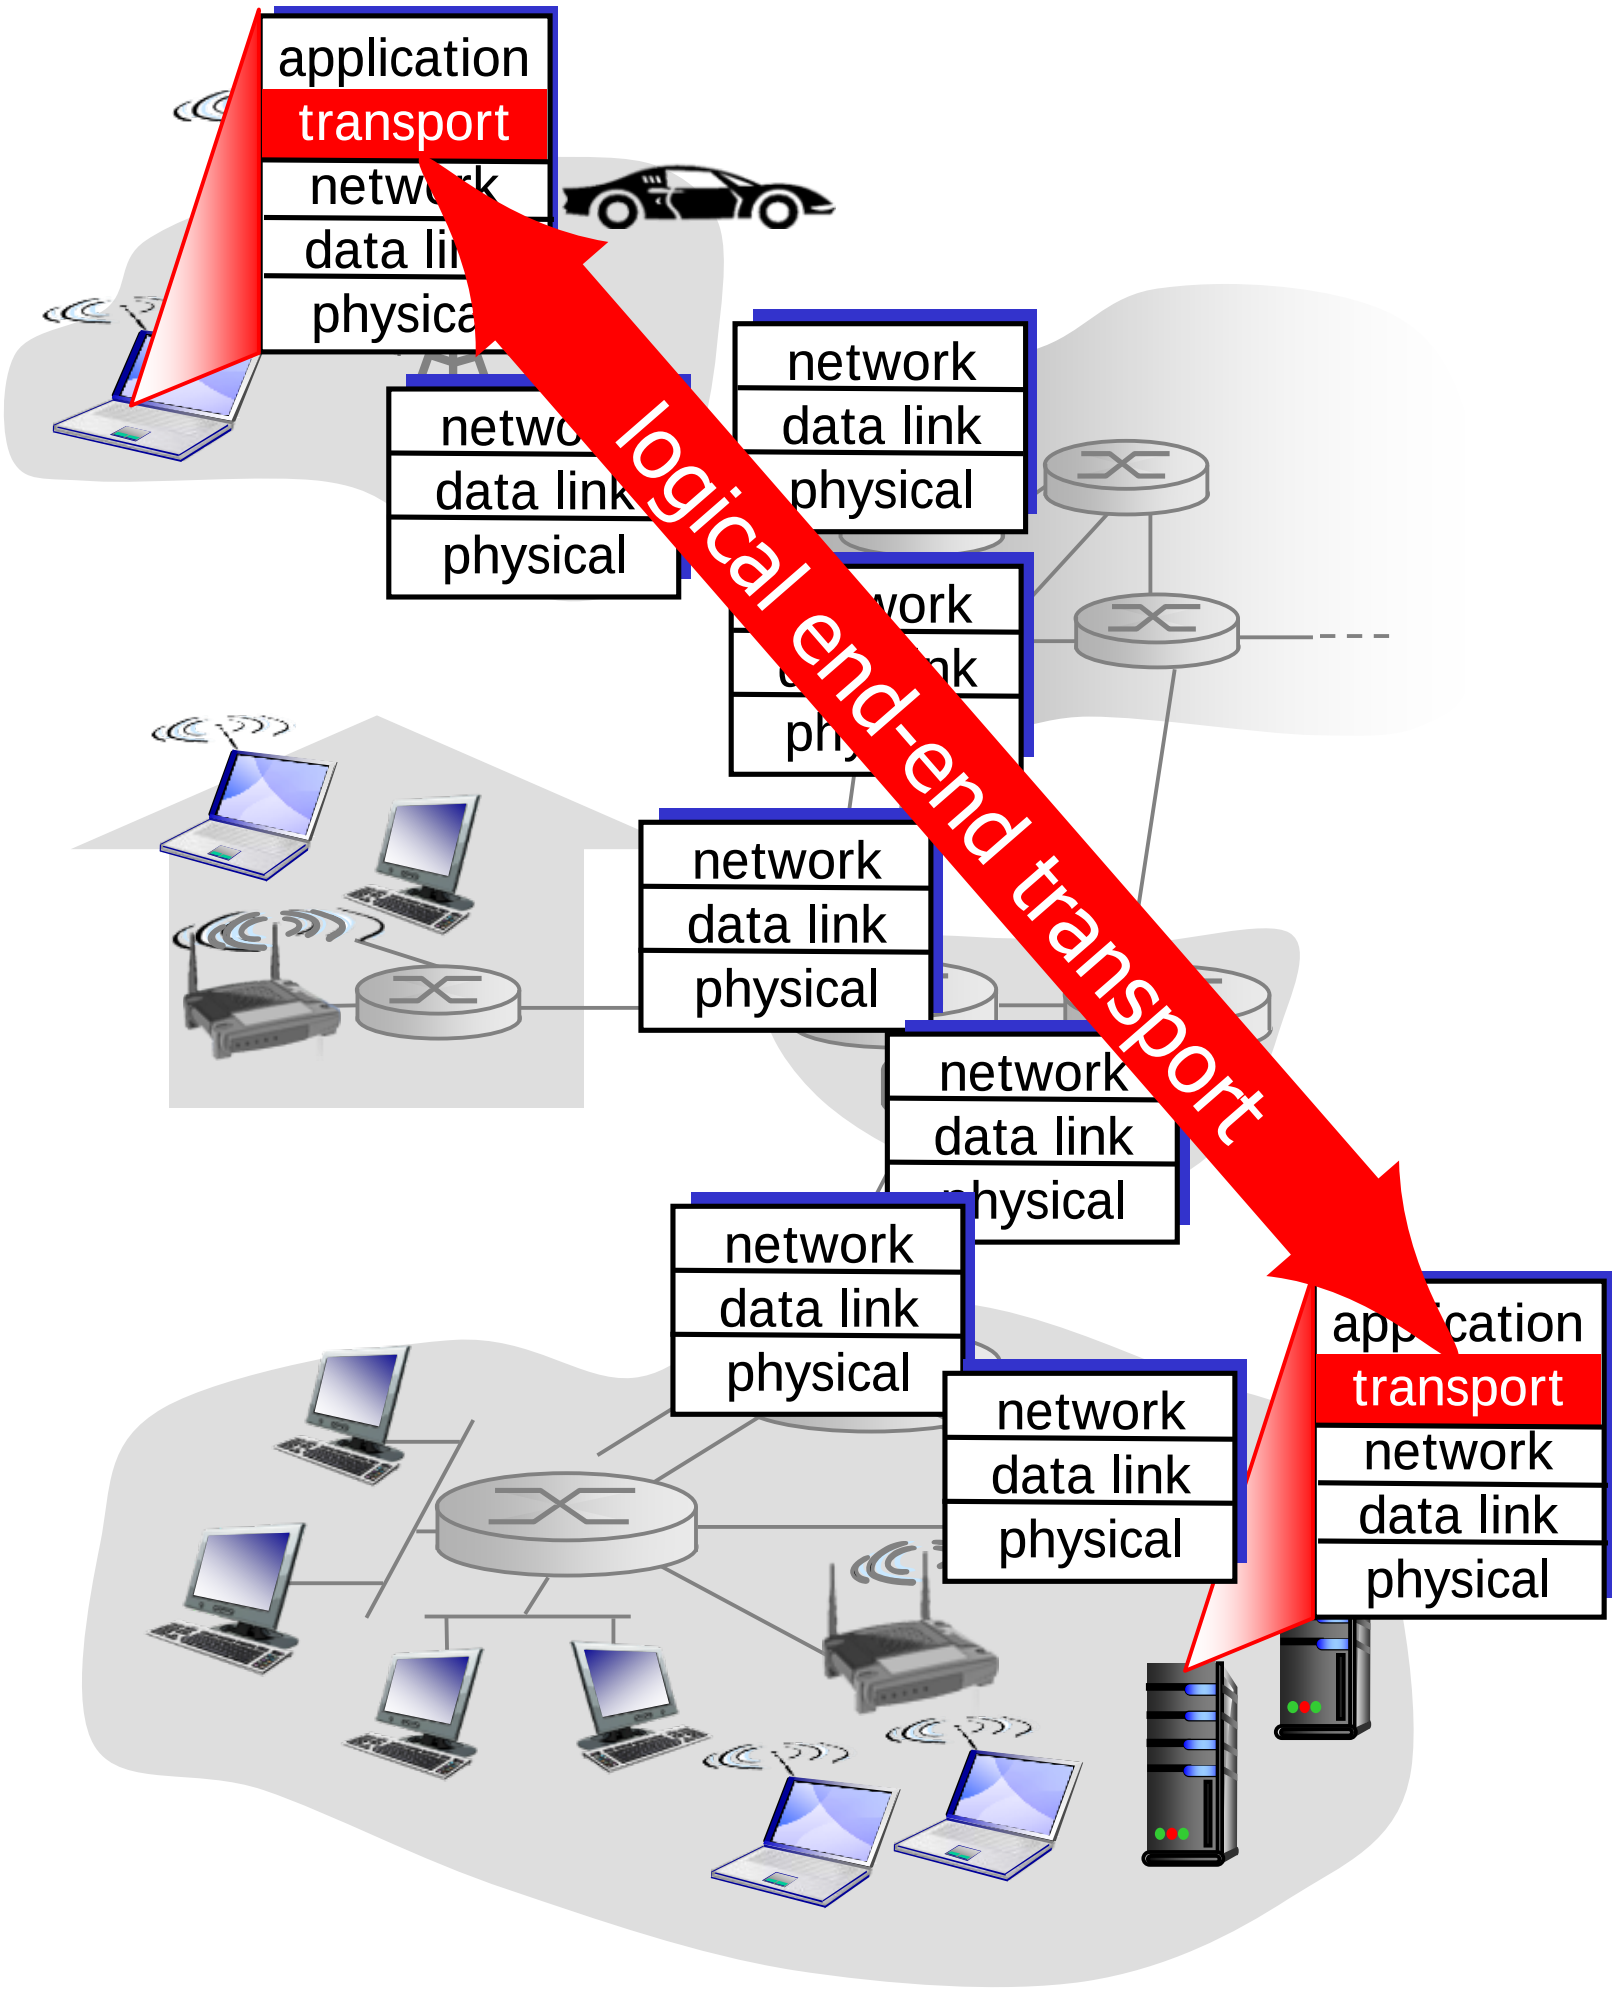

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- connection management

3.7 TCP congestion control

Multiplexing/demultiplexing

multiplexing at sender:
handle data from multiple sockets, add transport header (later used for demultiplexing)

demultiplexing at receiver:
use header info to deliver received segments to correct socket

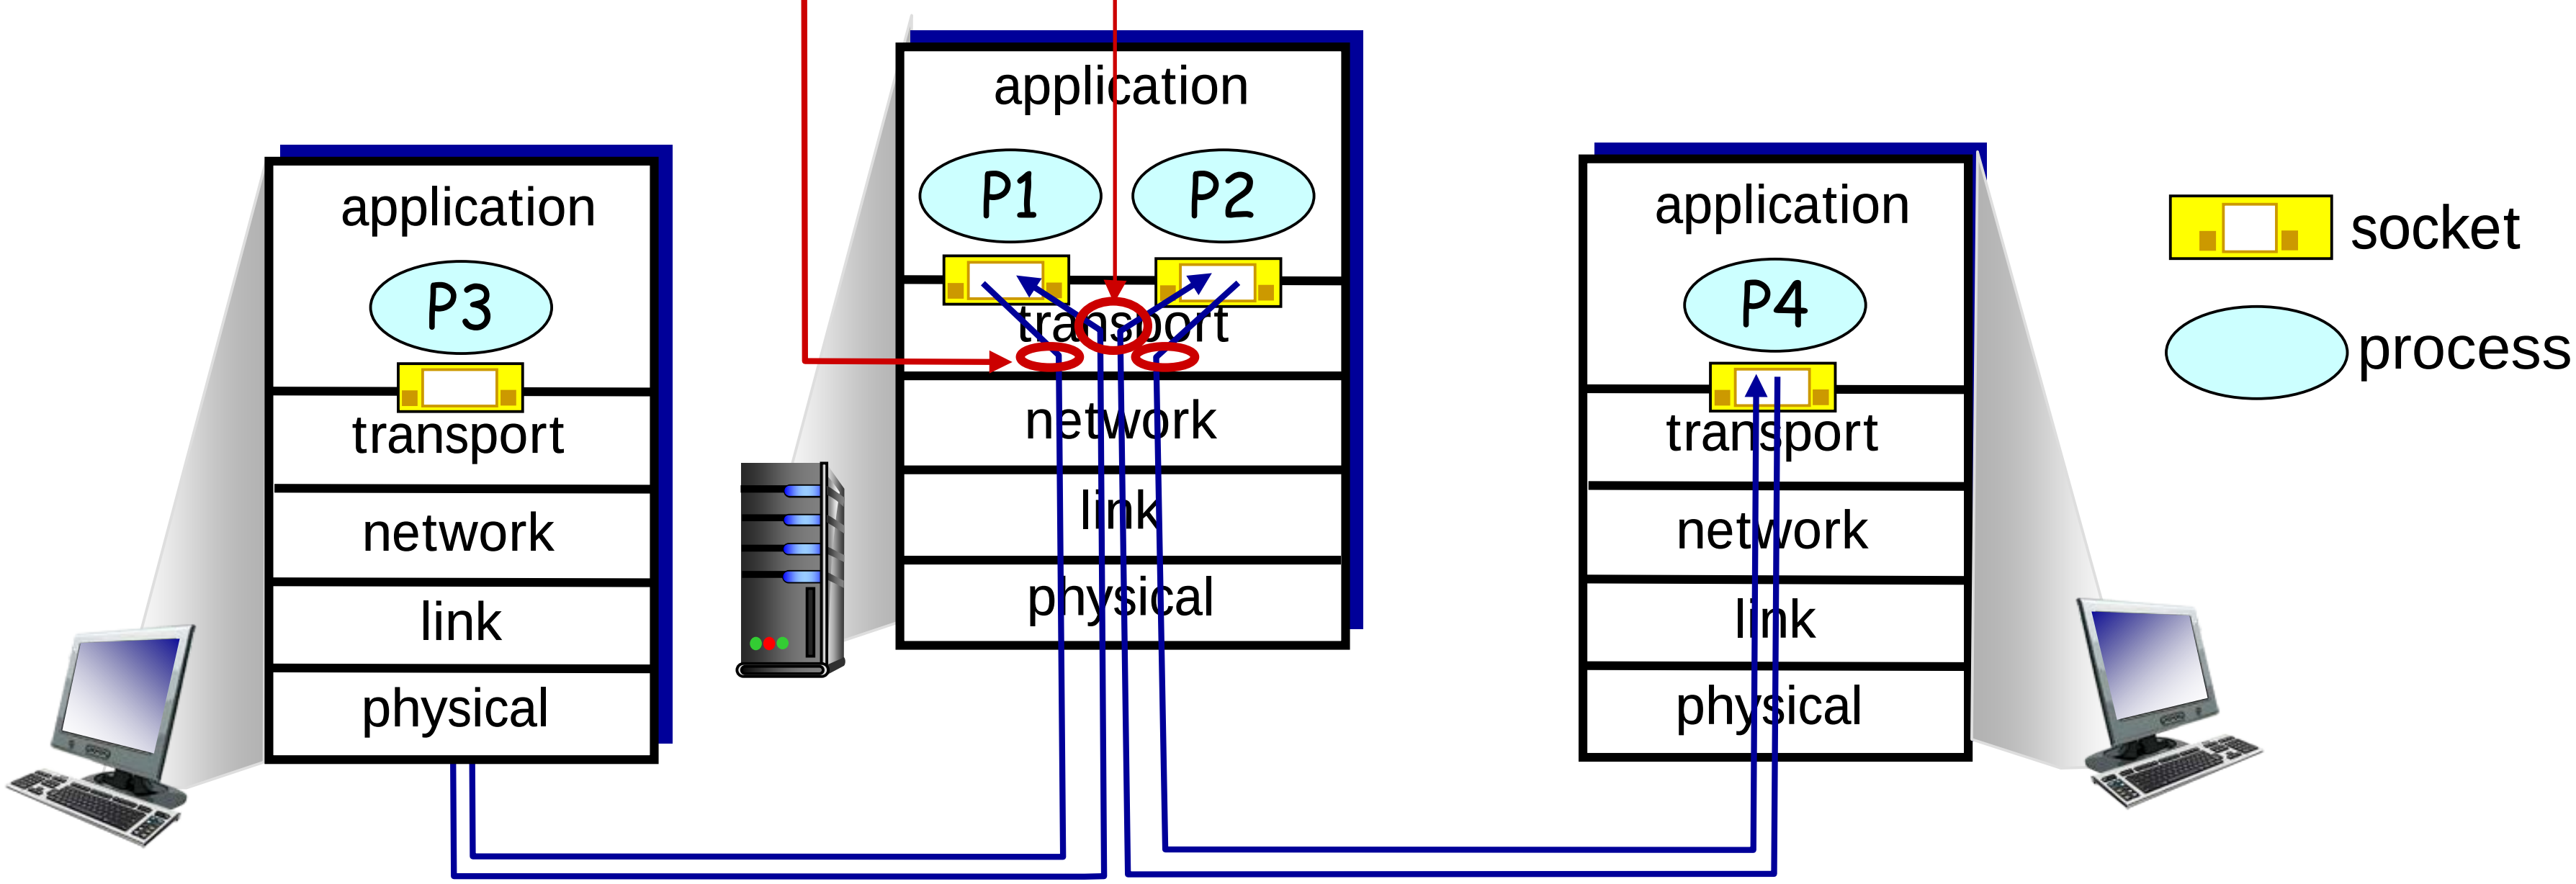

How demultiplexing works

- host receives IP datagrams
  - each datagram has source IP address, destination IP address
  - each datagram carries one transport-layer segment
  - each segment has source, destination port number
- host uses *IP addresses & port numbers* to direct segment to appropriate socket

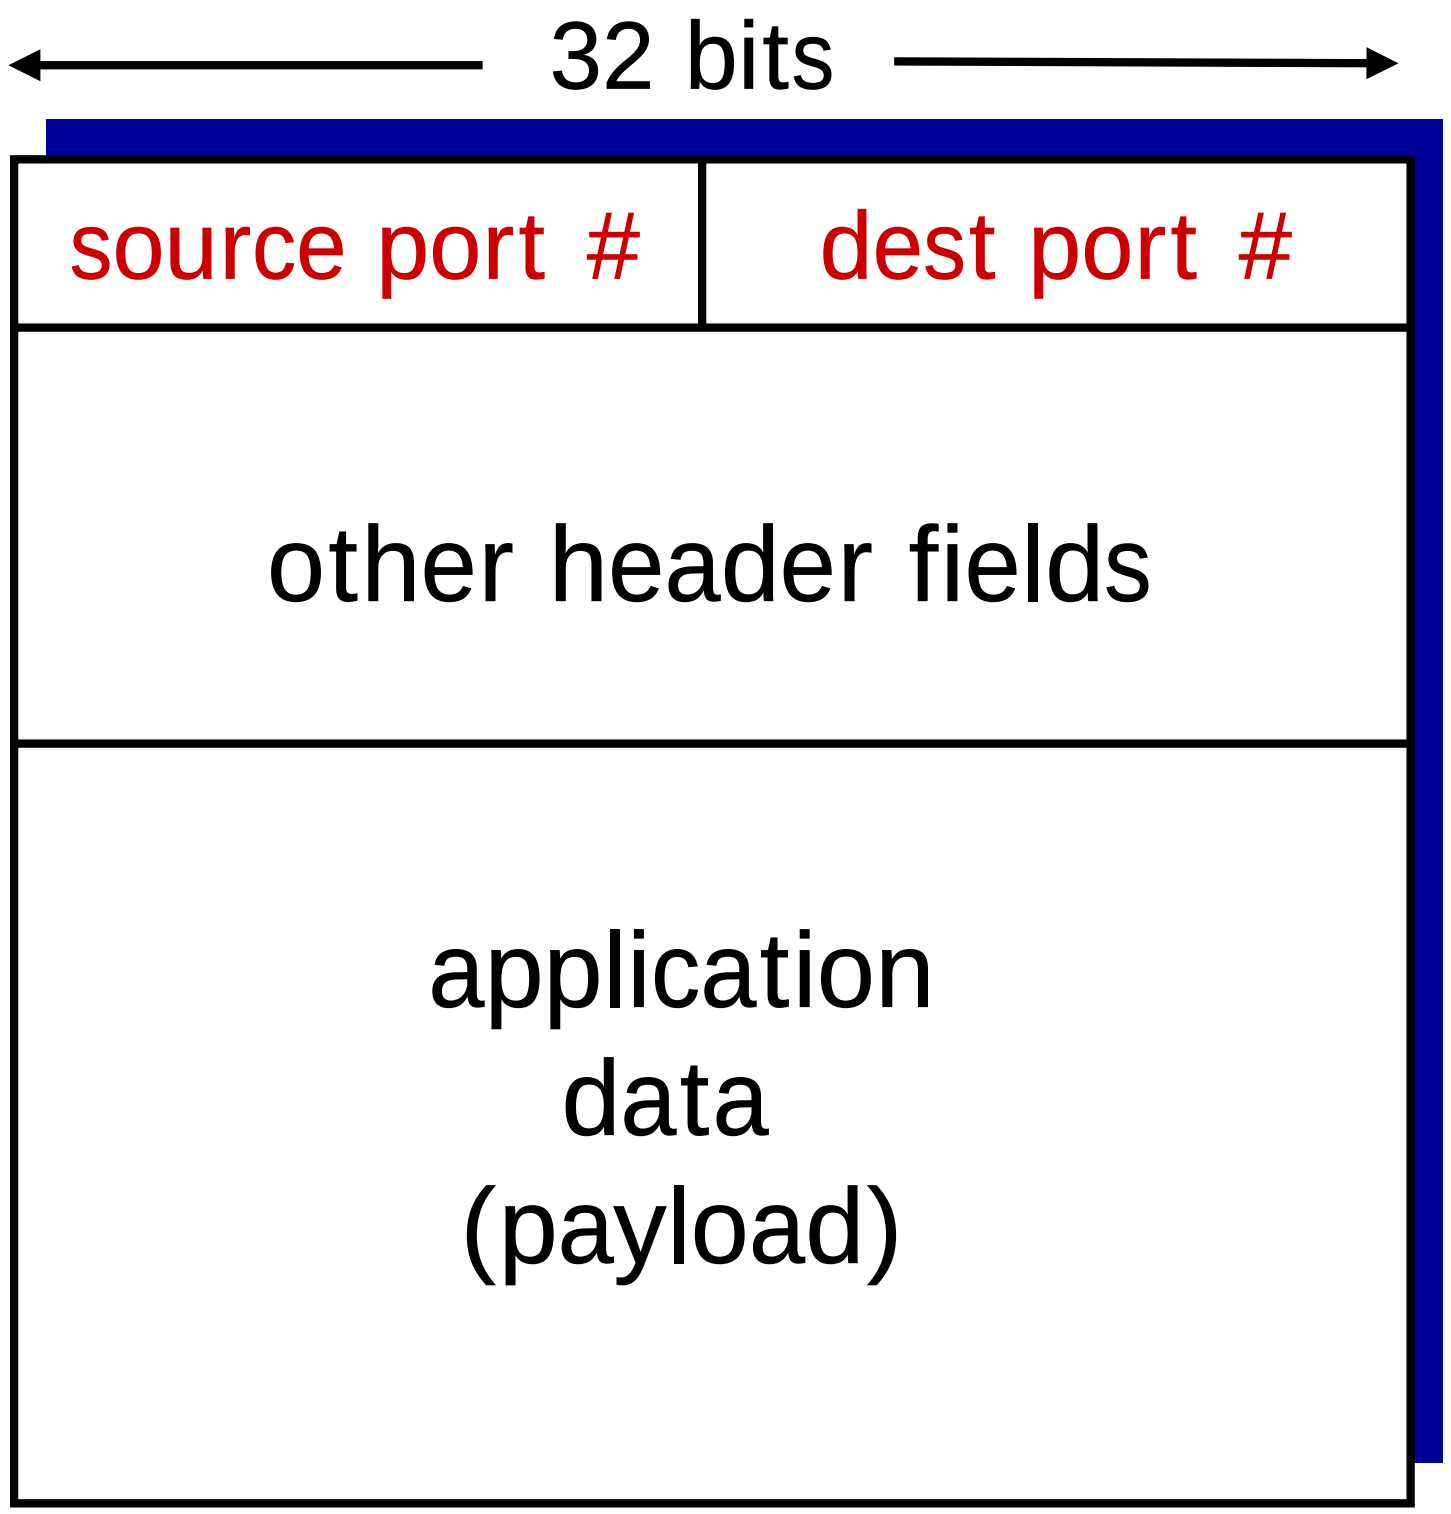

TCP/UDP segment format

Connectionless demultiplexing

- socket has host-local port #:

```
DatagramSocket mySocket1
= new DatagramSocket(12534);
```

- when creating datagram to send into UDP socket, must specify
  - destination IP address
  - destination port #

- when host receives UDP segment:
  - checks destination port # in segment
  - directs UDP segment to socket with that port #

IP datagrams with *same dest. port #,* but different source IP addresses and/or source port numbers will be directed to *same socket* at dest

Connectionless demux: example

```
DatagramSocket
 mySocket2 = new
 DatagramSocket(9157);
```

```
DatagramSocket
  serverSocket = new
  DatagramSocket(6428);
```

```
DatagramSocket
 mySocket1 = new
 DatagramSocket(5775);
```

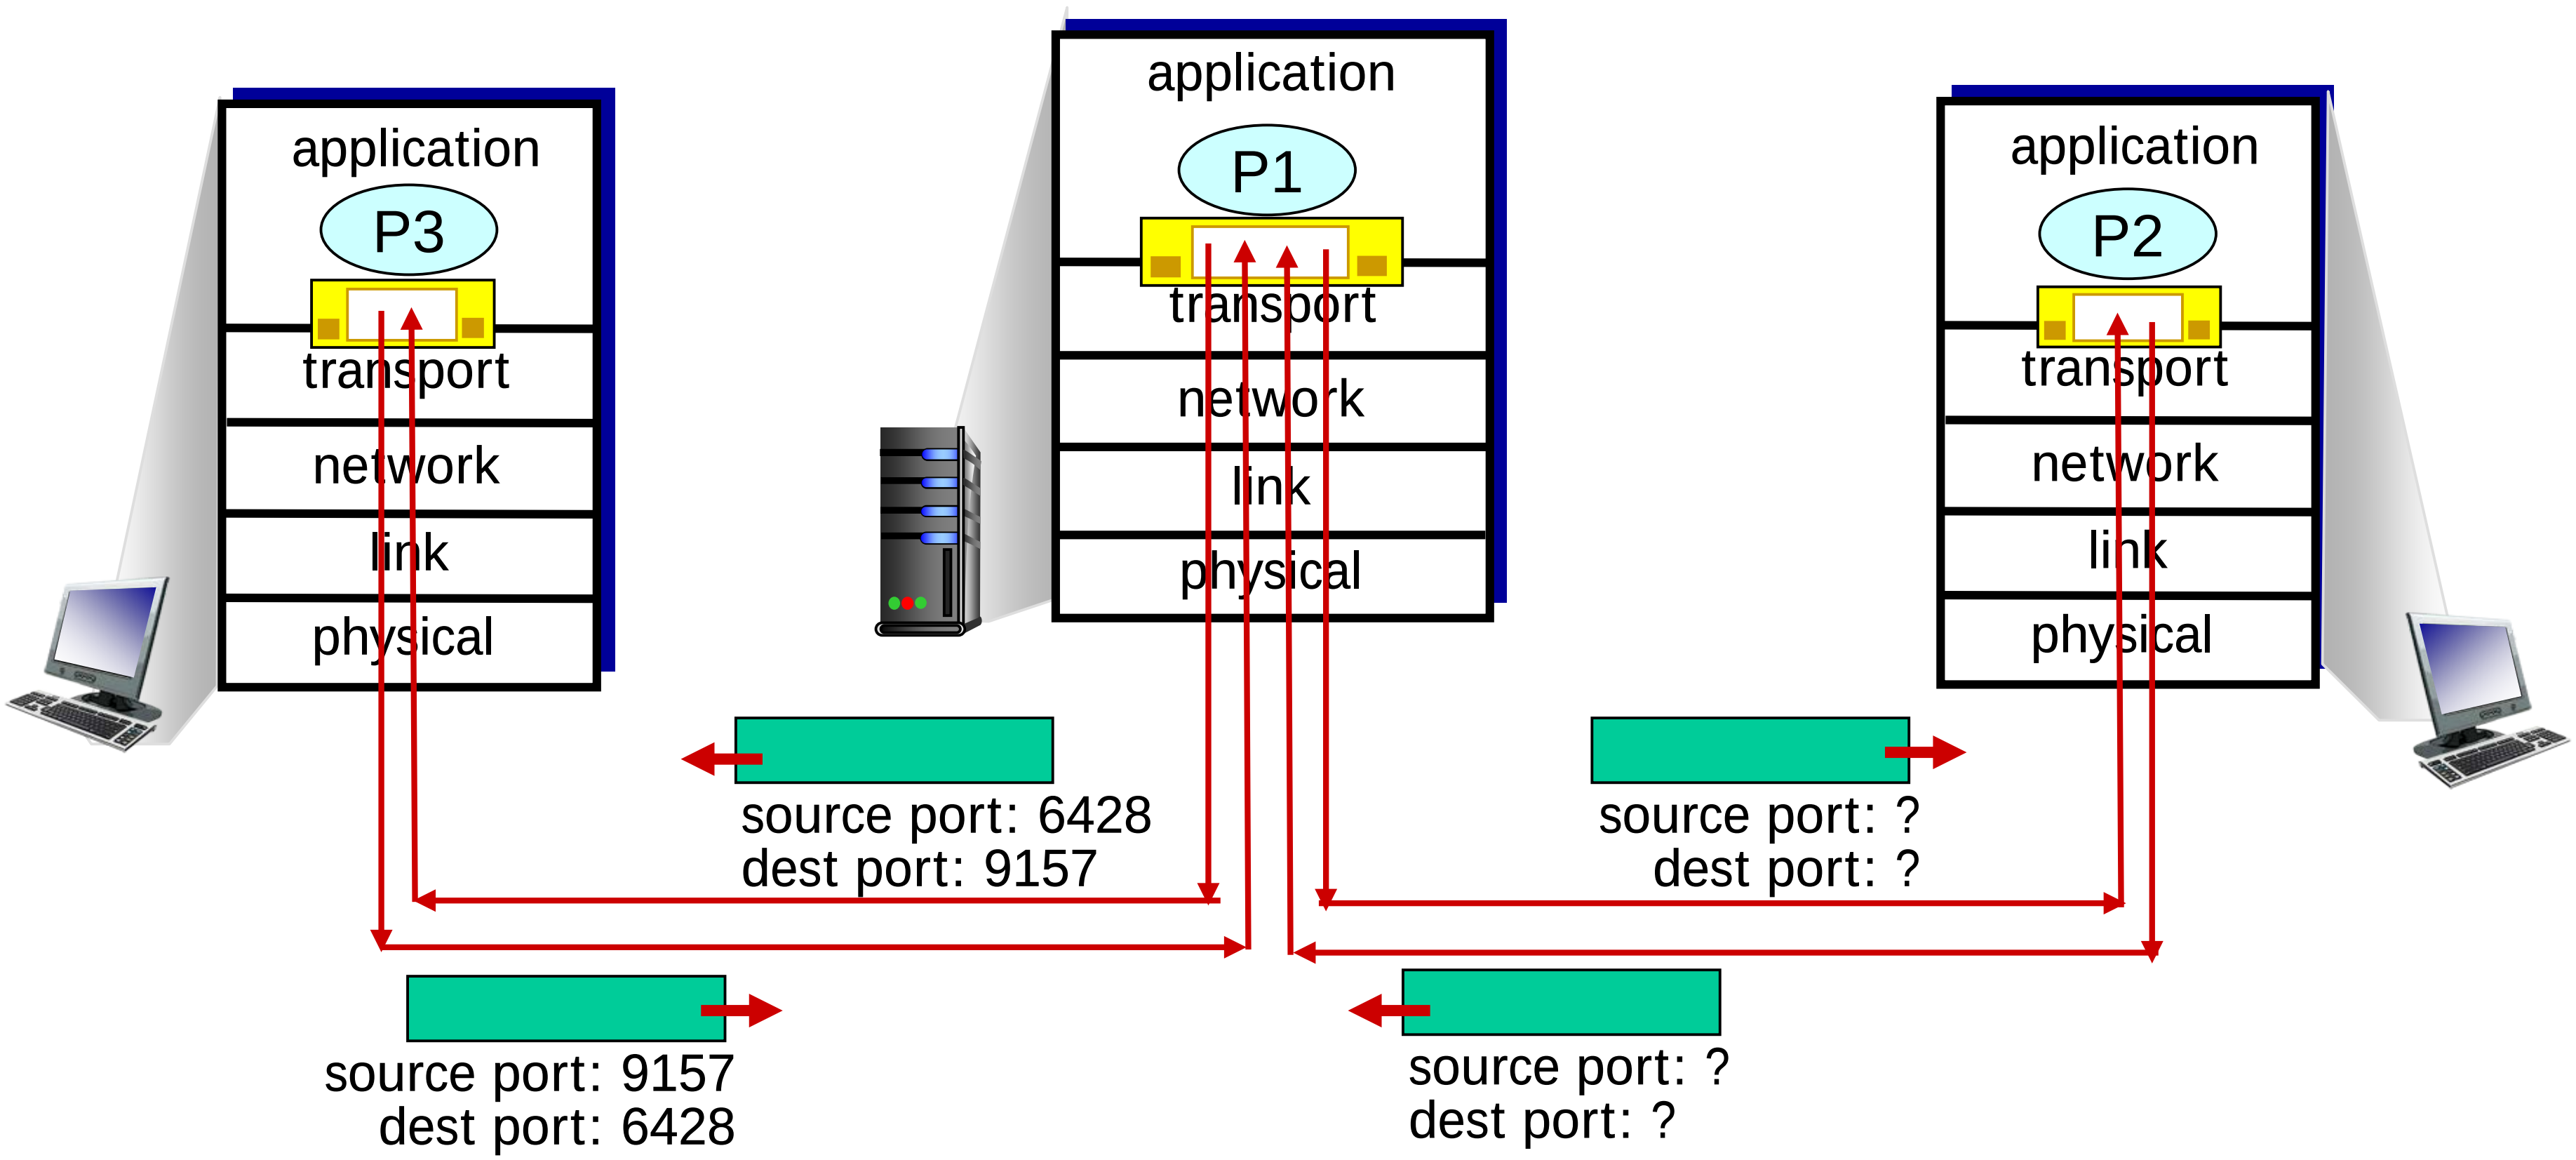

Connection-oriented demux

- TCP socket identified by 4-tuple:
  - source IP address
  - source port number
  - dest IP address
  - dest port number
- demux: receiver uses all four values to direct segment to appropriate socket

- server host may support many simultaneous TCP sockets:
  - each socket identified by its own 4-tuple
- E.g., web servers have different sockets for each connecting client

Connection-oriented demux: example

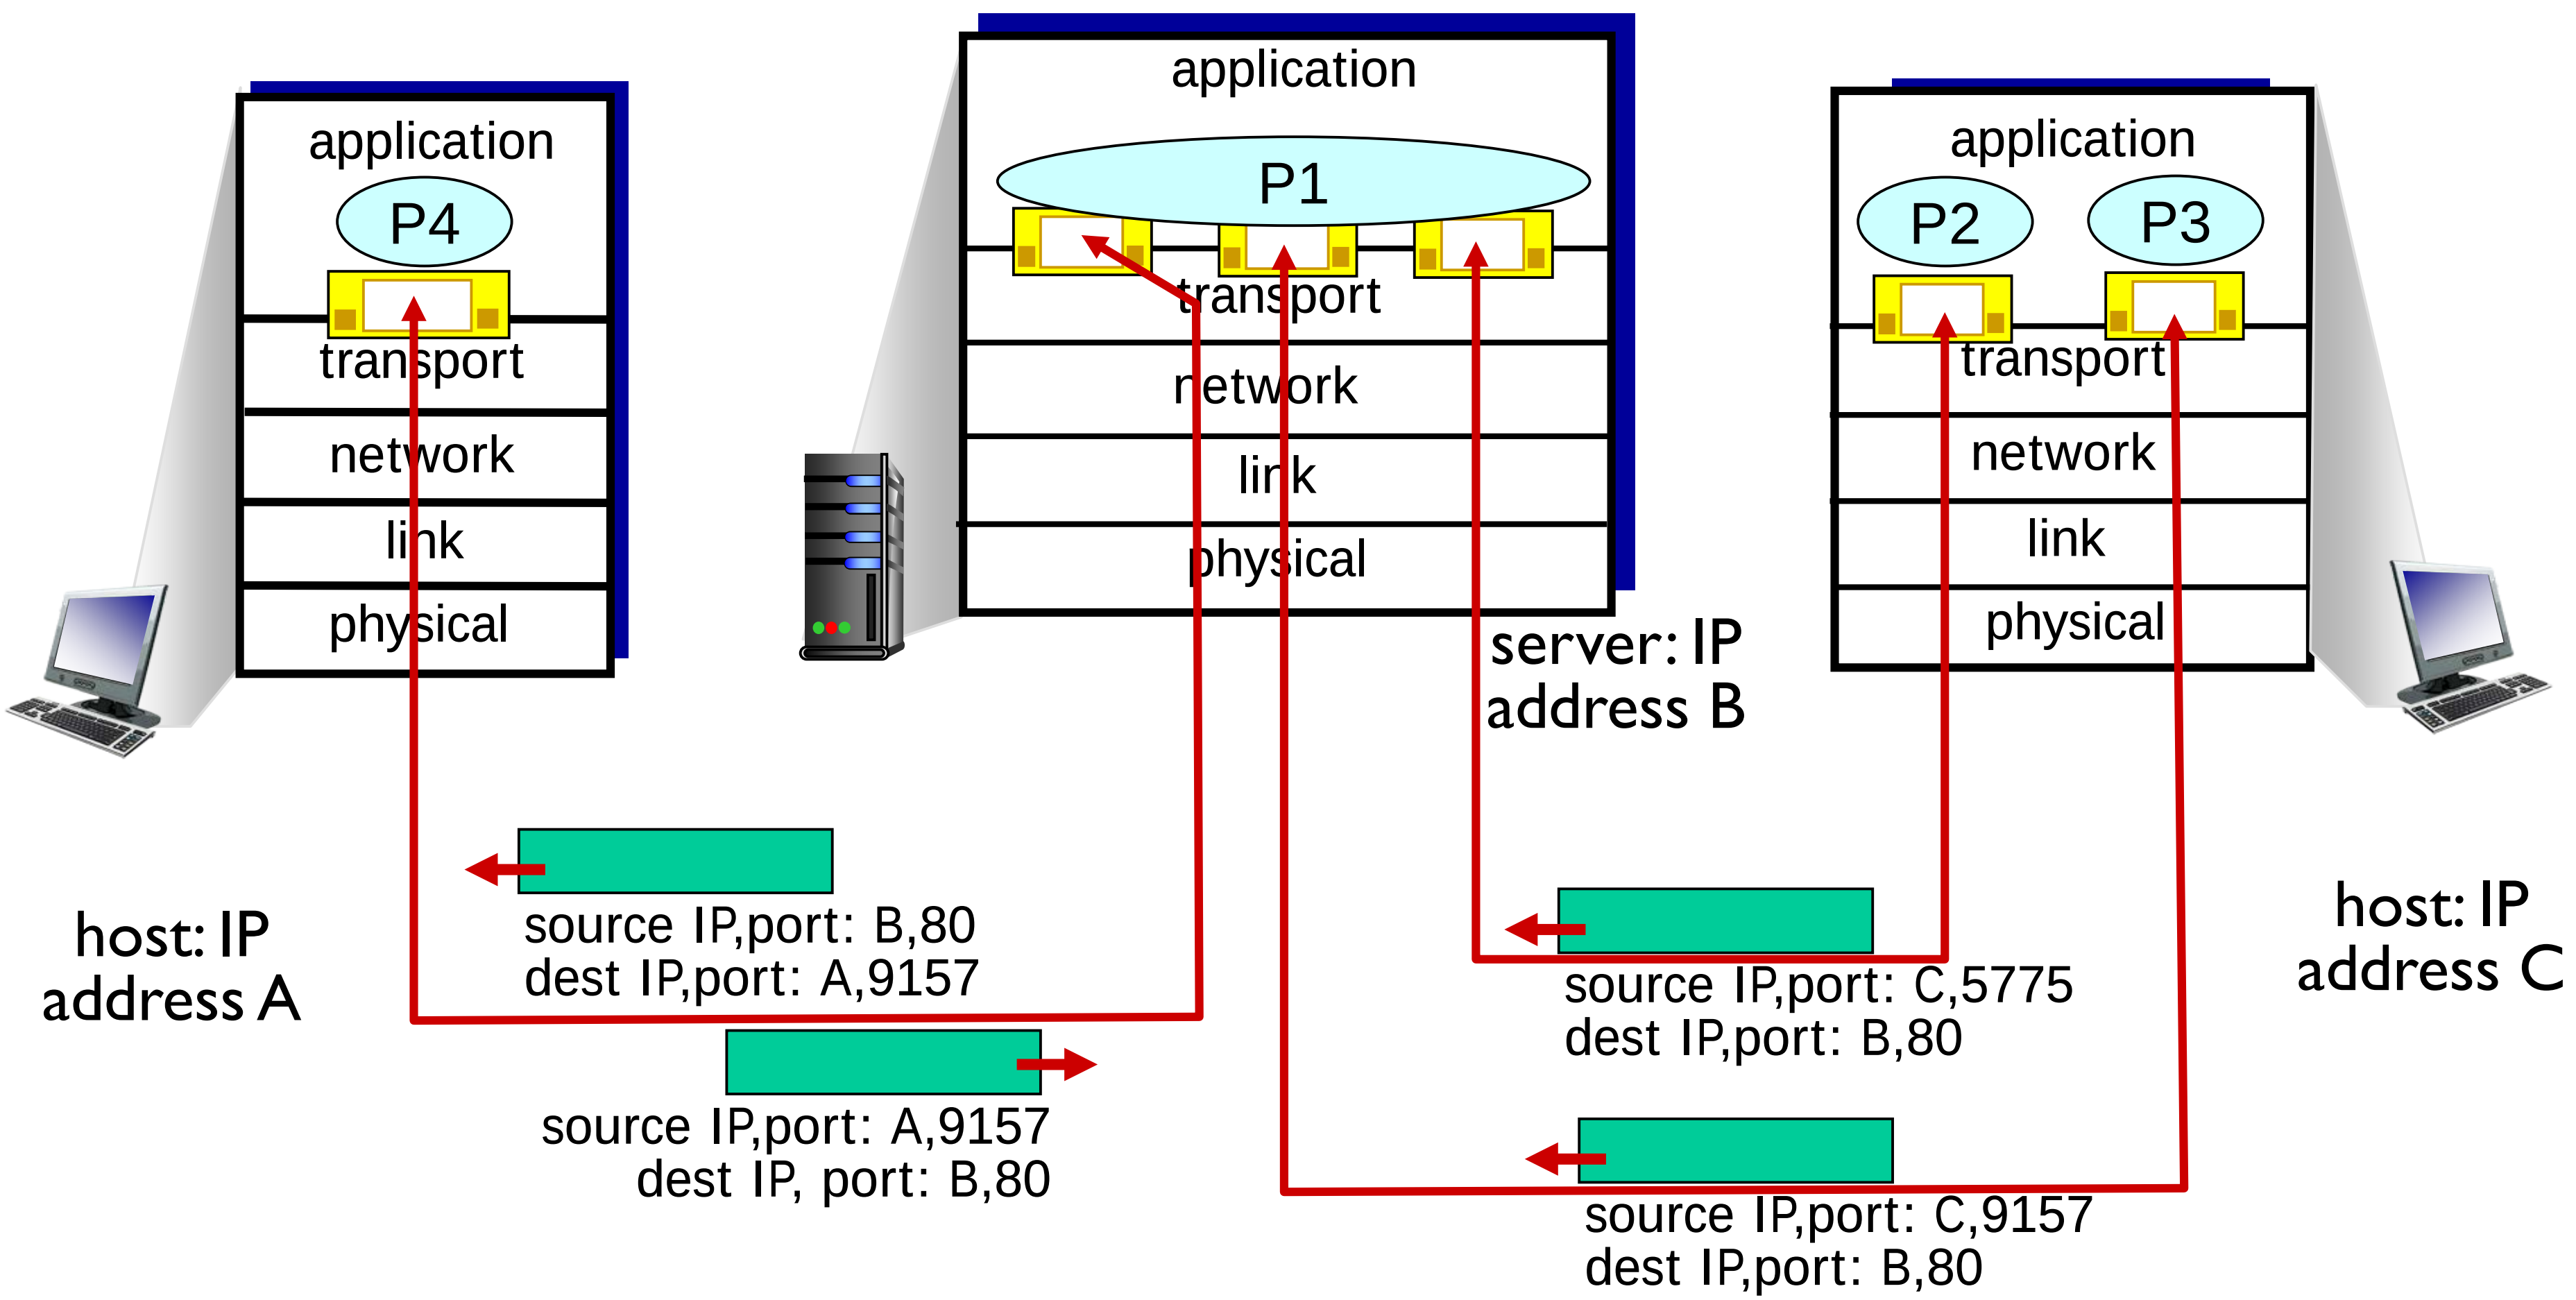

three segments, all destined to IP address: B,
dest port: 80 are demultiplexed to *different* sockets

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

UDP: User Datagram Protocol [RFC 768]

- "no frills," "bare bones" Internet transport protocol
- "best effort" service, UDP segments may be:
  - lost
  - delivered out-of-order to app
- *connectionless:*
  - no handshaking between UDP sender, receiver
  - each UDP segment handled independently of others

- UDP use:
  - streaming multimedia apps (loss tolerant, rate sensitive)
  - DNS
  - SNMP
- reliable transfer over UDP:
  - add reliability at application layer
  - application-specific error recovery!

UDP: segment header

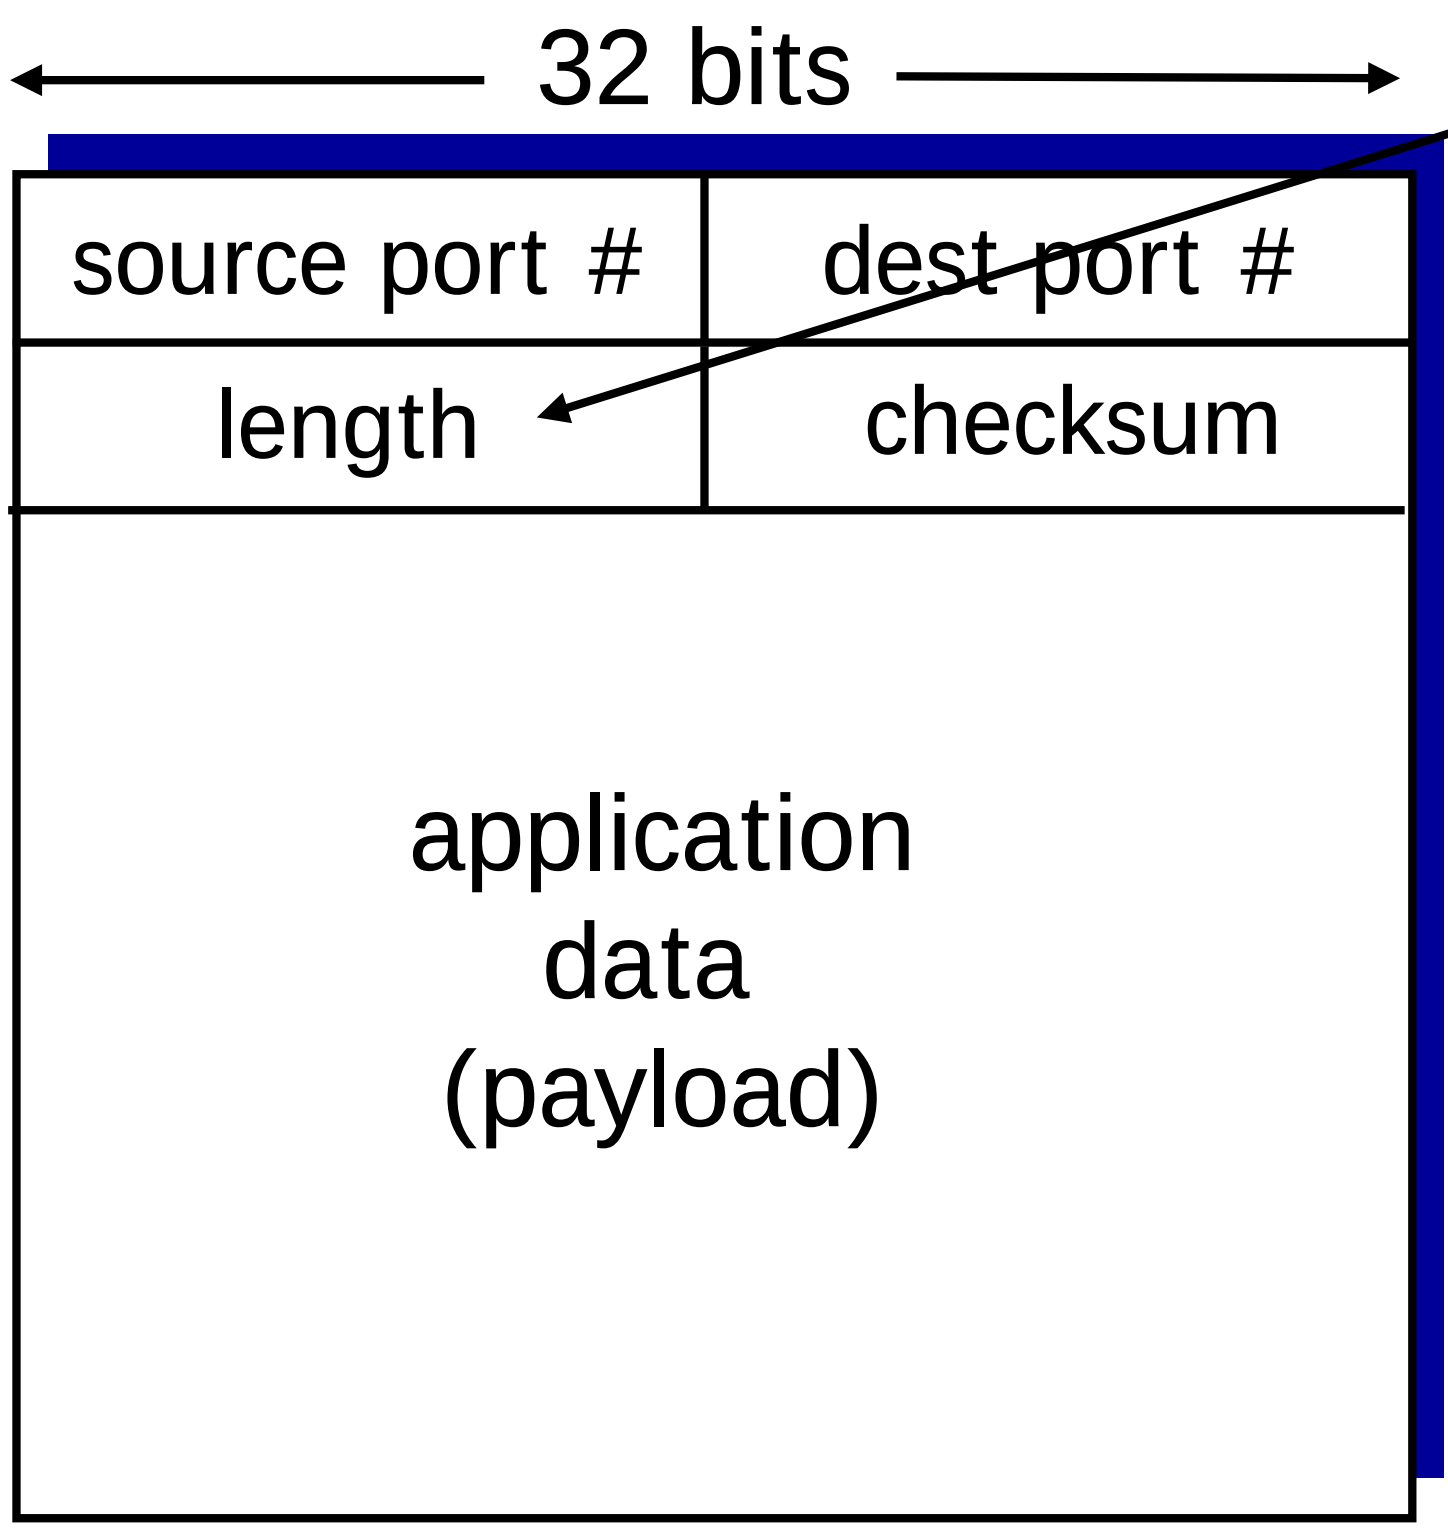

UDP segment format

length, in bytes of UDP segment, including header

why is there a UDP?

- no connection establishment (which can add delay)
- simple: no connection state at sender, receiver
- small header size
- no congestion control: UDP can blast away as fast as desired

UDP checksum

Goal: detect "errors" (e.g., flipped bits) in transmitted segment

sender:

- treat segment contents, including header fields, as sequence of 16-bit integers
- checksum: addition (one's complement sum) of segment contents
- sender puts checksum value into UDP checksum field

receiver:

- compute checksum of received segment
- check if computed checksum equals checksum field value:
  - NO - error detected
  - YES - no error detected. *But maybe errors nonetheless?* More later ….

Internet checksum: example

example: add two 16-bit integers

		1	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0
		1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
wraparound	1	1	0	1	1	1	0	1	1	1	0	1	1	1	0	1	1
sum		1	0	1	1	1	0	1	1	1	0	1	1	1	1	0	0
checksum		0	1	0	0	0	1	0	0	0	1	0	0	0	0	1	1

Note: when adding numbers, a carryout from the most significant bit needs to be added to the result

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

Principles of reliable data transfer

- important in application, transport, link layers

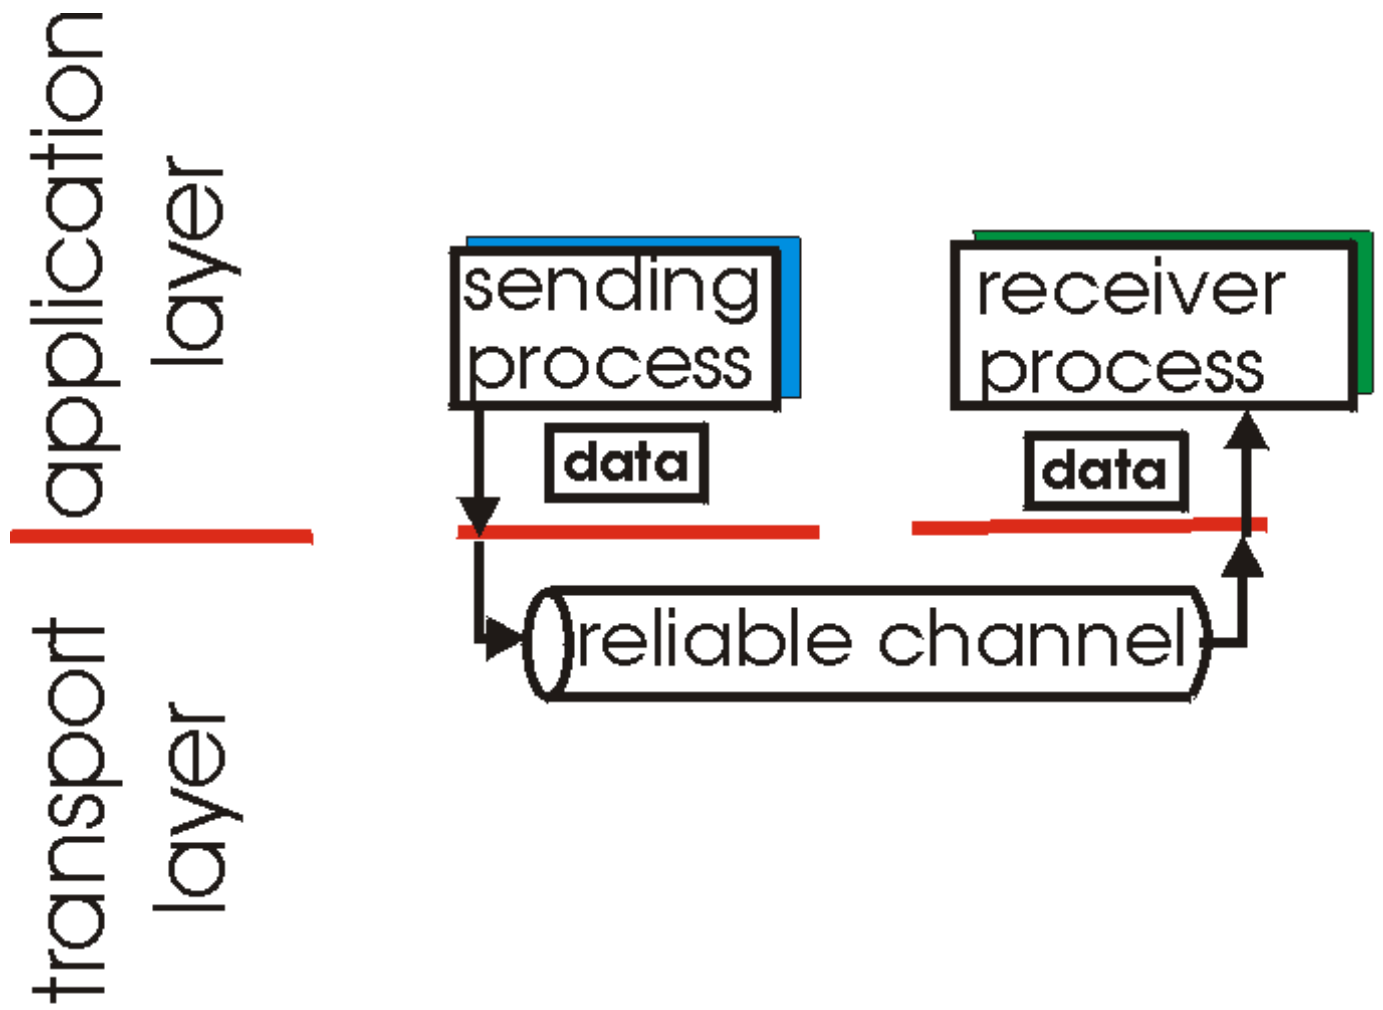

(a) provided service

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Principles of reliable data transfer

- important in application, transport, link layers

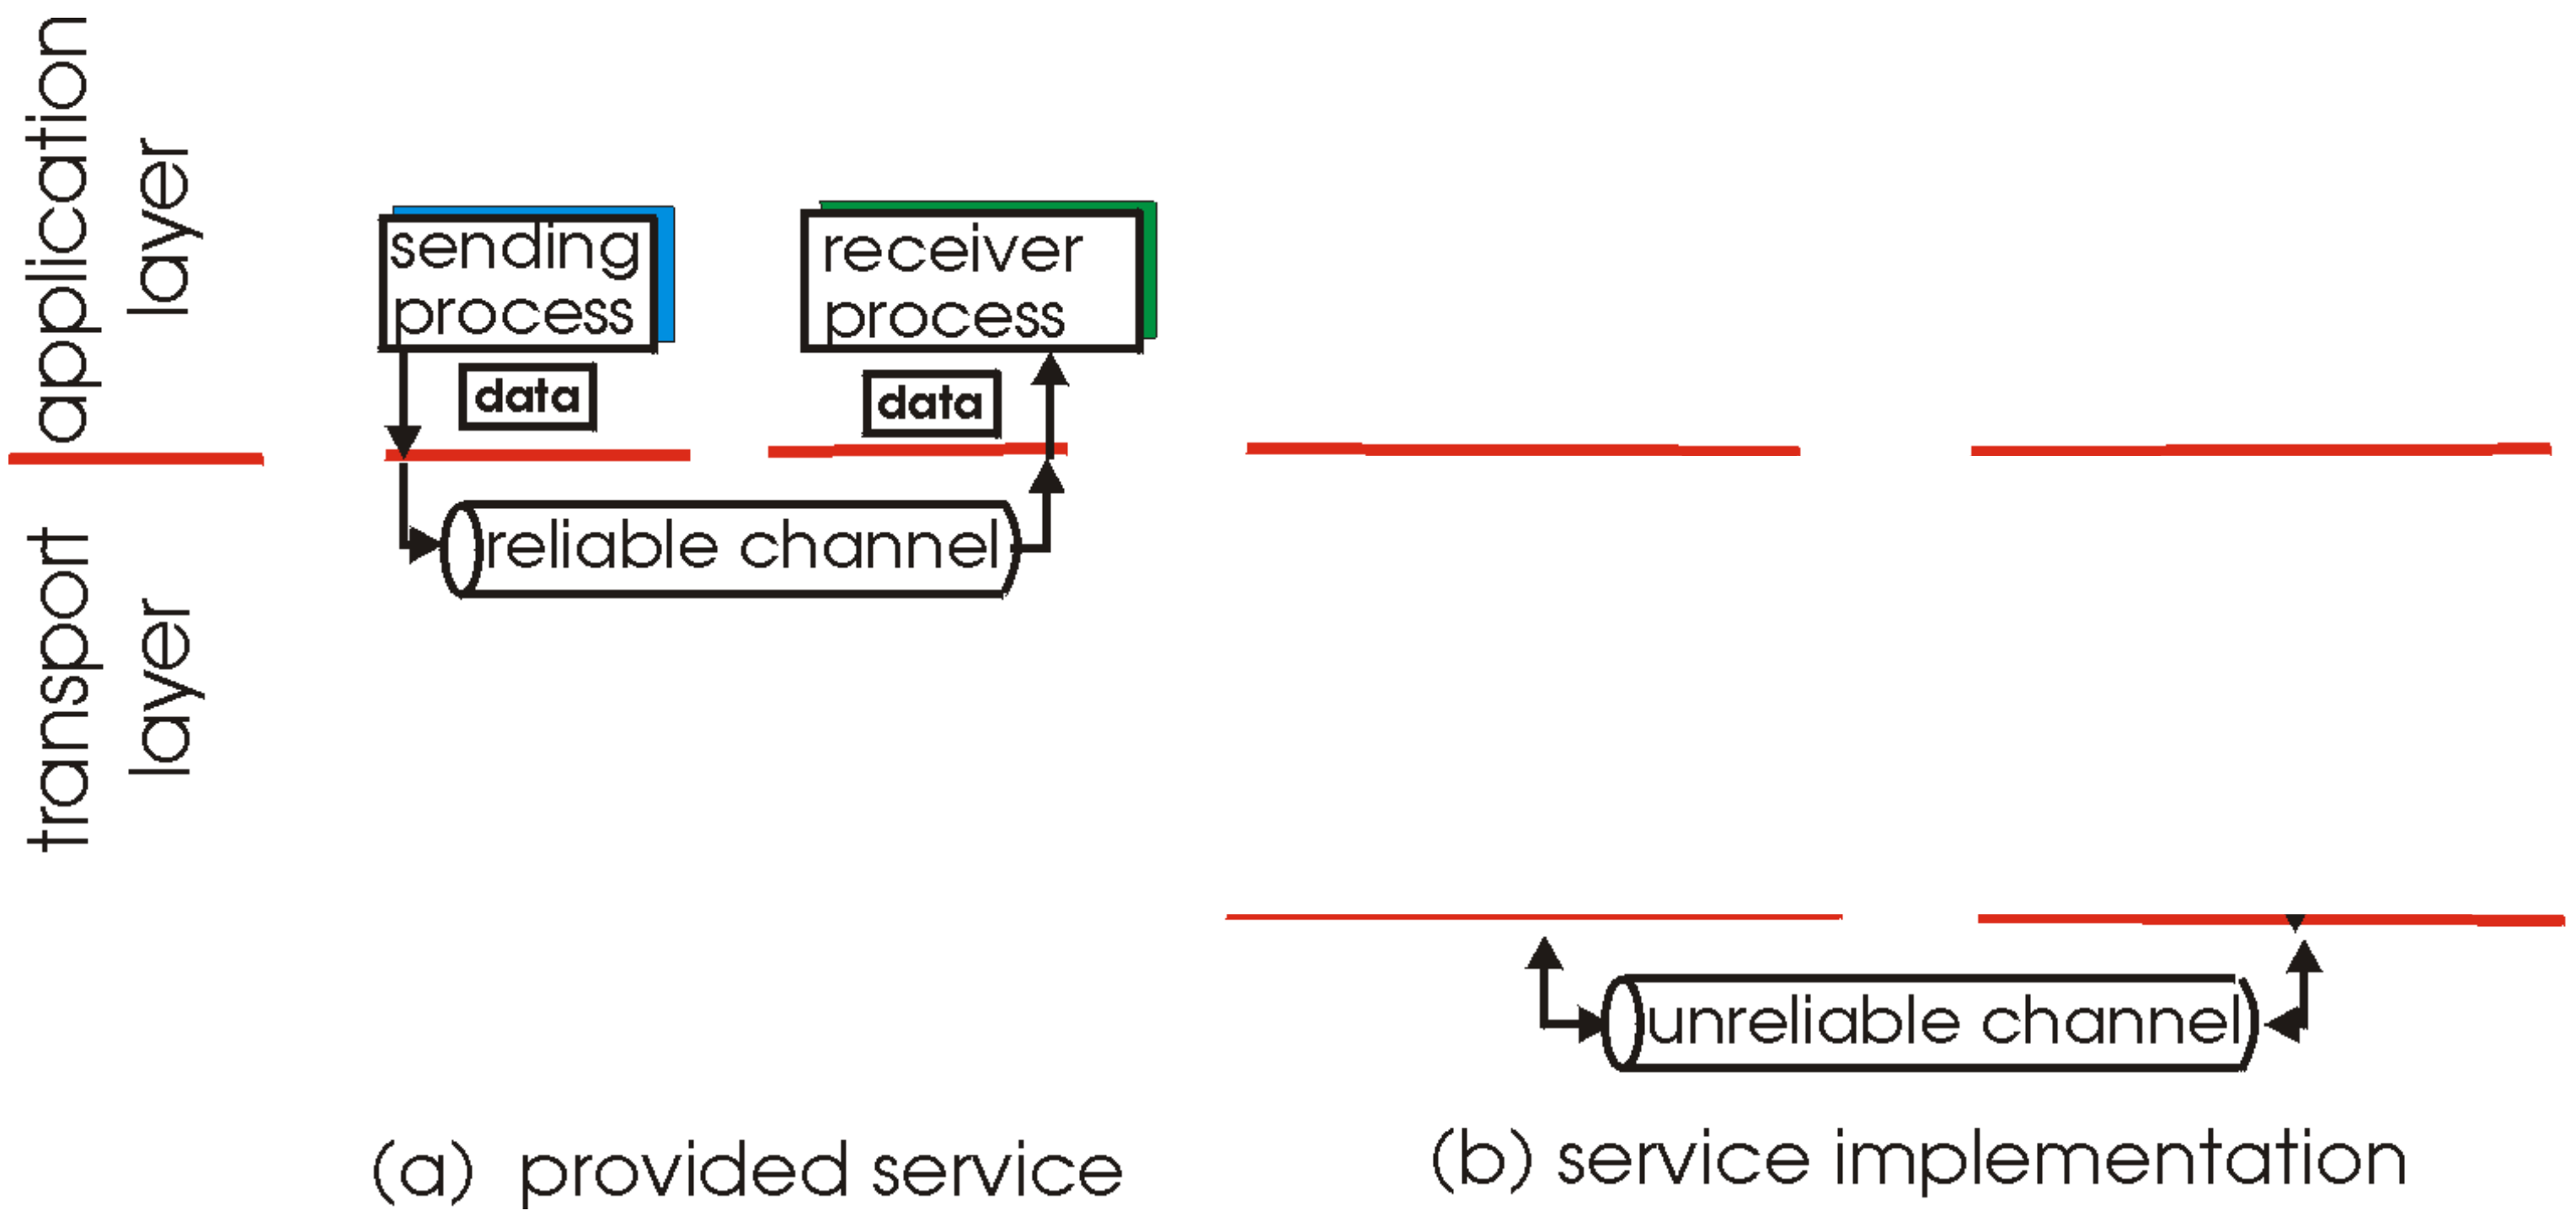

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Principles of reliable data transfer

- important in application, transport, link layers

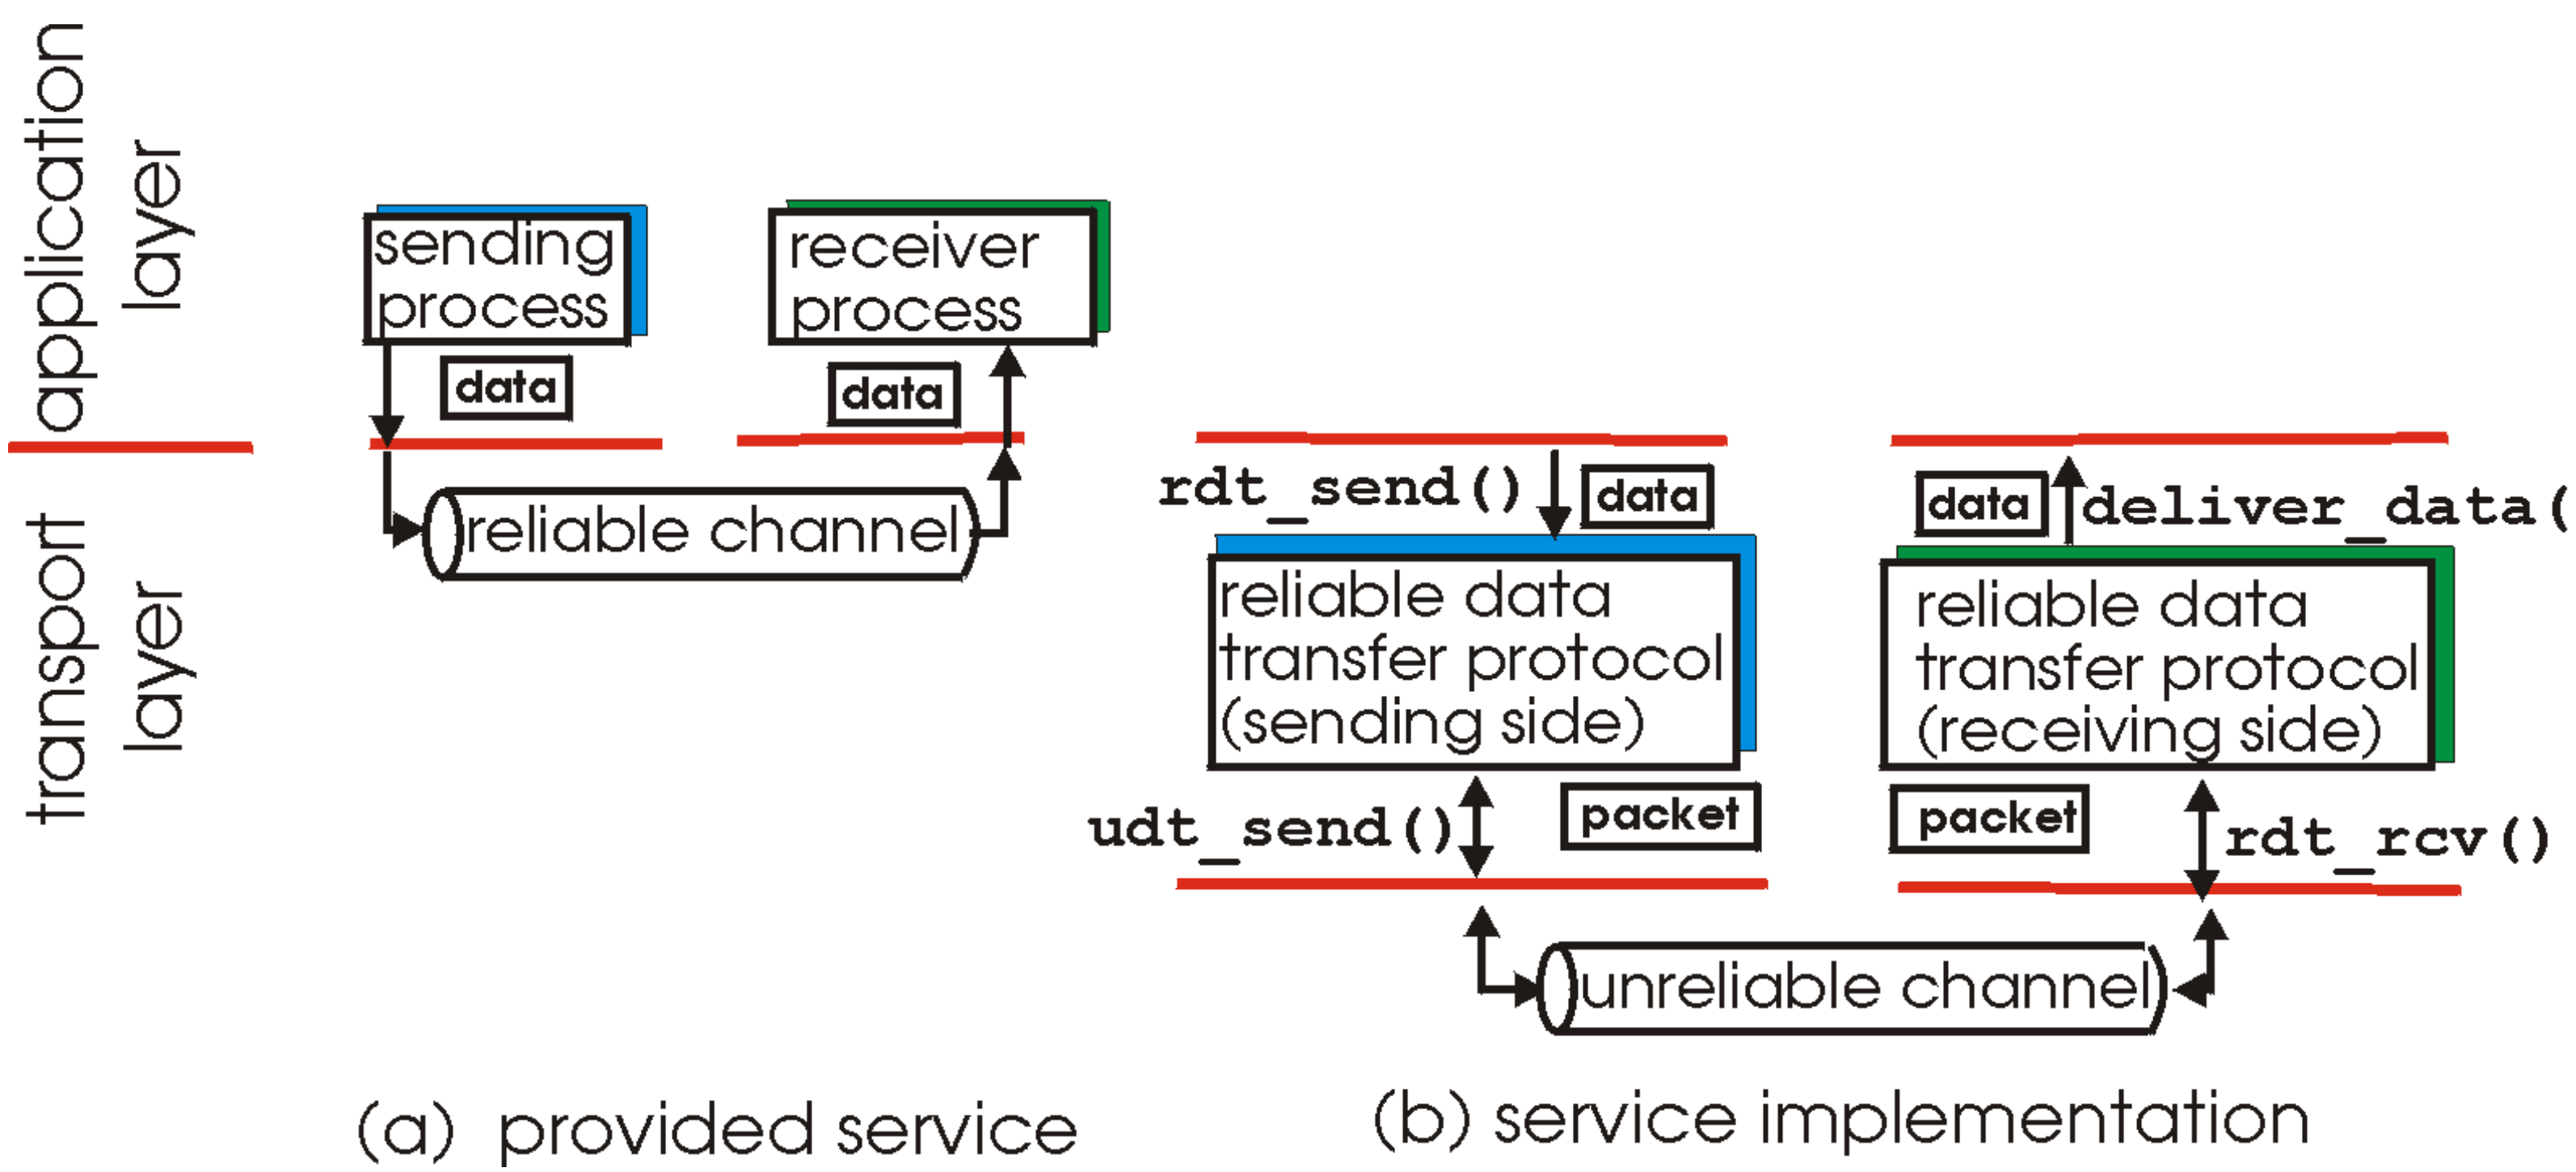

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Reliable data transfer: getting started

rdt_send(): called from above, (e.g., by app.). Passed data to deliver to receiver upper layer

deliver_data(): called by **rdt** to deliver data to upper

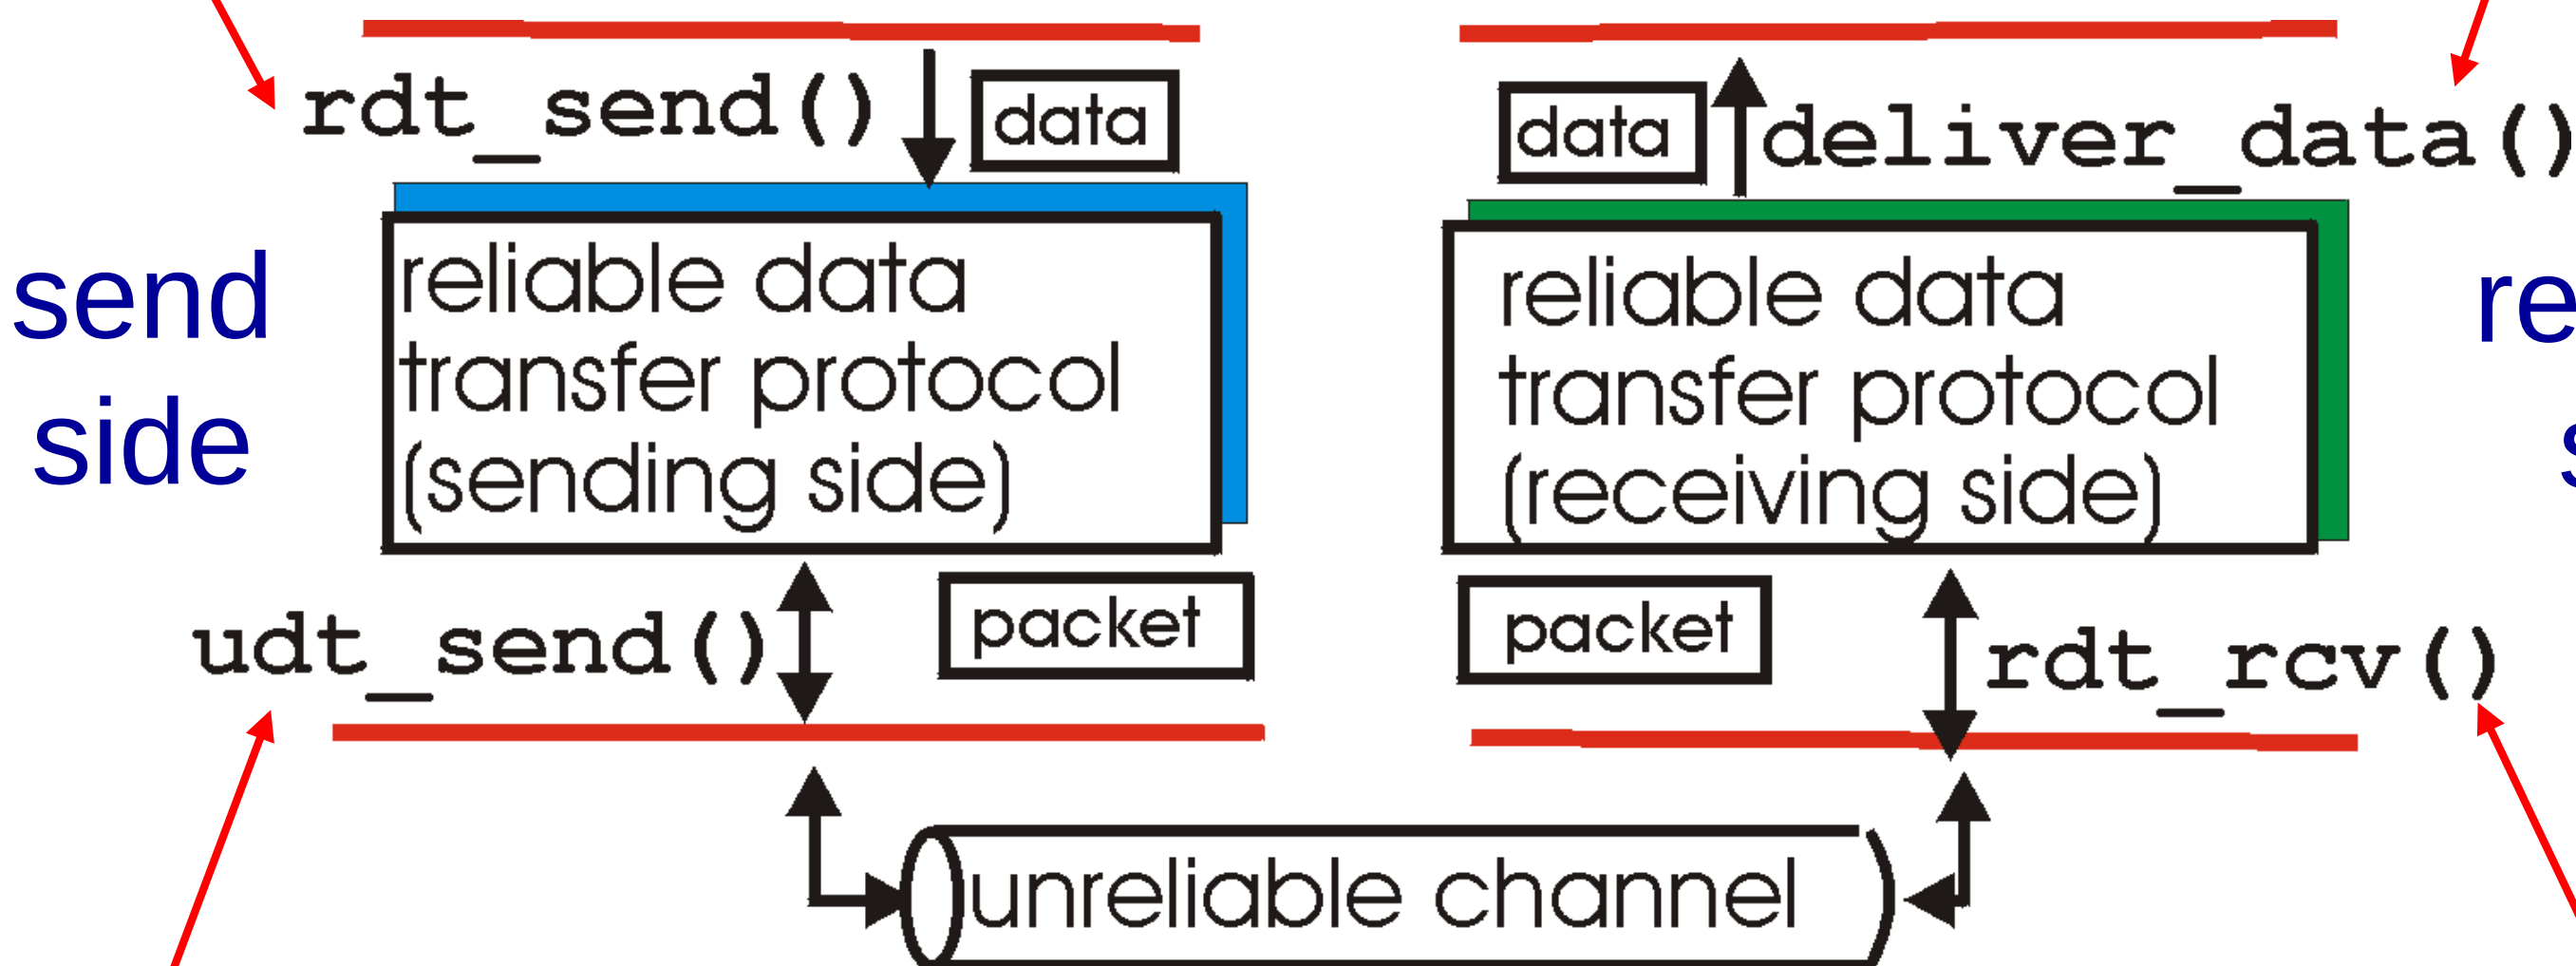

udt_send(): called by rdt, to transfer packet over unreliable channel to receiver

rdt_rcv(): called when packet arrives on rcv-side of channel

Reliable data transfer: getting started

we'll:

- incrementally develop sender, receiver sides of reliable data transfer protocol (rdt)
- consider only unidirectional data transfer
  - but control info will flow on both directions!
- use finite state machines (FSM) to specify sender, receiver

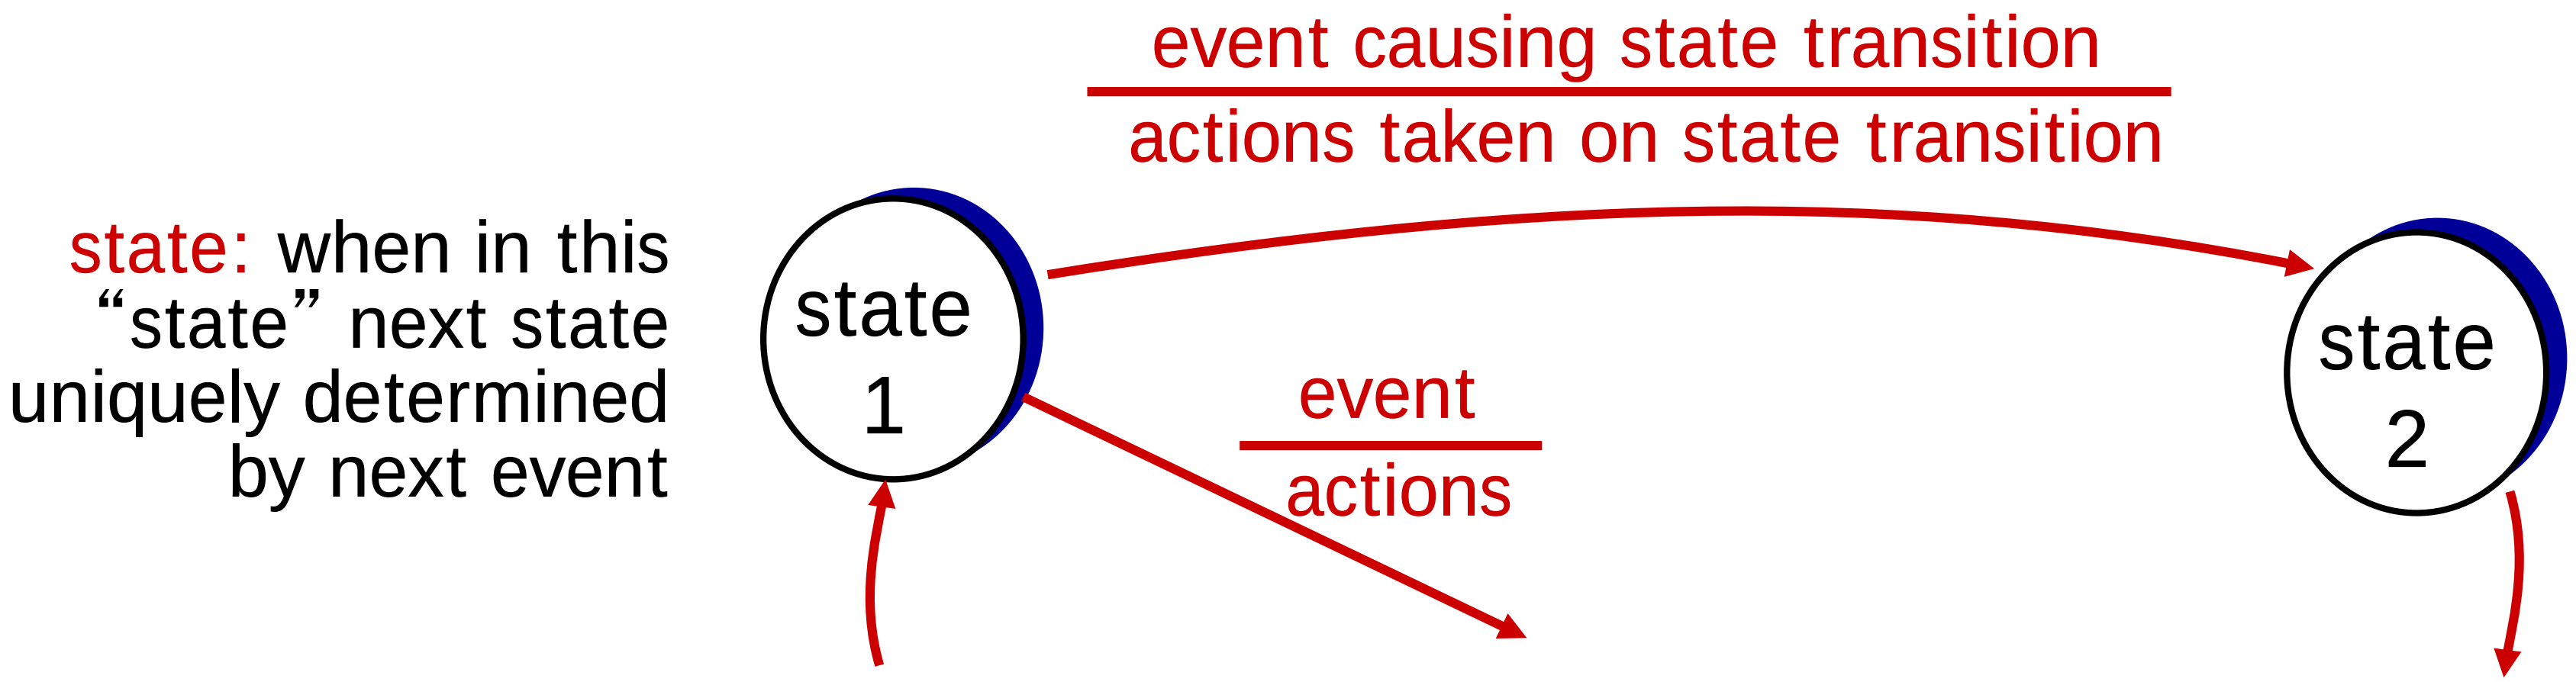

rdt1.0: reliable transfer over a reliable channel

- underlying channel perfectly reliable
  - no bit errors
  - no loss of packets
- separate FSMs for sender, receiver:
  - sender sends data into underlying channel
  - receiver reads data from underlying channel

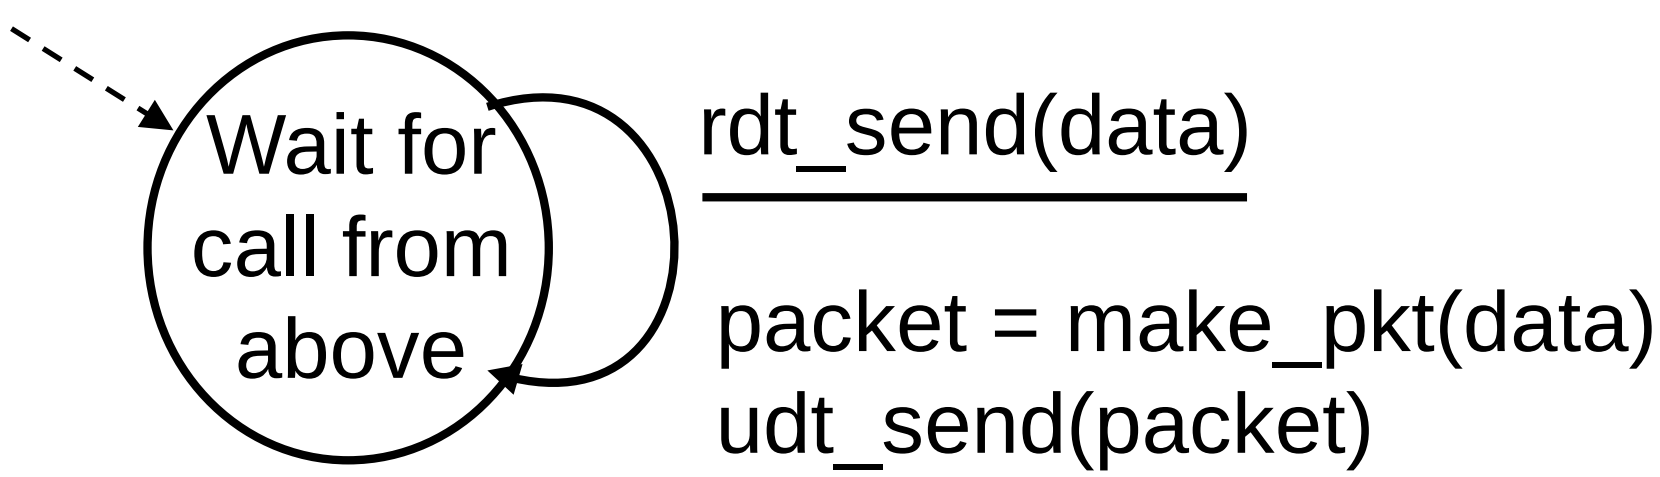

sender

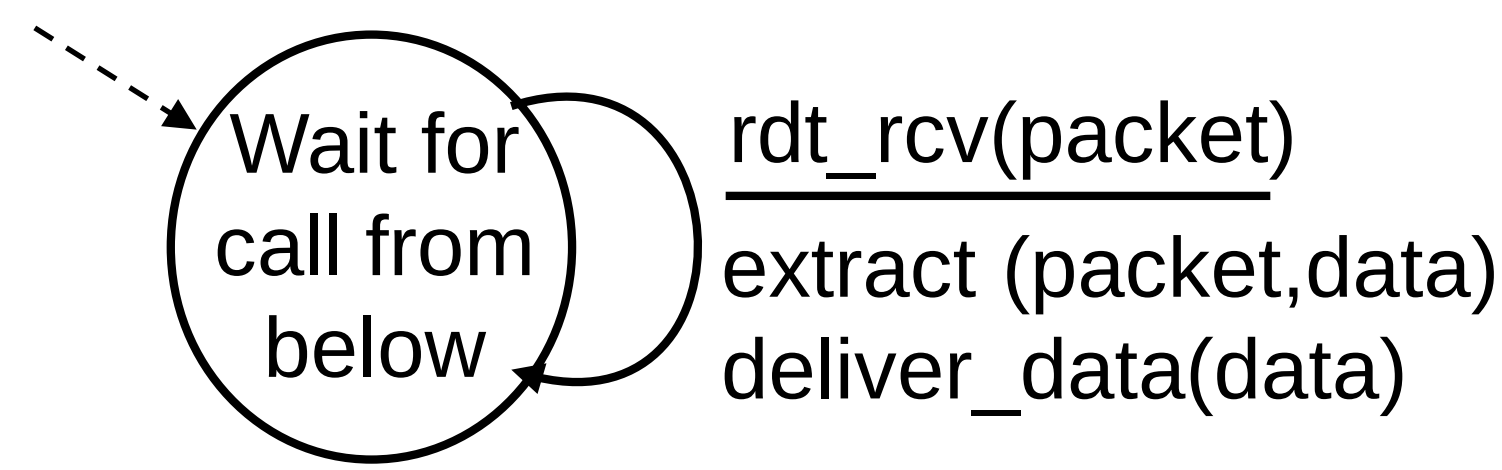

receiver

rdt2.0: channel with bit errors

- underlying channel may flip bits in packet
  - checksum to detect bit errors
- question: how to recover from errors:

rdt2.0: channel with bit errors

- underlying channel may flip bits in packet
  - checksum to detect bit errors
- question: how to recover from errors:
  - *acknowledgements (ACKs):* receiver explicitly tells sender that pkt received OK
  - *negative acknowledgements (NAKs):* receiver explicitly tells sender that pkt had errors
  - sender retransmits pkt on receipt of NAK
- new mechanisms in **`rdt2.0`** (beyond **`rdt1.0`**):
  - error detection
  - feedback: control msgs (ACK,NAK) from receiver to sender

ARQ:
Automatic Repeat reQuest

rdt2.0: FSM specification

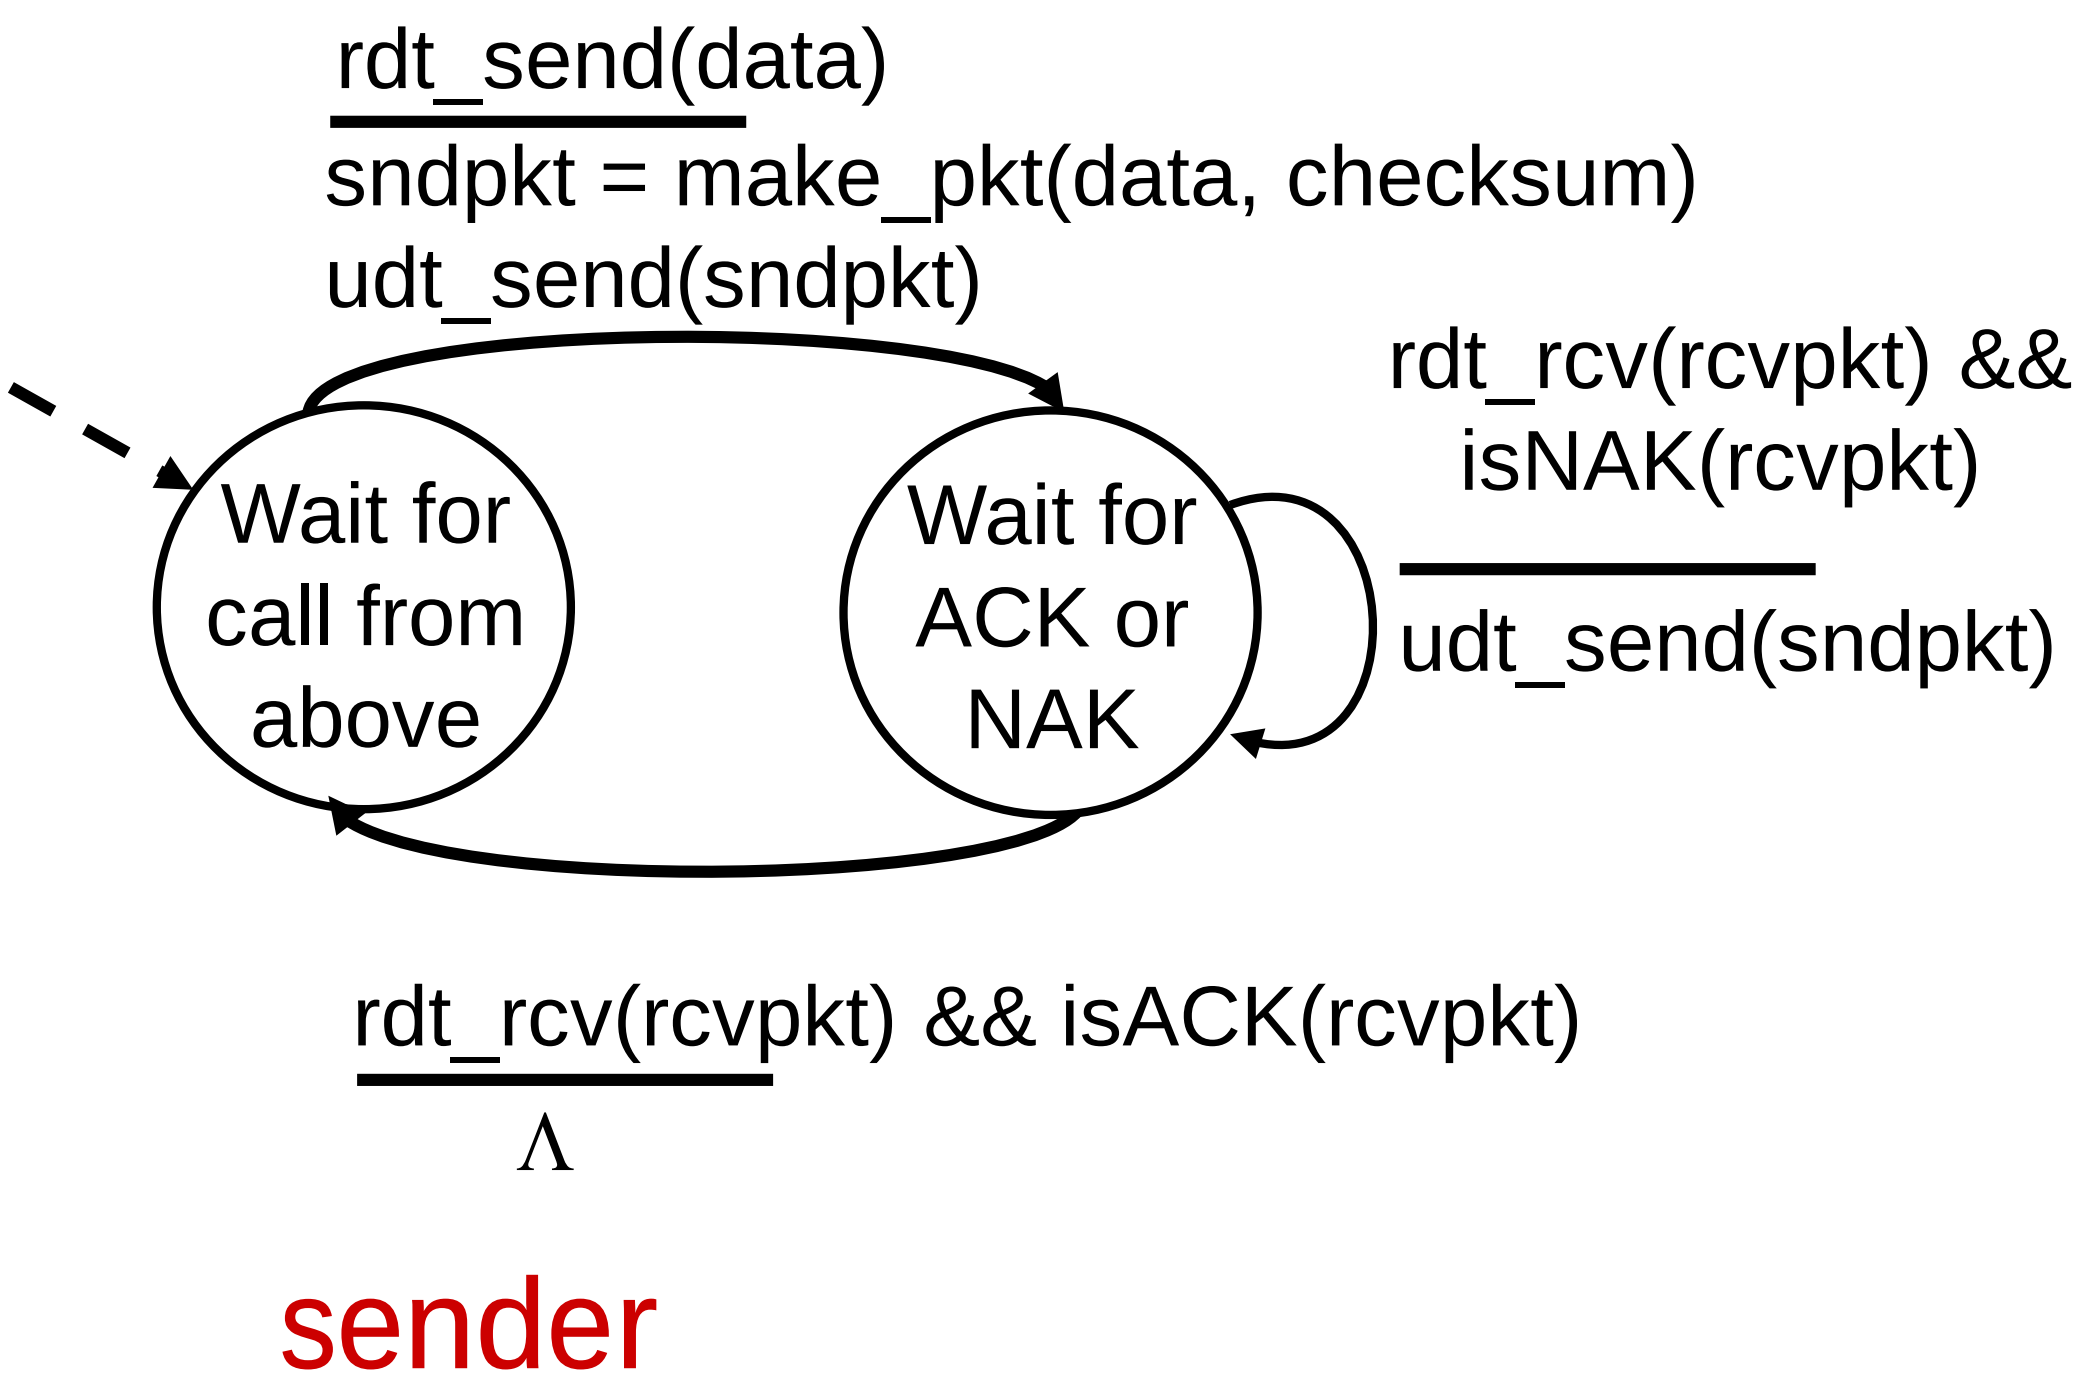

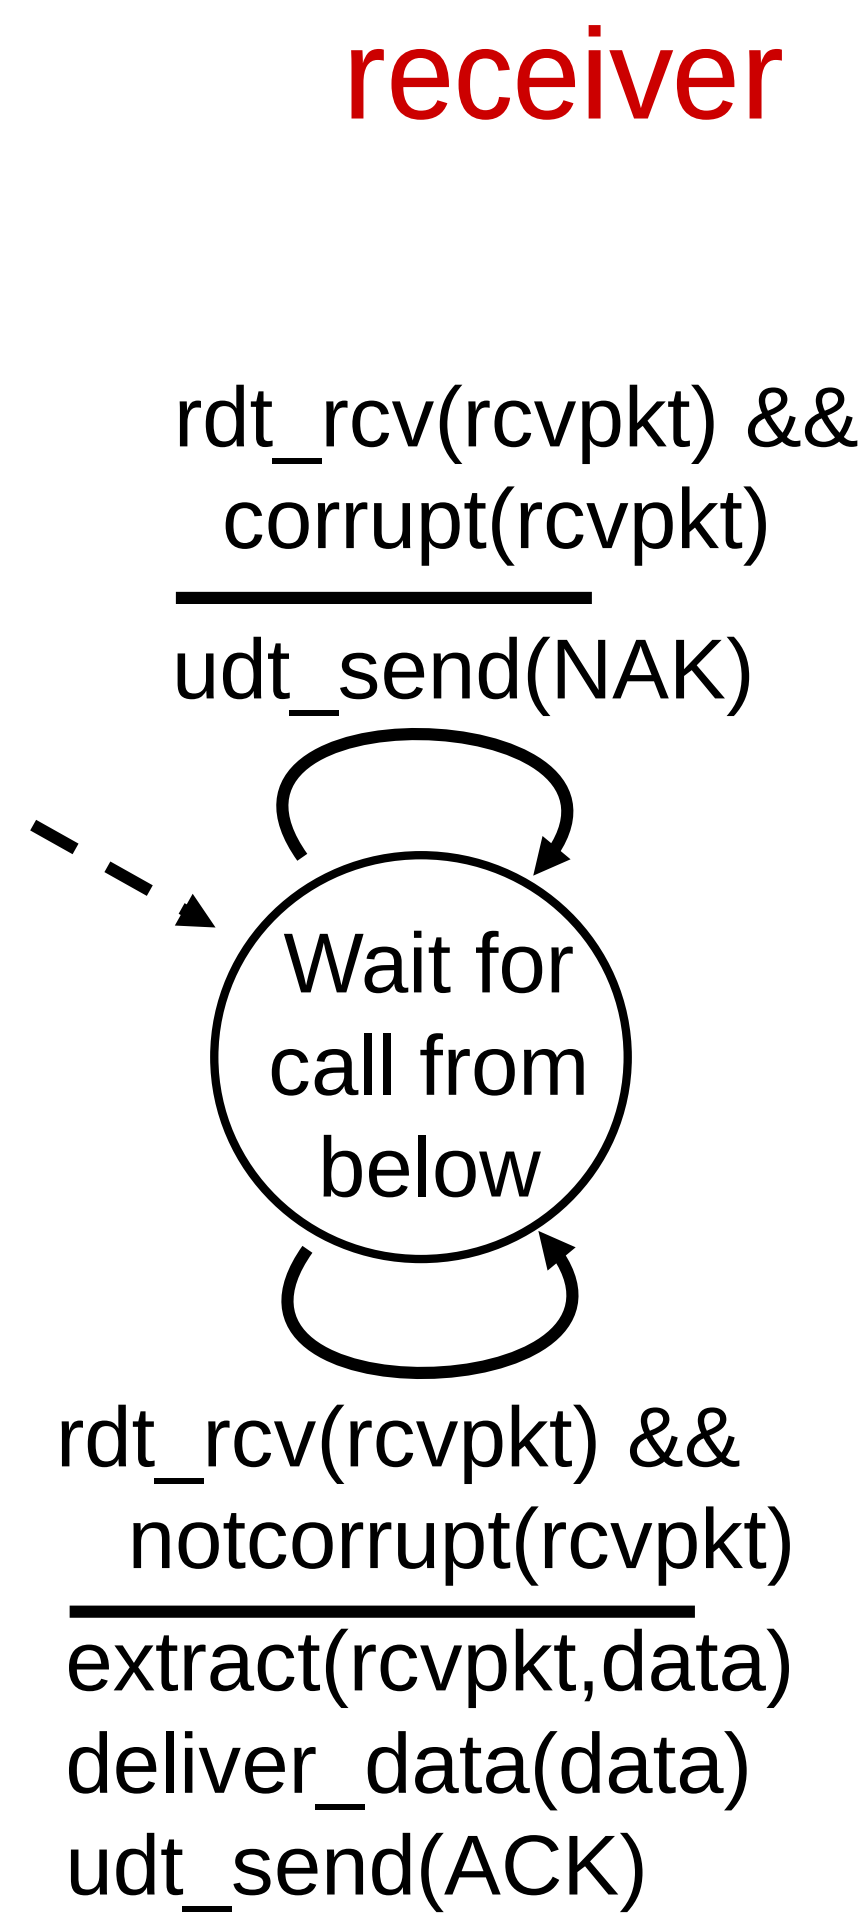

rdt2.0: operation with no errors

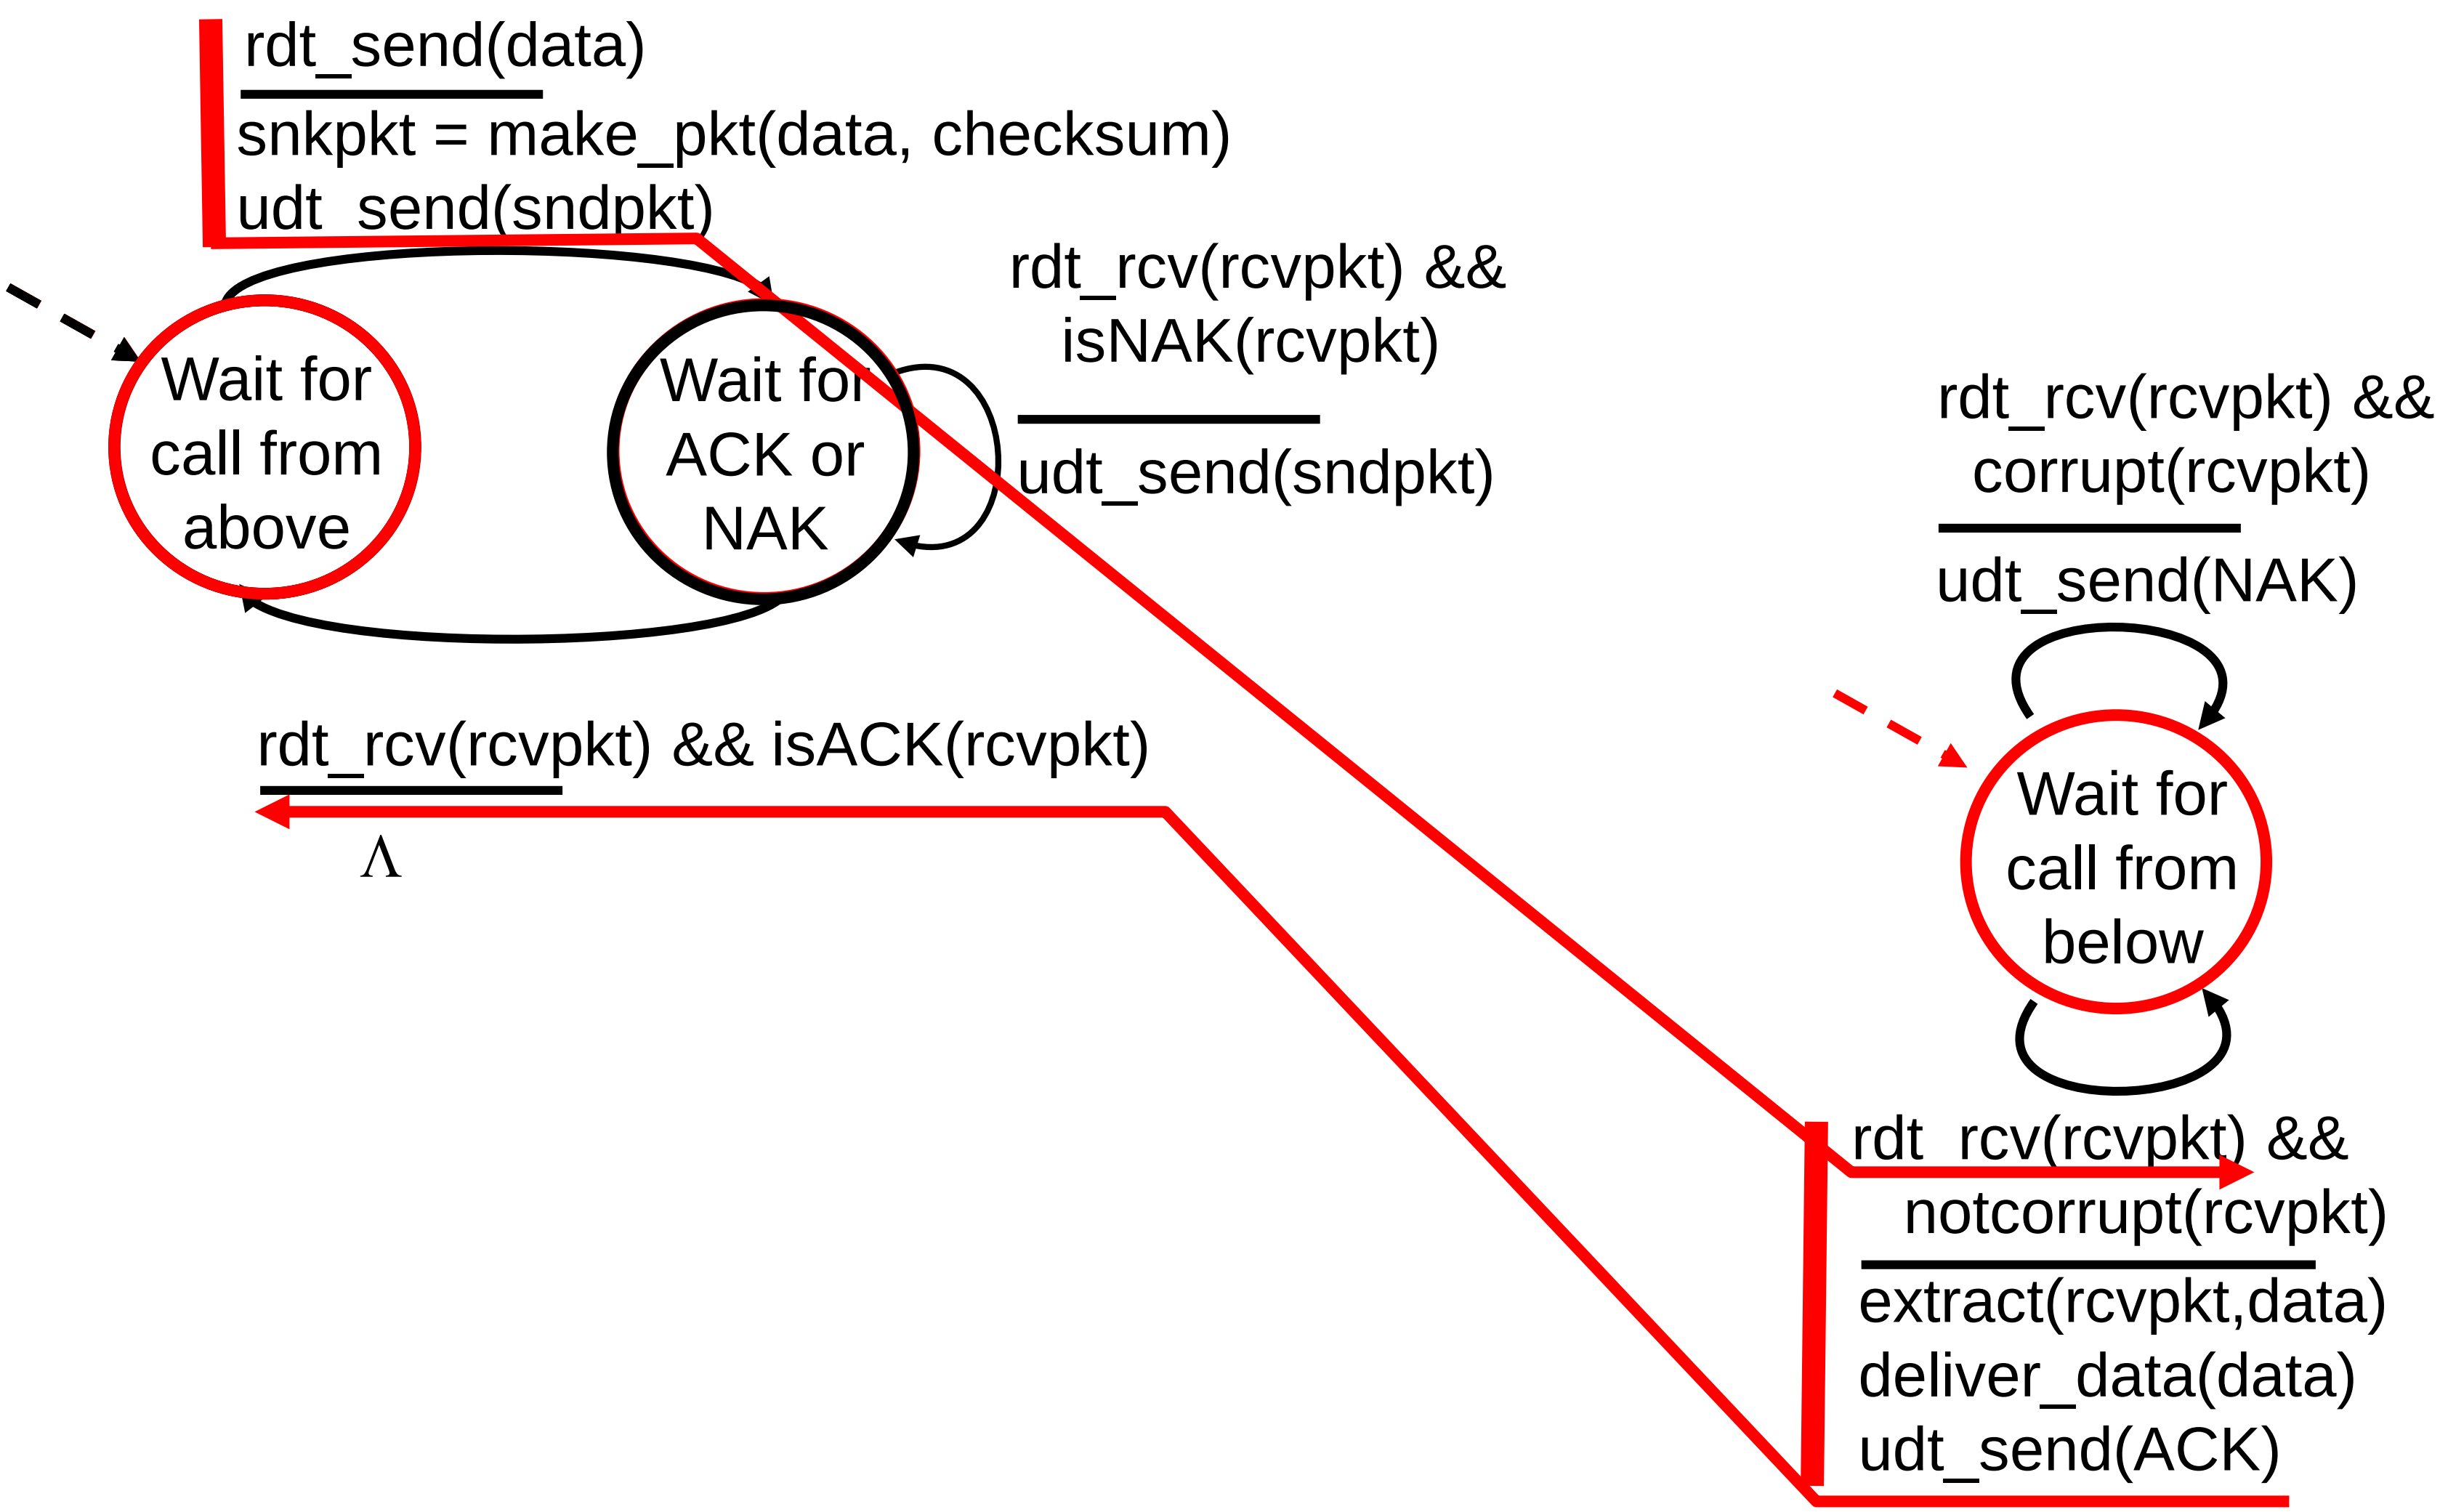

rdt2.0: error scenario

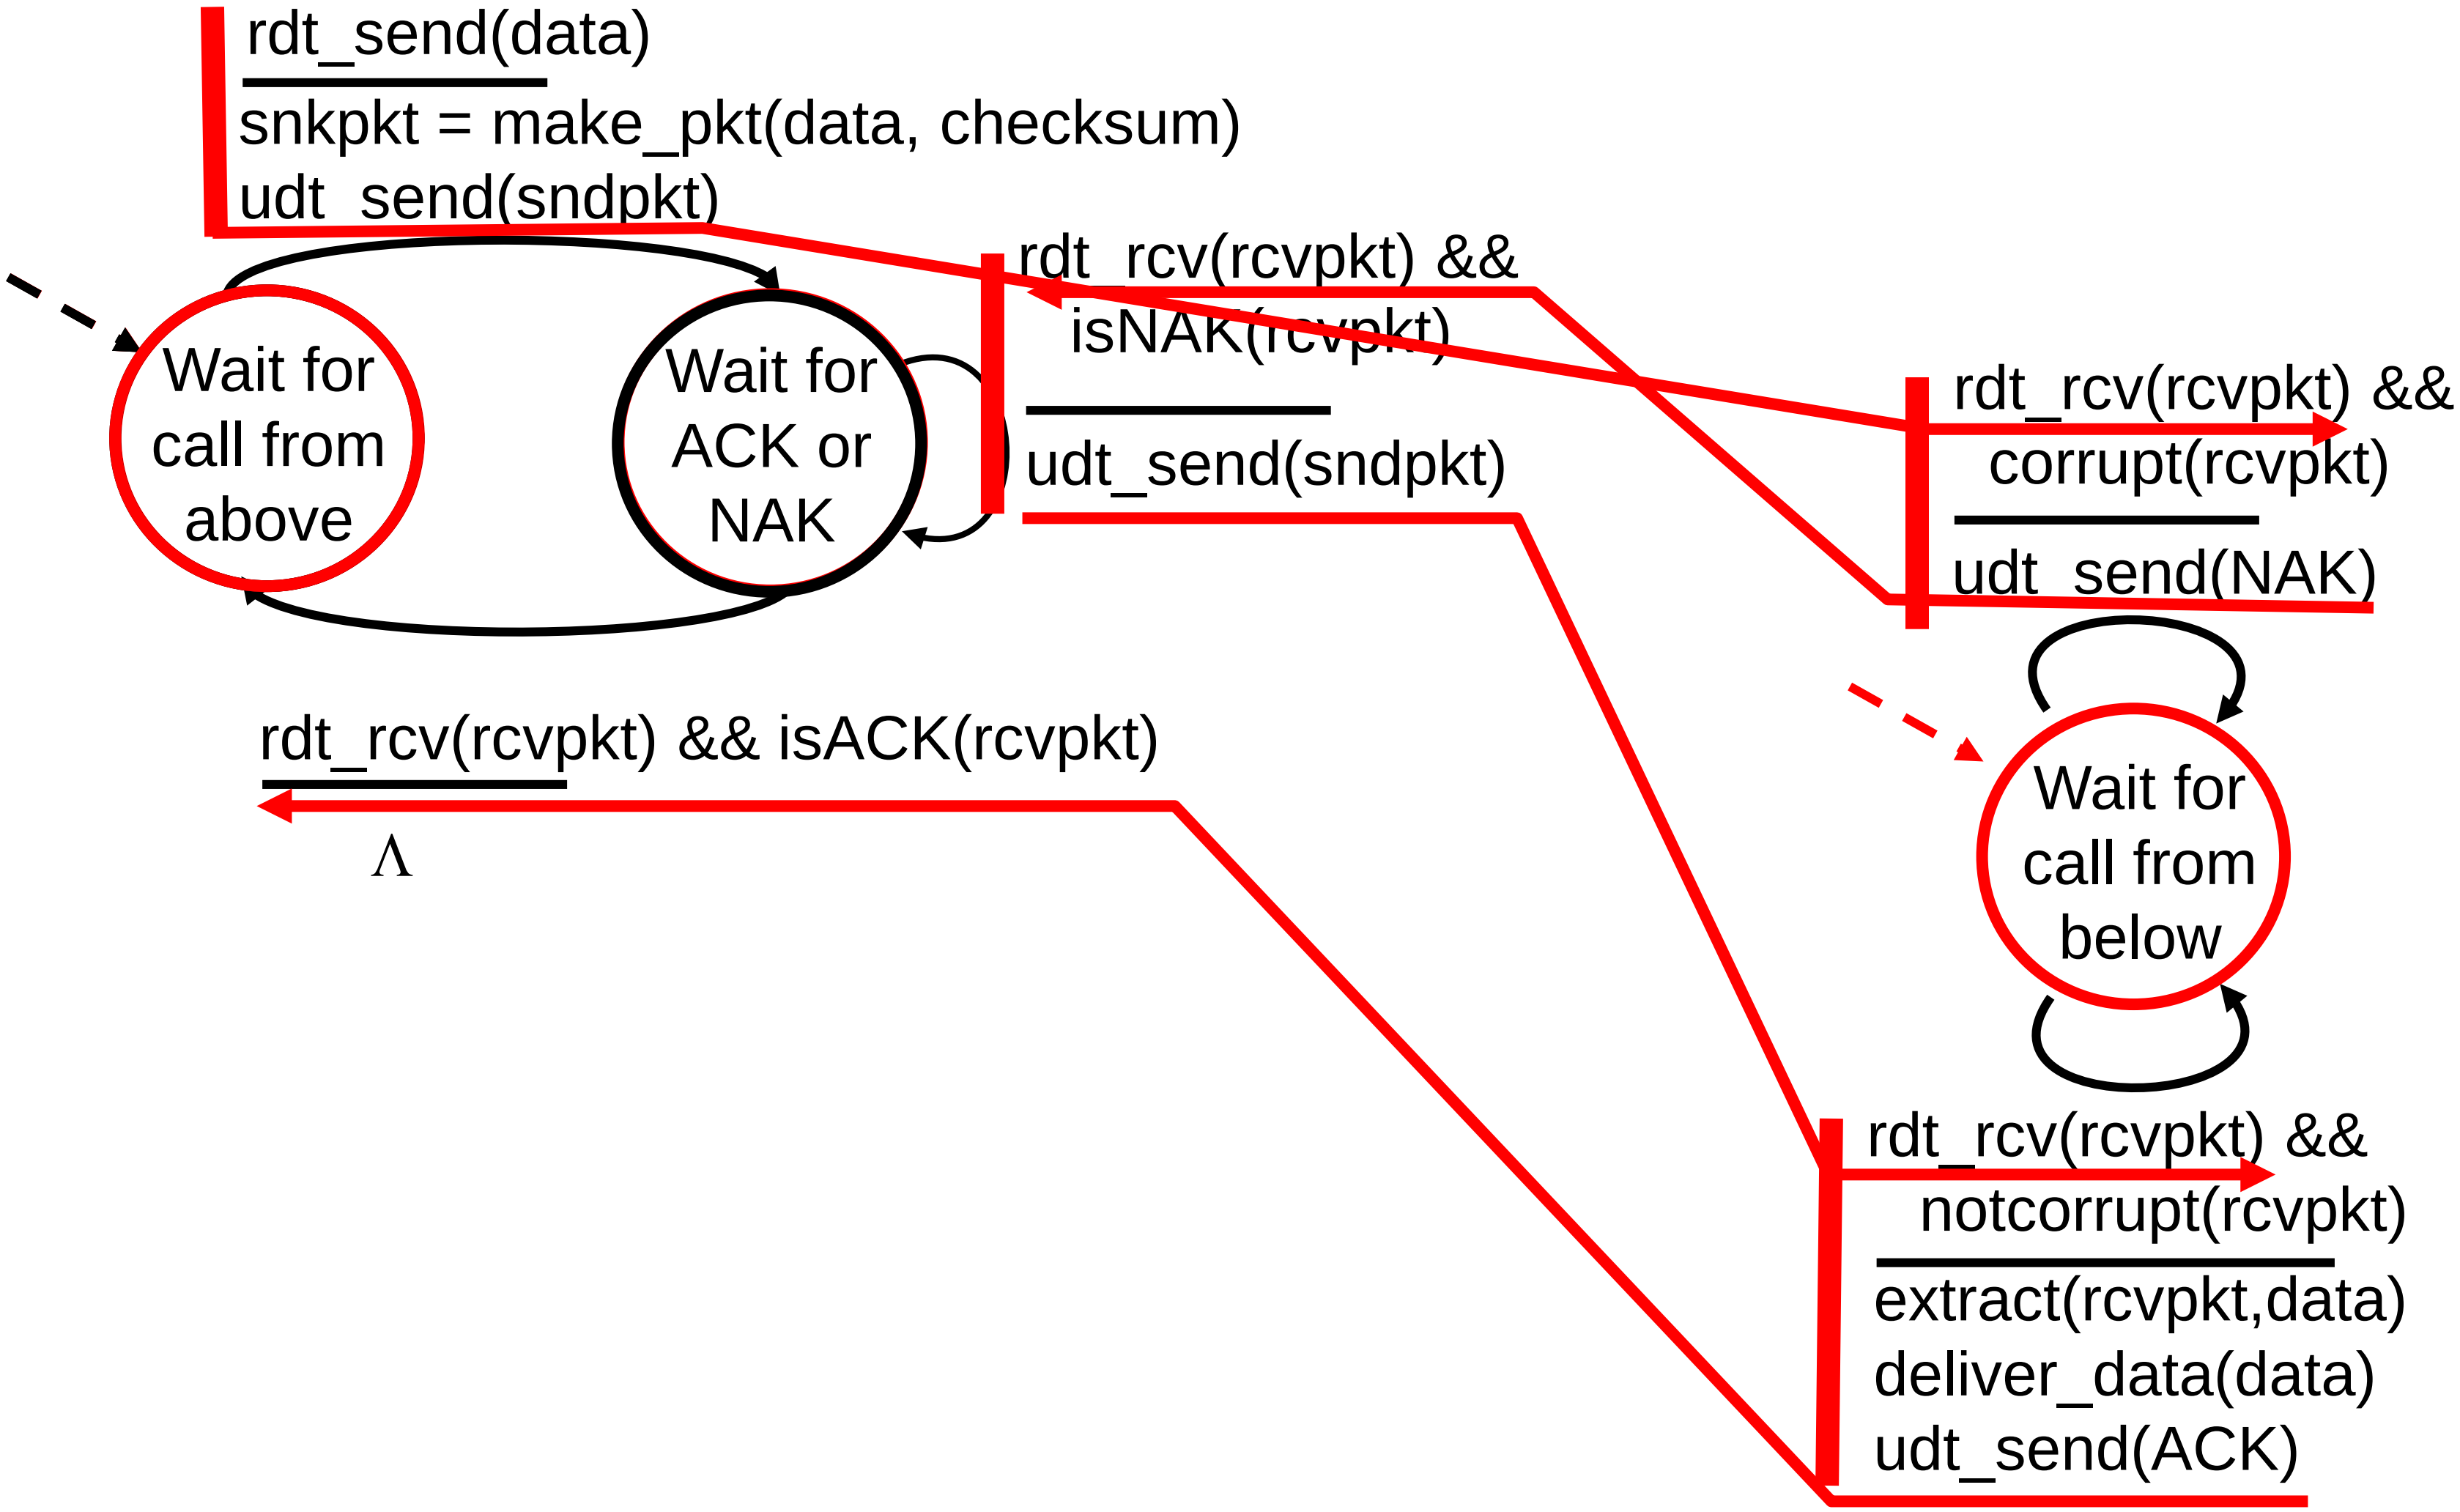

rdt2.0 has a fatal flaw!

what happens if ACK/NAK corrupted?

- sender doesn't know what happened at receiver!
- can't just retransmit: possible duplicate

handling duplicates:

- sender retransmits current pkt if ACK/NAK corrupted
- sender adds *sequence number* to each pkt
- receiver discards (doesn't deliver up) duplicate pkt

stop and wait

sender sends one packet, then waits for receiver response

rdt2.1: sender, handles garbled ACK/NAKs

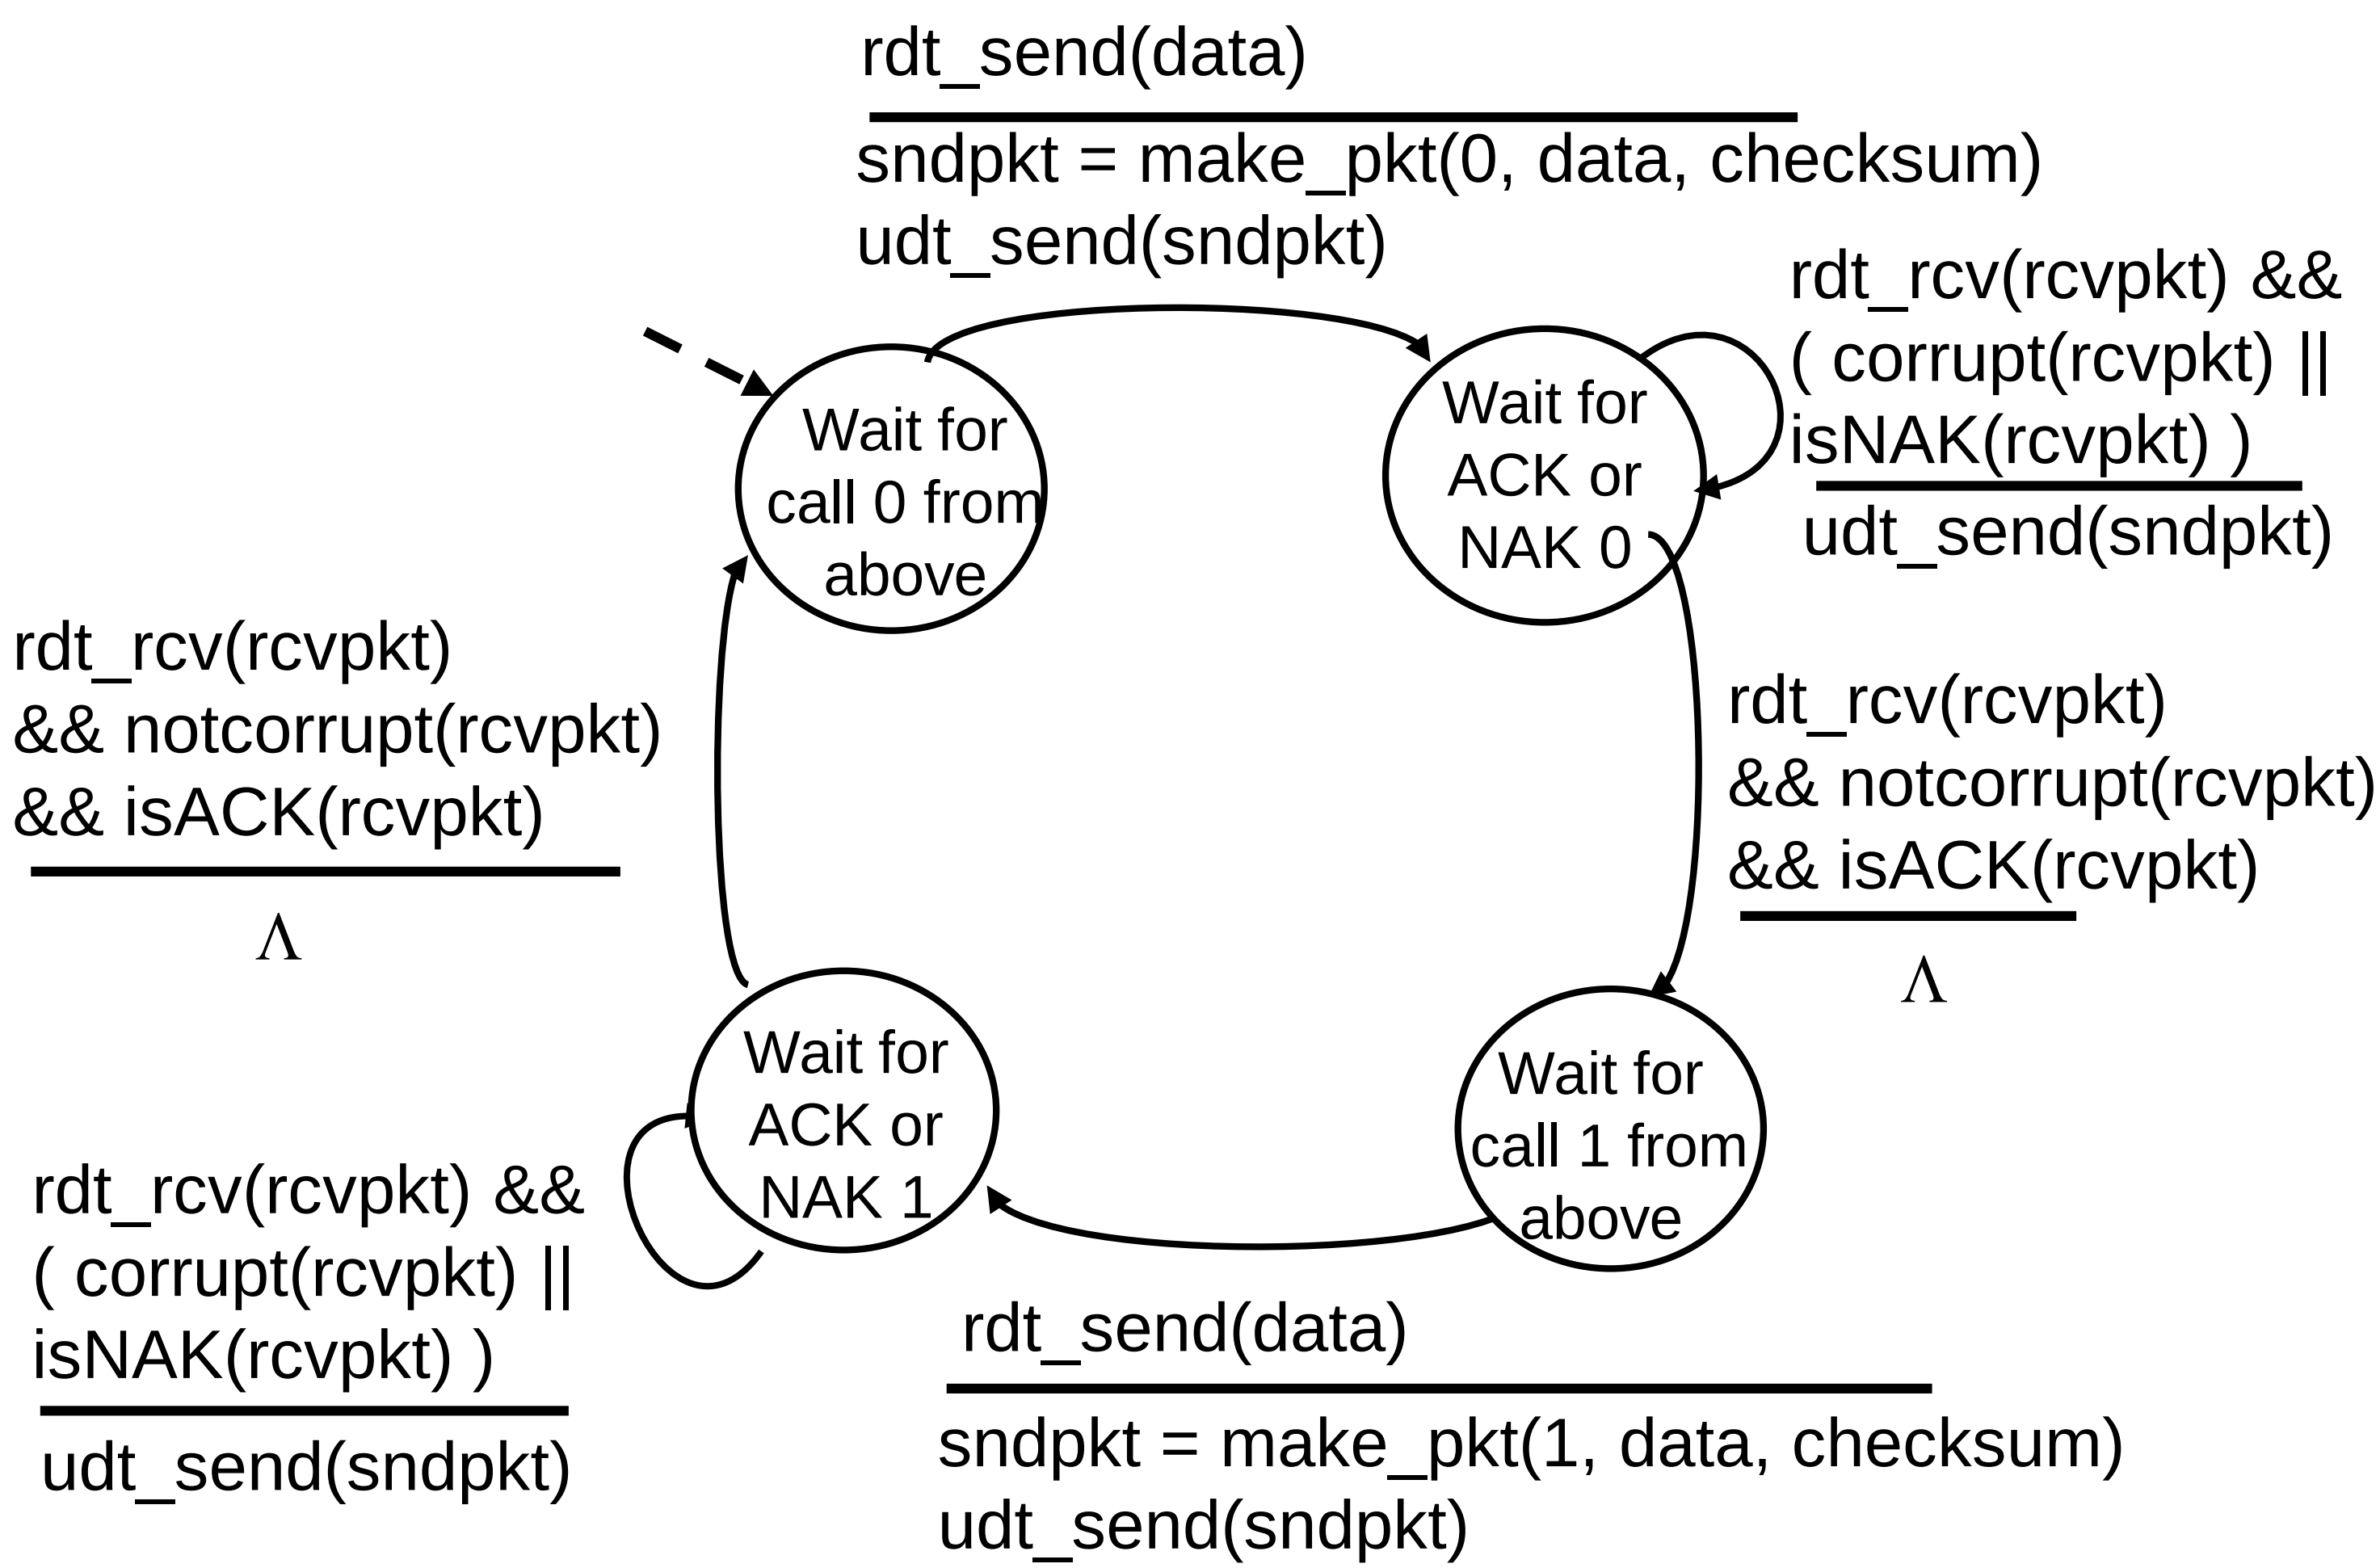

rdt2.1: receiver, handles garbled ACK/NAKs

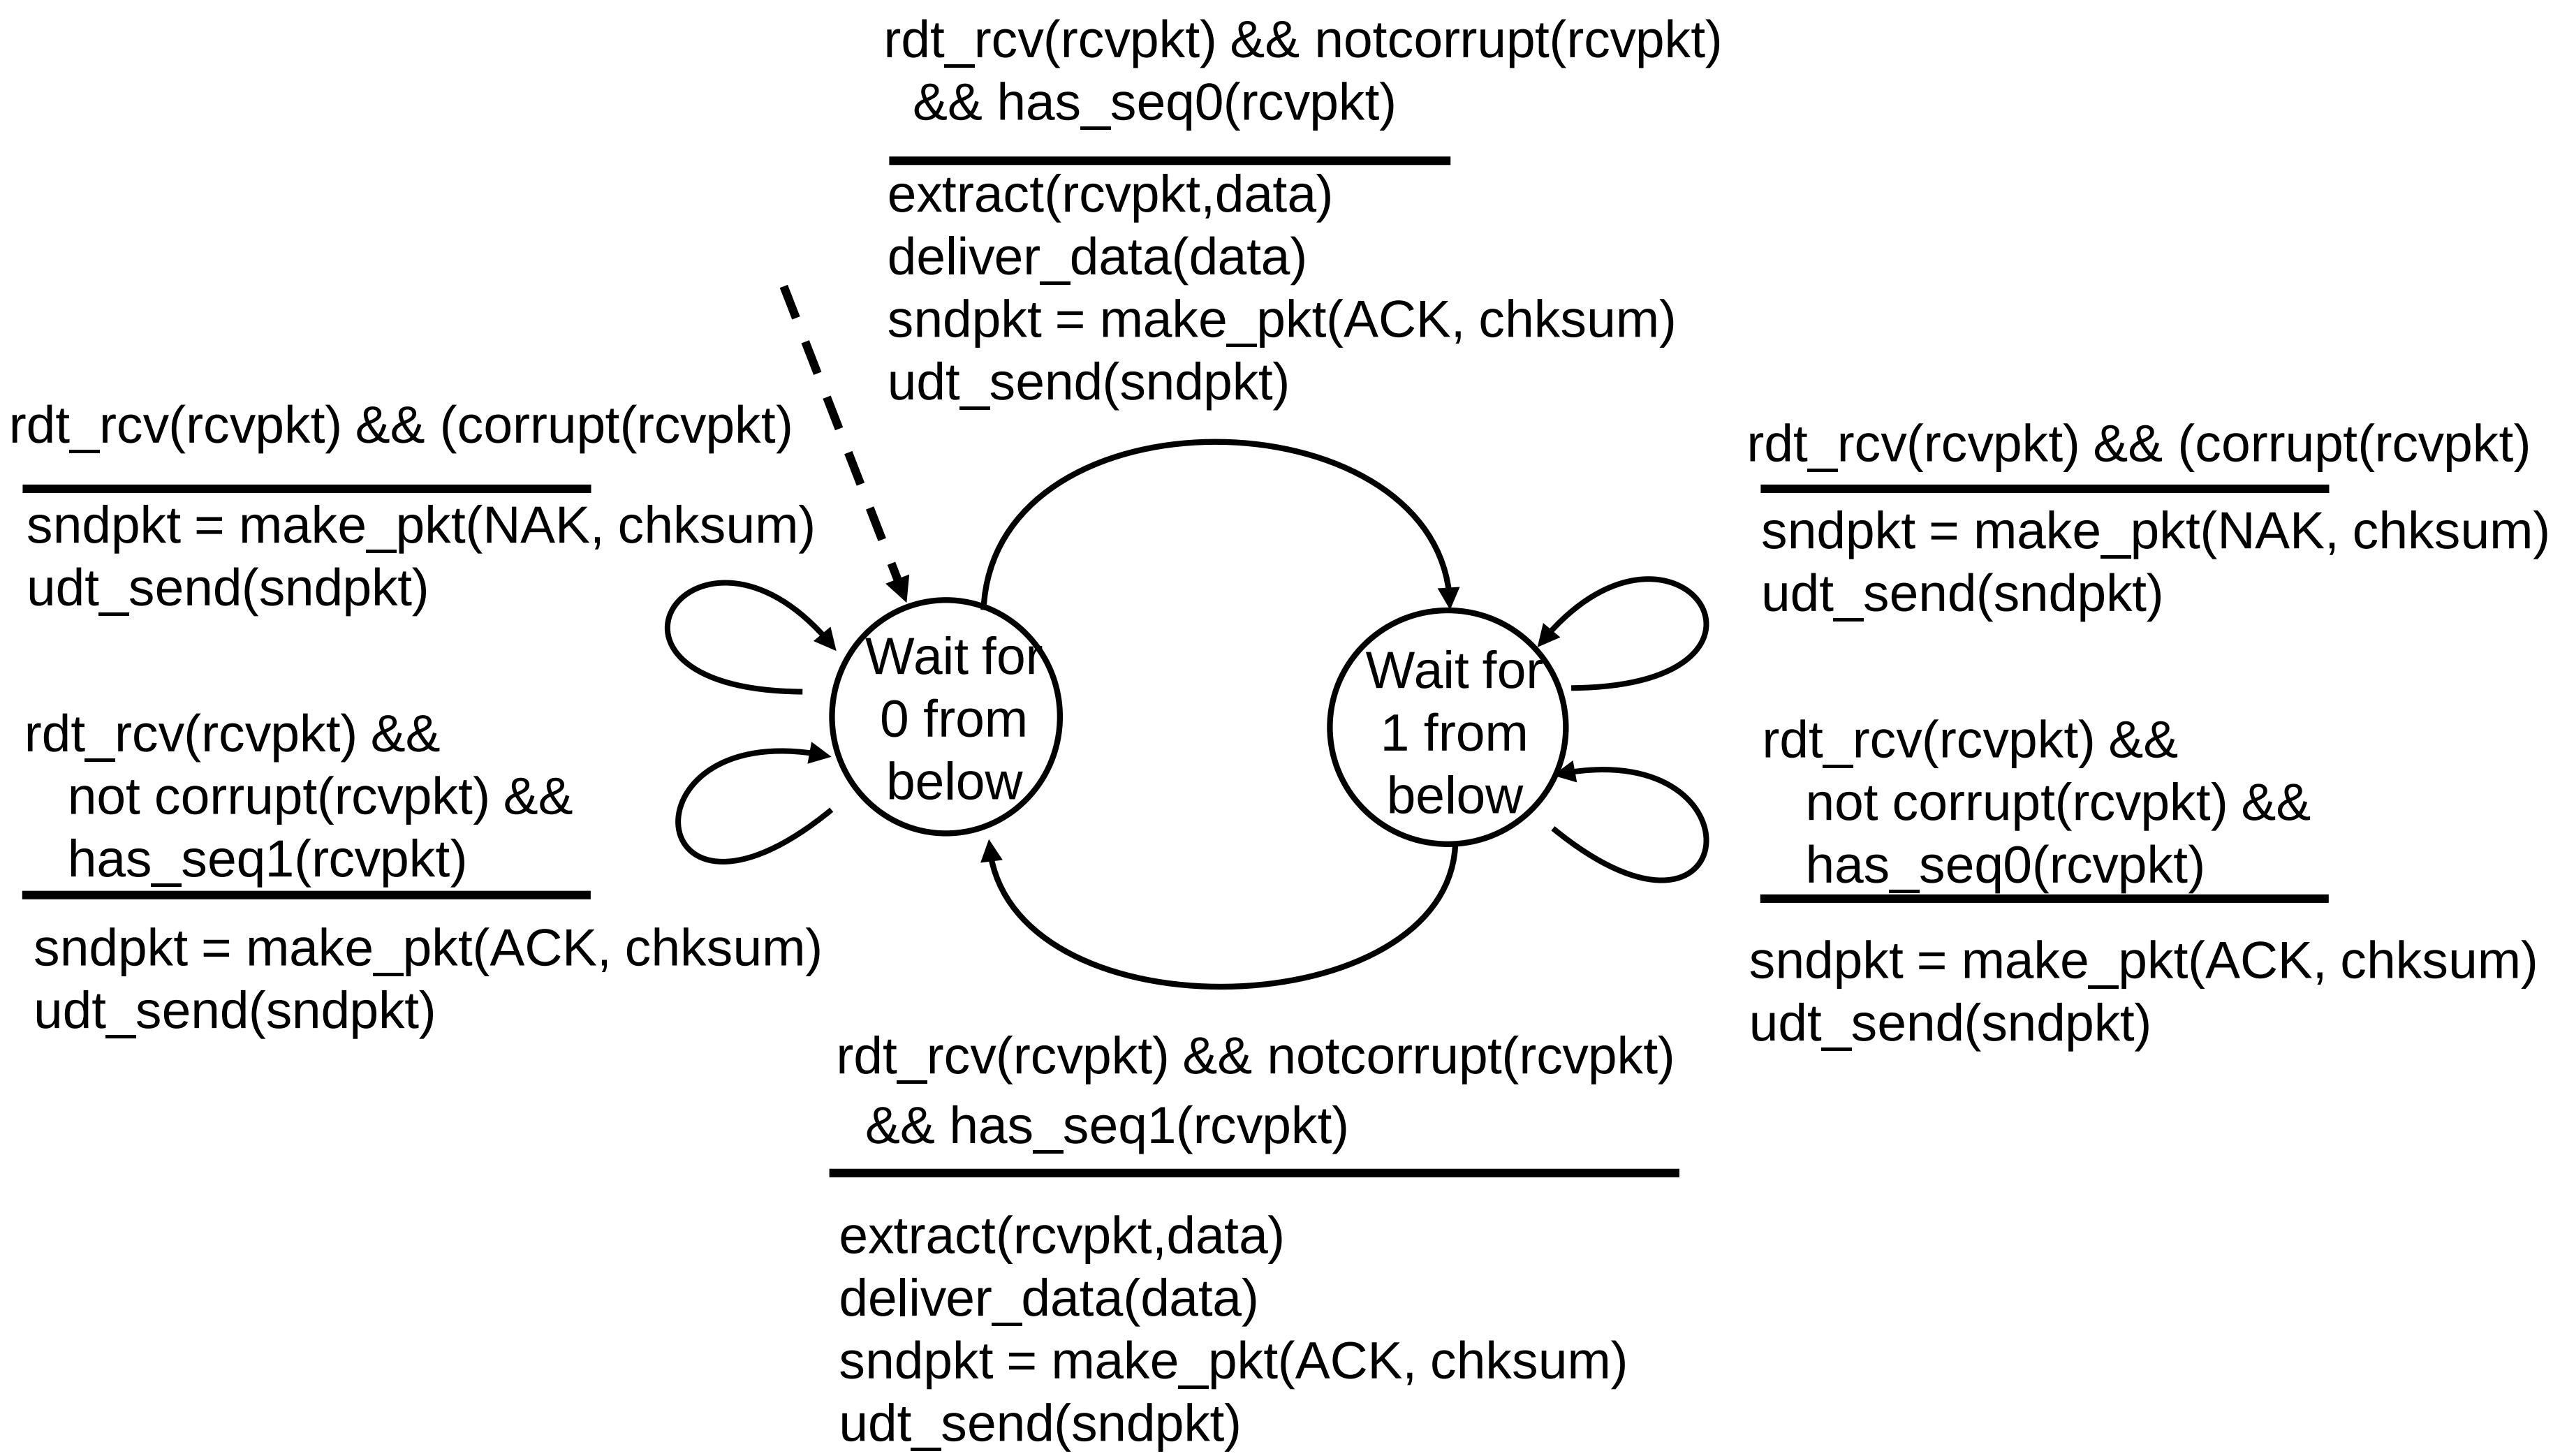

rdt2.1: discussion

sender:

- seq # added to pkt
- two seq. #' s (0,1) will suffice. Why?
- must check if received ACK/NAK corrupted

receiver:

- must check if received packet is duplicate
  - state indicates whether 0 or 1 is expected pkt seq #

rdt2.2: a NAK-free protocol

- same functionality as rdt2.1, using ACKs only
- instead of NAK, receiver sends ACK for last pkt received OK
  - receiver must *explicitly* include seq # of pkt being ACKed
- duplicate ACK at sender results in same action as NAK: *retransmit current pkt*

rdt3.0: channels with errors *and* loss

new assumption: underlying channel can also lose packets (data, ACKs)

- checksum, seq. #, ACKs, retransmissions will be of help … but not enough

approach: sender waits "reasonable" amount of time for ACK

- retransmits if no ACK received in this time
- if pkt (or ACK) just delayed (not lost):
  - retransmission will be duplicate, but seq. #'s already handles this
- requires countdown timer

rdt3.0 in action

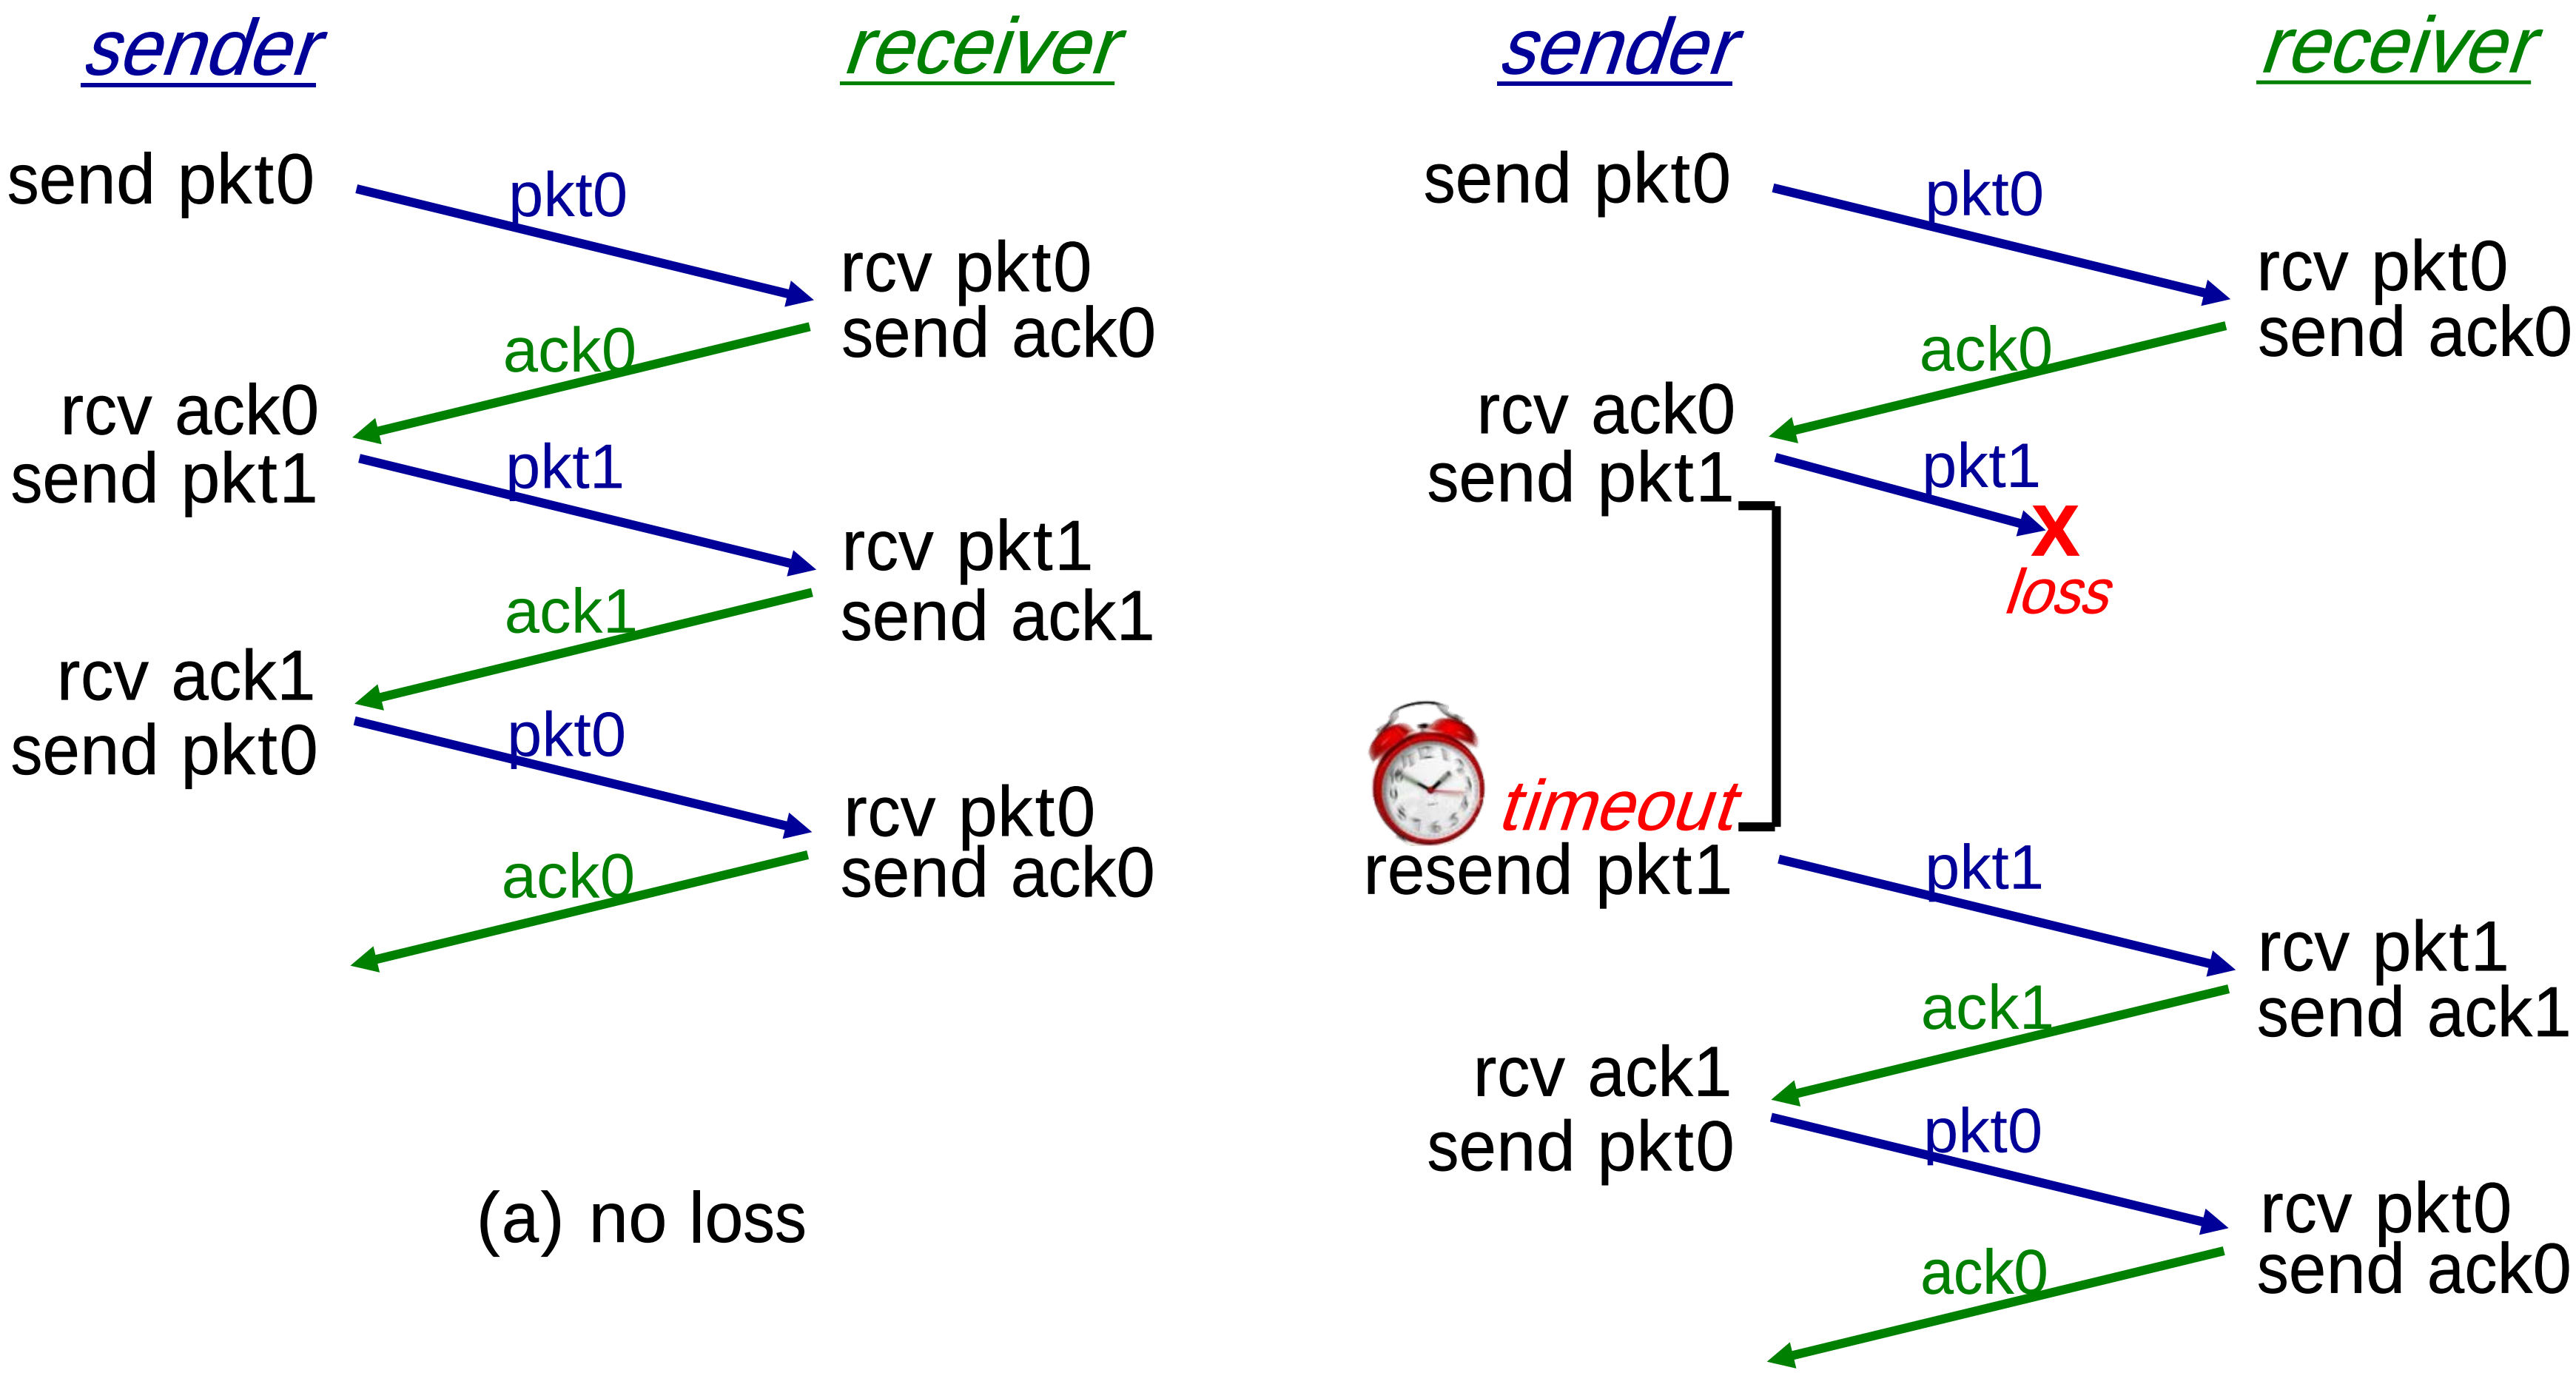

(a) no loss

(b) packet loss

rdt3.0 in action

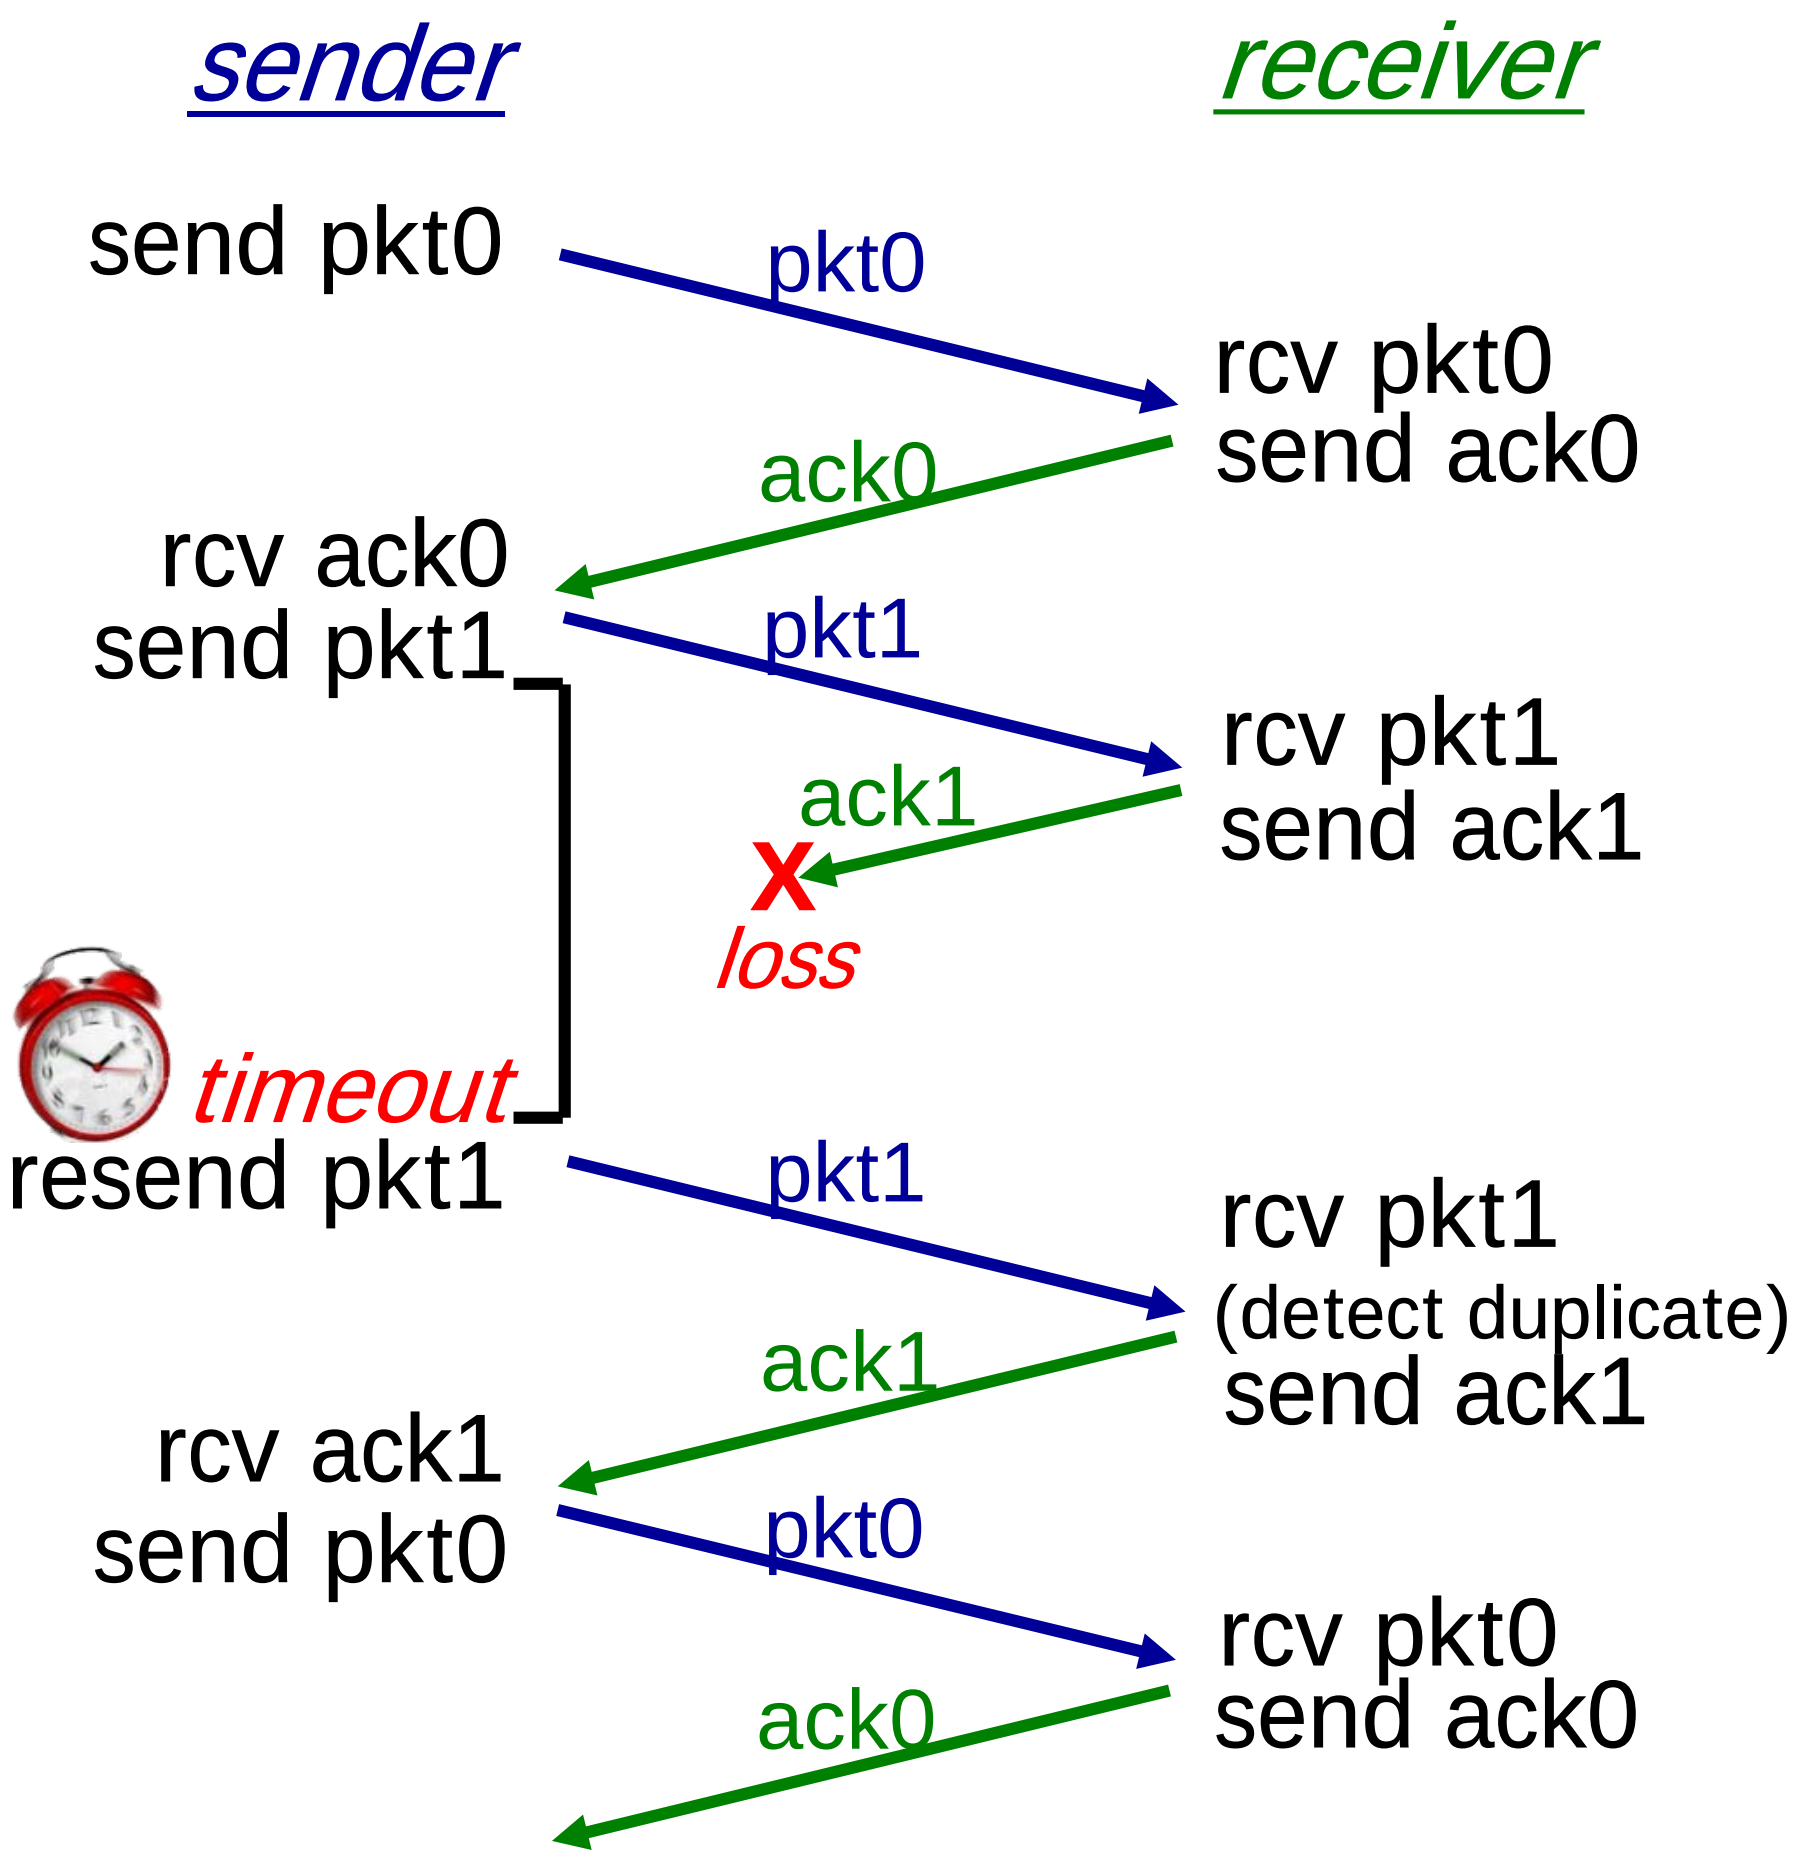

(c) ACK loss

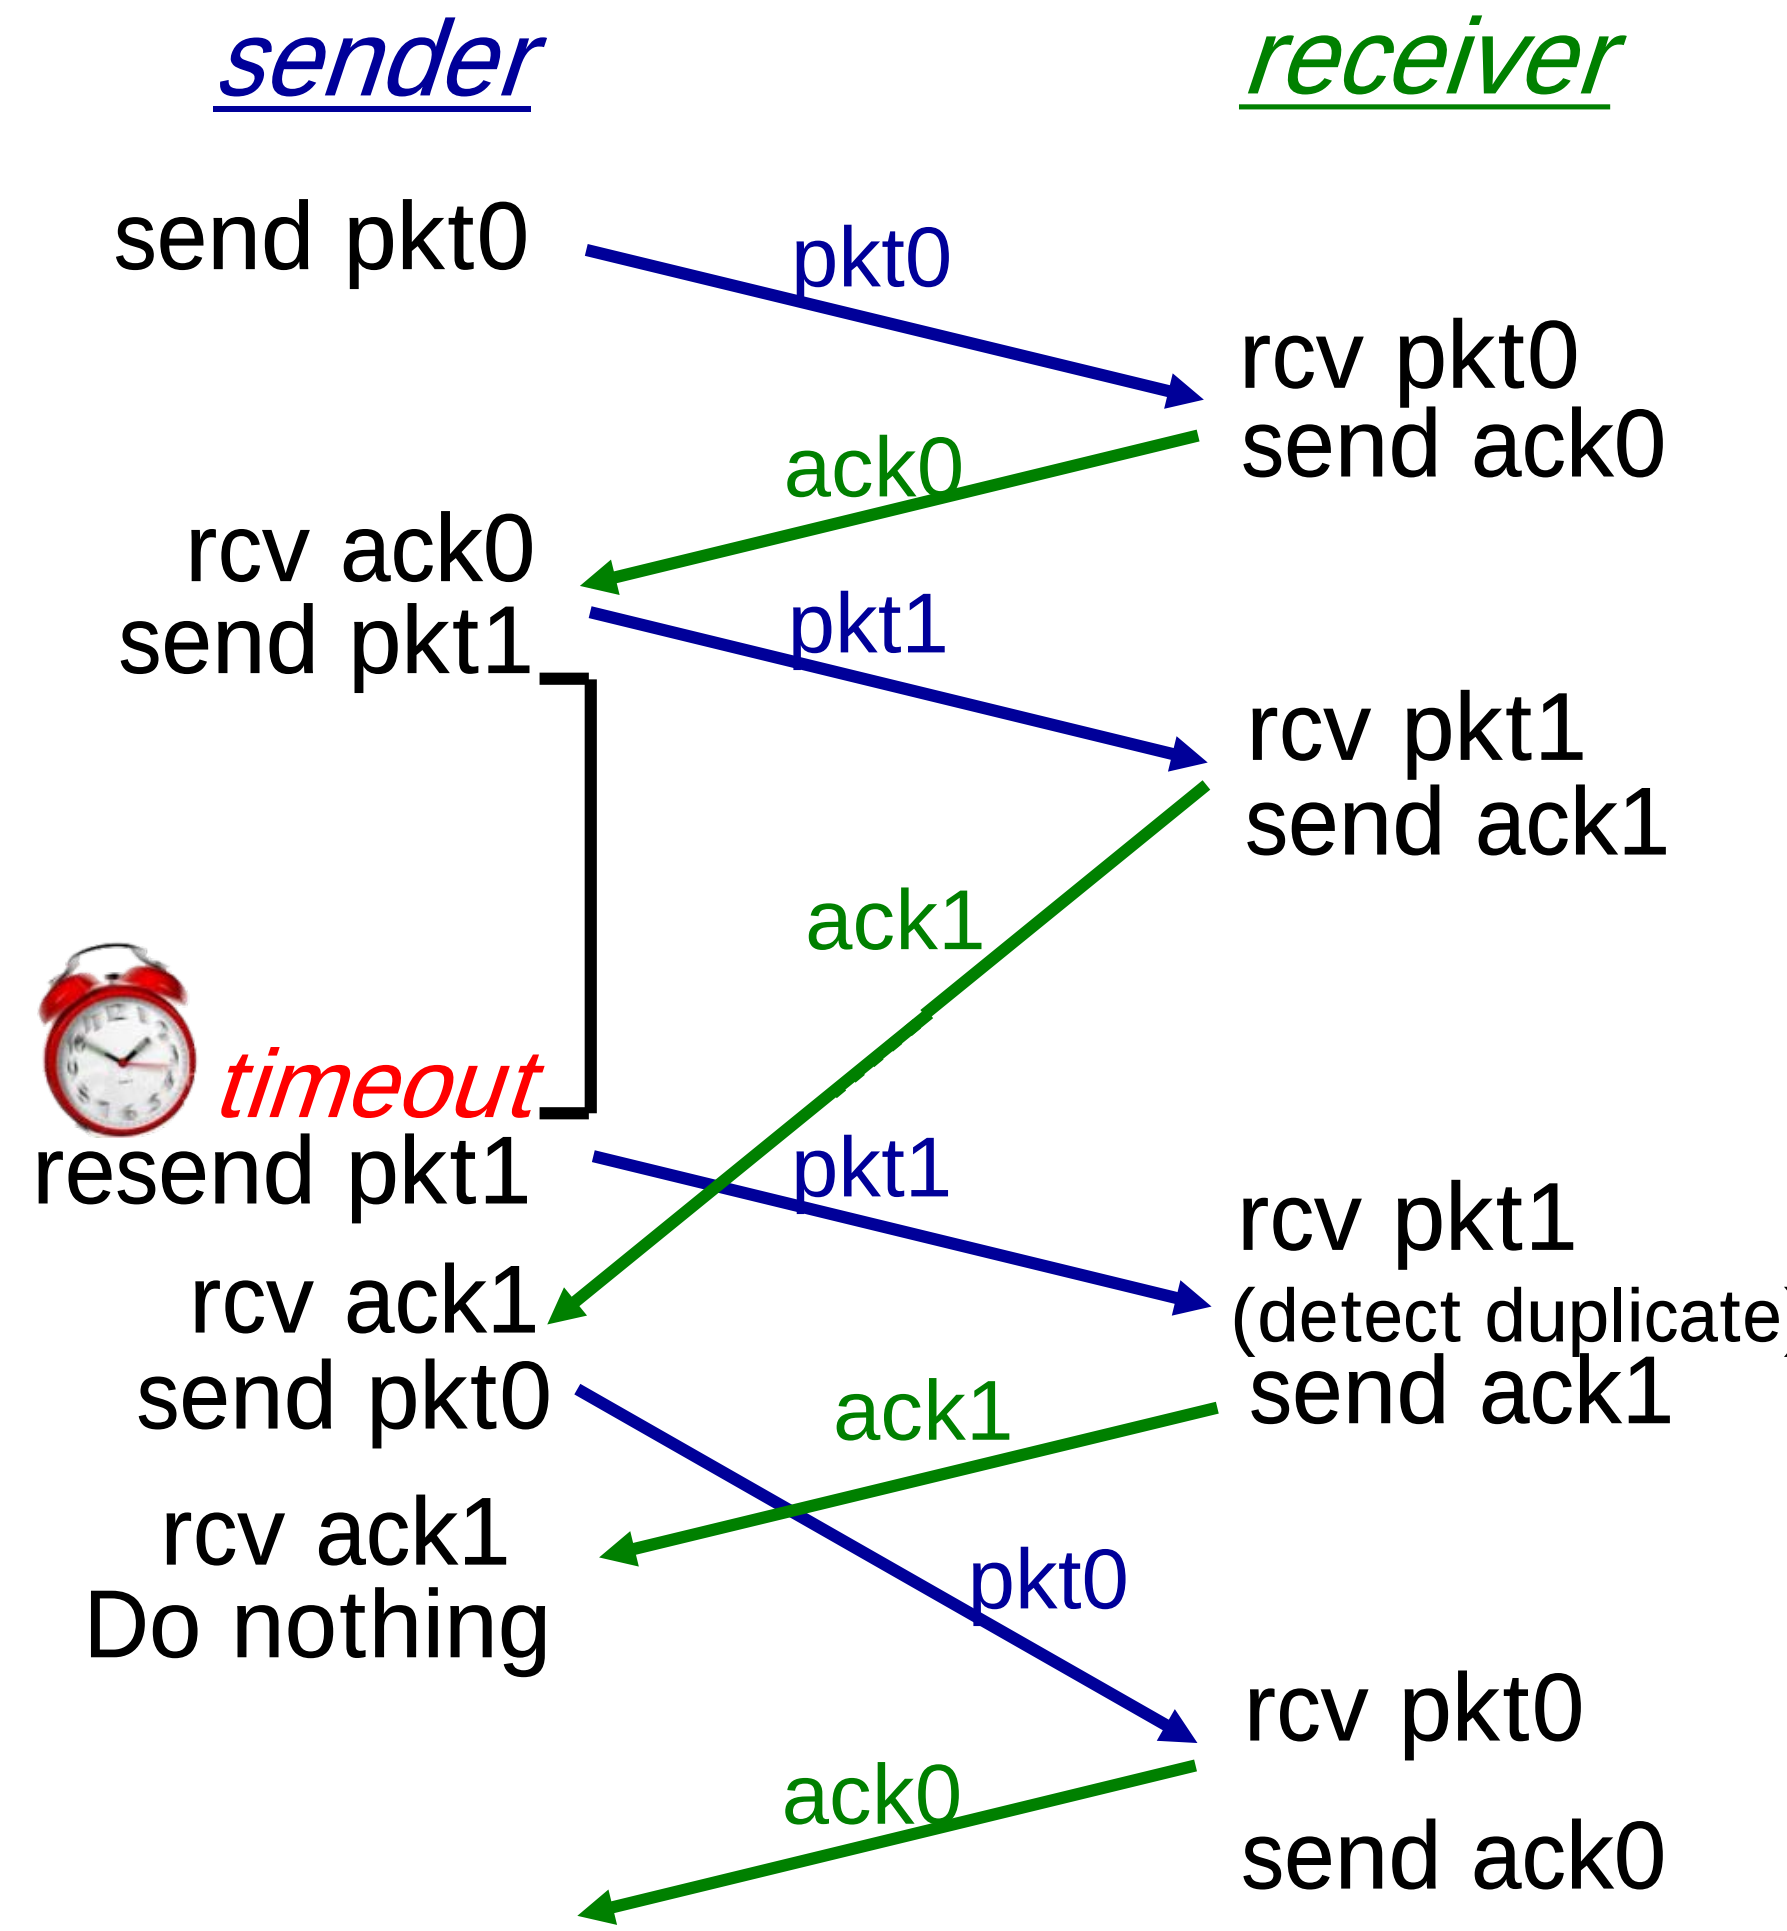

(d) premature timeout/ delayed ACK

Performance of rdt3.0

- rdt3.0 is correct, but performance stinks
- e.g.: 1 Gbps link, 15 ms prop. delay, 8000 bit packet:

$$D_{trans} = \frac{L}{R} = \frac{8000 \text{ bits}}{10^9 \text{ bits/sec}} = 8 \text{ microsecs}$$

  - U_{sender}: *utilization* – fraction of time sender busy sending

$$U_{sender} = \frac{L / R}{RTT + L / R} = \frac{.008}{30.008} = 0.00027$$

  - if RTT=30 msec, 1KB pkt every 30 msec: 33kB/sec thruput over 1 Gbps link
- network protocol limits use of physical resources!

rdt3.0: stop-and-wait operation

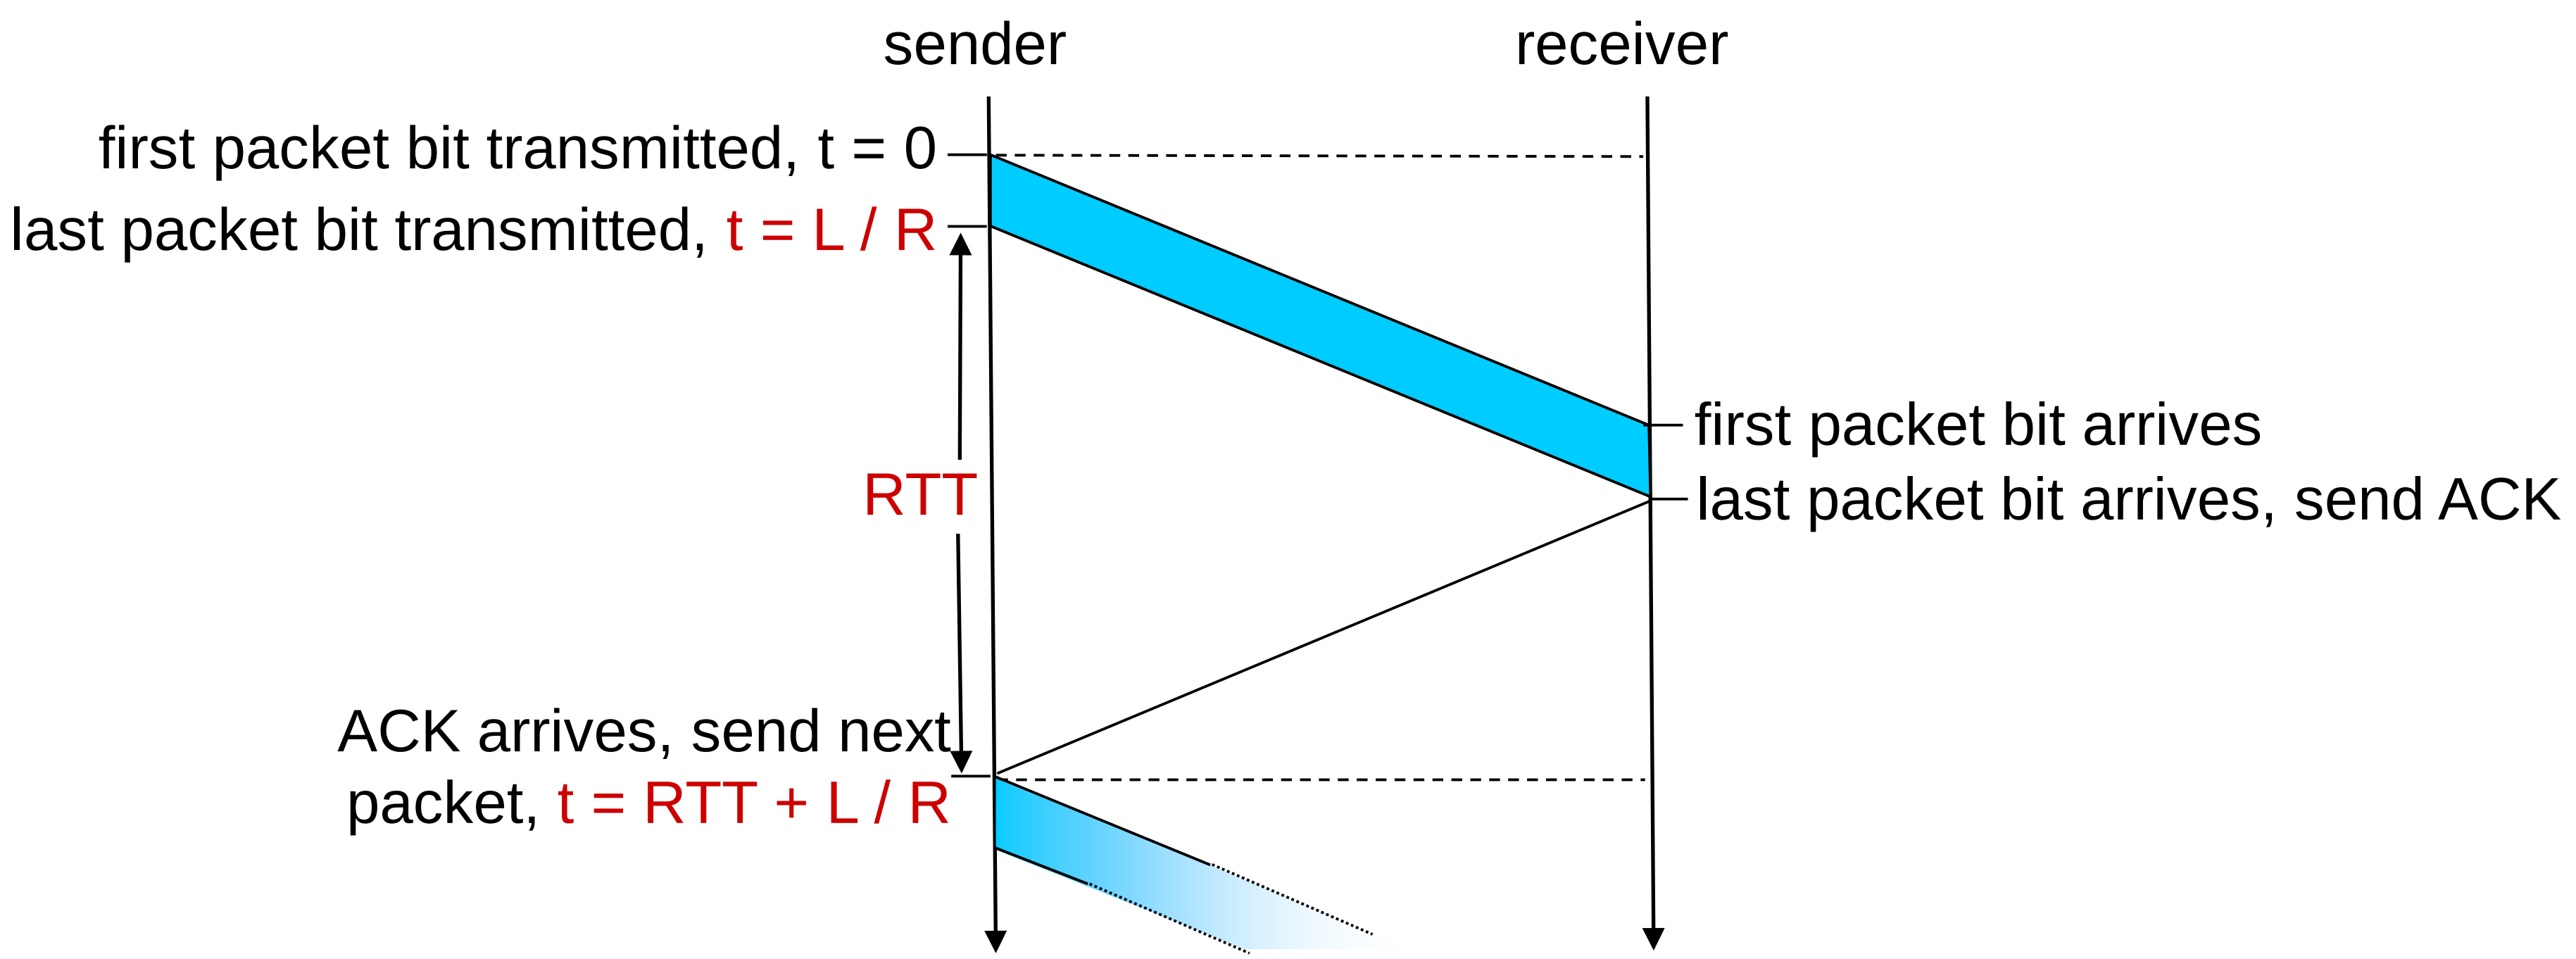

Pipelined protocols

pipelining: sender allows multiple, "in-flight", yet-to-be-acknowledged pkts

- range of sequence numbers must be increased
- buffering at sender and/or receiver

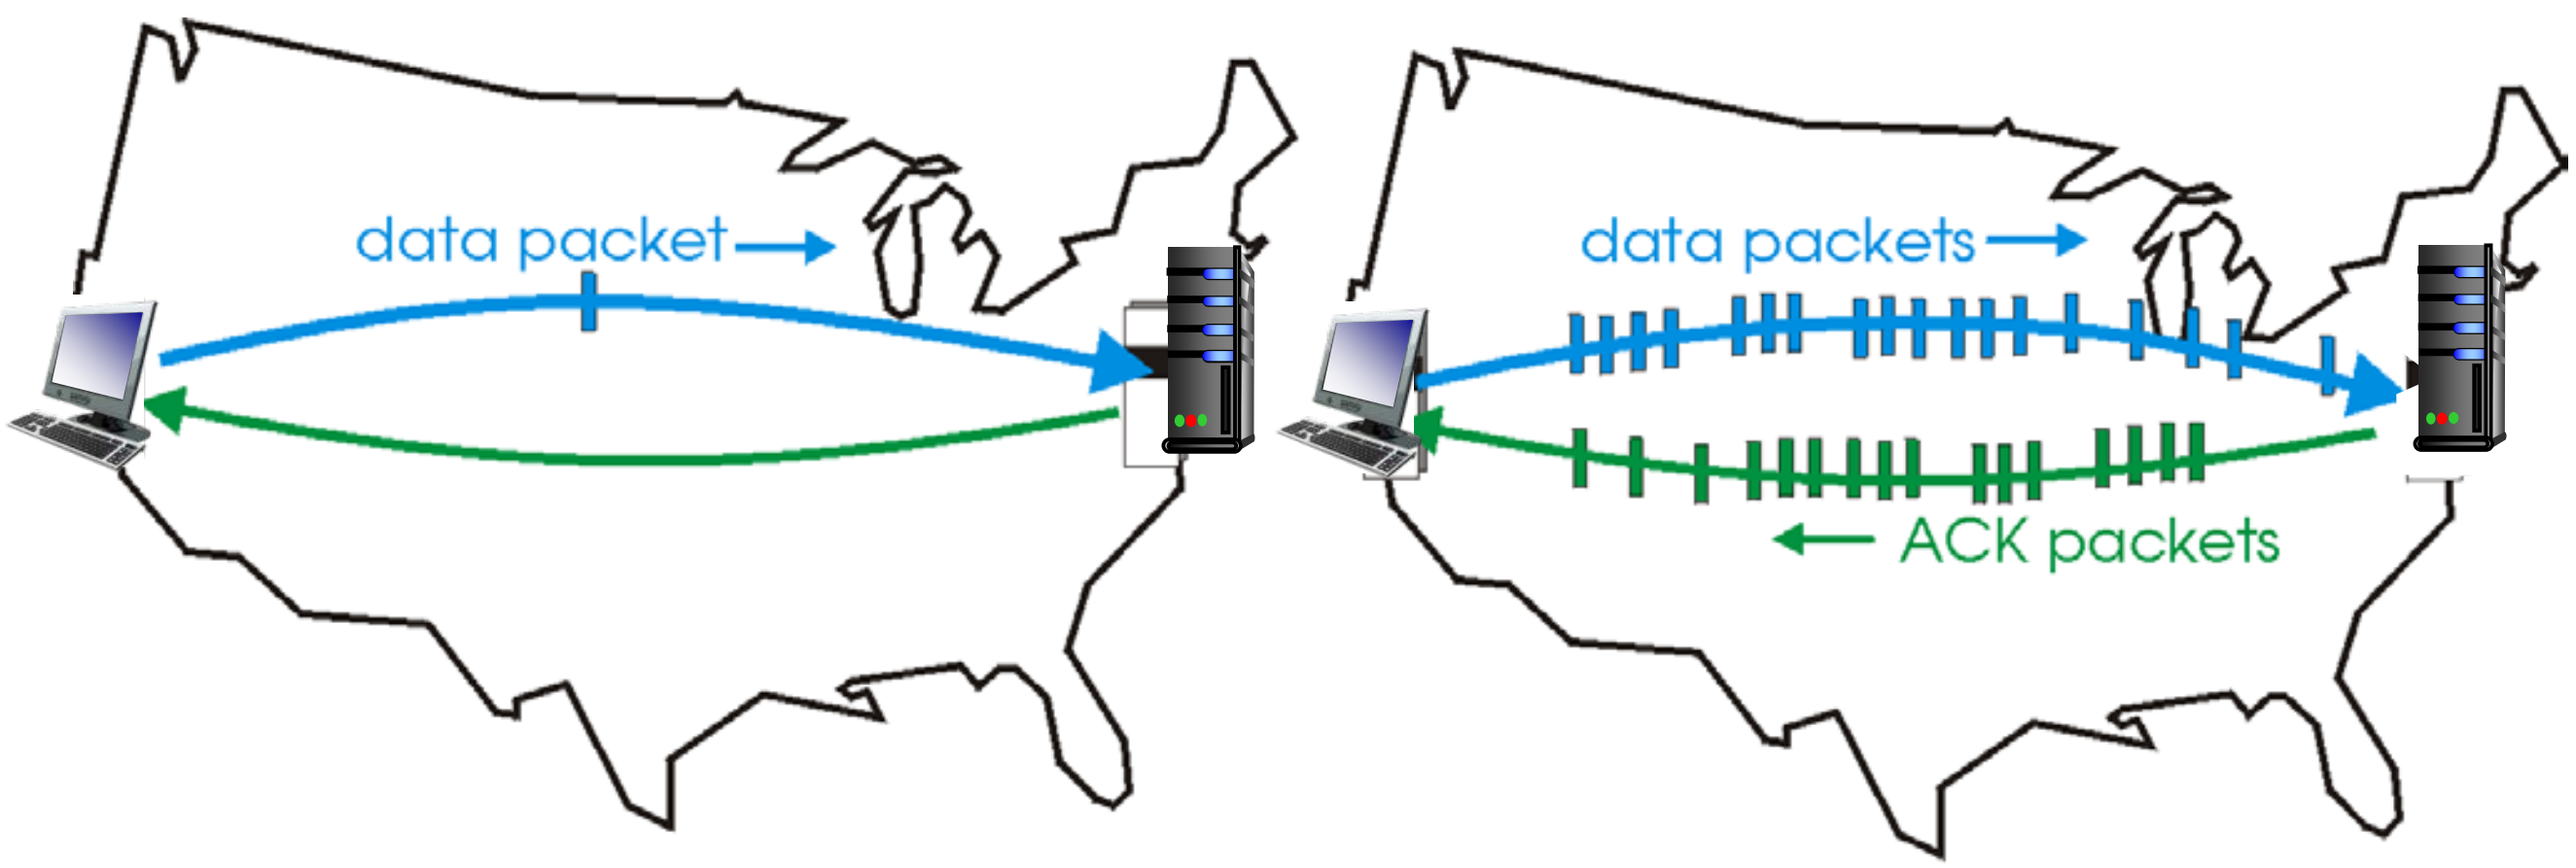

(a) a stop-and-wait protocol in operation

(b) a pipelined protocol in operation

- two generic forms of pipelined protocols: *go-Back-N, selective repeat*

Pipelining: increased utilization

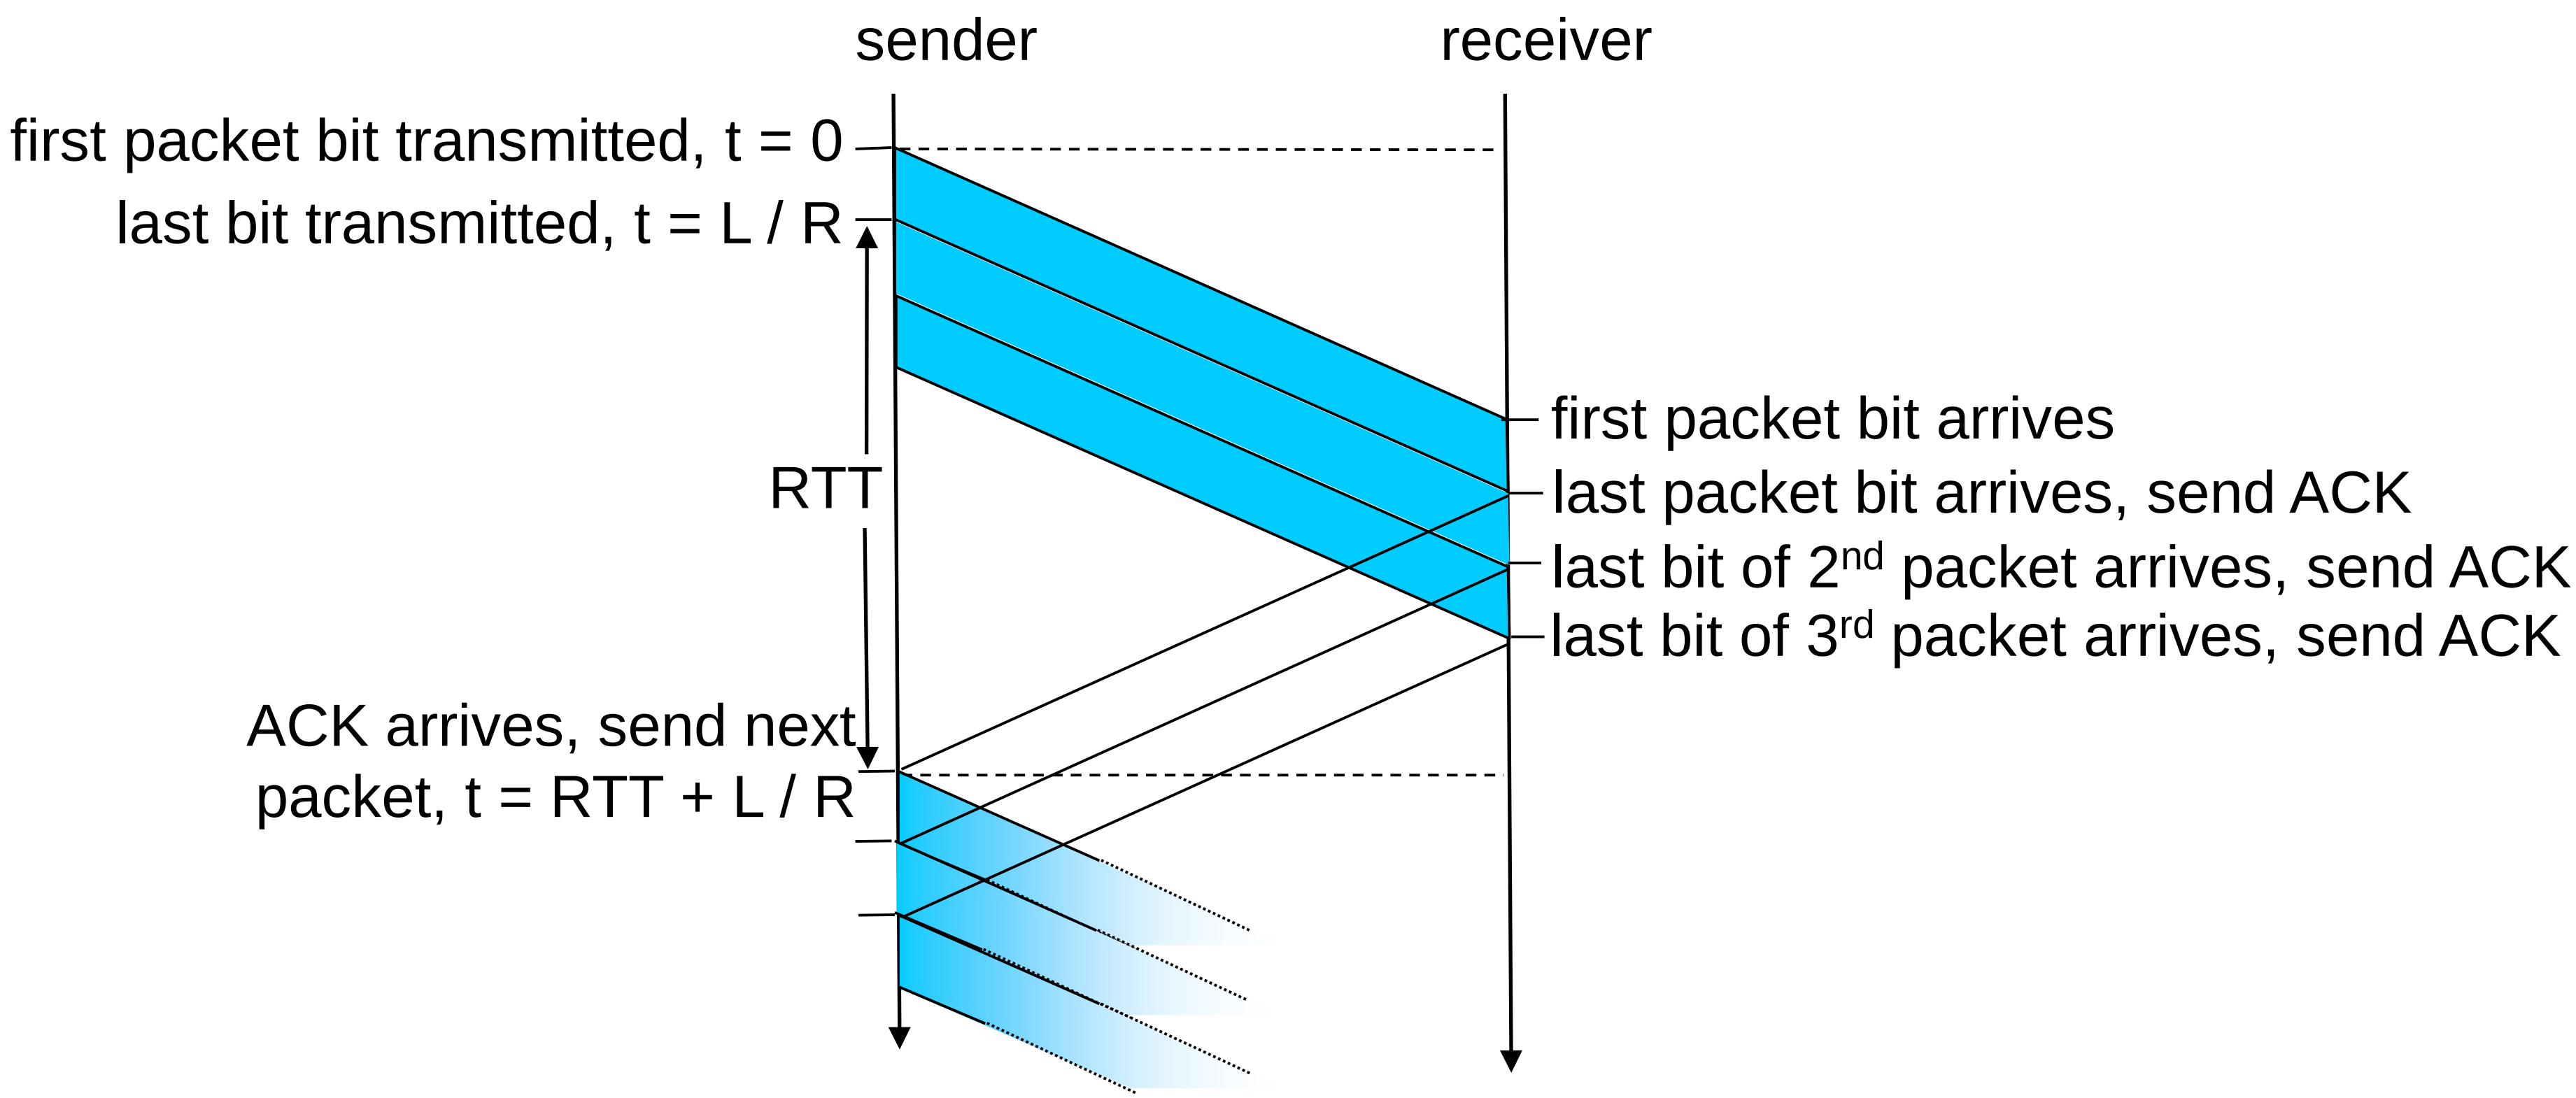

Pipelined protocols: overview

Go-back-N:

- sender can have up to N unacked packets in pipeline
- receiver only sends *cumulative ack*
  - doesn't ack packet if there's a gap
- sender has timer for oldest unacked packet
  - when timer expires, retransmit *all* unacked packets

Selective Repeat:

- sender can have up to N unacked packets in pipeline
- rcvr sends *individual ack* for each packet
- sender maintains timer for each unacked packet
  - when timer expires, retransmit only that unacked packet

Go-Back-N: sender

- k-bit seq # in pkt header
- "window" of up to N, consecutive unack' ed pkts allowed

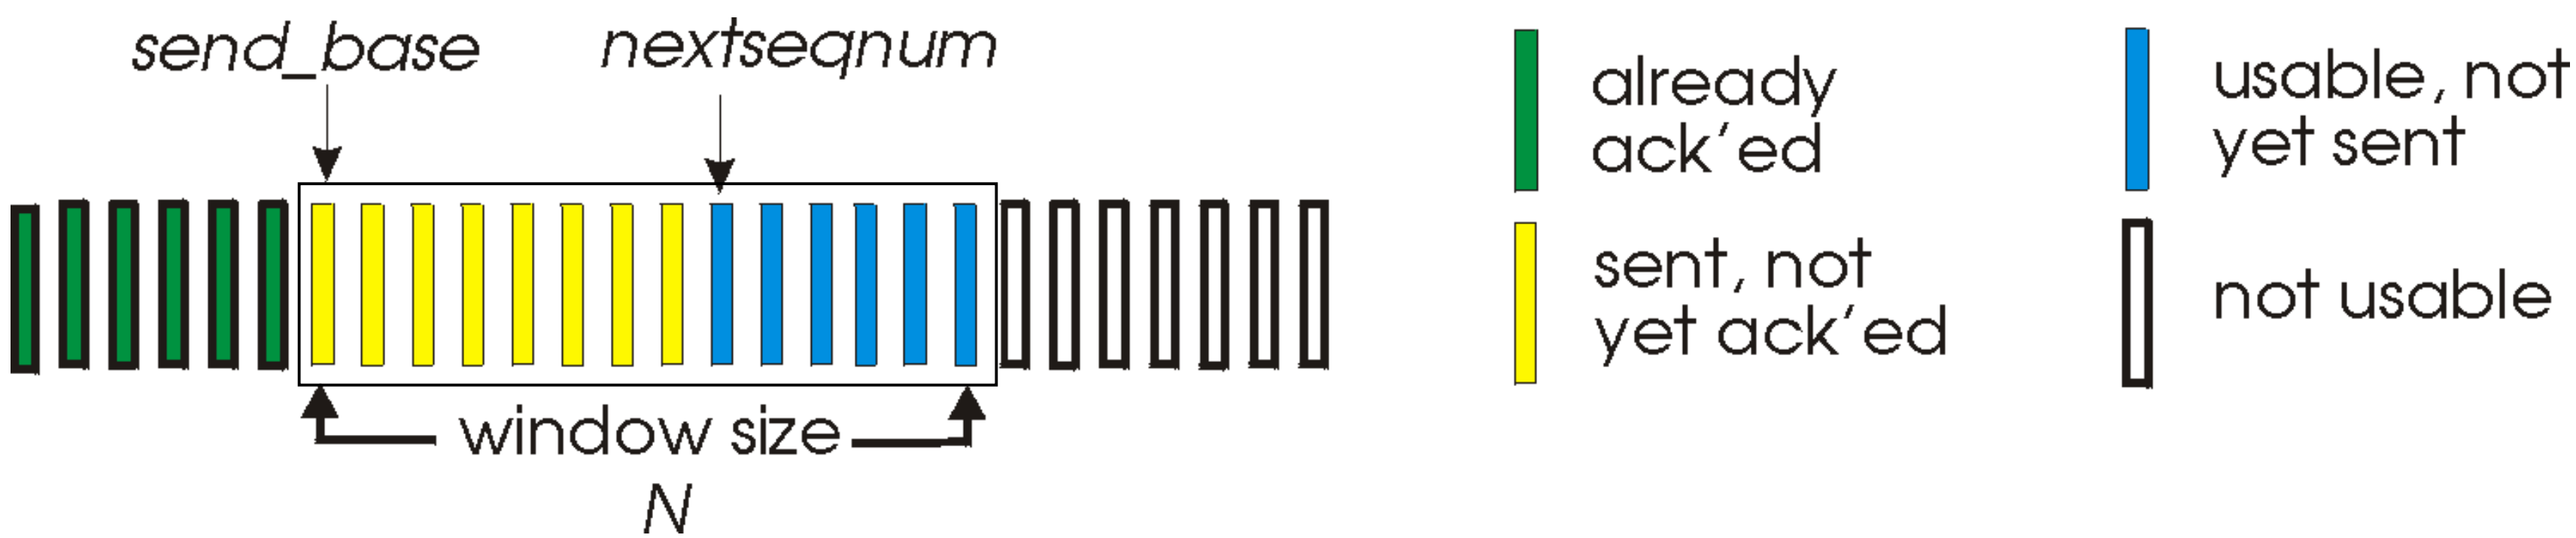

- ACK(n): ACKs all pkts up to (excluding) seq # n *"cumulative ACK"*
  - seq# n is expected next
  - may receive duplicate ACKs
- timer for oldest in-flight pkt
- *timeout:* retransmit all unaked pkts in window

GBN: sender extended FSM

rdt_send(data)

```
if (nextseqnum < base+N) {
    sndpkt[nextseqnum] = make_pkt(nextseqnum,data,chksum)
    udt_send(sndpkt[nextseqnum])
    if (base == nextseqnum)
       start_timer
    nextseqnum++
    }
else
  refuse_data(data)
```

Λ

---

base=0
nextseqnum=0



timeout

```
start_timer
udt_send(sndpkt[base])
udt_send(sndpkt[base+1])
…
udt_send(sndpkt[nextseqnum-1])
```

rdt_rcv(rcvpkt)
&& corrupt(rcvpkt)

---

rdt_rcv(rcvpkt) &&
notcorrupt(rcvpkt)

```
base = getacknum(rcvpkt)
If (base == nextseqnum)
    stop_timer
  else
    start_timer
```

GBN: receiver extended FSM

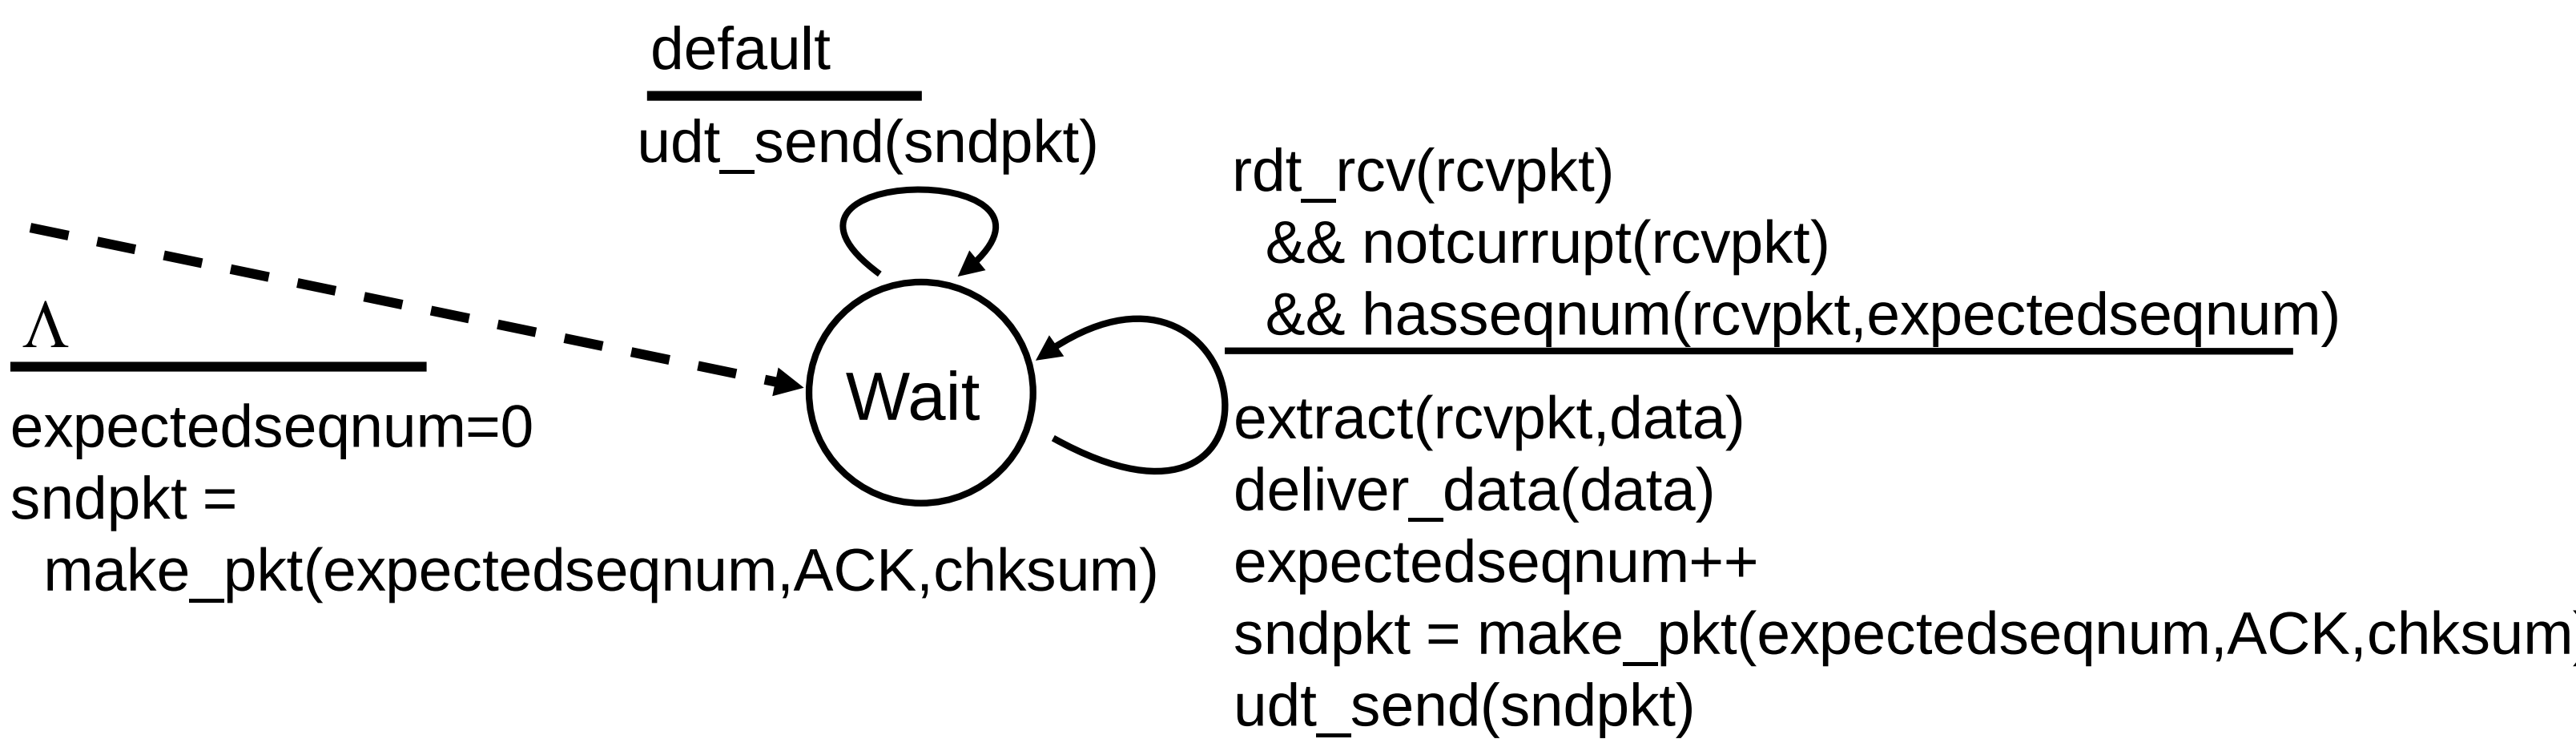

ACK-only: always send ACK for next expected seq #

- may generate duplicate ACKs
- need only remember **`expectedseqnum`**

- out-of-order pkt:
  - discard (don't buffer): *no receiver buffering!*
  - re-ACK pkt with next expected seq #

GBN in action

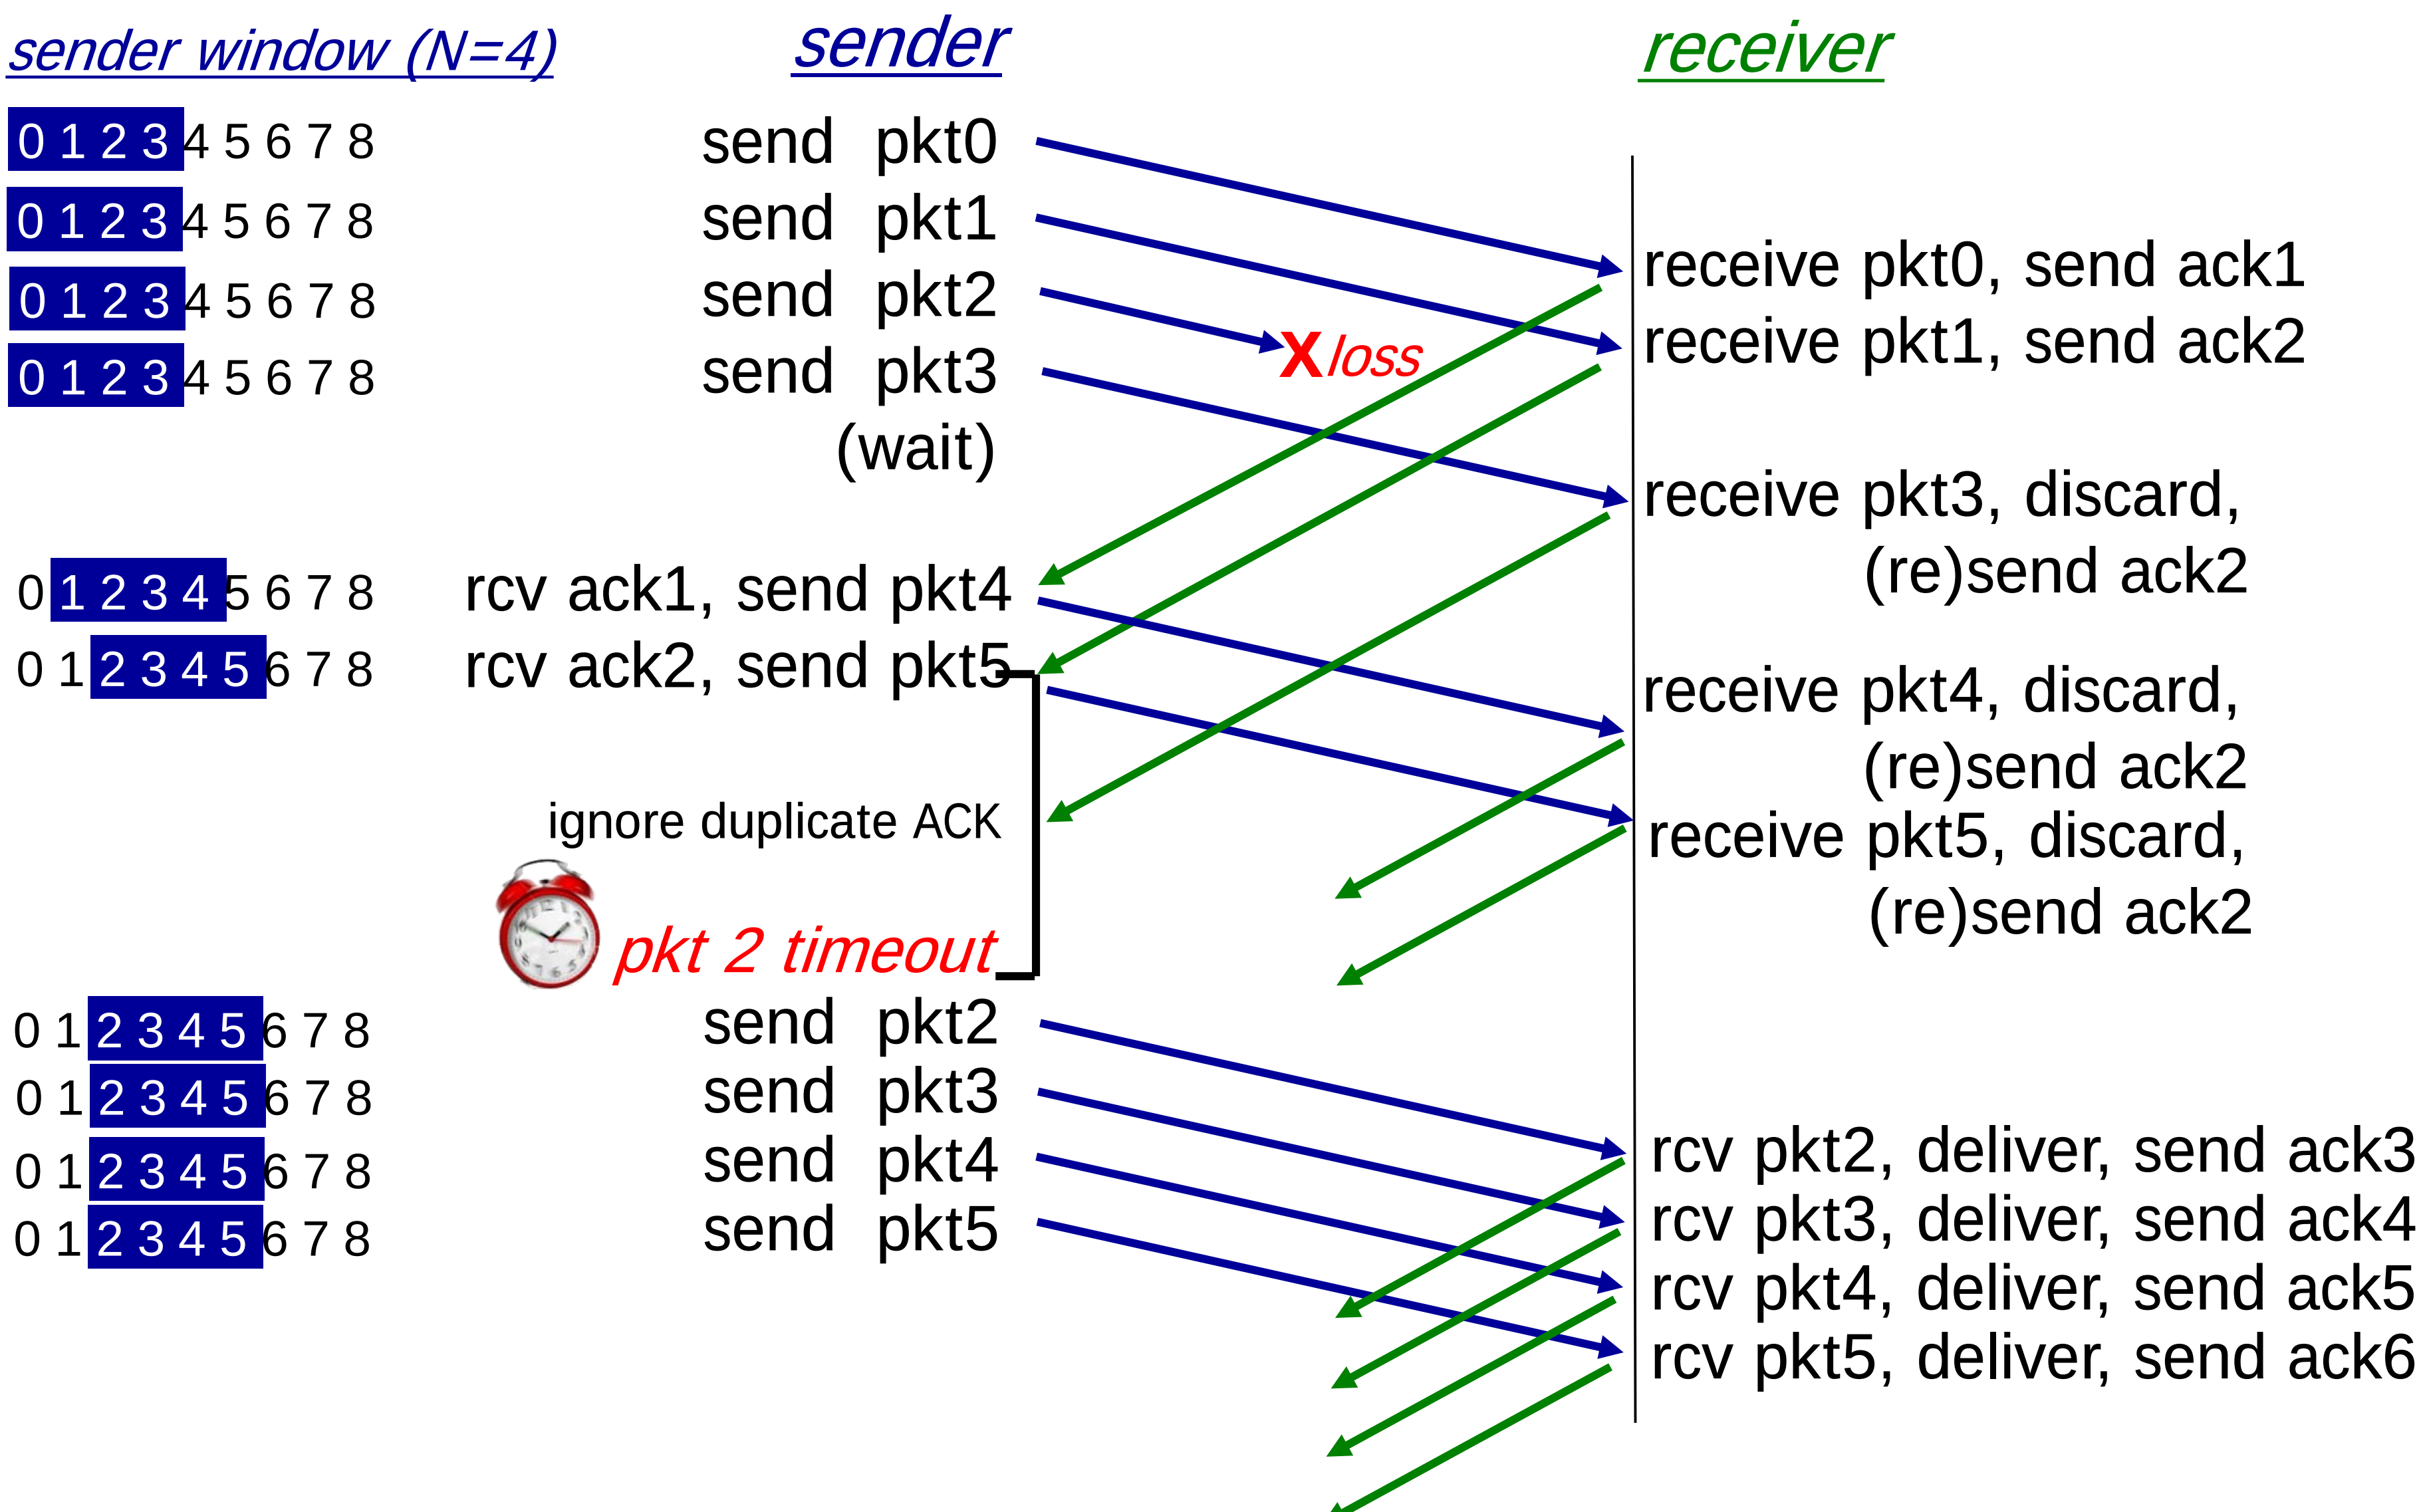

Selective repeat

- receiver *individually* acknowledges all correctly received pkts
  - buffers pkts, as needed, for eventual in-order delivery to upper layer
- sender only resends pkts for which ACK not received
  - sender timer for each unACKed pkt
- sender window
  - *N* consecutive seq #'s
  - limits seq #s of sent, unACKed pkts

Selective repeat: sender, receiver windows

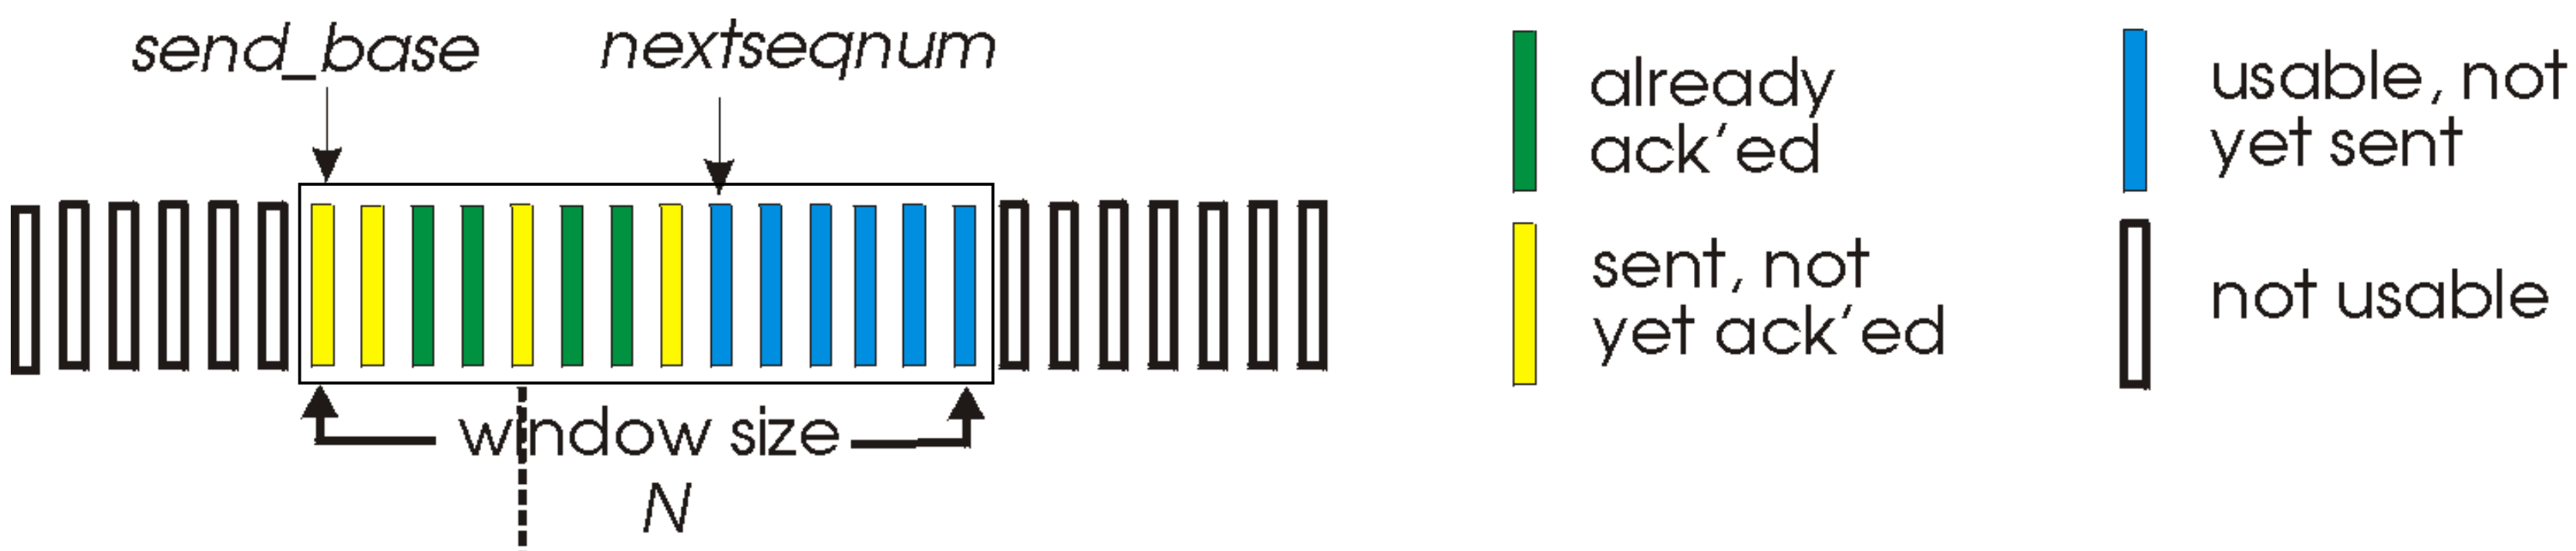

(a) sender view of sequence numbers

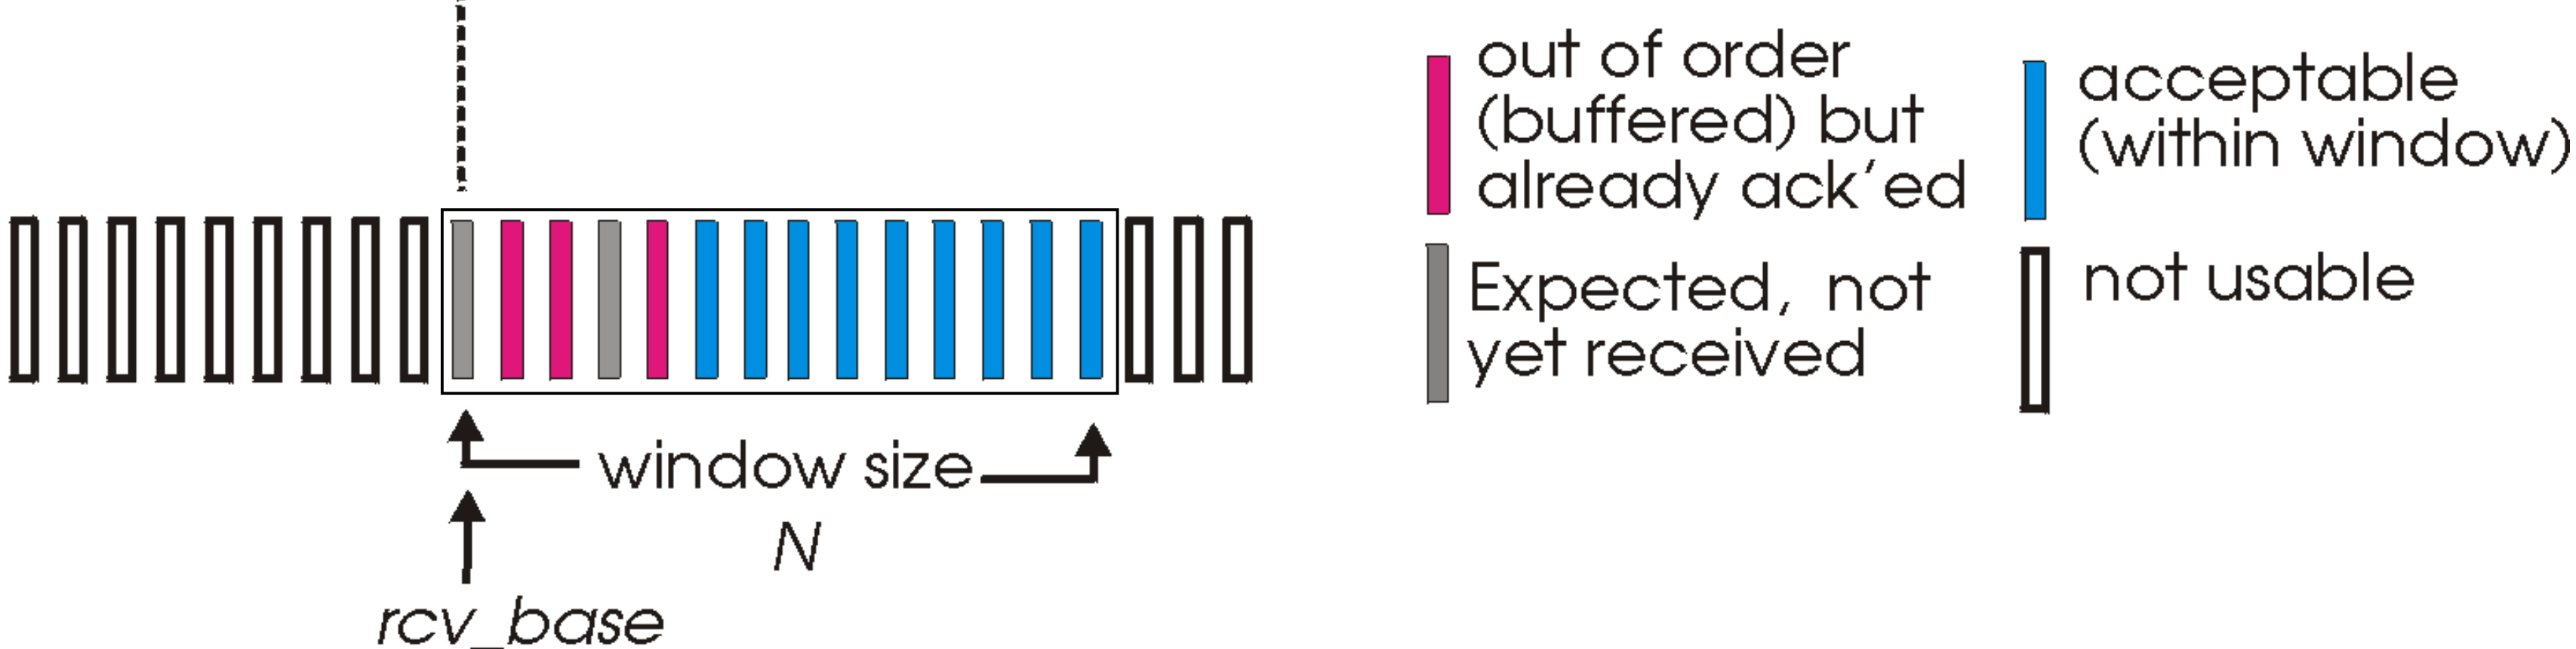

(b) receiver view of sequence numbers

Selective repeat

sender

data from above:

- if next available seq # in window, send pkt

timeout(n):

- resend pkt n, restart timer

ACK(n) in [sendbase,sendbase+N-1]:

- mark pkt n as received
- if n smallest unACKed pkt, advance window base to next unACKed seq #

receiver

pkt n in [rcvbase, rcvbase+N-1]

- send ACK(n)
- out-of-order: buffer
- in-order: deliver (also deliver buffered, in-order pkts), advance window to next not-yet-received pkt

pkt n in [rcvbase-N,rcvbase-1]

- ACK(n)

Selective repeat in action

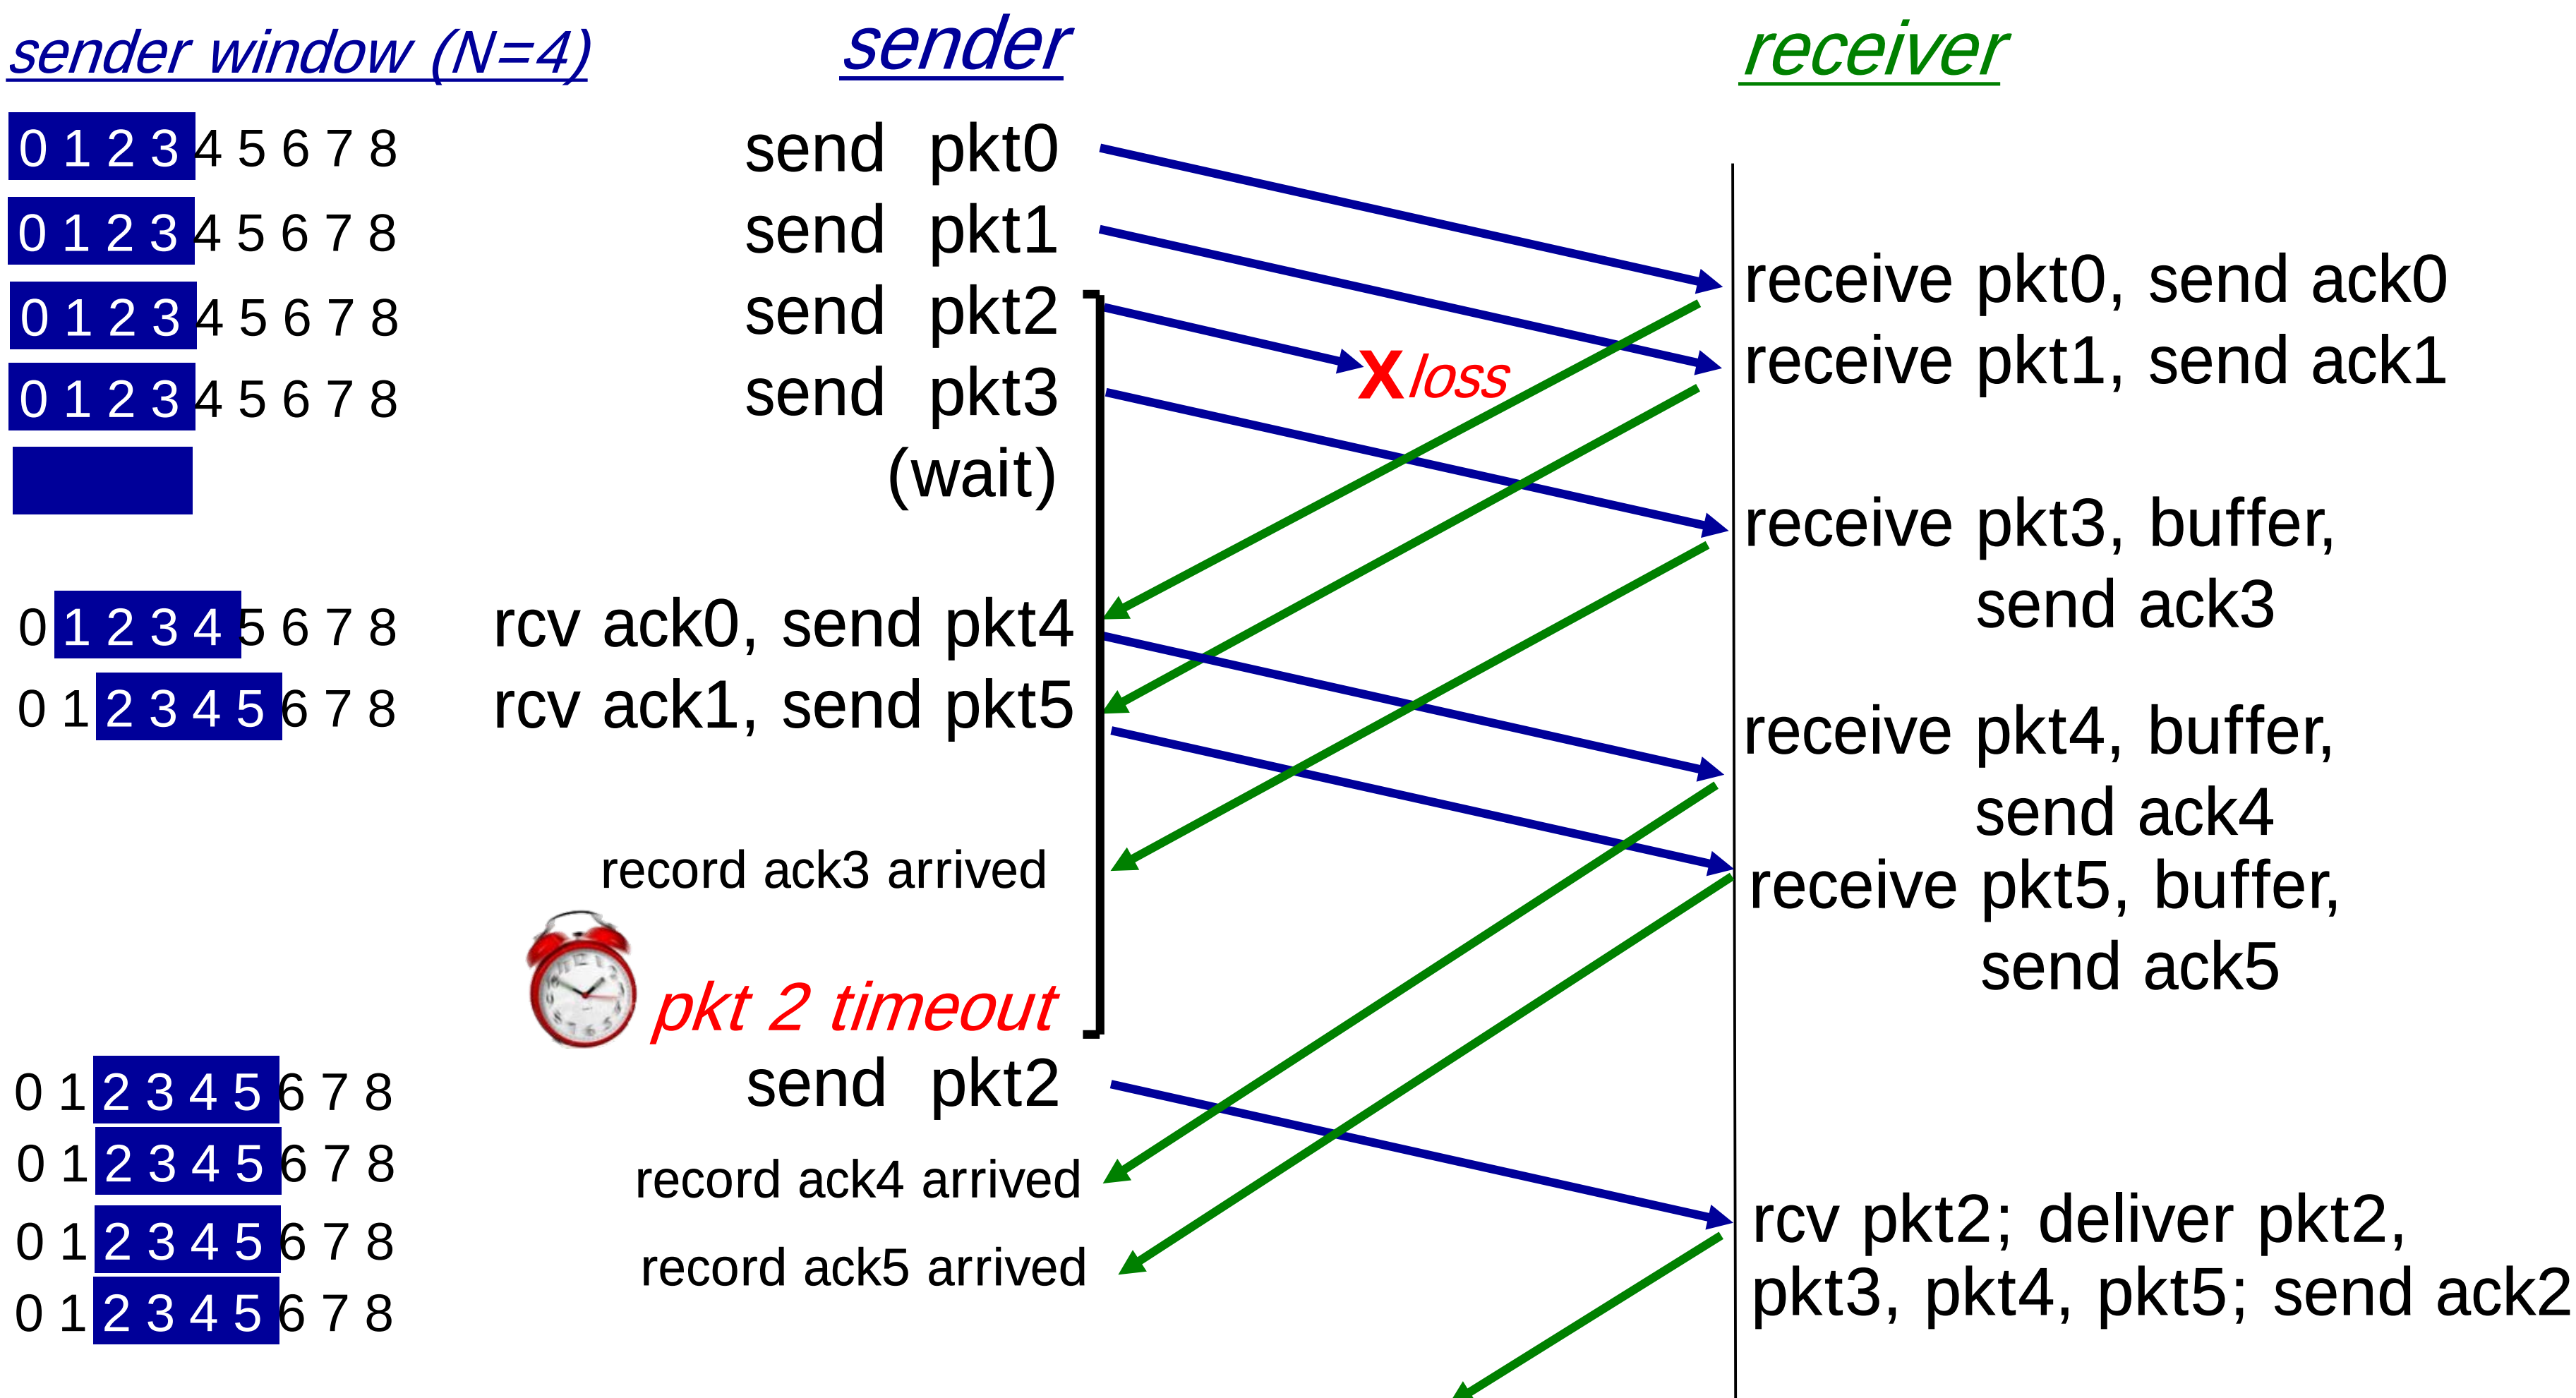

Q: what happens when ack2 arrives?

Selective repeat: dilemma

example:

- seq #'s: 0, 1, 2, 3
- window size=3
- receiver sees no difference in two scenarios!
- duplicate data accepted as new in (b)

Q: what relationship between seq # size and window size to avoid problem in (b)?

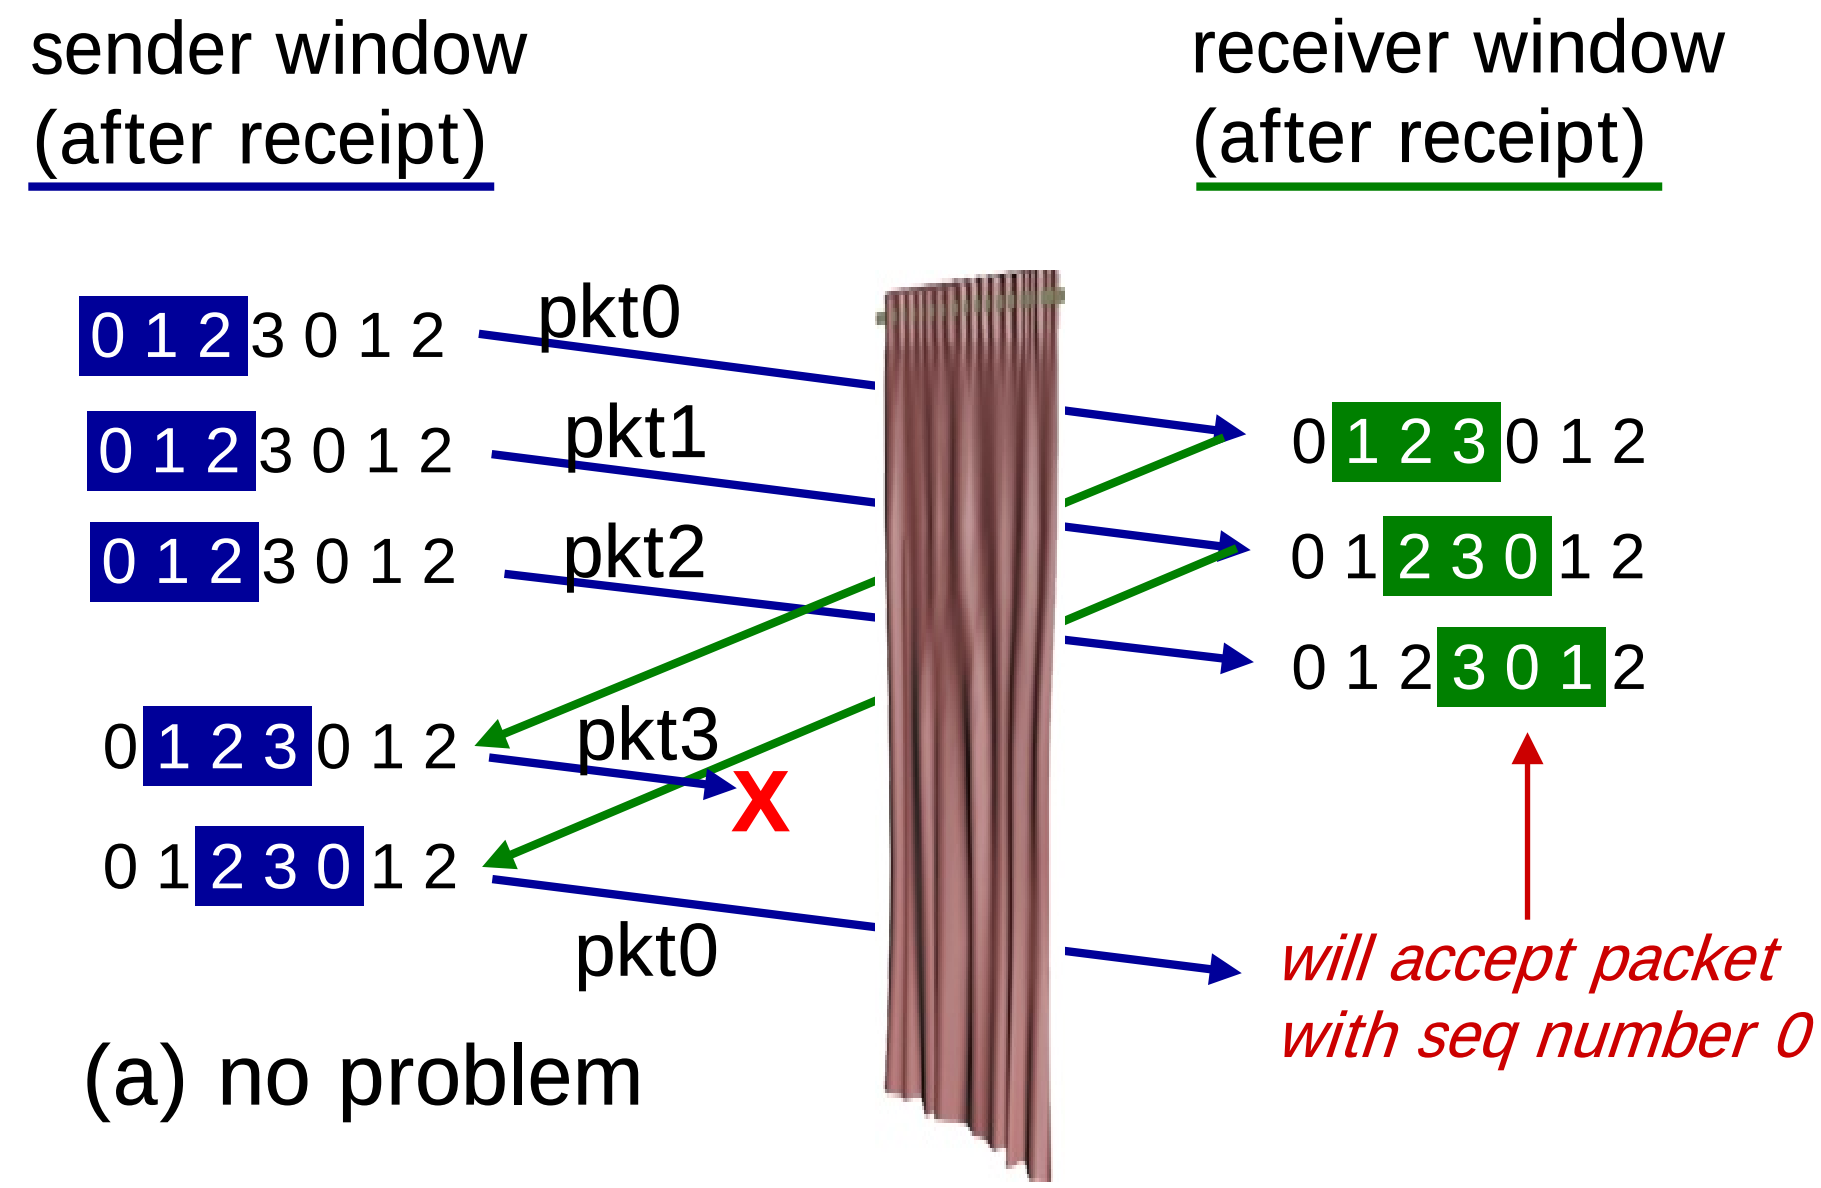

(a) no problem

receiver can't see sender side.
receiver behavior identical in both cases!
something's (very) wrong!

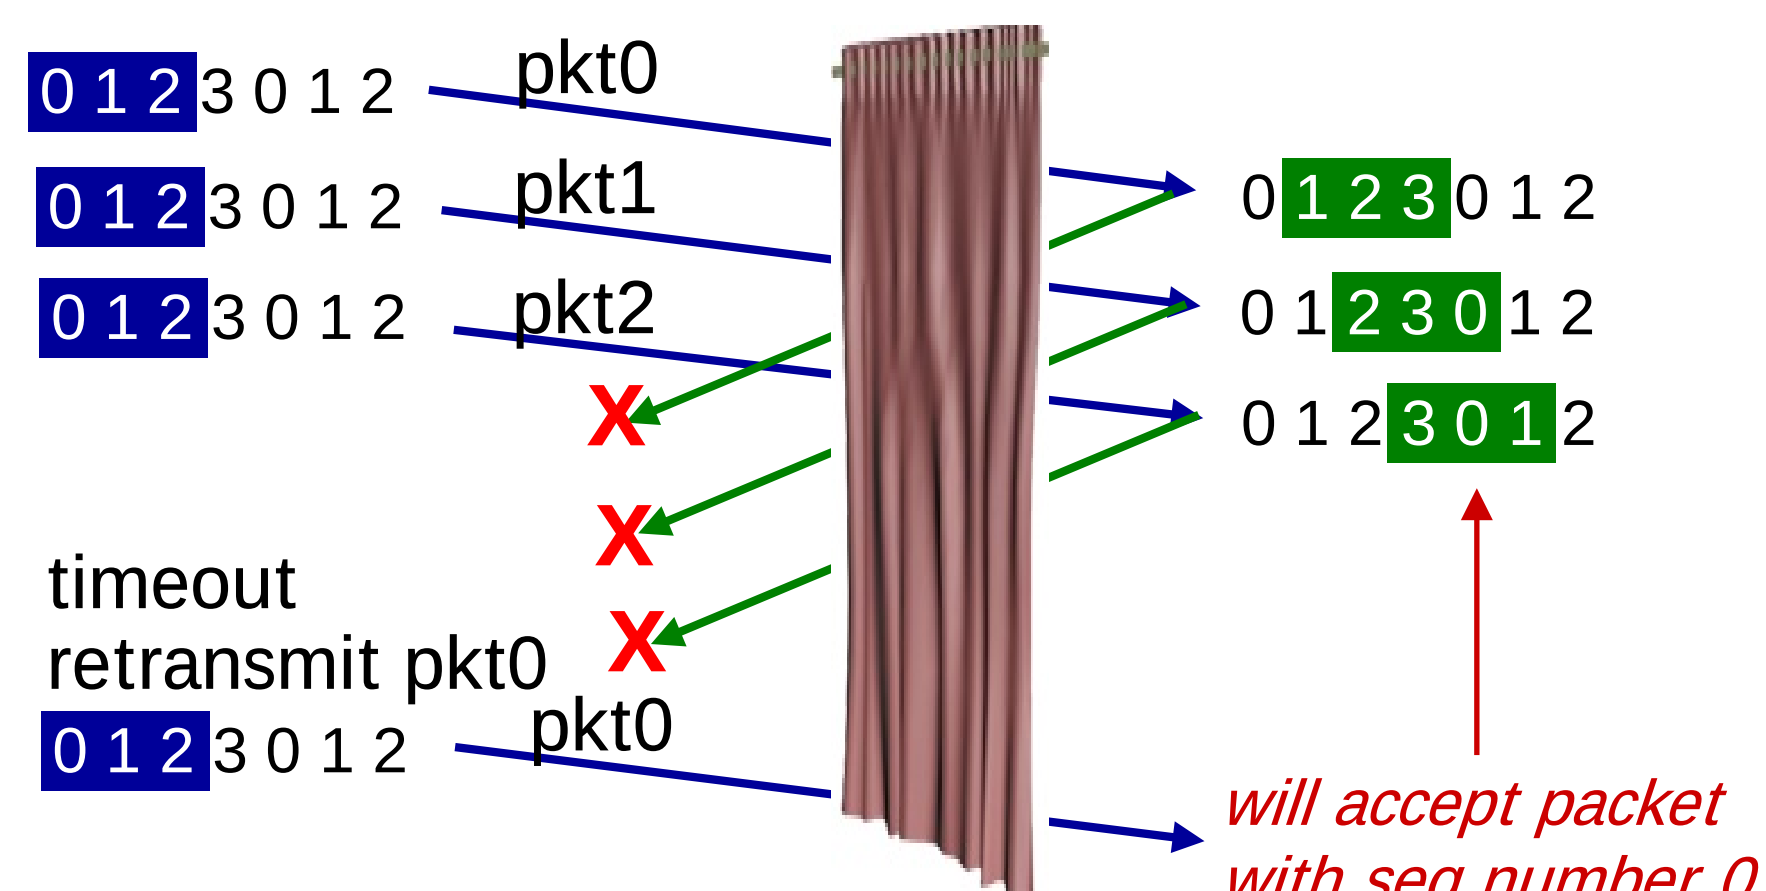

(b) oops!

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- connection management

3.7 TCP congestion control

TCP: Overview RFCs: 793,1122,1323, 2018, 2581

- point-to-point:
  - one sender, one receiver
- reliable, in-order *byte stream:*
  - no "message boundaries"
- pipelined:
  - dynamic window size
- full duplex data:
  - bi-directional data flow in same connection
  - MSS: maximum segment size
- connection-oriented:
  - handshaking (exchange of control msgs) inits sender, receiver state before data exchange

TCP segment structure

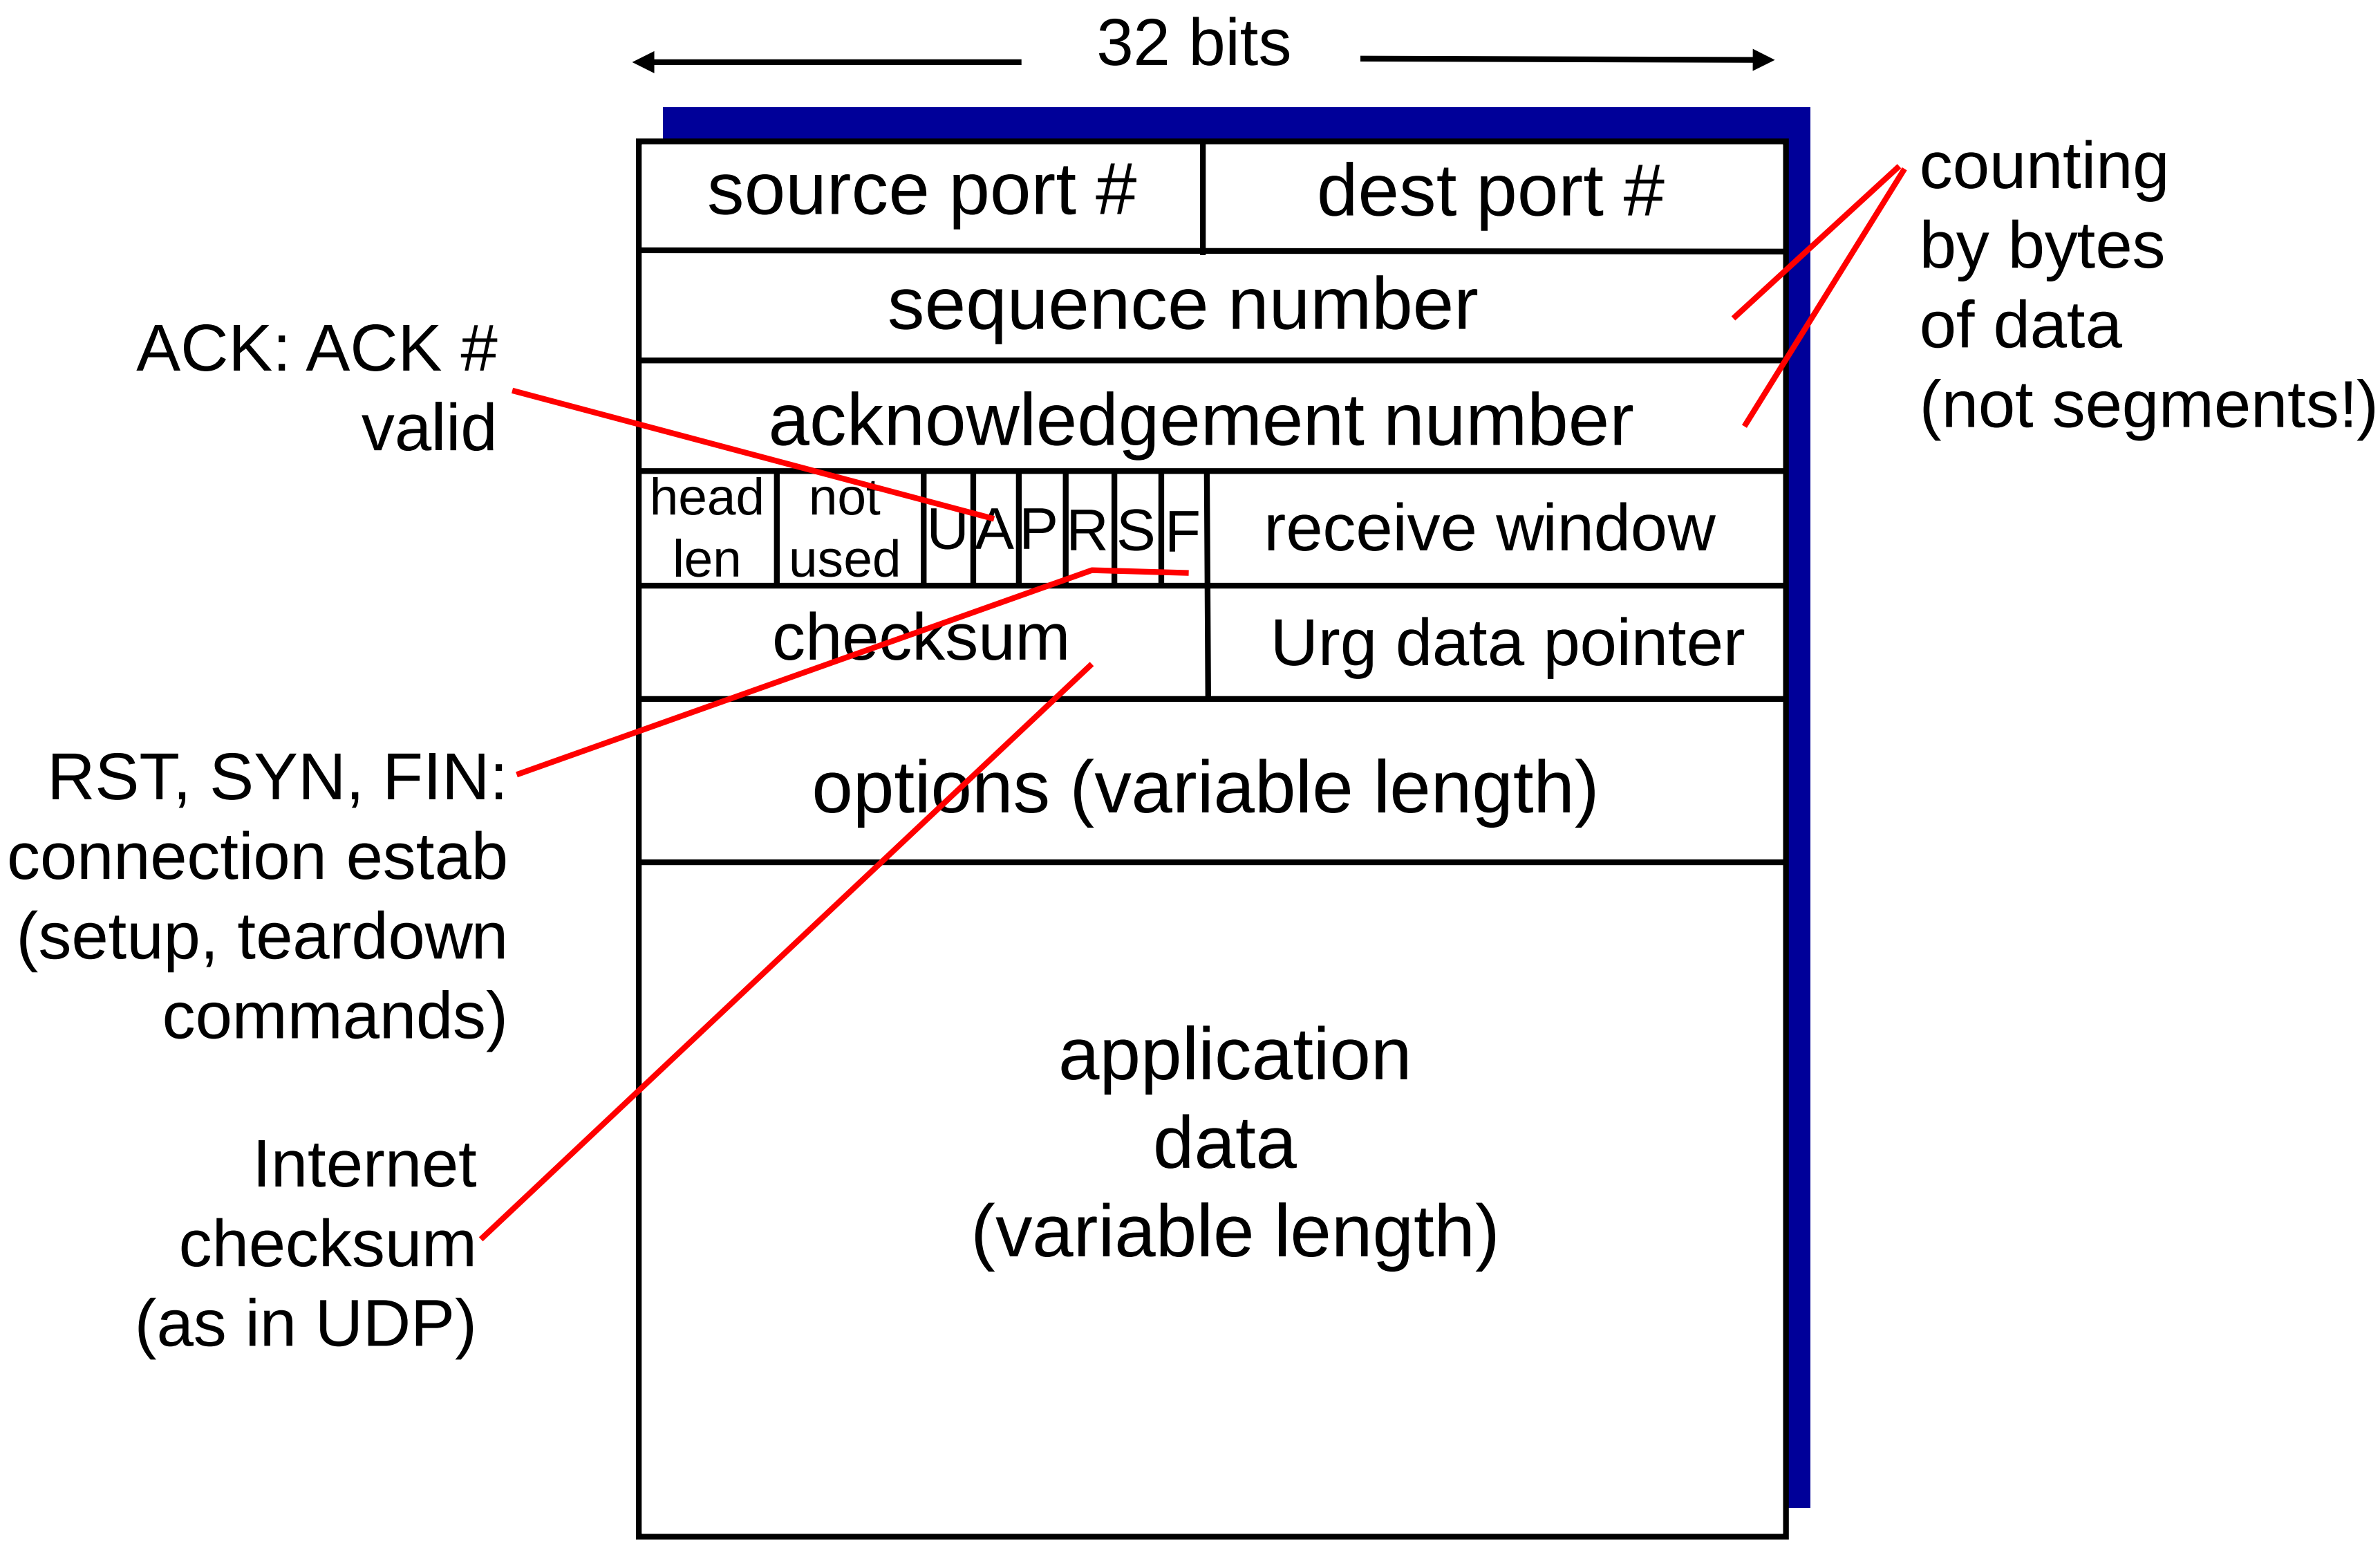

TCP seq. numbers, ACKs

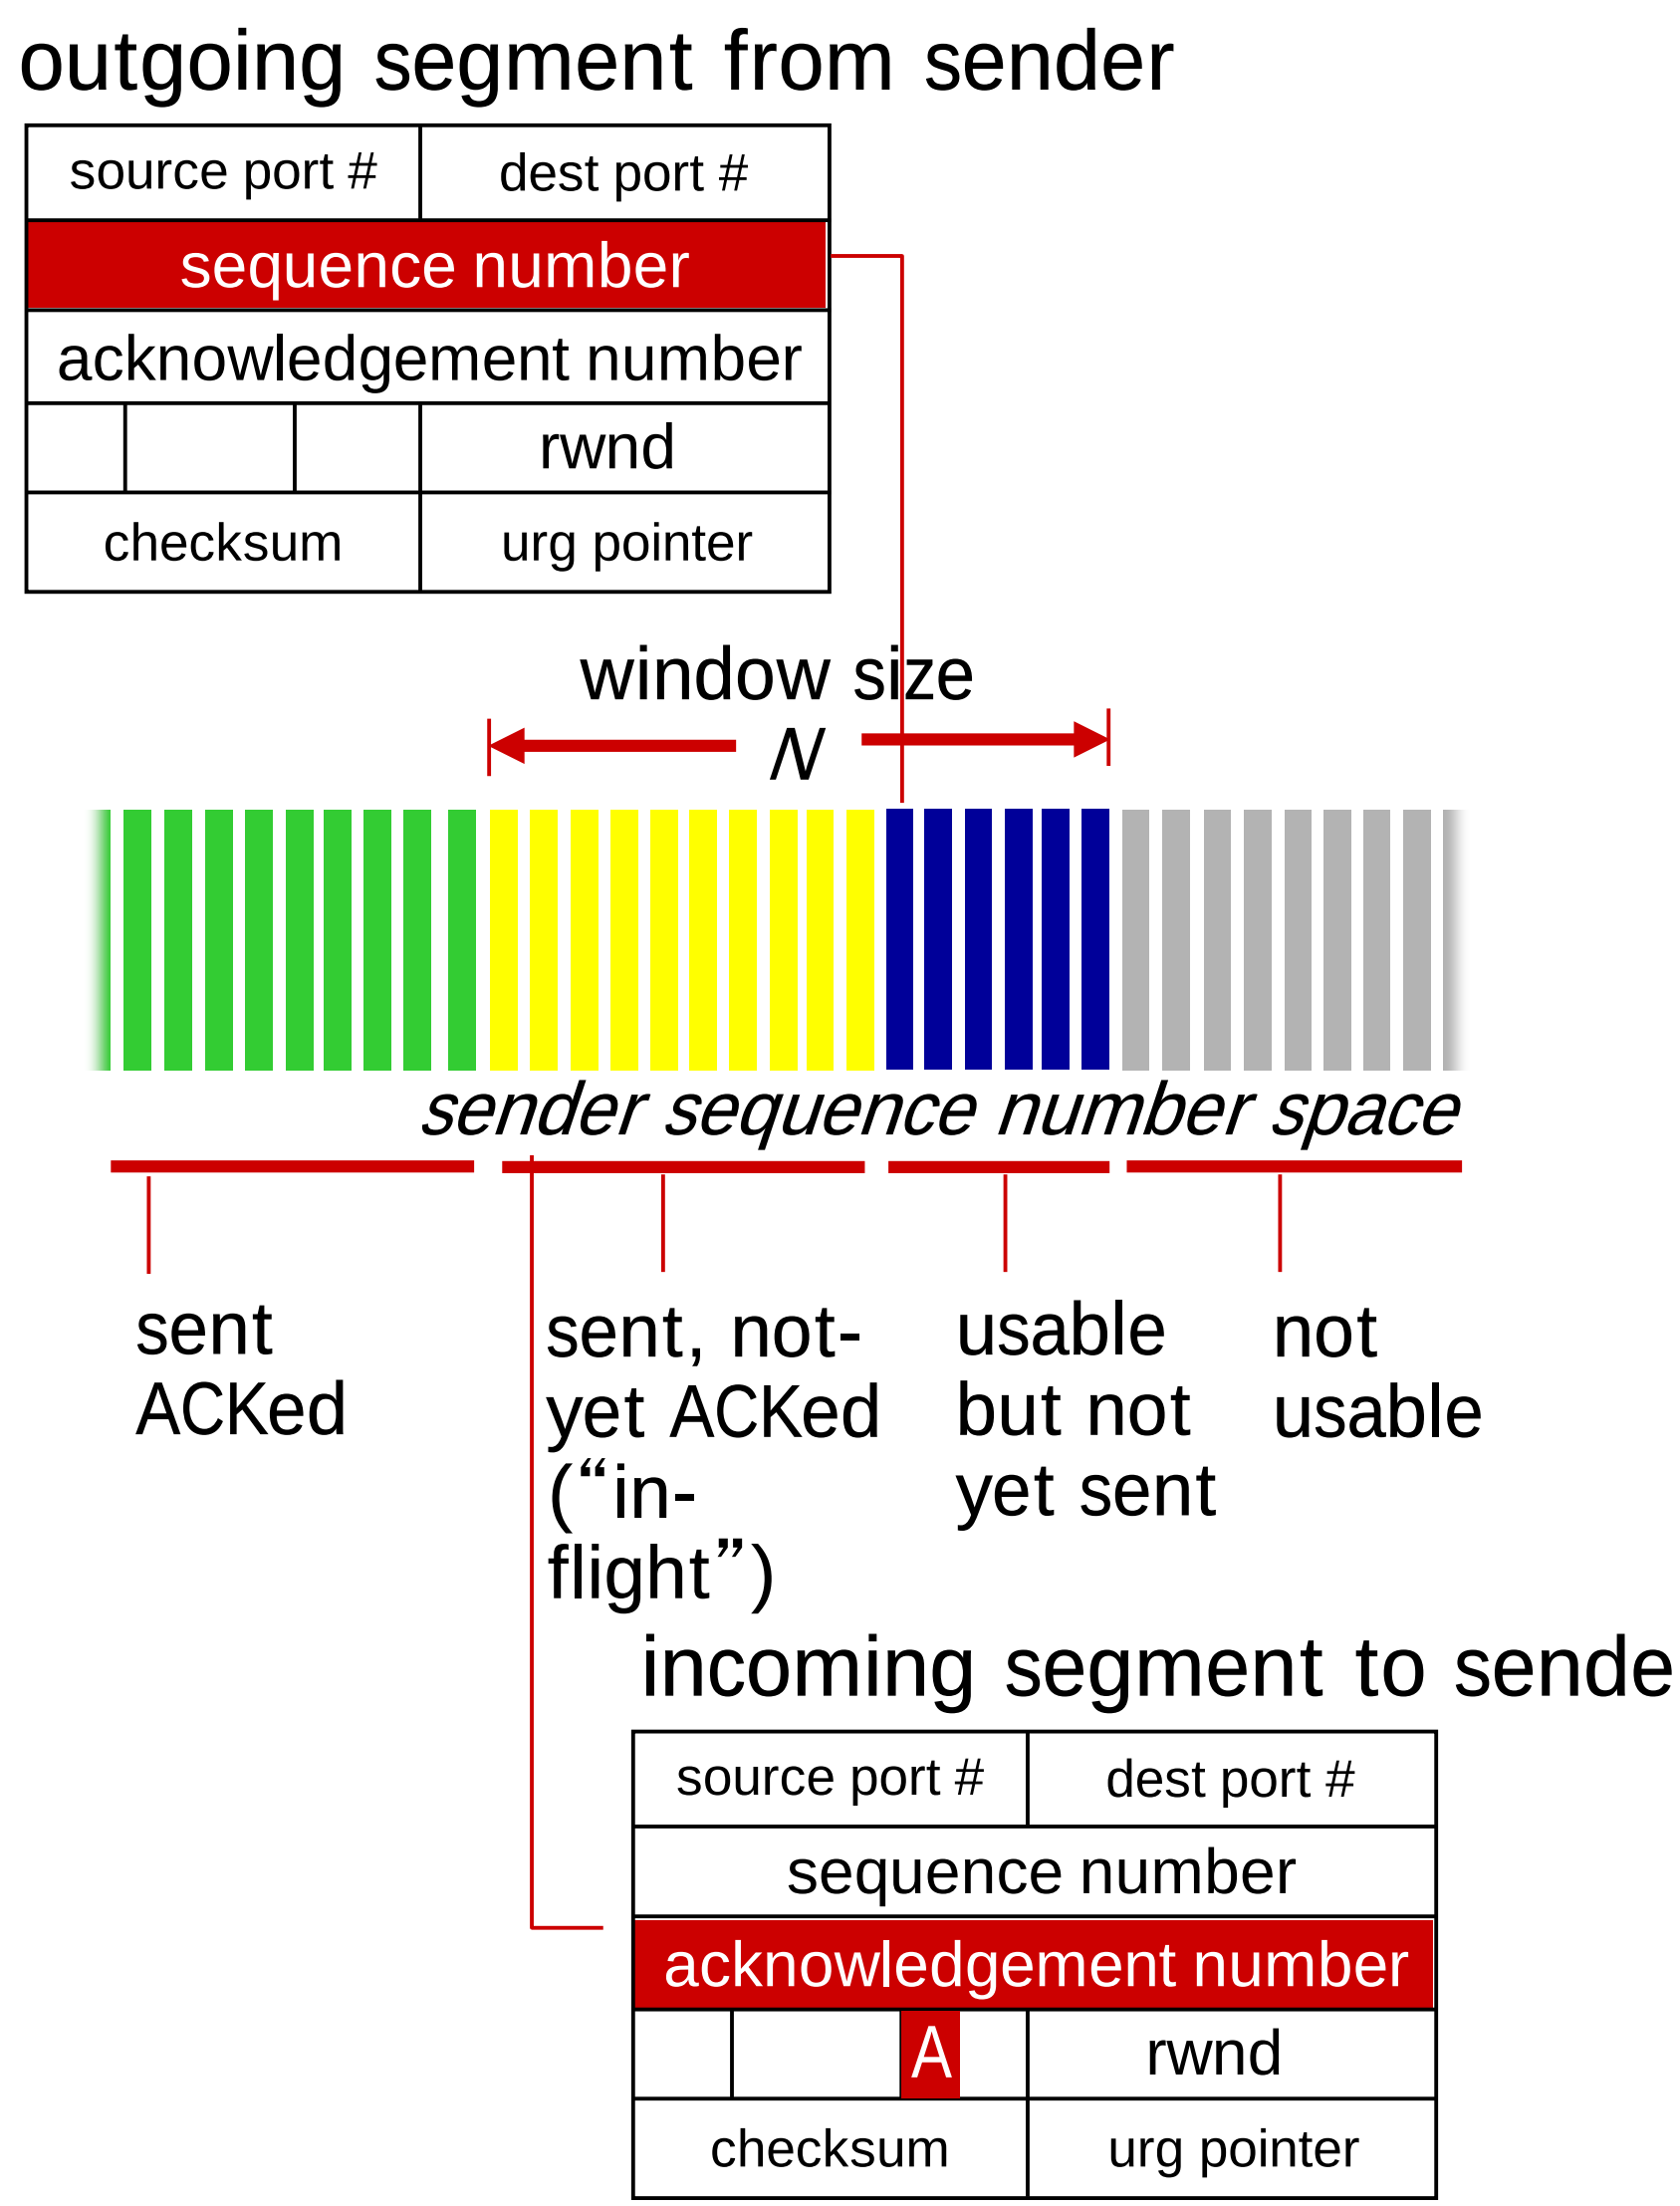

sequence numbers:

- byte stream "number" of first byte in segment's data

acknowledgements:

- seq # of next byte expected from other side
- cumulative ACK

Q: how receiver handles out-of-order segments

- A: TCP spec doesn't say, - up to implementor

TCP seq. numbers, ACKs

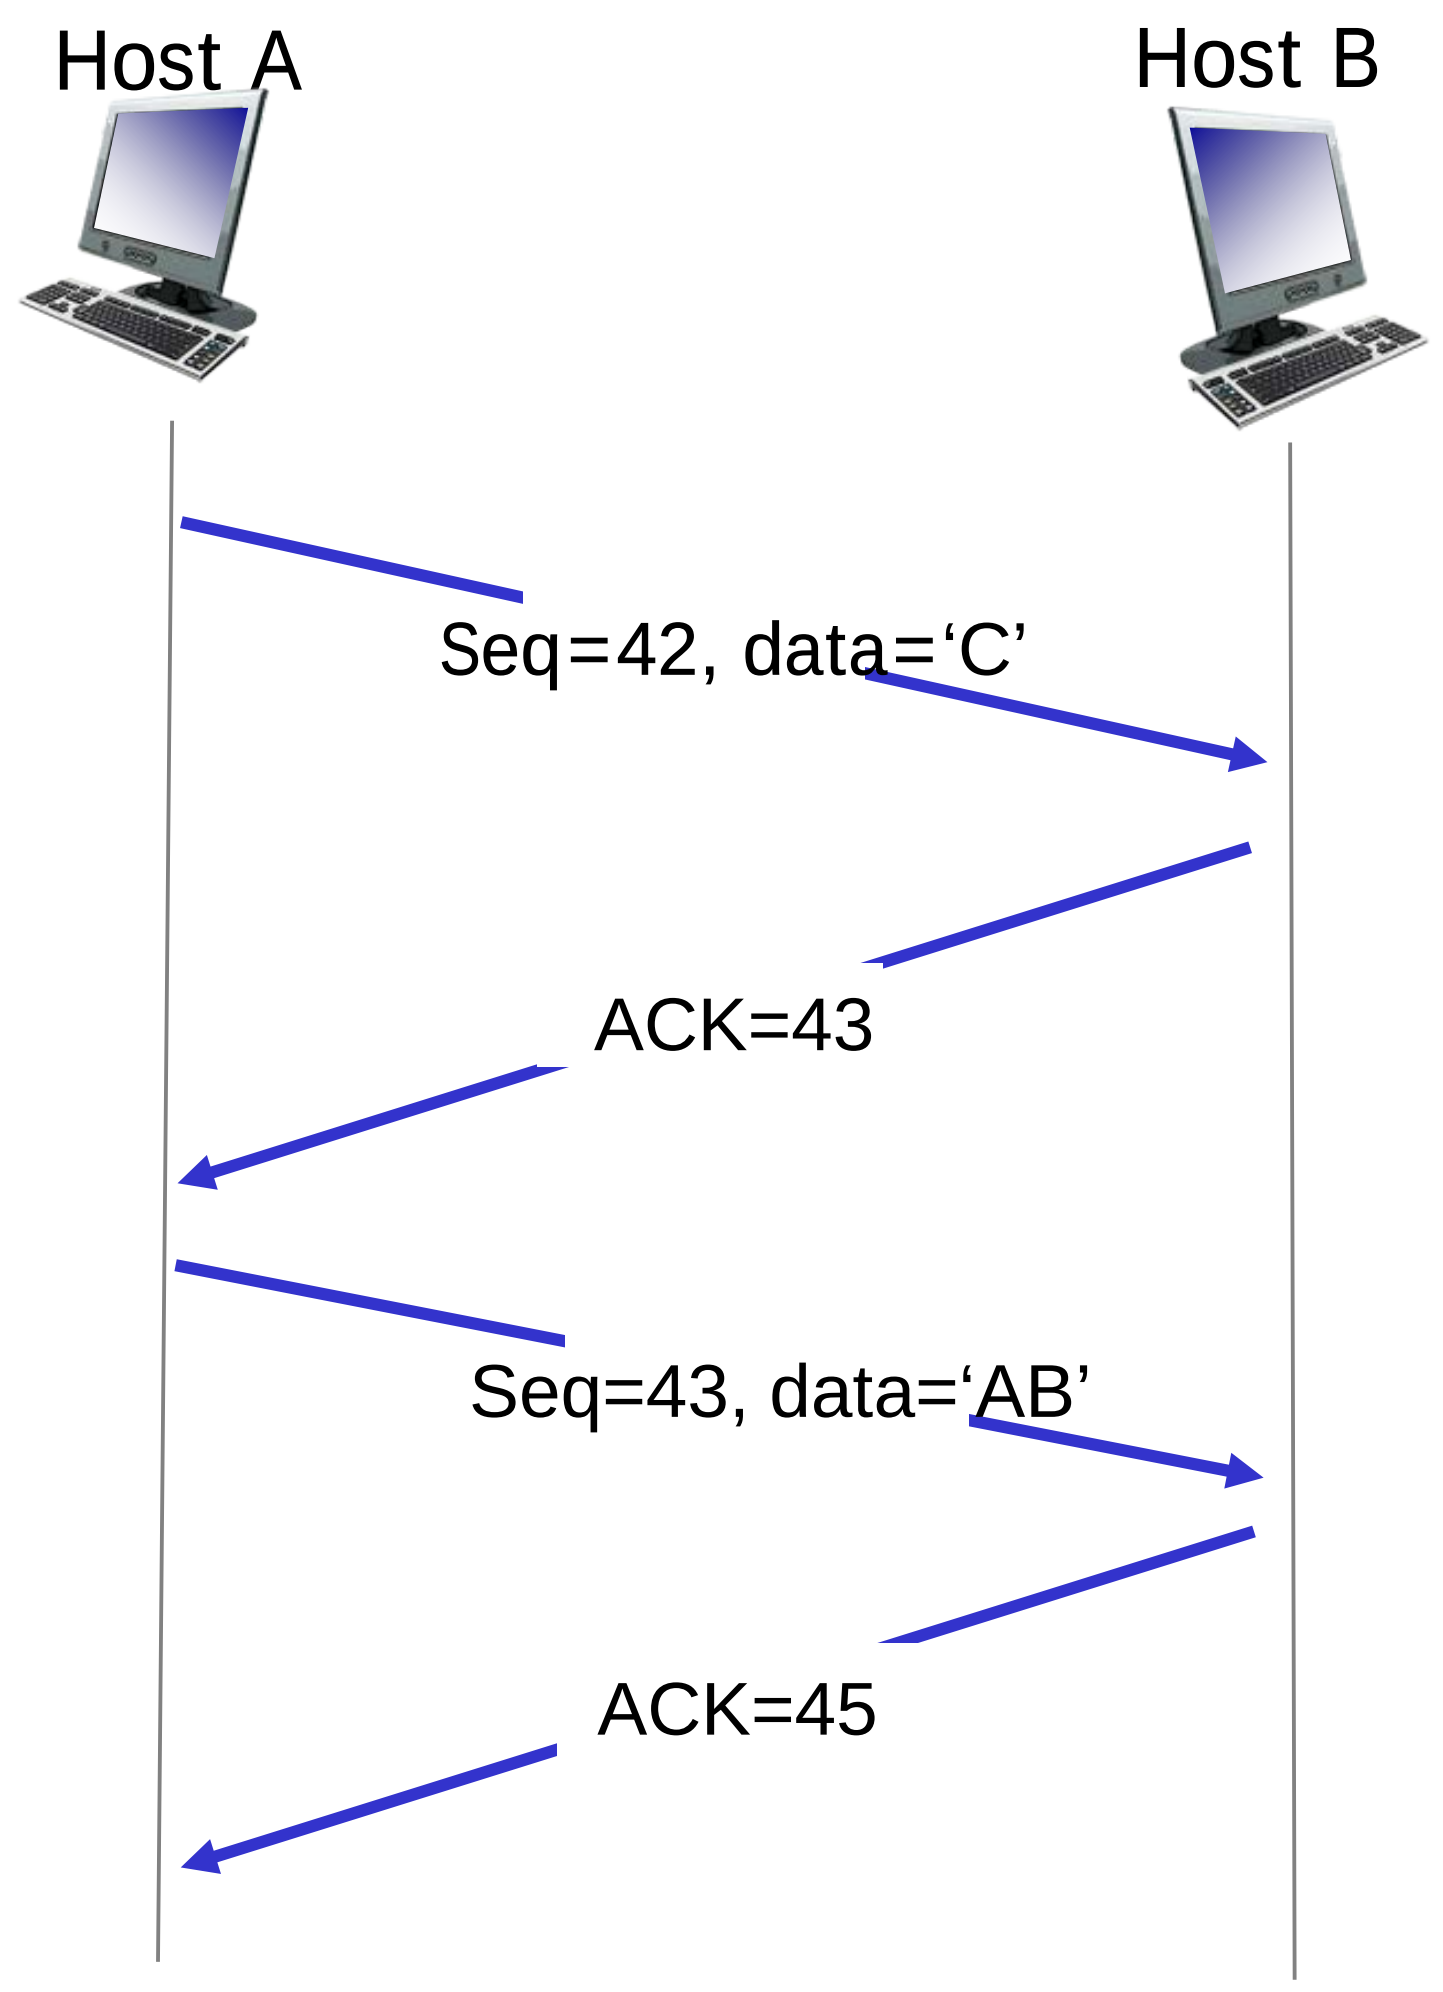

TCP round trip time, timeout

Q: how to set TCP timeout value?

- longer than RTT
  - but RTT varies
- *too short:* premature timeout, unnecessary retransmissions
- *too long:* slow reaction to segment loss

Q: how to estimate RTT?

- **`SampleRTT`**: measured time from segment transmission until ACK receipt
  - ignore retransmissions
- **`SampleRTT`** will vary, want estimated RTT "smoother"
  - average several *recent* measurements, not just current **`SampleRTT`**

TCP round trip time, timeout

`EstimatedRTT = (1- α)*EstimatedRTT + α*SampleRTT`

- exponential weighted moving average
- influence of past sample decreases exponentially fast
- typical value: α = 0.125

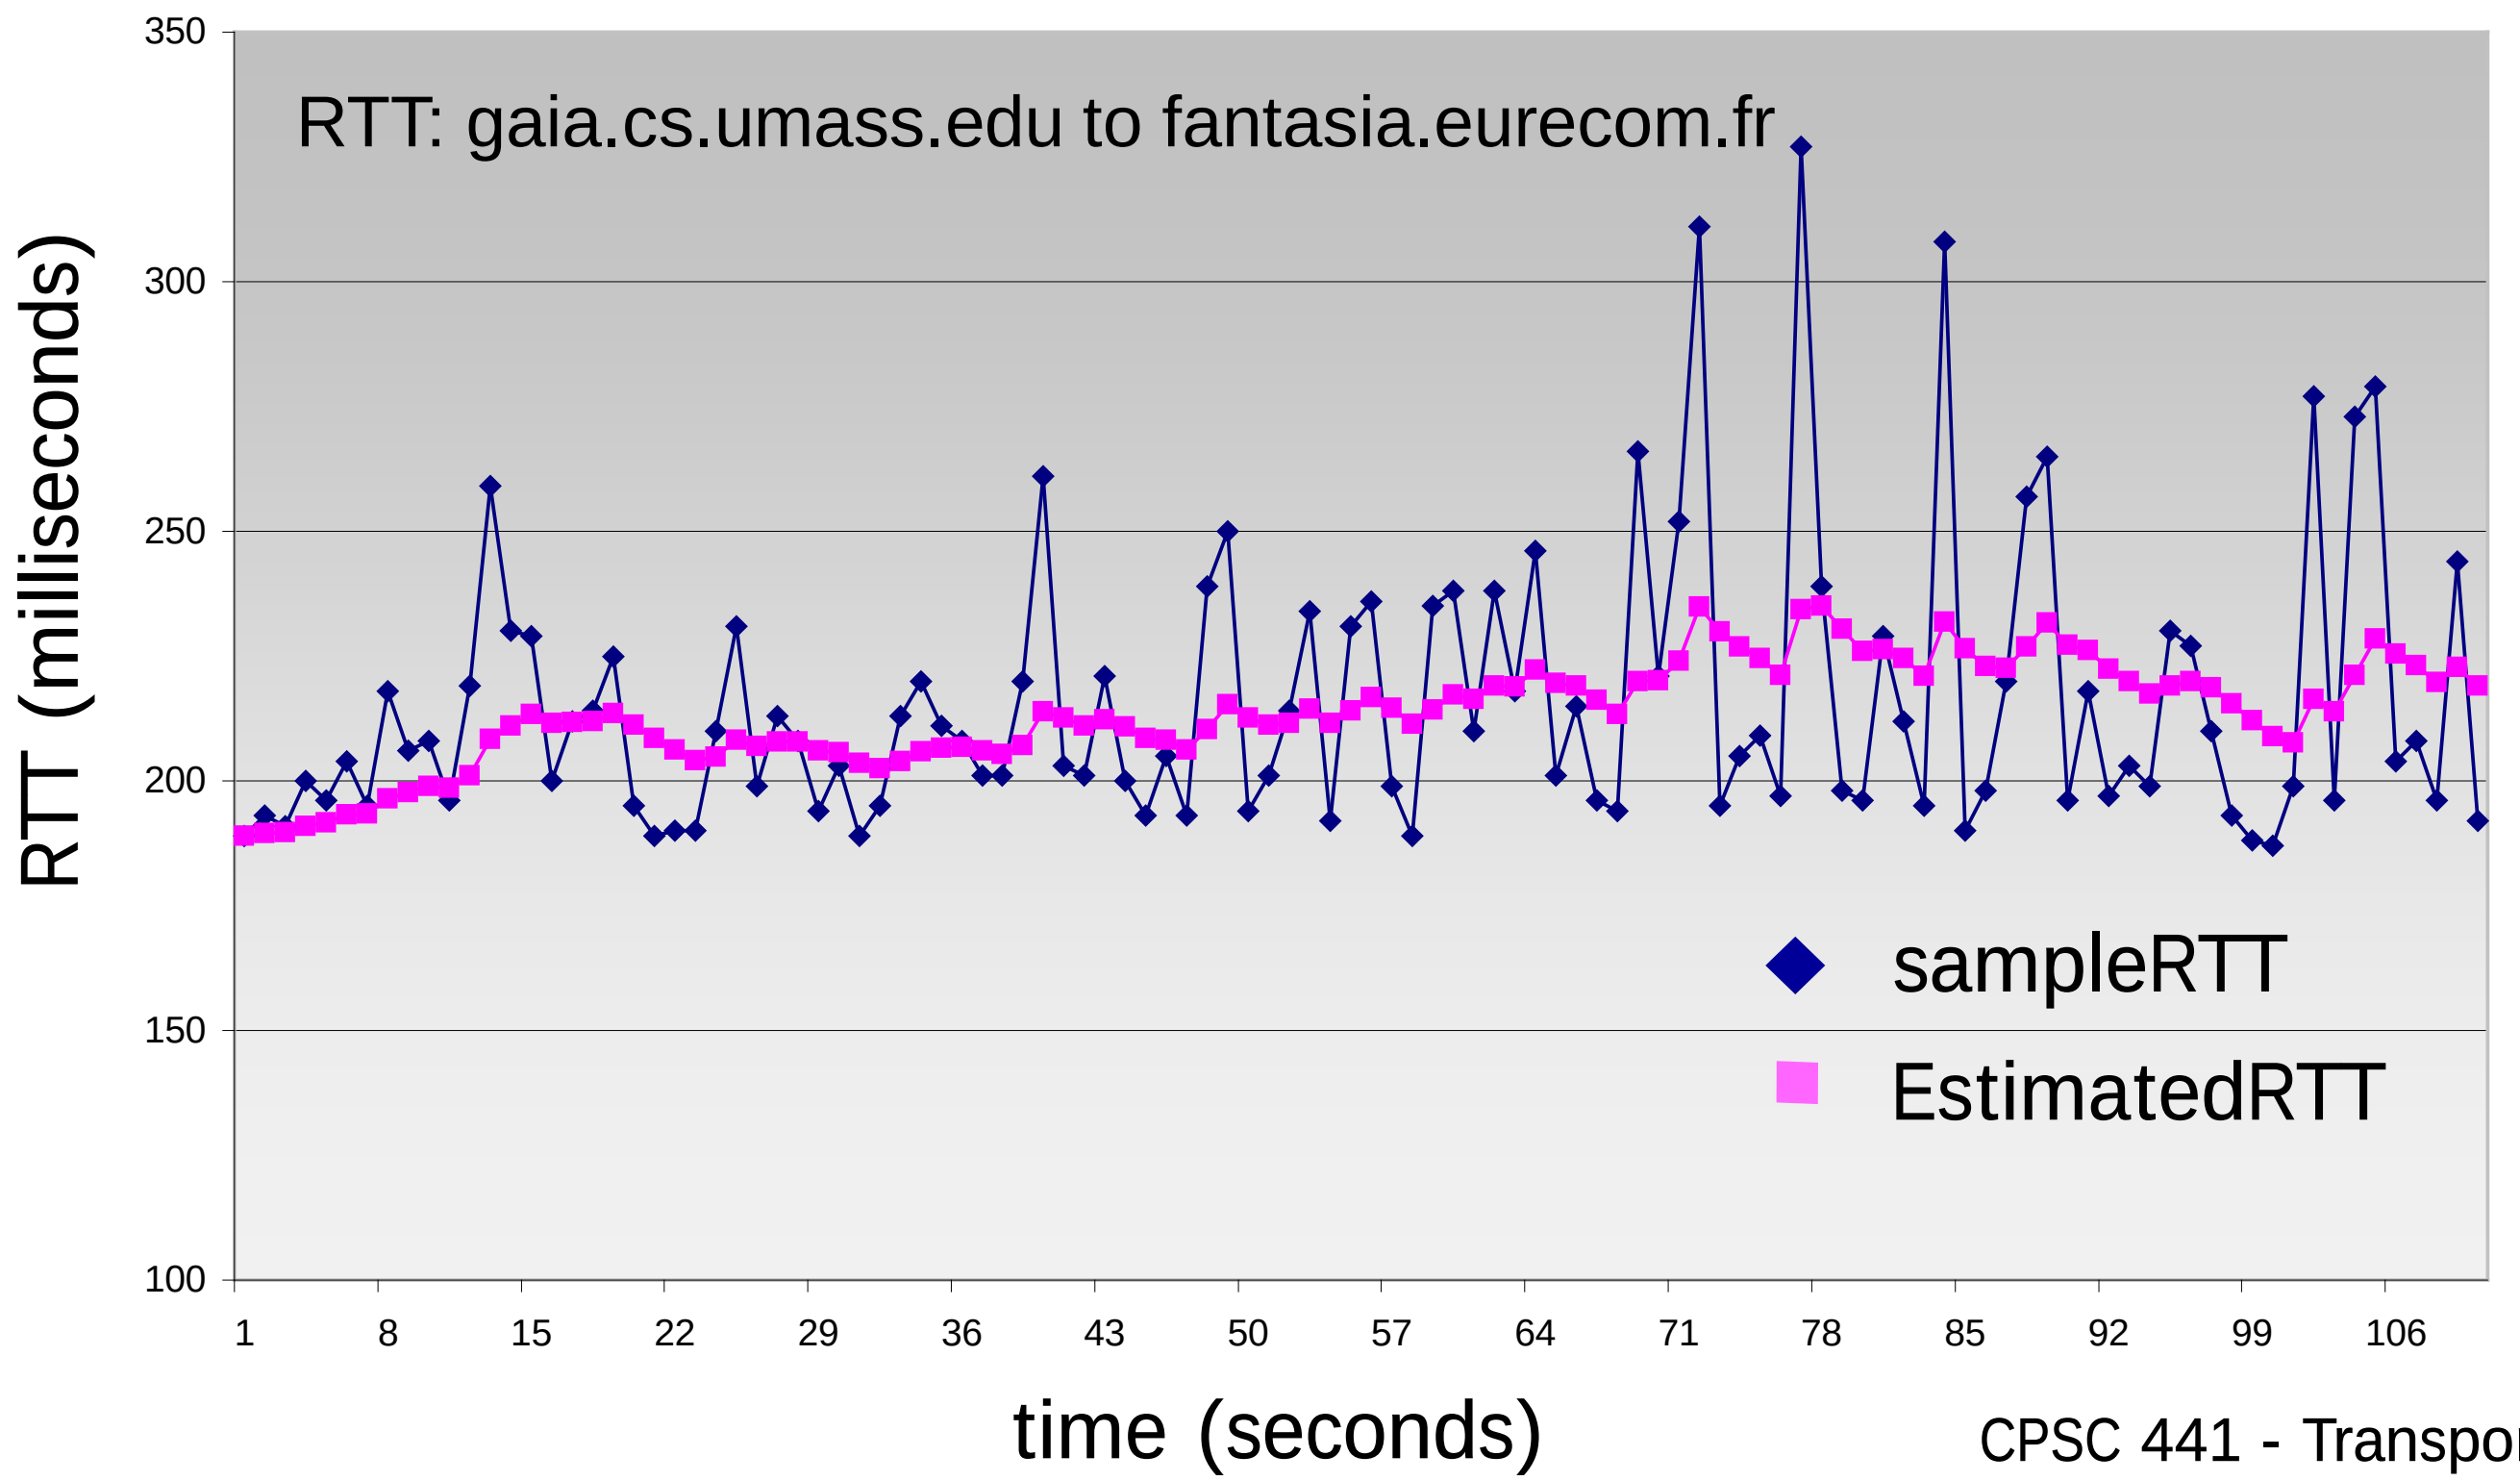

TCP round trip time, timeout

- timeout interval: **`EstimatedRTT`** plus "safety margin"
  - large variation in **`EstimatedRTT ->`** larger safety margin
- estimate SampleRTT deviation from EstimatedRTT:

```
DevRTT = (1-β)*DevRTT +
                β*|SampleRTT-EstimatedRTT|

                (typically, β = 0.25)
```

```
TimeoutInterval = EstimatedRTT + 4*DevRTT
```

estimated RTT

"safety margin"

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- connection management

3.7 TCP congestion control

TCP reliable data transfer

- TCP creates rdt service on top of IP's unreliable service
  - pipelined segments
  - cumulative acks
  - single retransmission timer

TCP sender events:

data rcvd from app:

- create segment with seq #
- seq # is byte-stream number of first data byte in segment
- start timer if not already running
  - think of timer as for oldest unacked segment
  - expiration interval: `TimeOutInterval`

timeout:

- retransmit segment that caused timeout
- restart timer

ack rcvd:

- if ack acknowledges previously unacked segments
  - update what is known to be ACKed
  - start timer if there are still unacked segments

TCP sender (simplified)

data received from application above

If (window == full) refuse_data
else {
    create segment, seq. #: NextSeqNum
    pass segment to IP (i.e., “send”)
    NextSeqNum = NextSeqNum + length(data)
    if (timer currently not running)
        start timer
}

Λ

NextSeqNum = InitialSeqNum
SendBase = InitialSeqNum

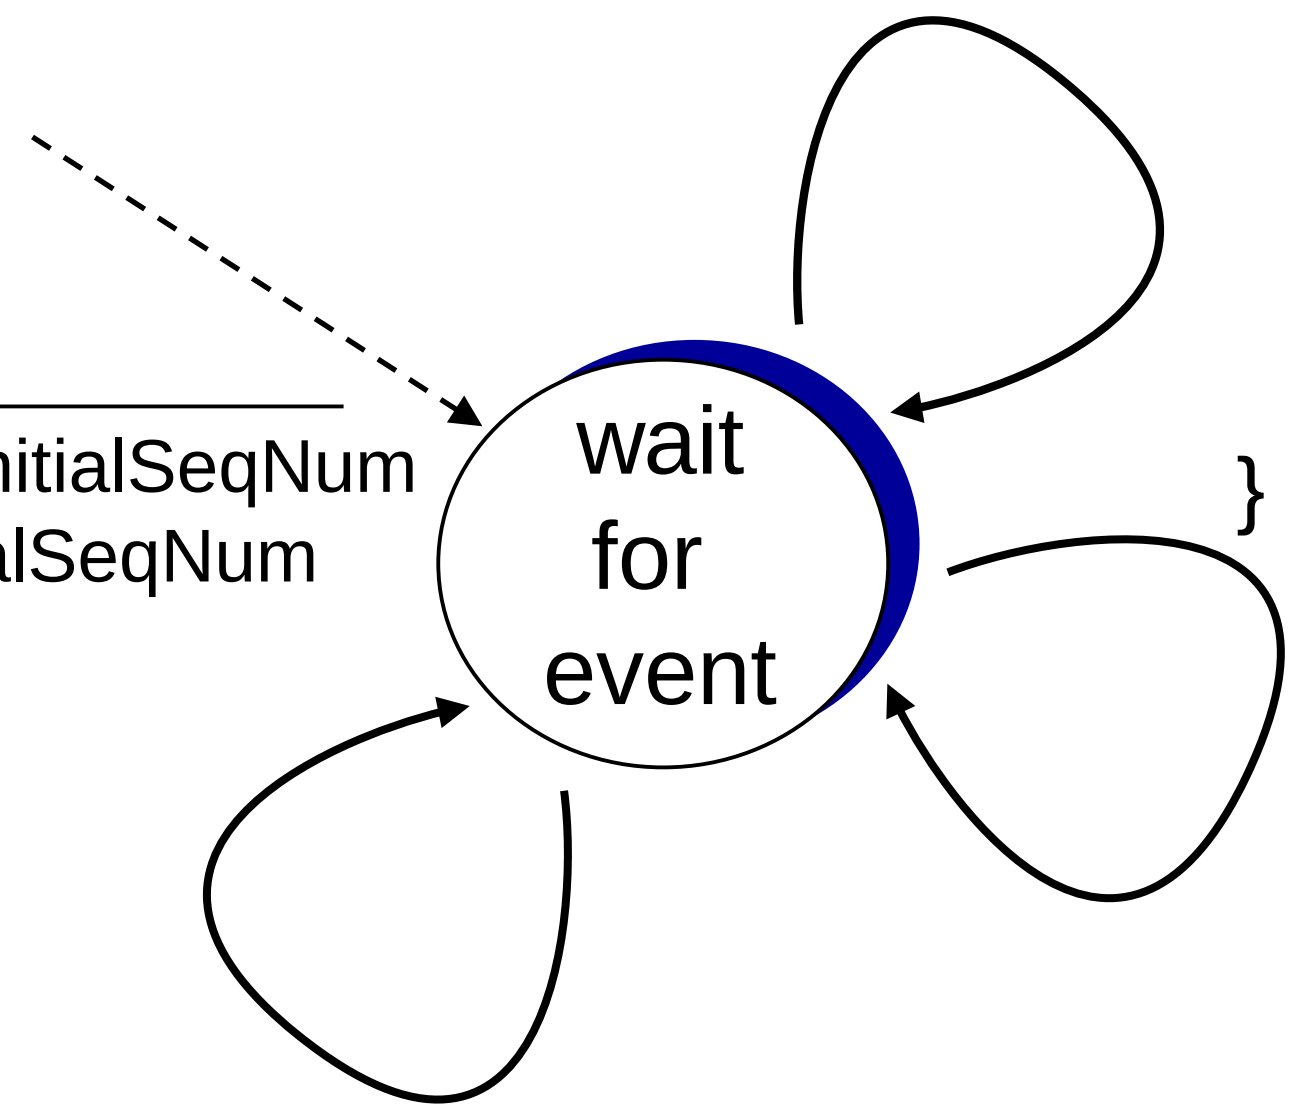

timeout

---

retransmit not-yet-acked segment
    with smallest seq. #
start timer

ACK received, with ACK field value y

---

if (y > SendBase) {
   SendBase = y
   /* SendBase–1: last cumulatively ACKed byte */
   if (there are currently not-yet-acked segments)
       start timer
     else stop timer
}

TCP: retransmission scenarios

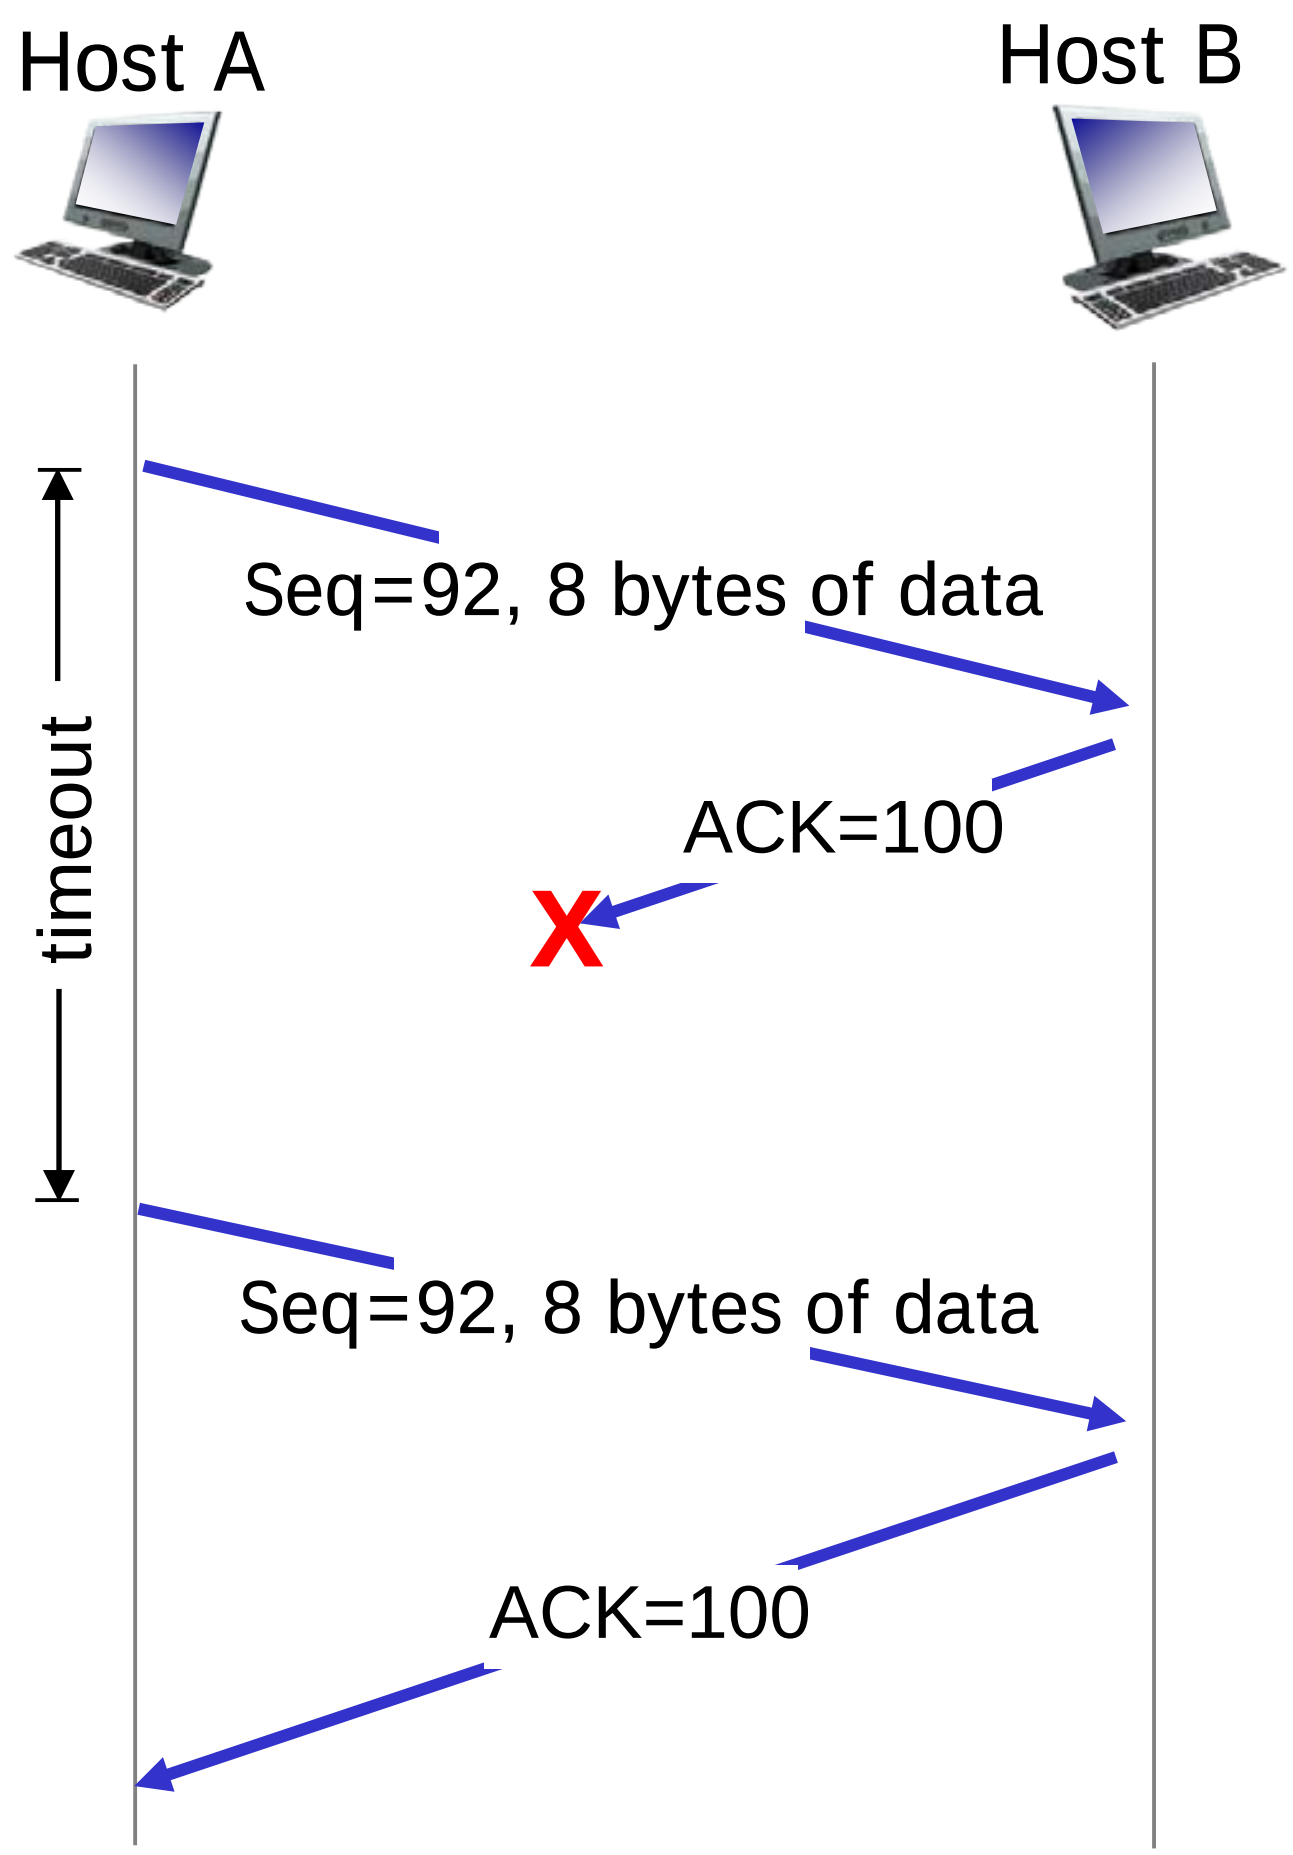

lost ACK scenario

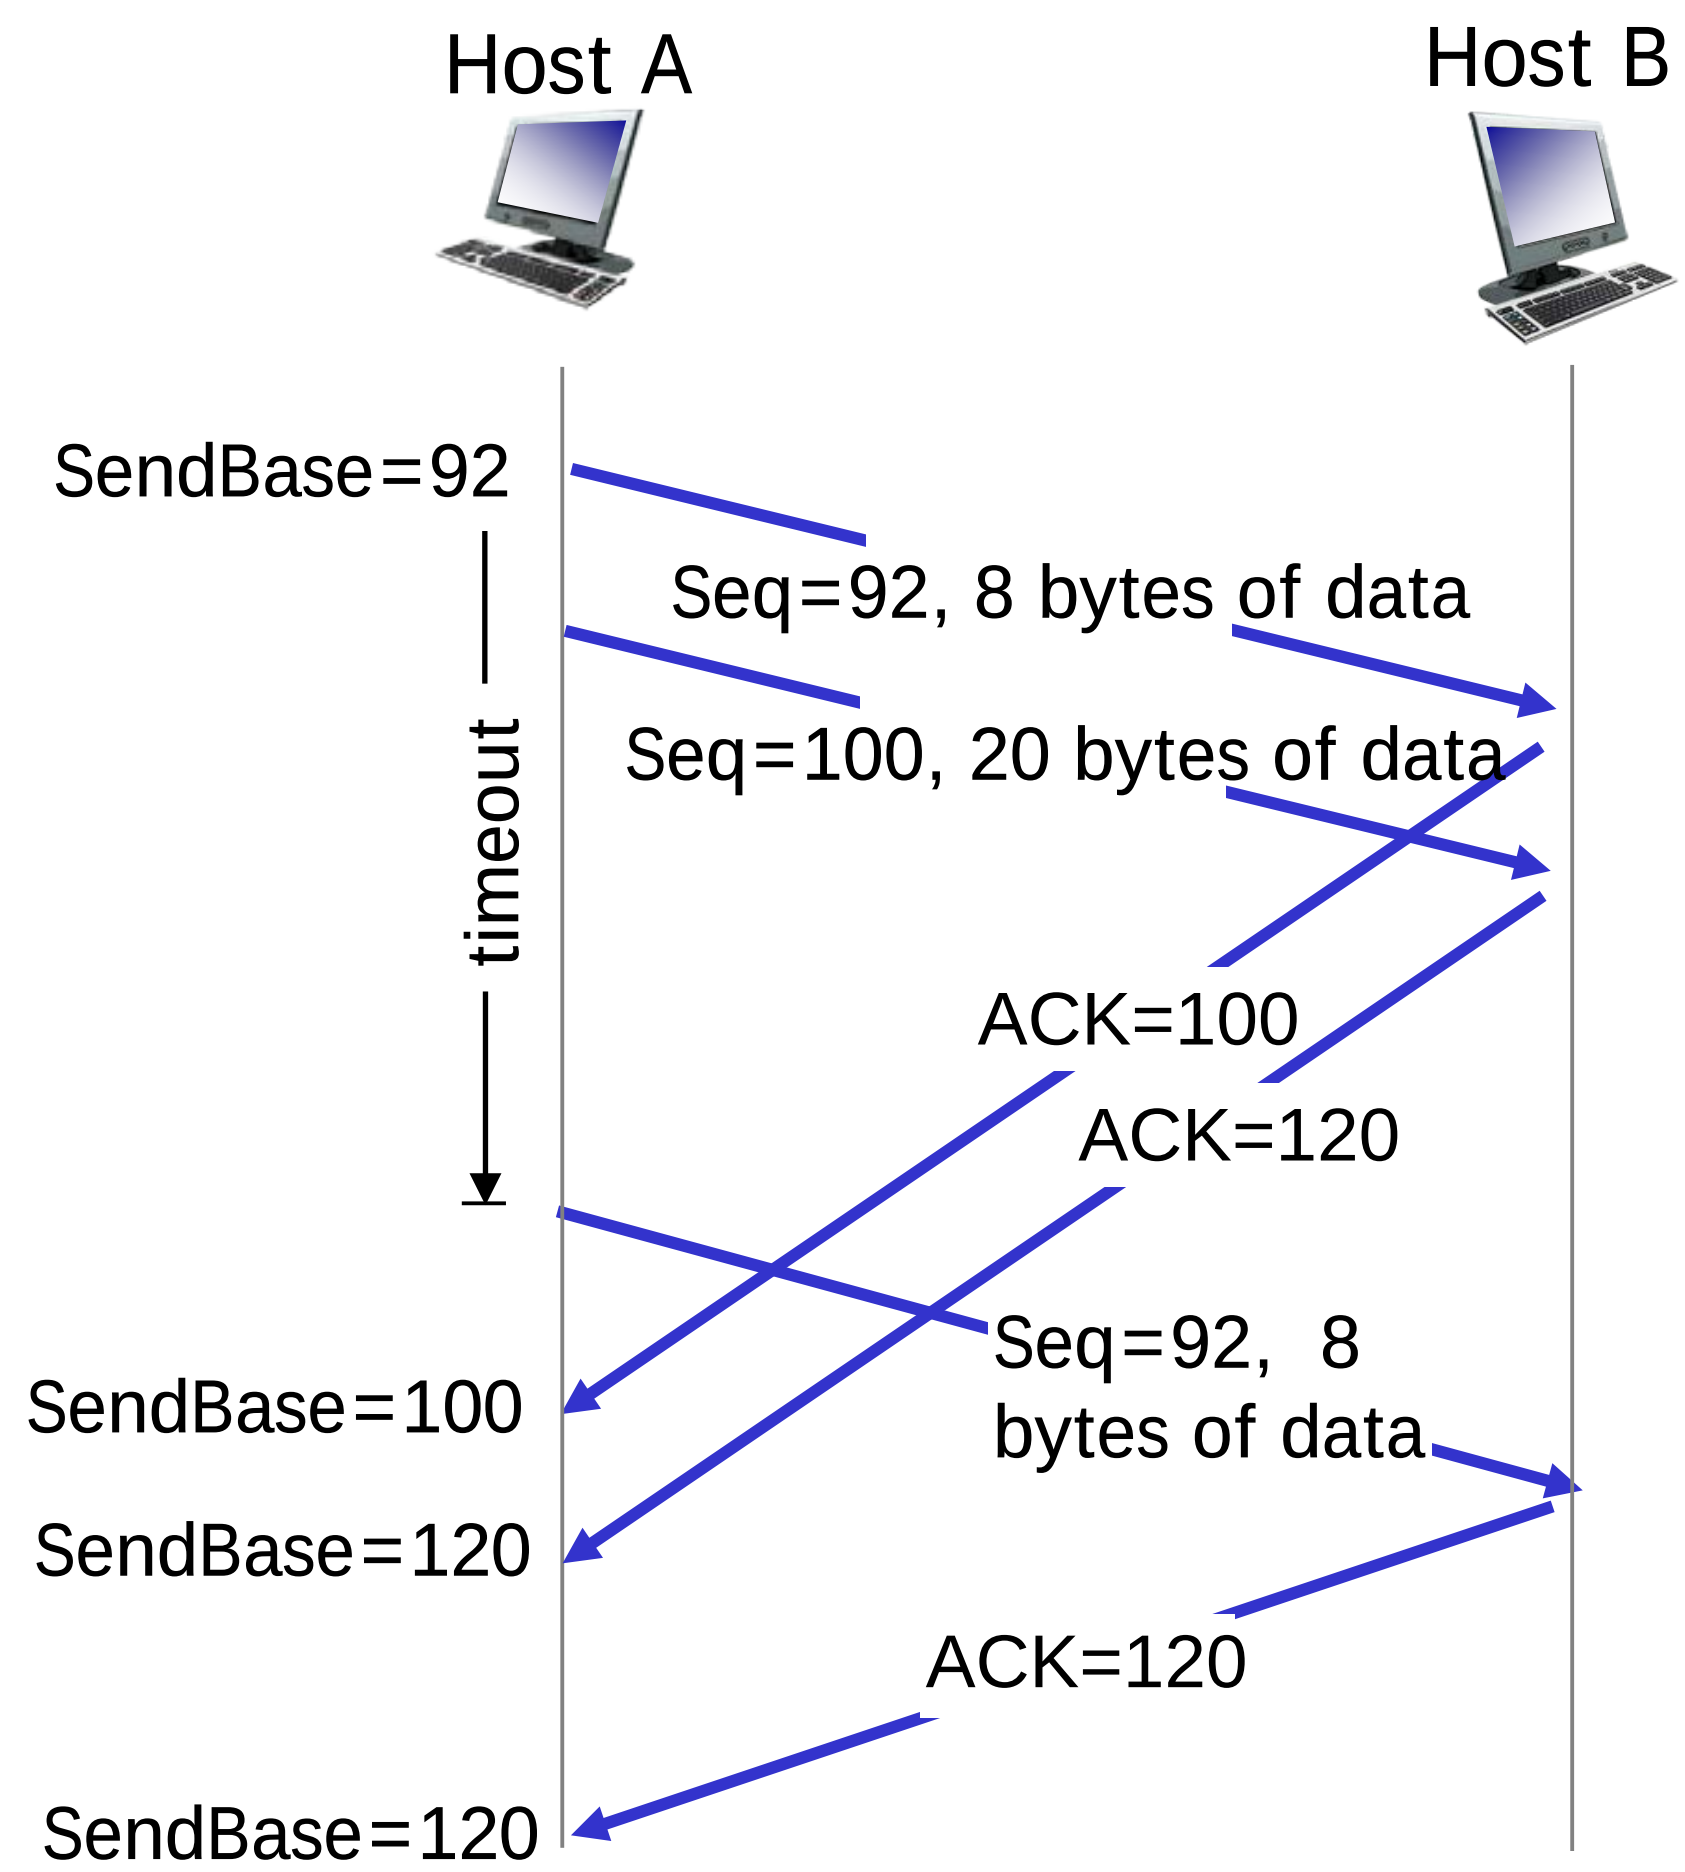

premature timeout

TCP: retransmission scenarios

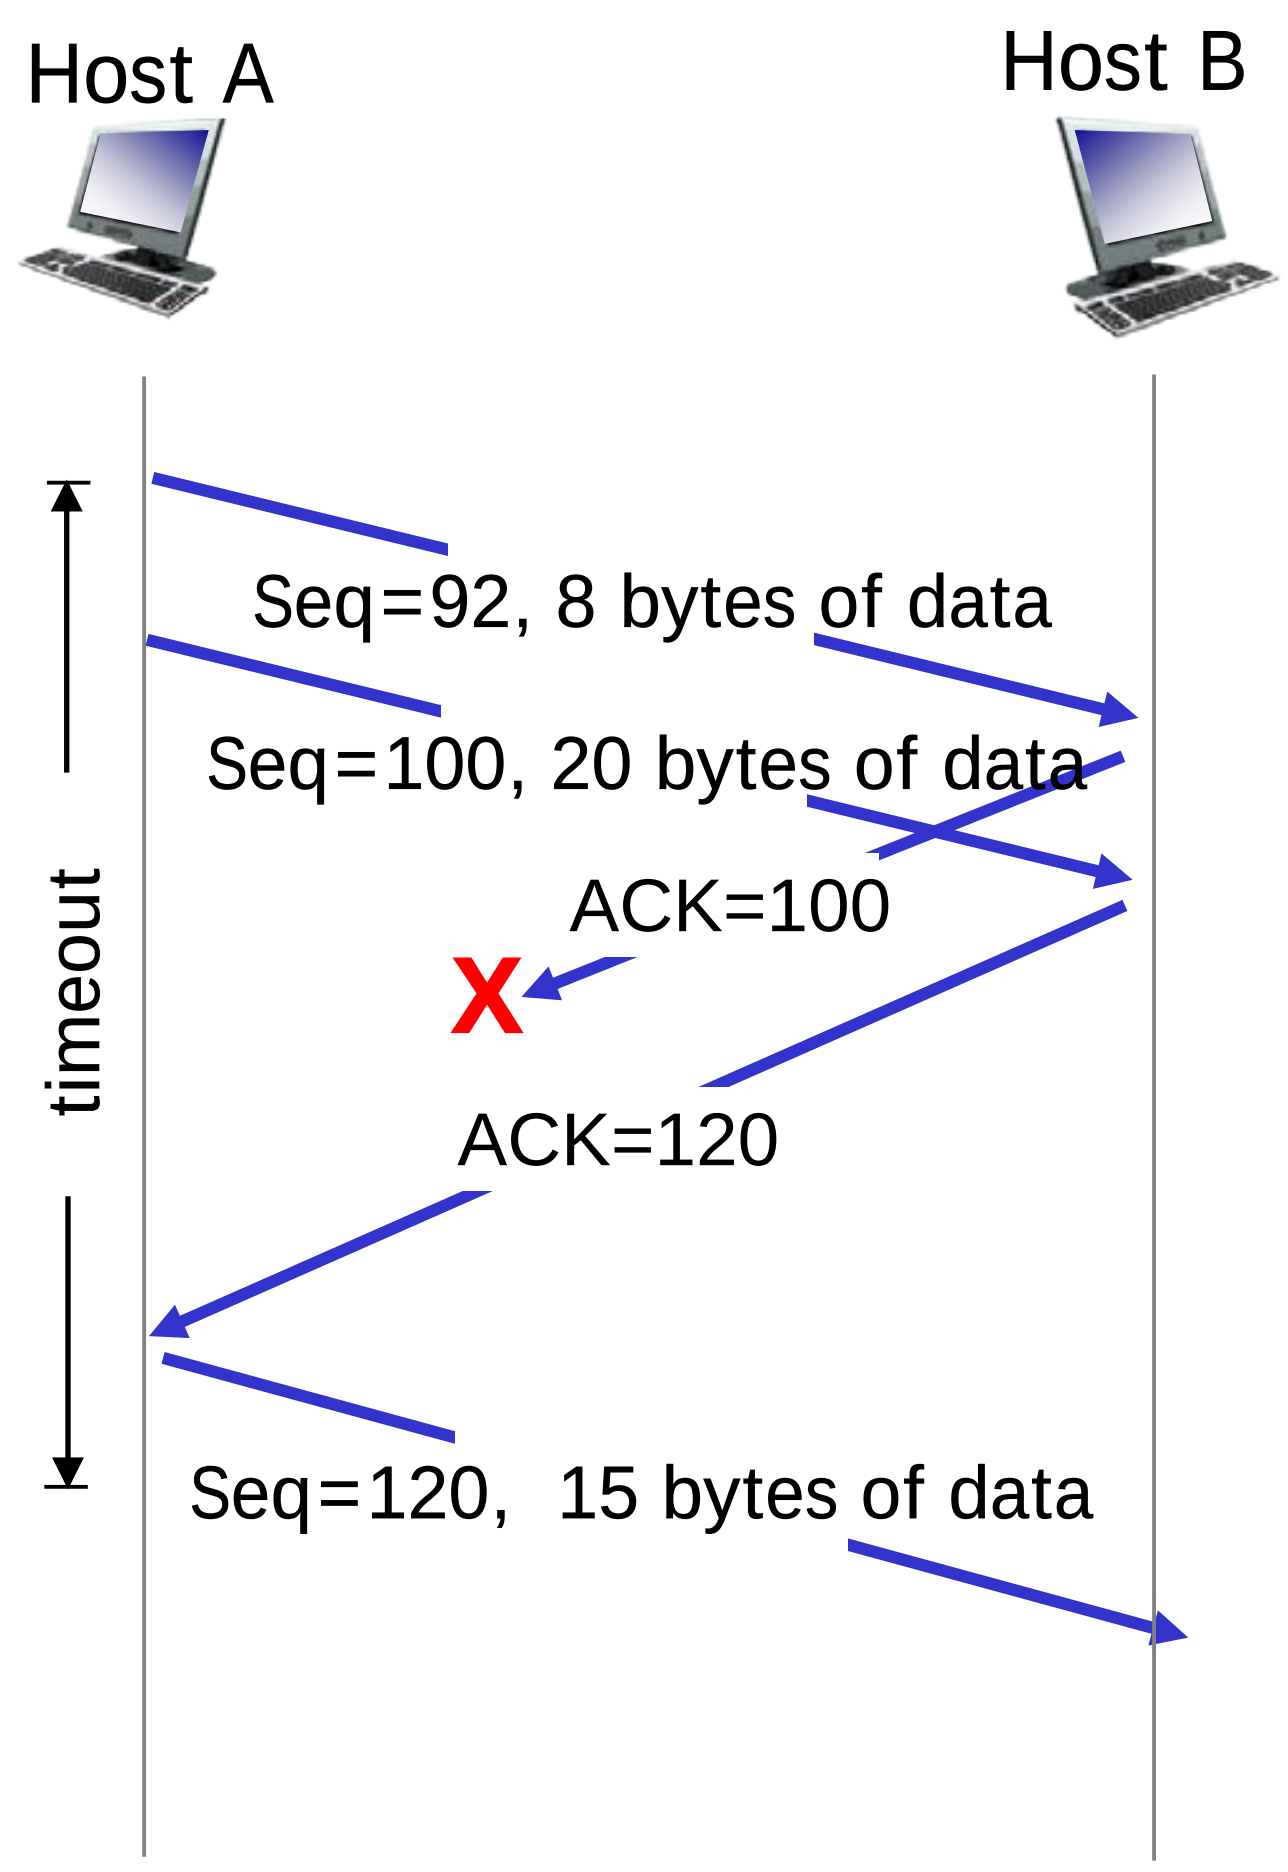

cumulative ACK

TCP fast retransmit

- time-out period often relatively long:
  - long delay before resending lost packet
- detect lost segments via duplicate ACKs.
  - sender often sends many segments back-to-back
  - if segment is lost, there will likely be many duplicate ACKs.

TCP fast retransmit

if sender receives 4 ACKs for same data ("triple duplicate ACKs"), resend unacked segment with smallest seq #

- likely that unacked segment lost, so don't wait for timeout

TCP fast retransmit

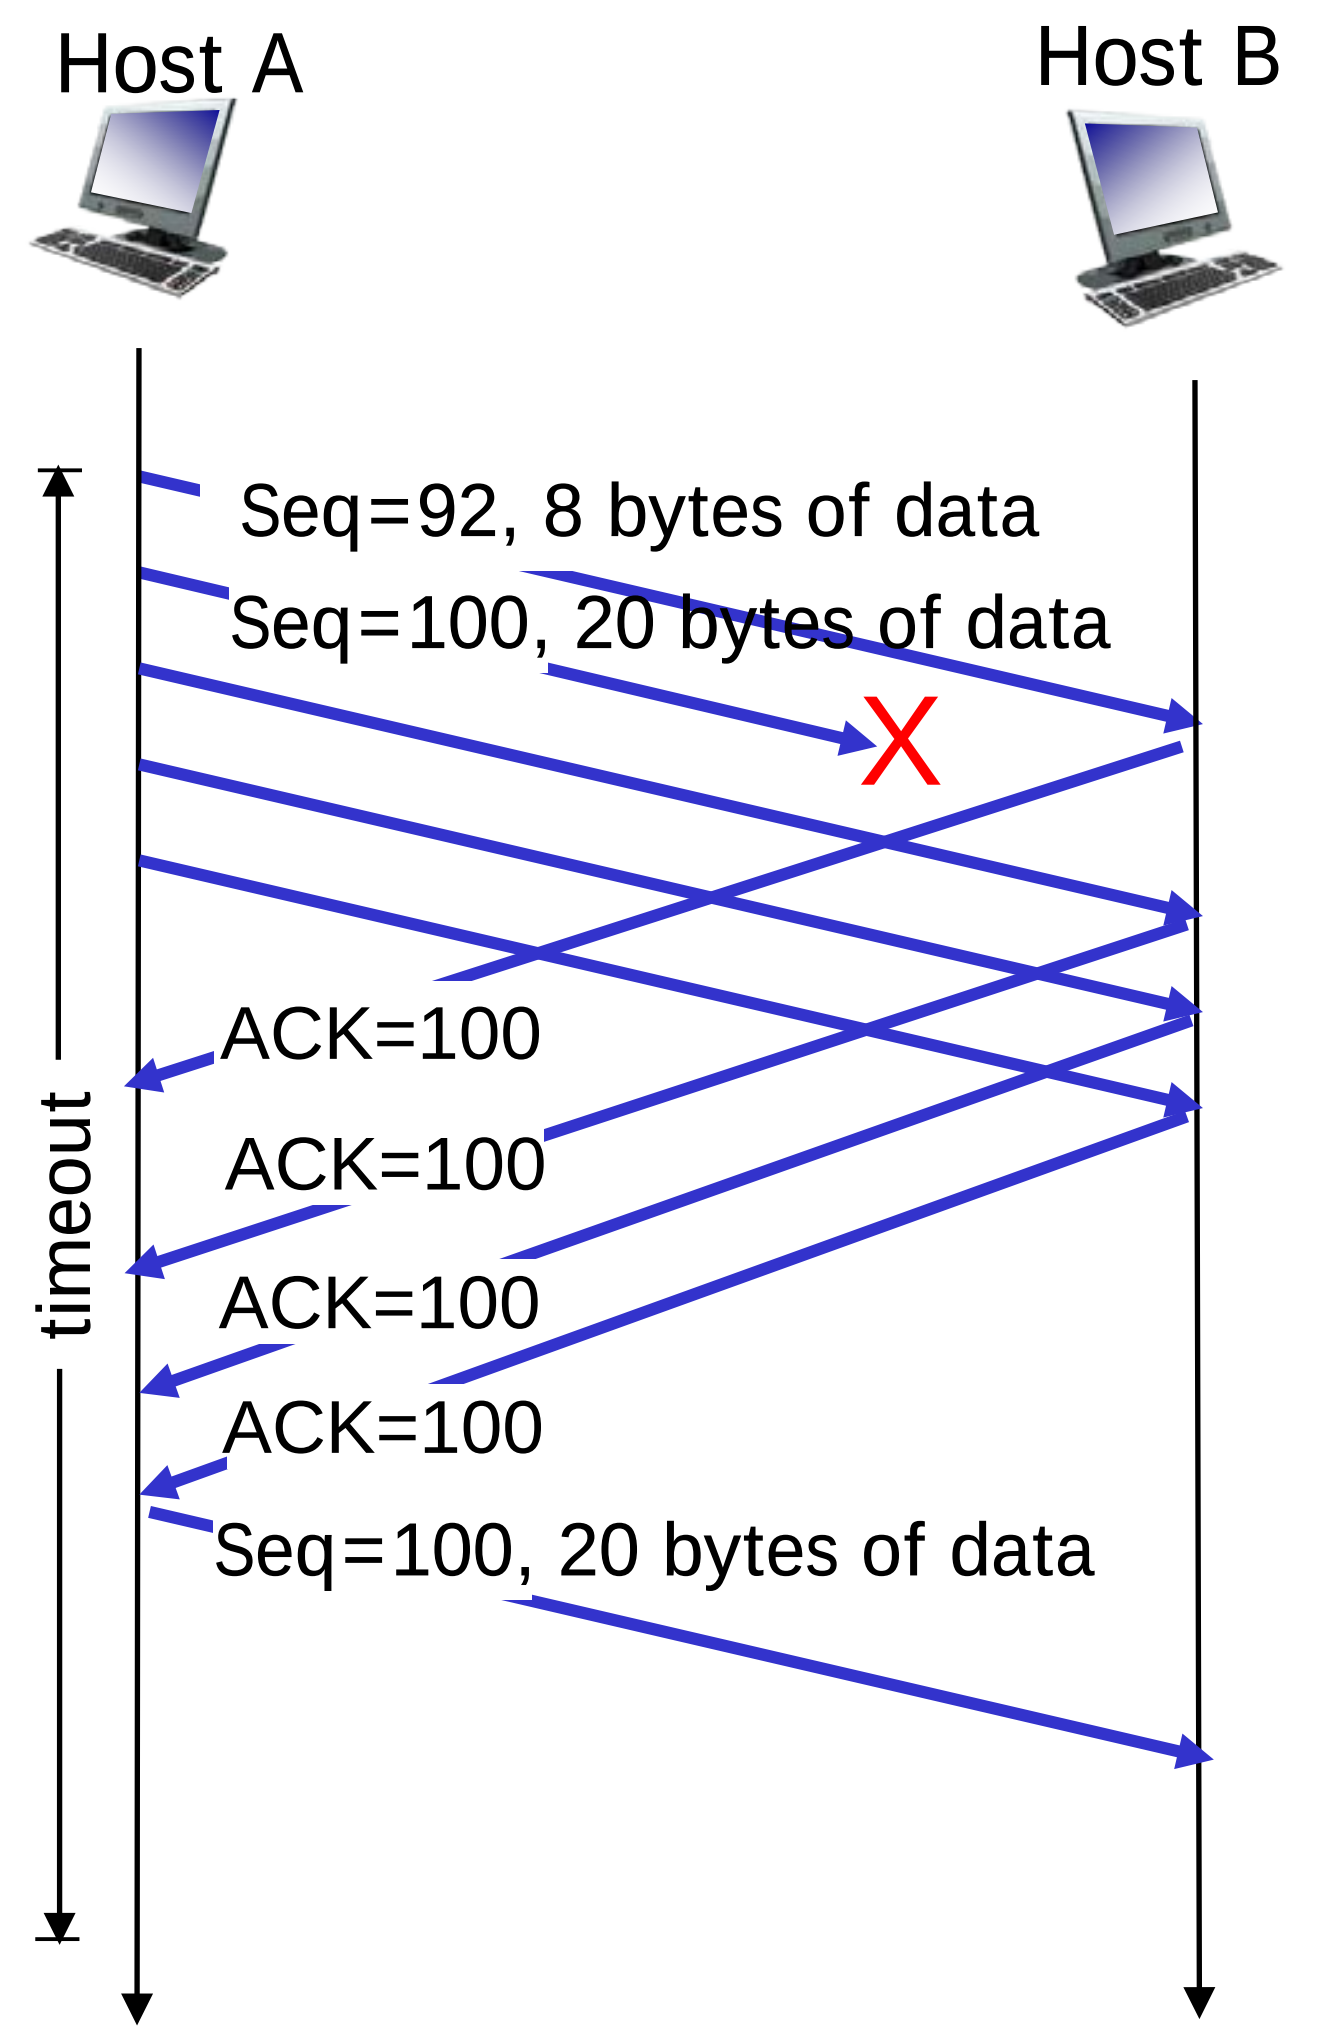

fast retransmit after sender receipt of triple duplicate ACKs

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- connection management

3.7 TCP congestion control

Connection Management

before exchanging data, sender/receiver "handshake":

- agree to establish connection (each knowing the other willing to establish connection)
- agree on connection parameters

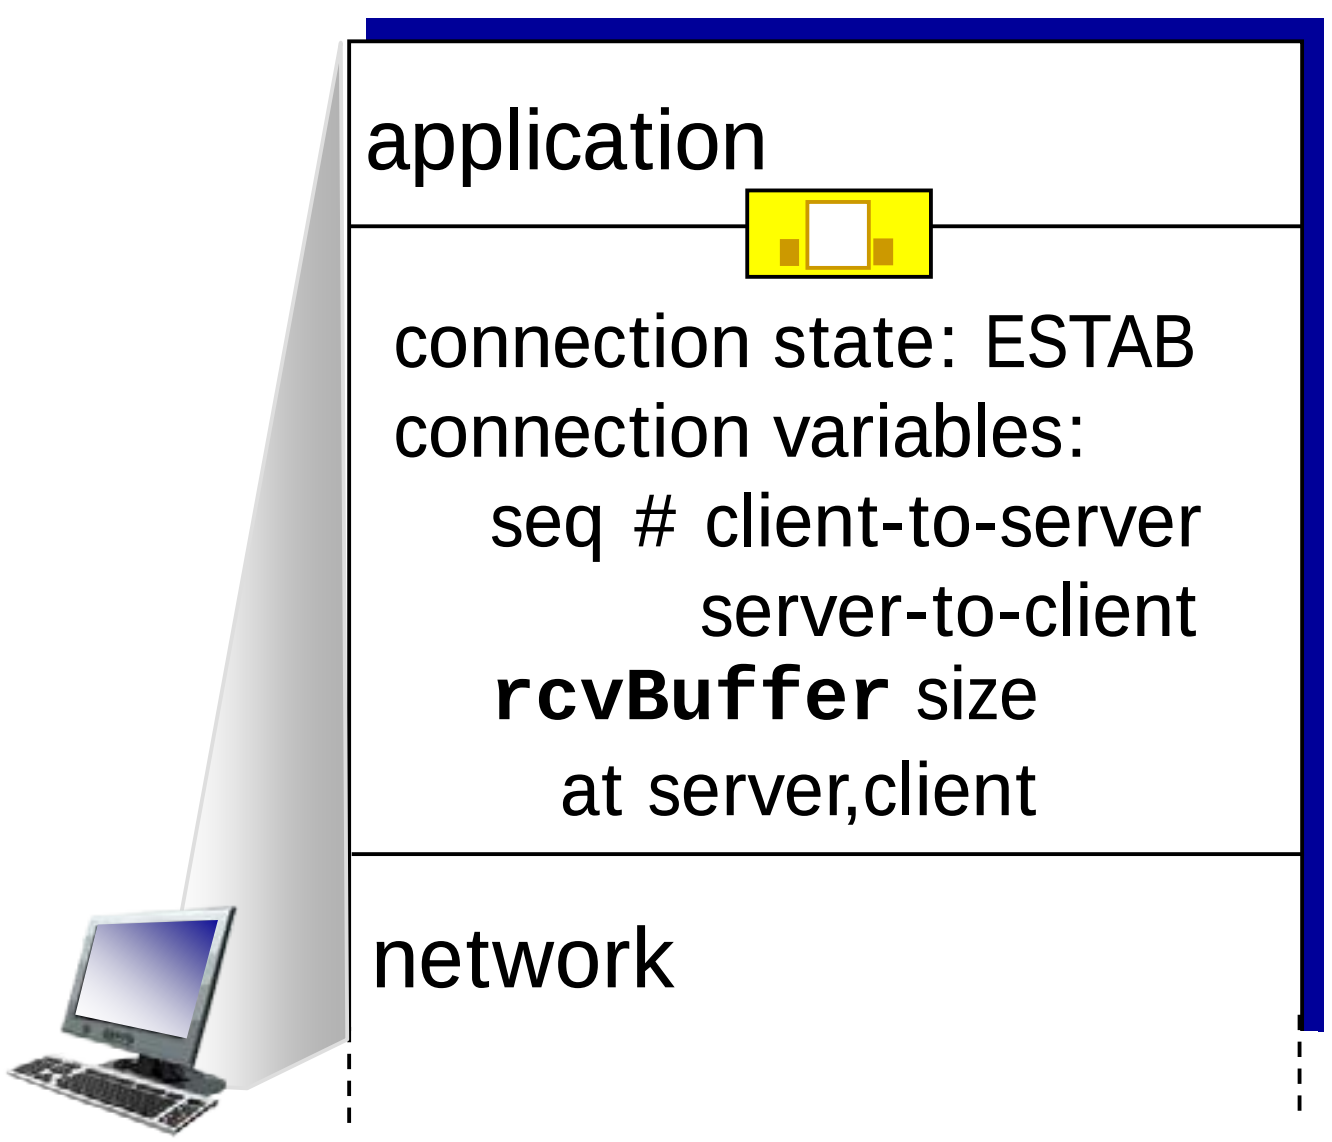


```
Socket clientSocket =
  new Socket("hostname","port number");
```

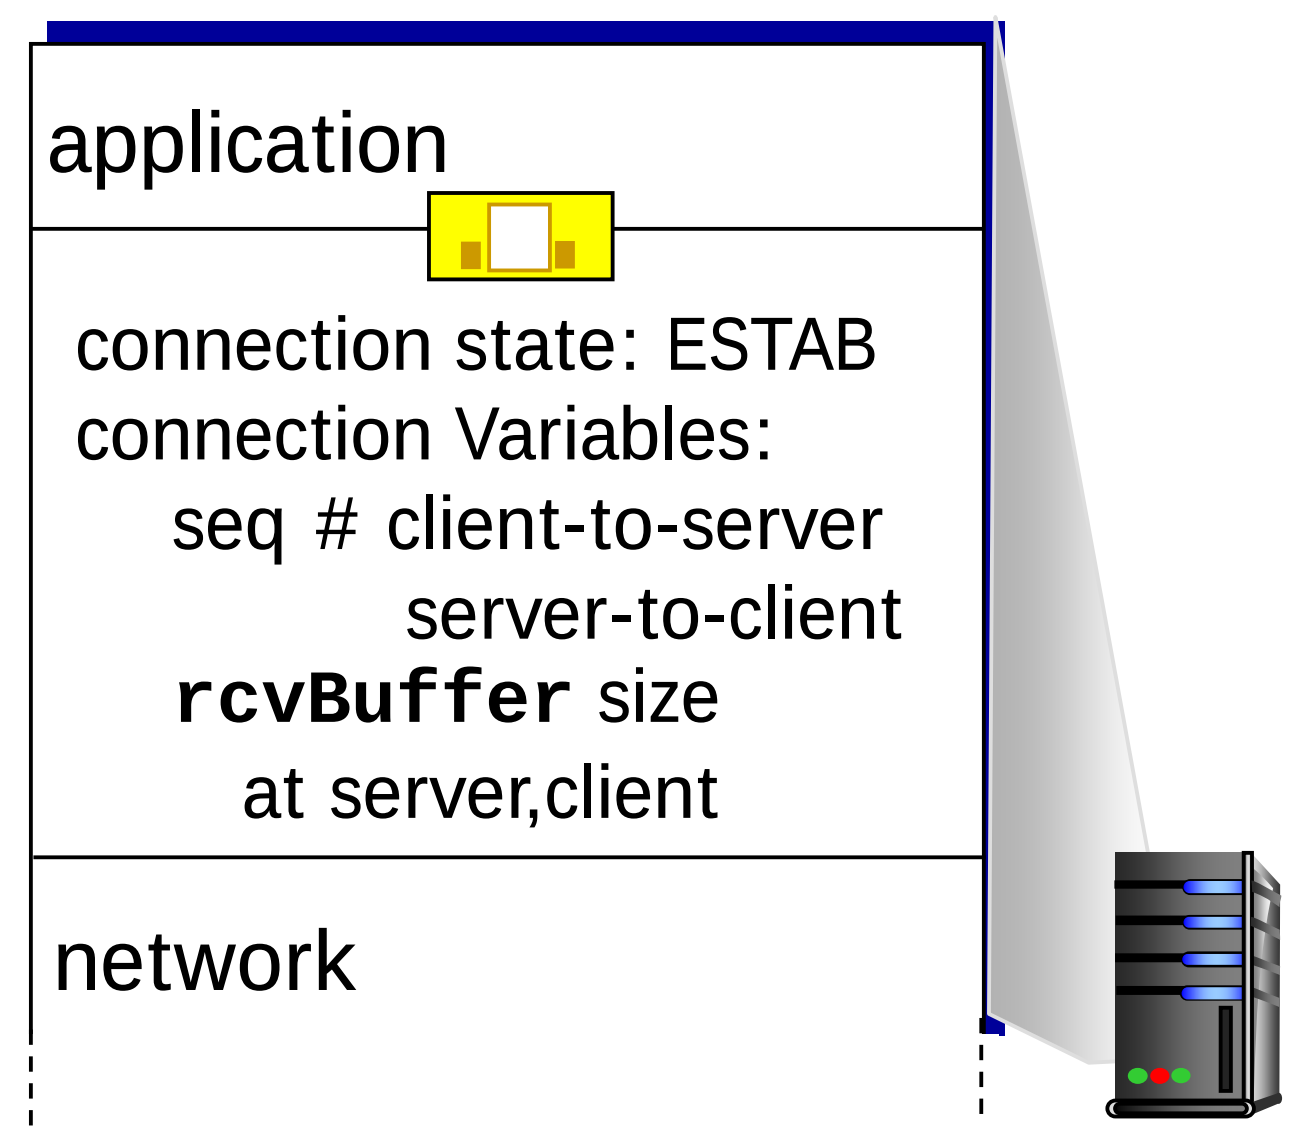


```
Socket connectionSocket =
  serverSocket.accept();
```

TCP 3-way handshake

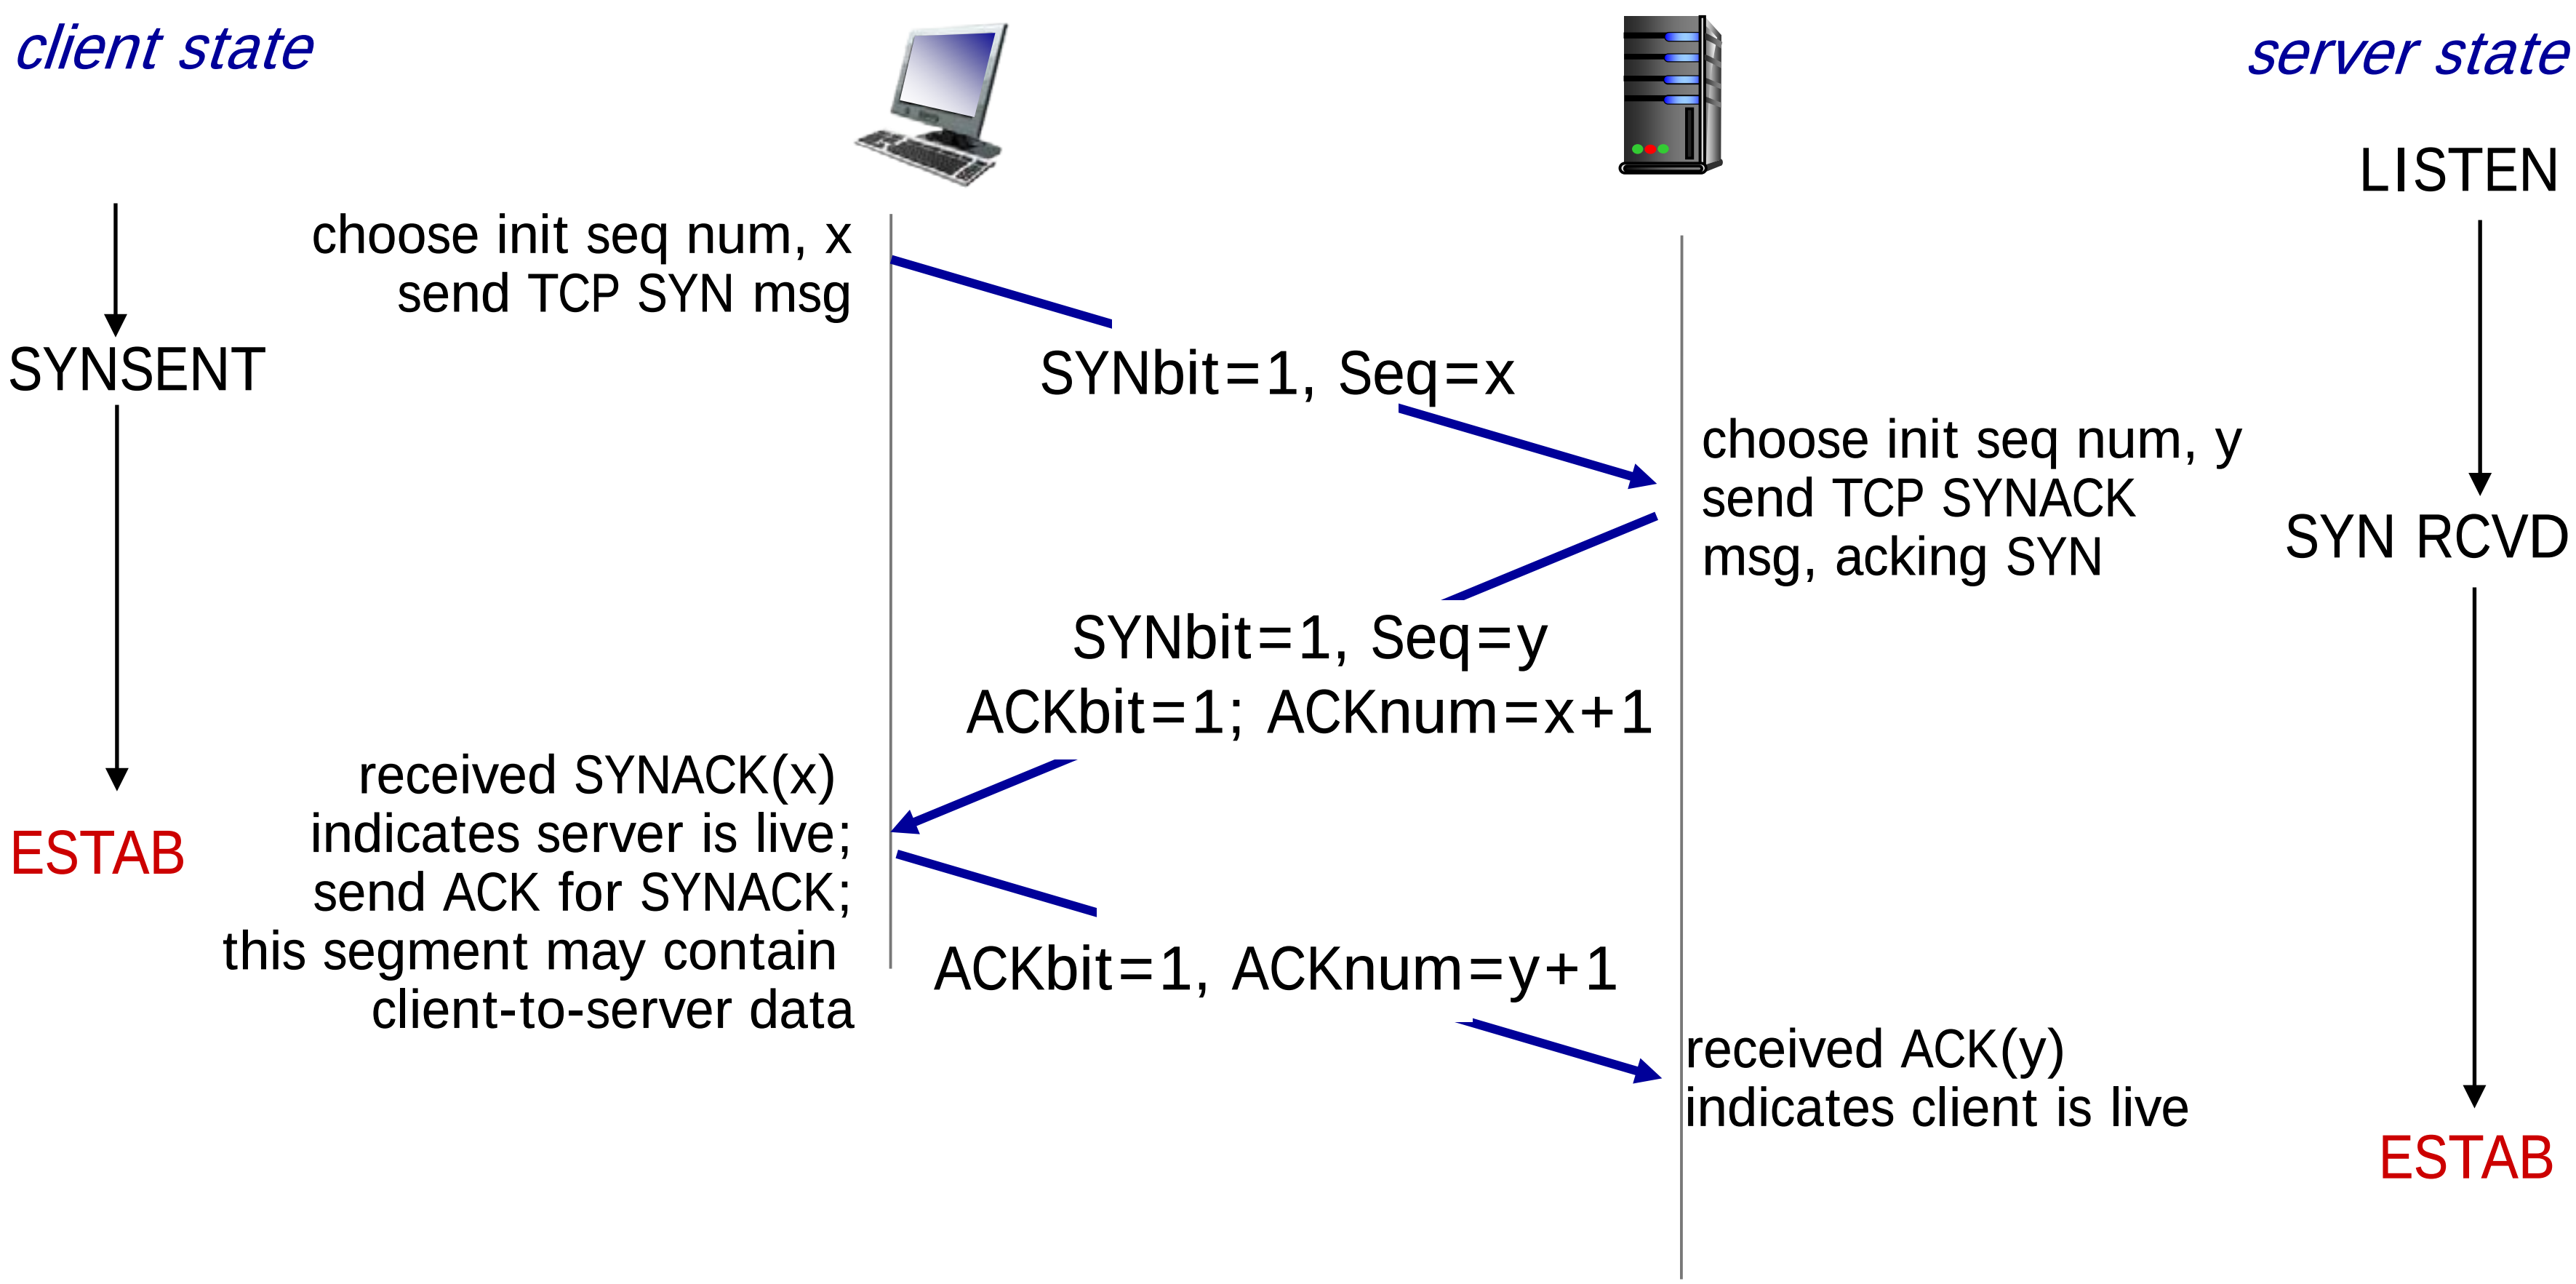

TCP: closing a connection

- client, server each close their side of connection
  - send TCP segment with FIN bit = 1
- respond to received FIN with ACK

TCP: closing a connection

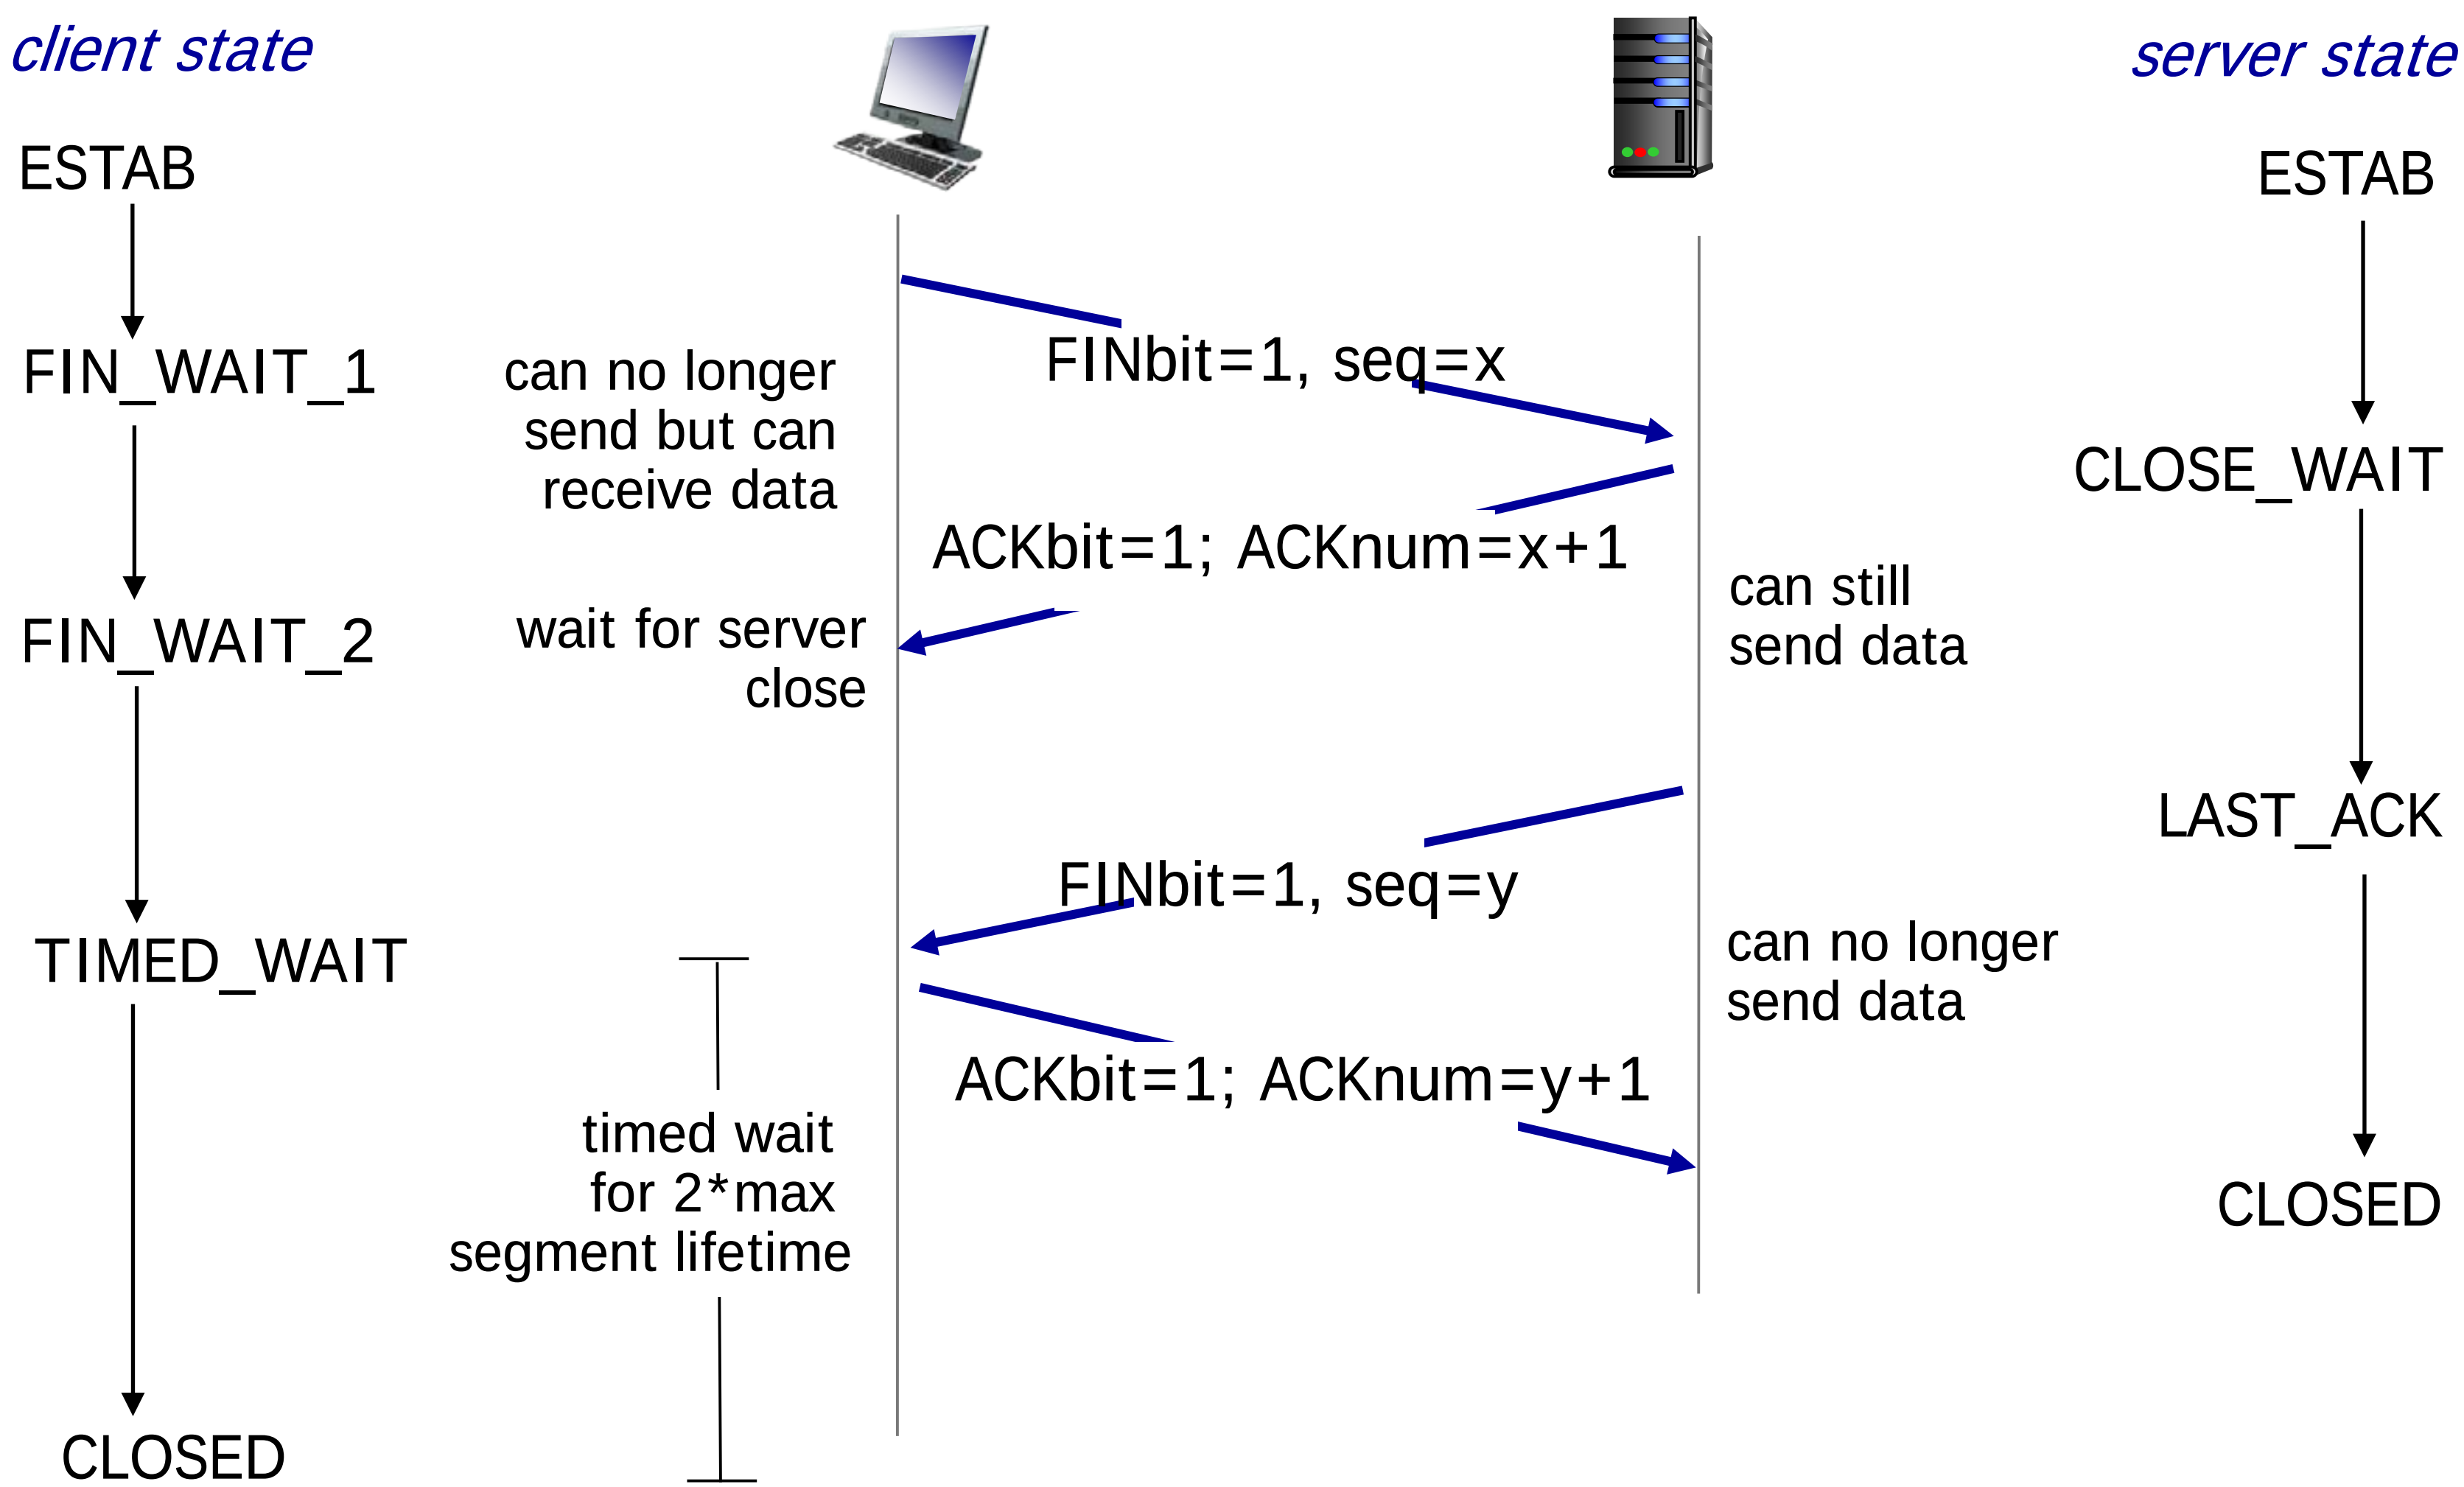

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- connection management

3.7 TCP congestion control

Network congestion

- informally: "too many sources sending too much data too fast for *network* to handle"
- manifestations:
  - lost packets (buffer overflow at routers)
  - long delays (queueing in router buffers)

Solution:

Ask sources to reduce their sending rate!

TCP congestion control: additive increase multiplicative decrease

- *approach:* sender increases transmission rate (window size), probing for usable bandwidth, until loss occurs
  - *additive increase:* increase **cwnd** by 1 MSS every RTT until loss detected
  - *multiplicative decrease:* cut **cwnd** in half after loss

AIMD saw tooth behavior: probing for bandwidth

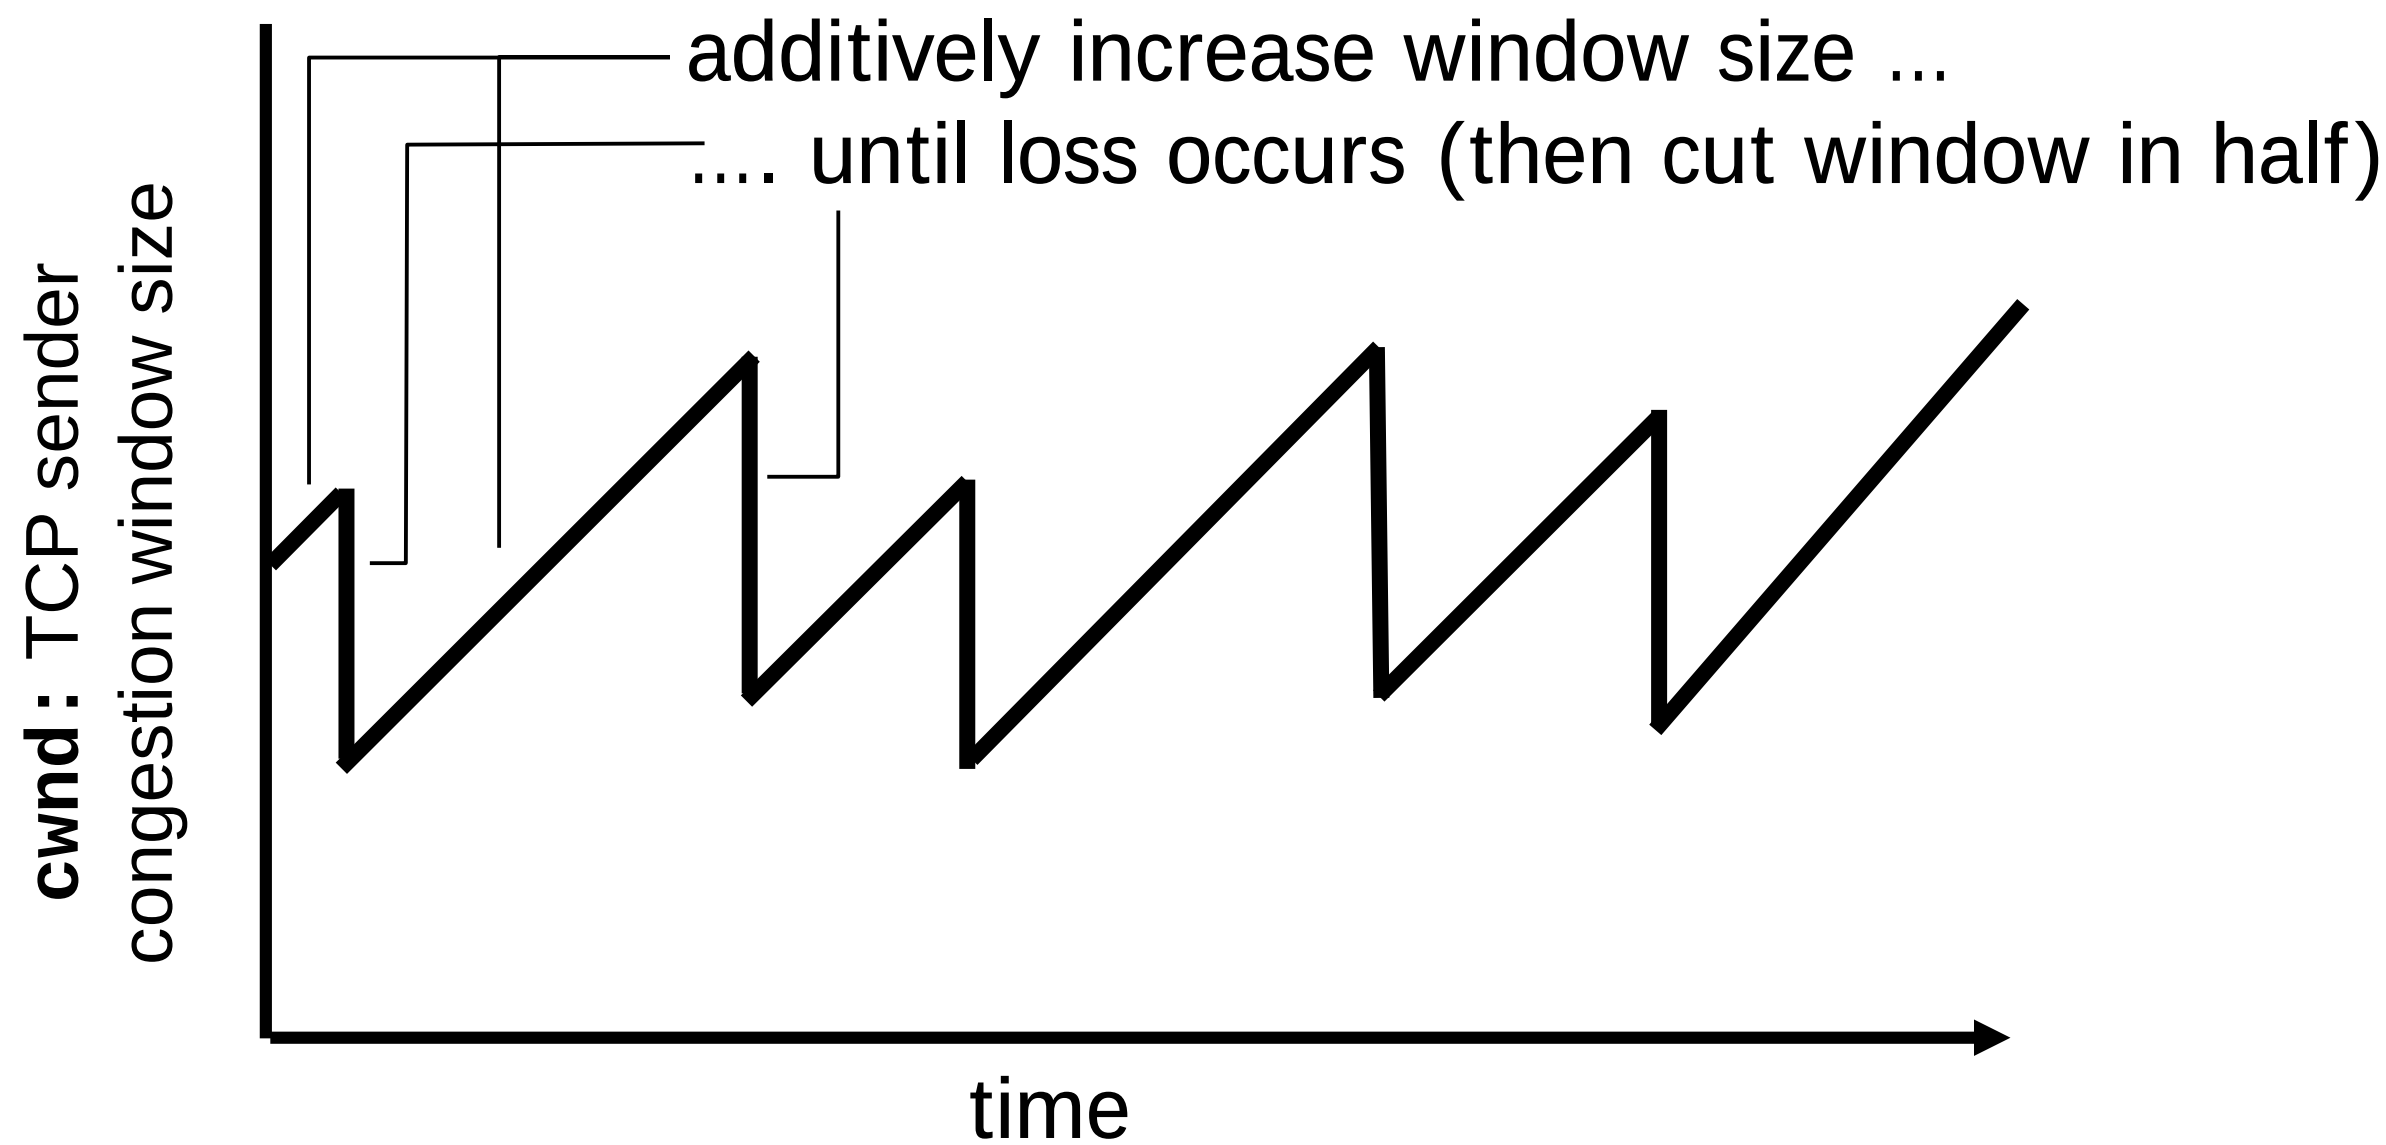

TCP Congestion Control: details

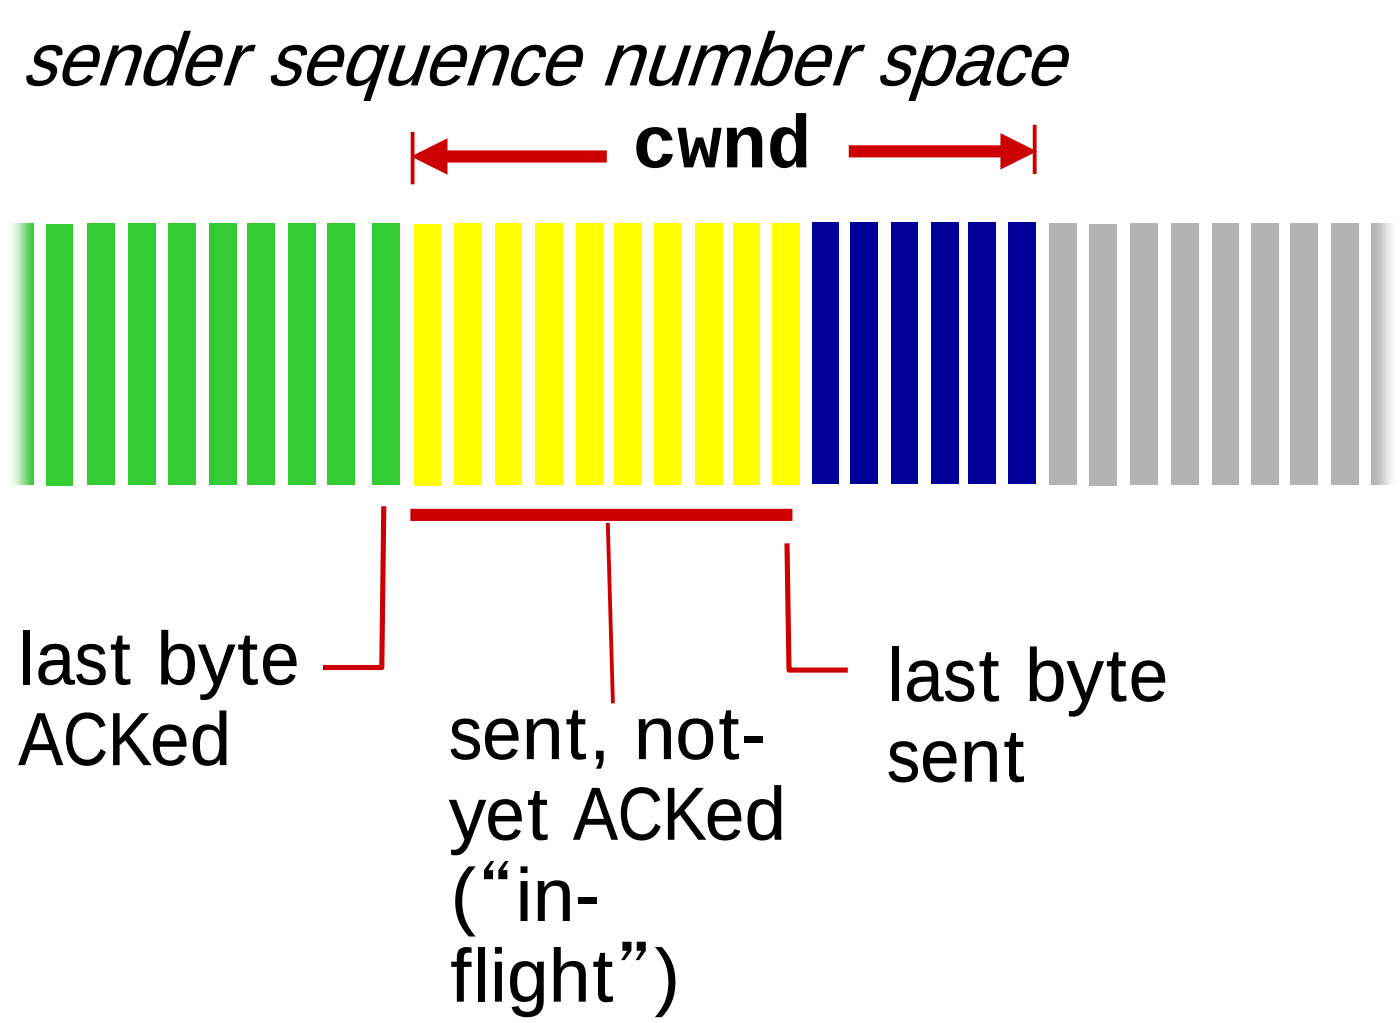

- sender limits transmission:

$$\texttt{LastByteSent-LastByteAcked} \leq \texttt{cwnd}$$

- **cwnd** is dynamic, function of perceived network congestion

TCP sending rate:

- *roughly:* send cwnd bytes, wait RTT for ACKS, then send more bytes

$$\text{rate} \approx \frac{\text{cwnd}}{\text{RTT}} \text{ bytes/sec}$$

TCP Slow Start

- when connection begins, increase rate exponentially fast:
  - initially **cwnd** = 1 MSS
  - double **cwnd** every RTT
- *summary:* initial rate is slow but ramps up exponentially fast

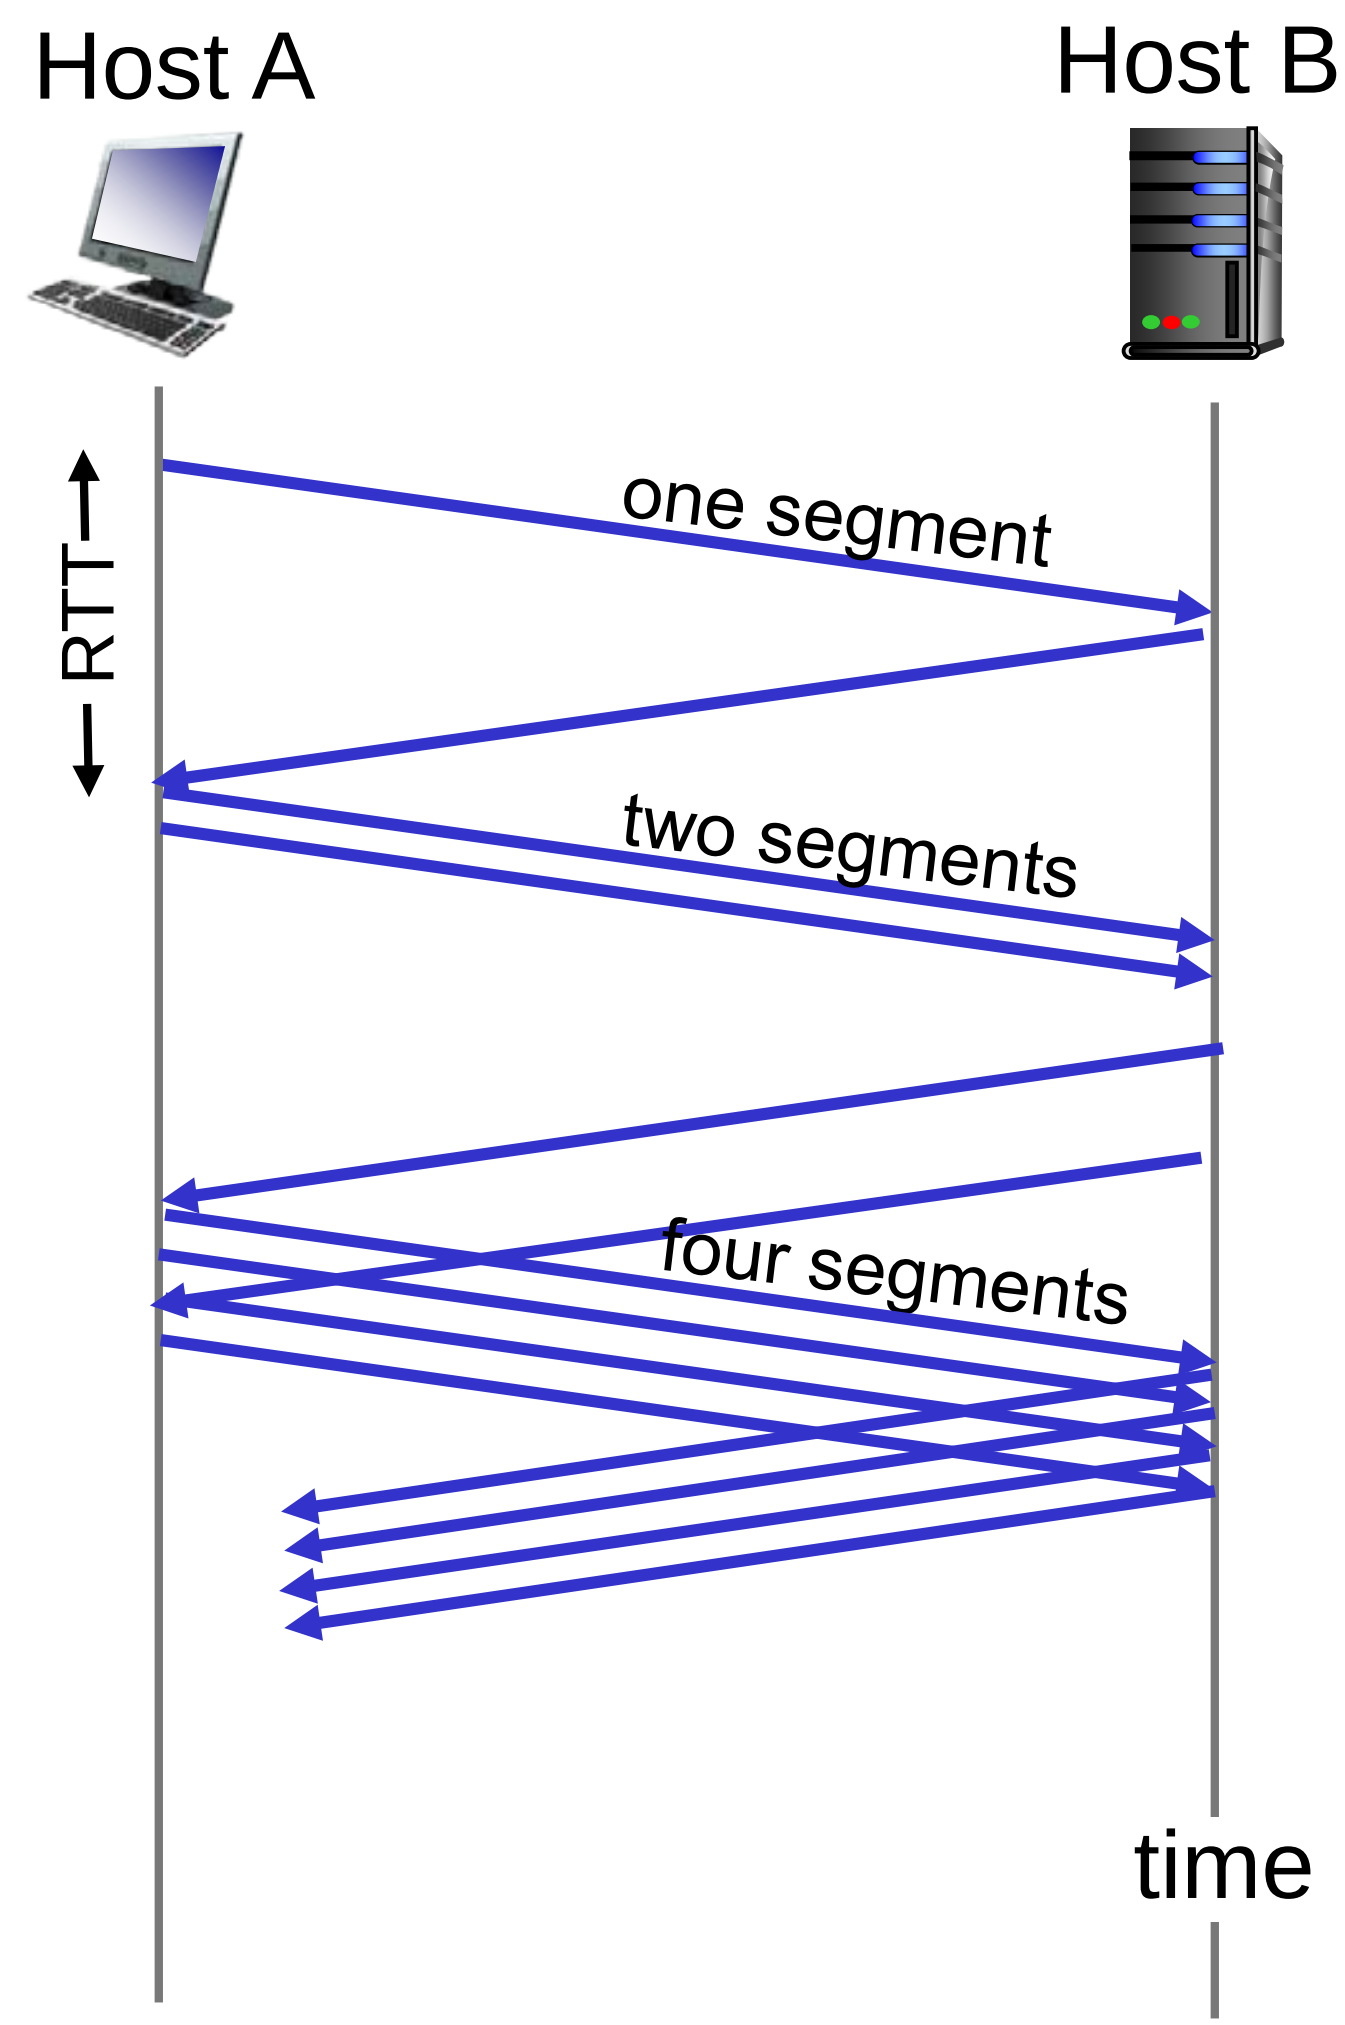

TCP: detecting, reacting to loss

- loss indicated by timeout:
  - **cwnd** set to 1 MSS;
  - window then grows exponentially (as in slow start) to a threshold, then grows linearly
- loss indicated by 3 duplicate ACKs
  - dup ACKs indicate network capable of delivering some segments
  - **cwnd** is cut in half window then grows linearly

TCP: switching from slow start to CA

Q: when should the exponential increase switch to linear?

A: when **cwnd** reaches **ssthresh**

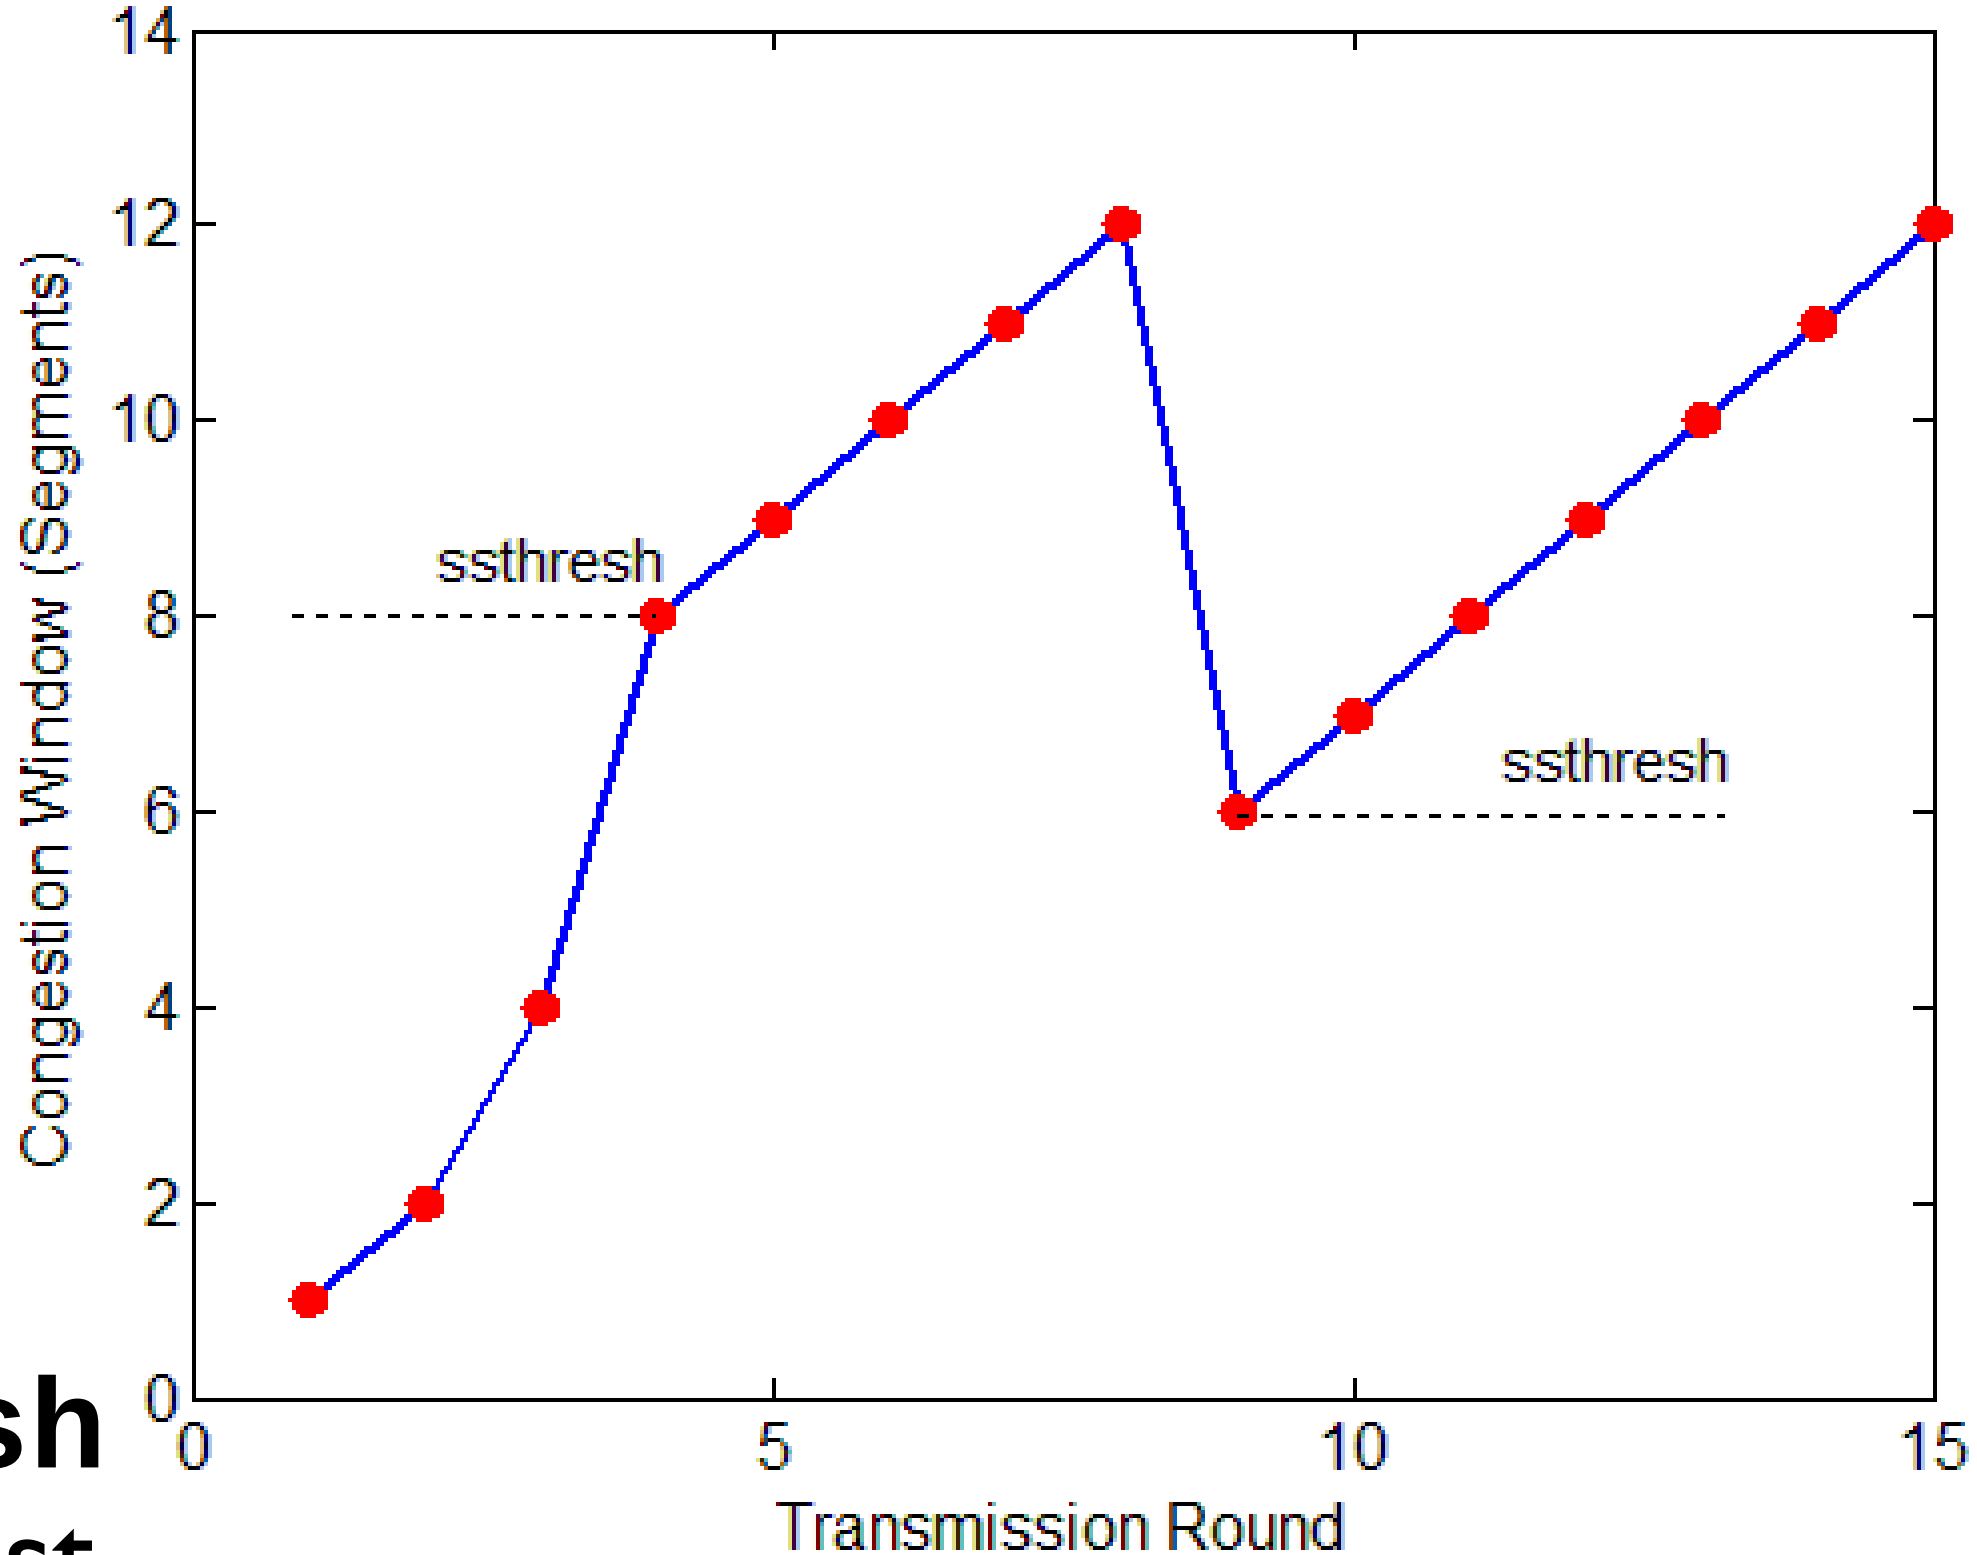

Implementation:

- variable **ssthresh**
- on loss event, **ssthresh** is set to 1/2 of **cwnd** just before loss event

Summary: TCP Congestion Control

- when `cwnd < ssthresh`, sender in slow-start phase, window grows exponentially.
- when `cwnd >= ssthresh`, sender is in congestion-avoidance phase, window grows linearly.
- when triple duplicate ACK occurs, `ssthresh` set to `cwnd/2`, `cwnd` set to ~ `ssthresh`
- when timeout occurs, `ssthresh` set to `cwnd/2`, `cwnd` set to 1 MSS.

TCP throughput

- avg. TCP thruput as function of window size, RTT?
  - ignore slow start, assume always data to send
- W: window size (measured in bytes) where loss occurs
  - avg. window size (# in-flight bytes) is ¾ W
  - avg. thruput is 3/4W per RTT

$$\text{avg TCP thruput} = \frac{3}{4}\frac{W}{RTT} \text{ bytes/sec}$$

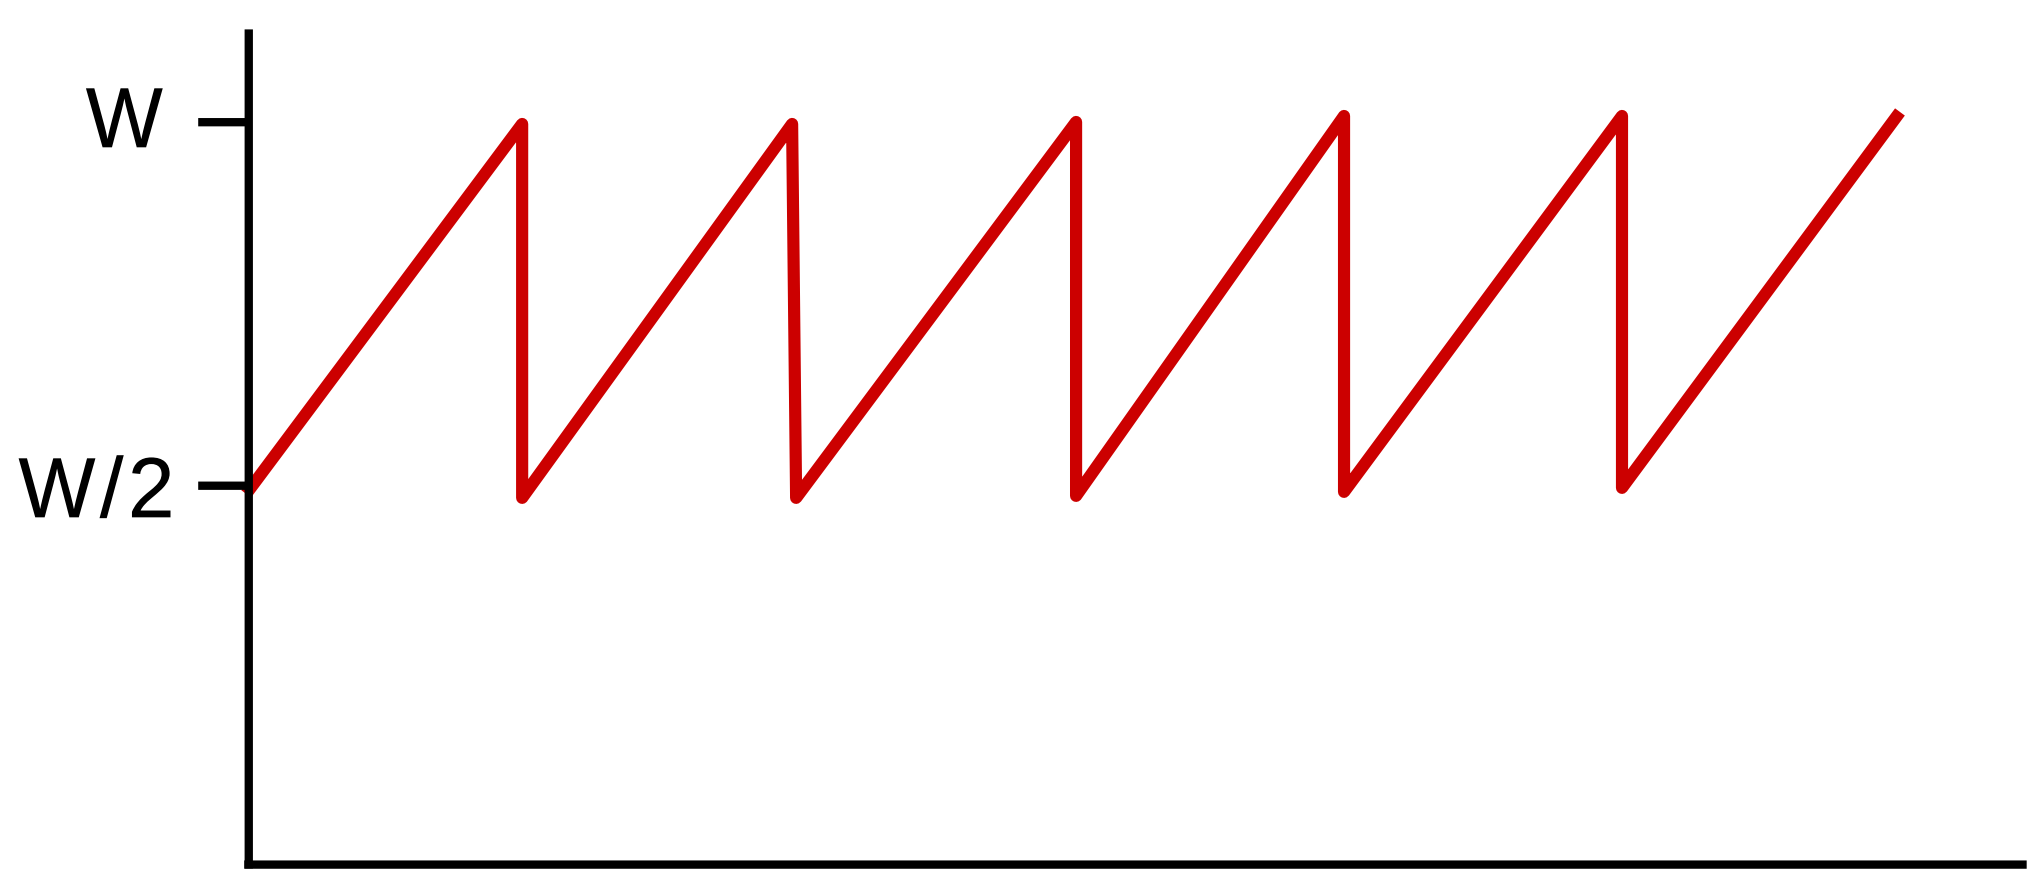

TCP Fairness

fairness goal: if K TCP sessions share same bottleneck link of bandwidth R, each should have average rate of R/K

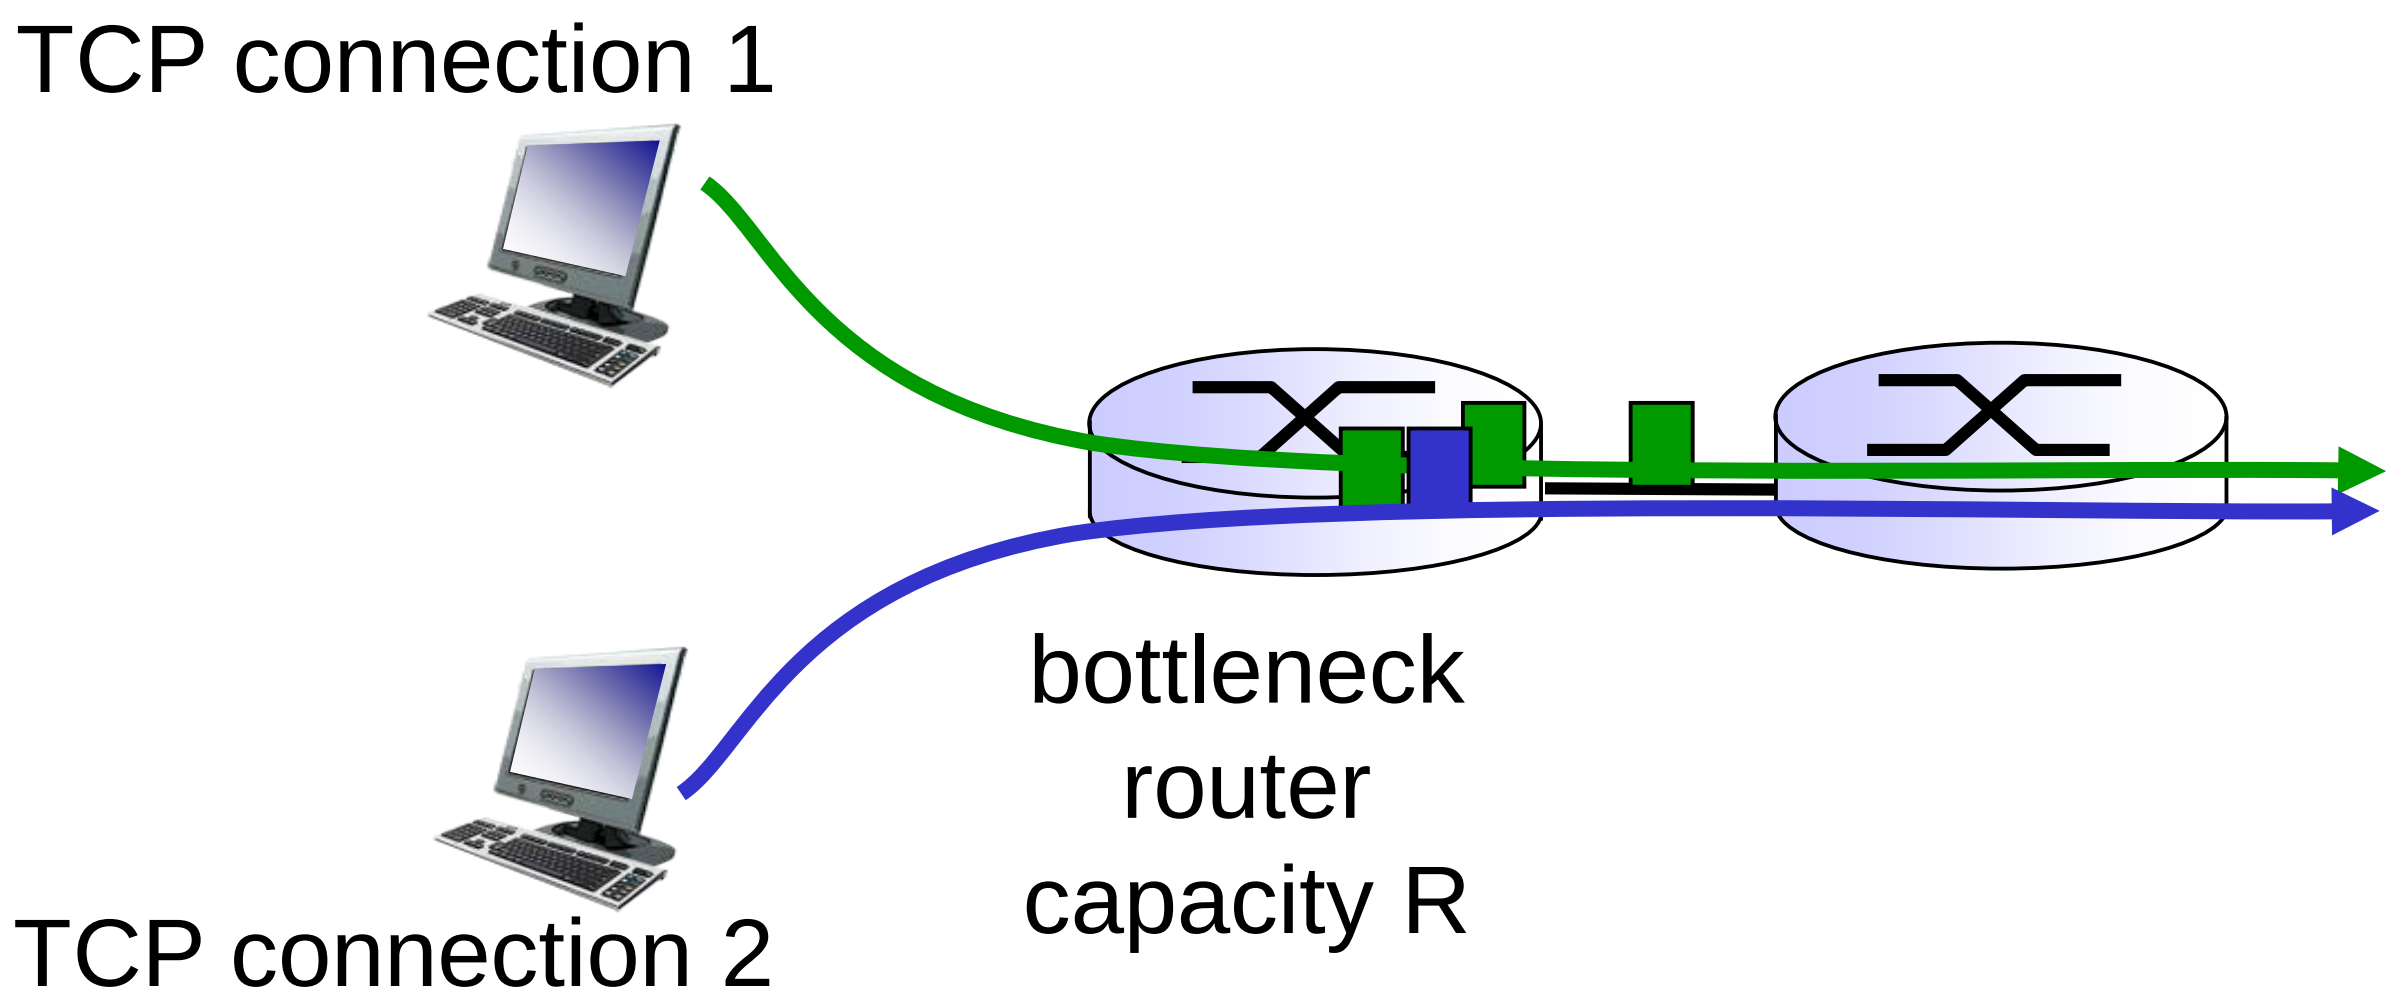

Why is TCP fair?

two competing sessions:

- additive increase gives slope of 1, as throughout increases
- multiplicative decrease decreases throughput proportionally

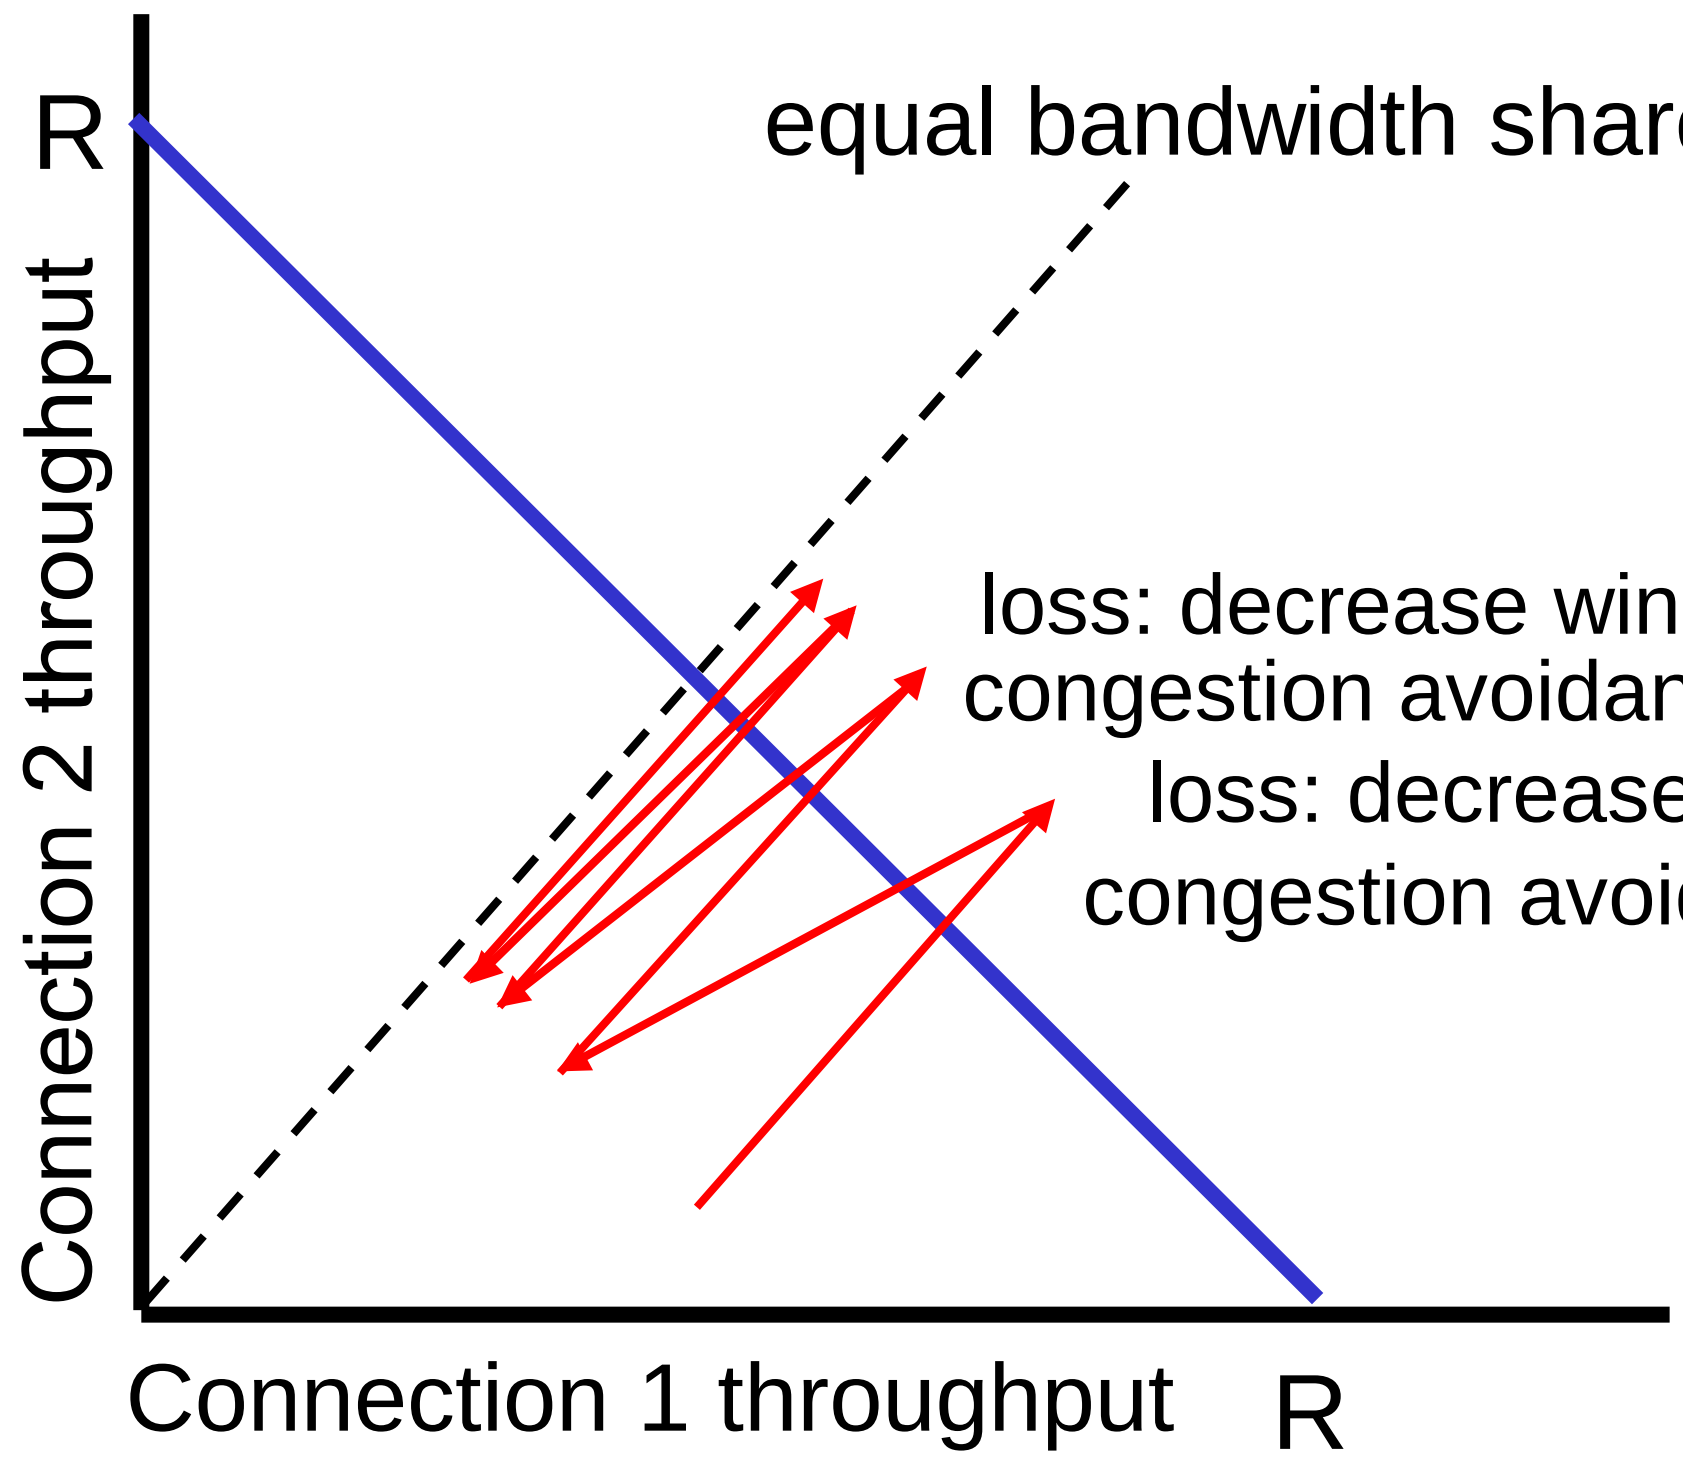

Fairness (more)

Fairness and UDP

- multimedia apps often do not use TCP
  - do not want rate throttled by congestion control
- instead use UDP:
  - send audio/video at constant rate, tolerate packet loss

Fairness, parallel TCP connections

- application can open multiple parallel connections between two hosts
- web browsers do this
- e.g., link of rate R with 9 existing connections:
  - new app asks for 1 TCP, gets rate R/10
  - new app asks for 11 TCPs, gets R/2

Acknowledgement

- These notes are adapted from the publishers material.