


Proz Educação

Exercício de criação de topologia com um Switch e quatro computadores.

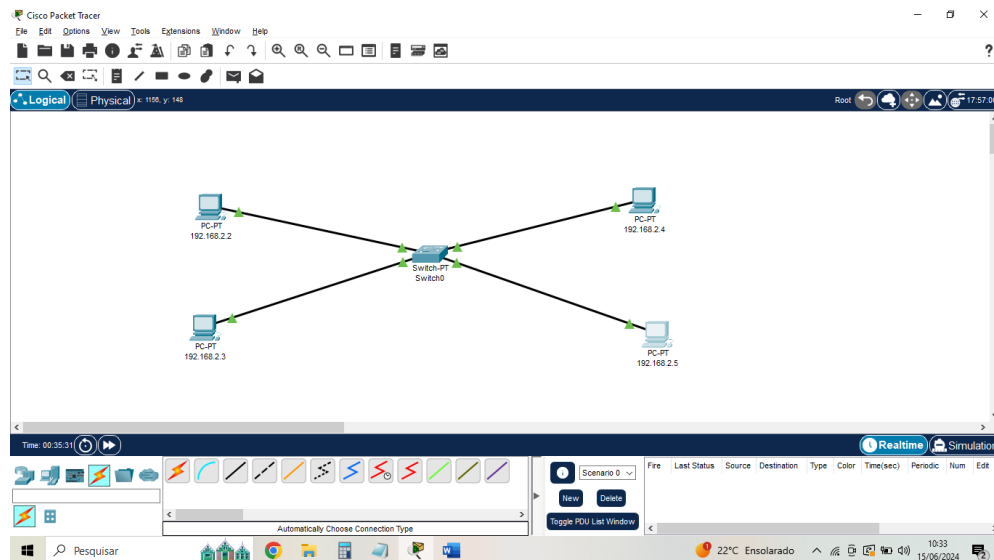

Definição dos IP's

The configuration window for PC 192.168.2.2 is shown. The 'Desktop' tab is selected. The 'P Configuration' window is open, showing the configuration for the 'FastEthernet0' interface. The 'IP Configuration' section is expanded, showing the 'Static' option selected. The IP Address is set to 192.168.2.2, the Subnet Mask is 255.255.255.0, the Default Gateway is 0.0.0.0, and the DNS Server is 0.0.0.0. The 'IPv6 Configuration' section is also expanded, showing the 'Static' option selected. The IPv6 Address is set to FE80::2E0:B0FF:FE96:7AD6, the Link Local Address is FE80::2E0:B0FF:FE96:7AD6, the Default Gateway is empty, and the DNS Server is empty. The '802.1X' section is expanded, showing the 'Use 802.1X Security' checkbox unchecked, the Authentication dropdown set to MD5, and the Username and Password fields empty.

192.168.2.3

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.2.3

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::290:CFF:FE3E:BA04

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

192.168.2.4

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.2.4

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::20A:F3FF:FE93:4769

Default Gateway

DNS Server

802.1X


☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

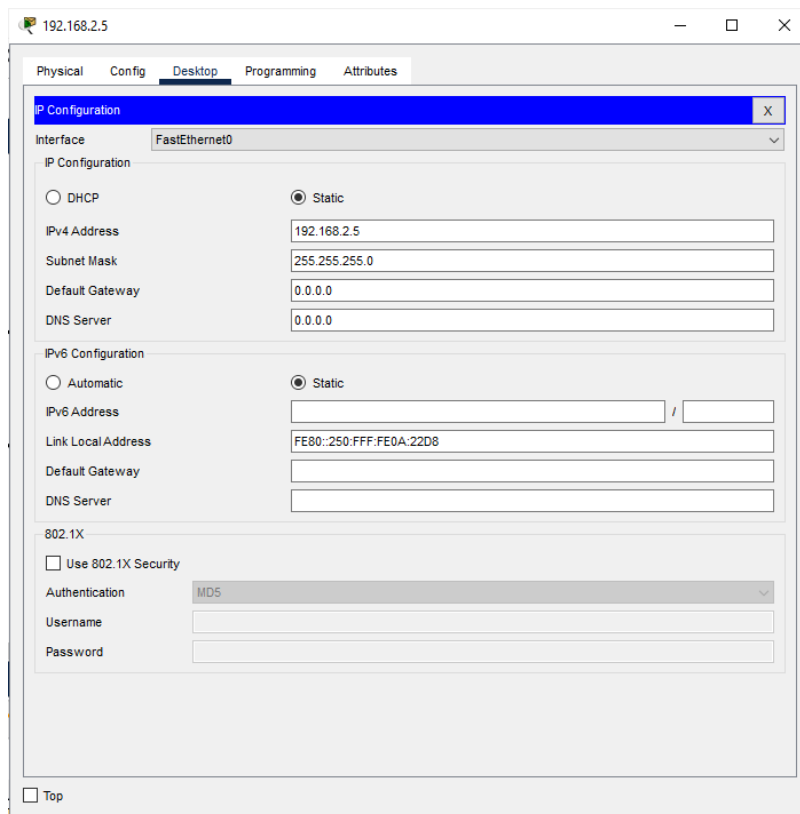

Teste de ping em cada um dos computadores.

