


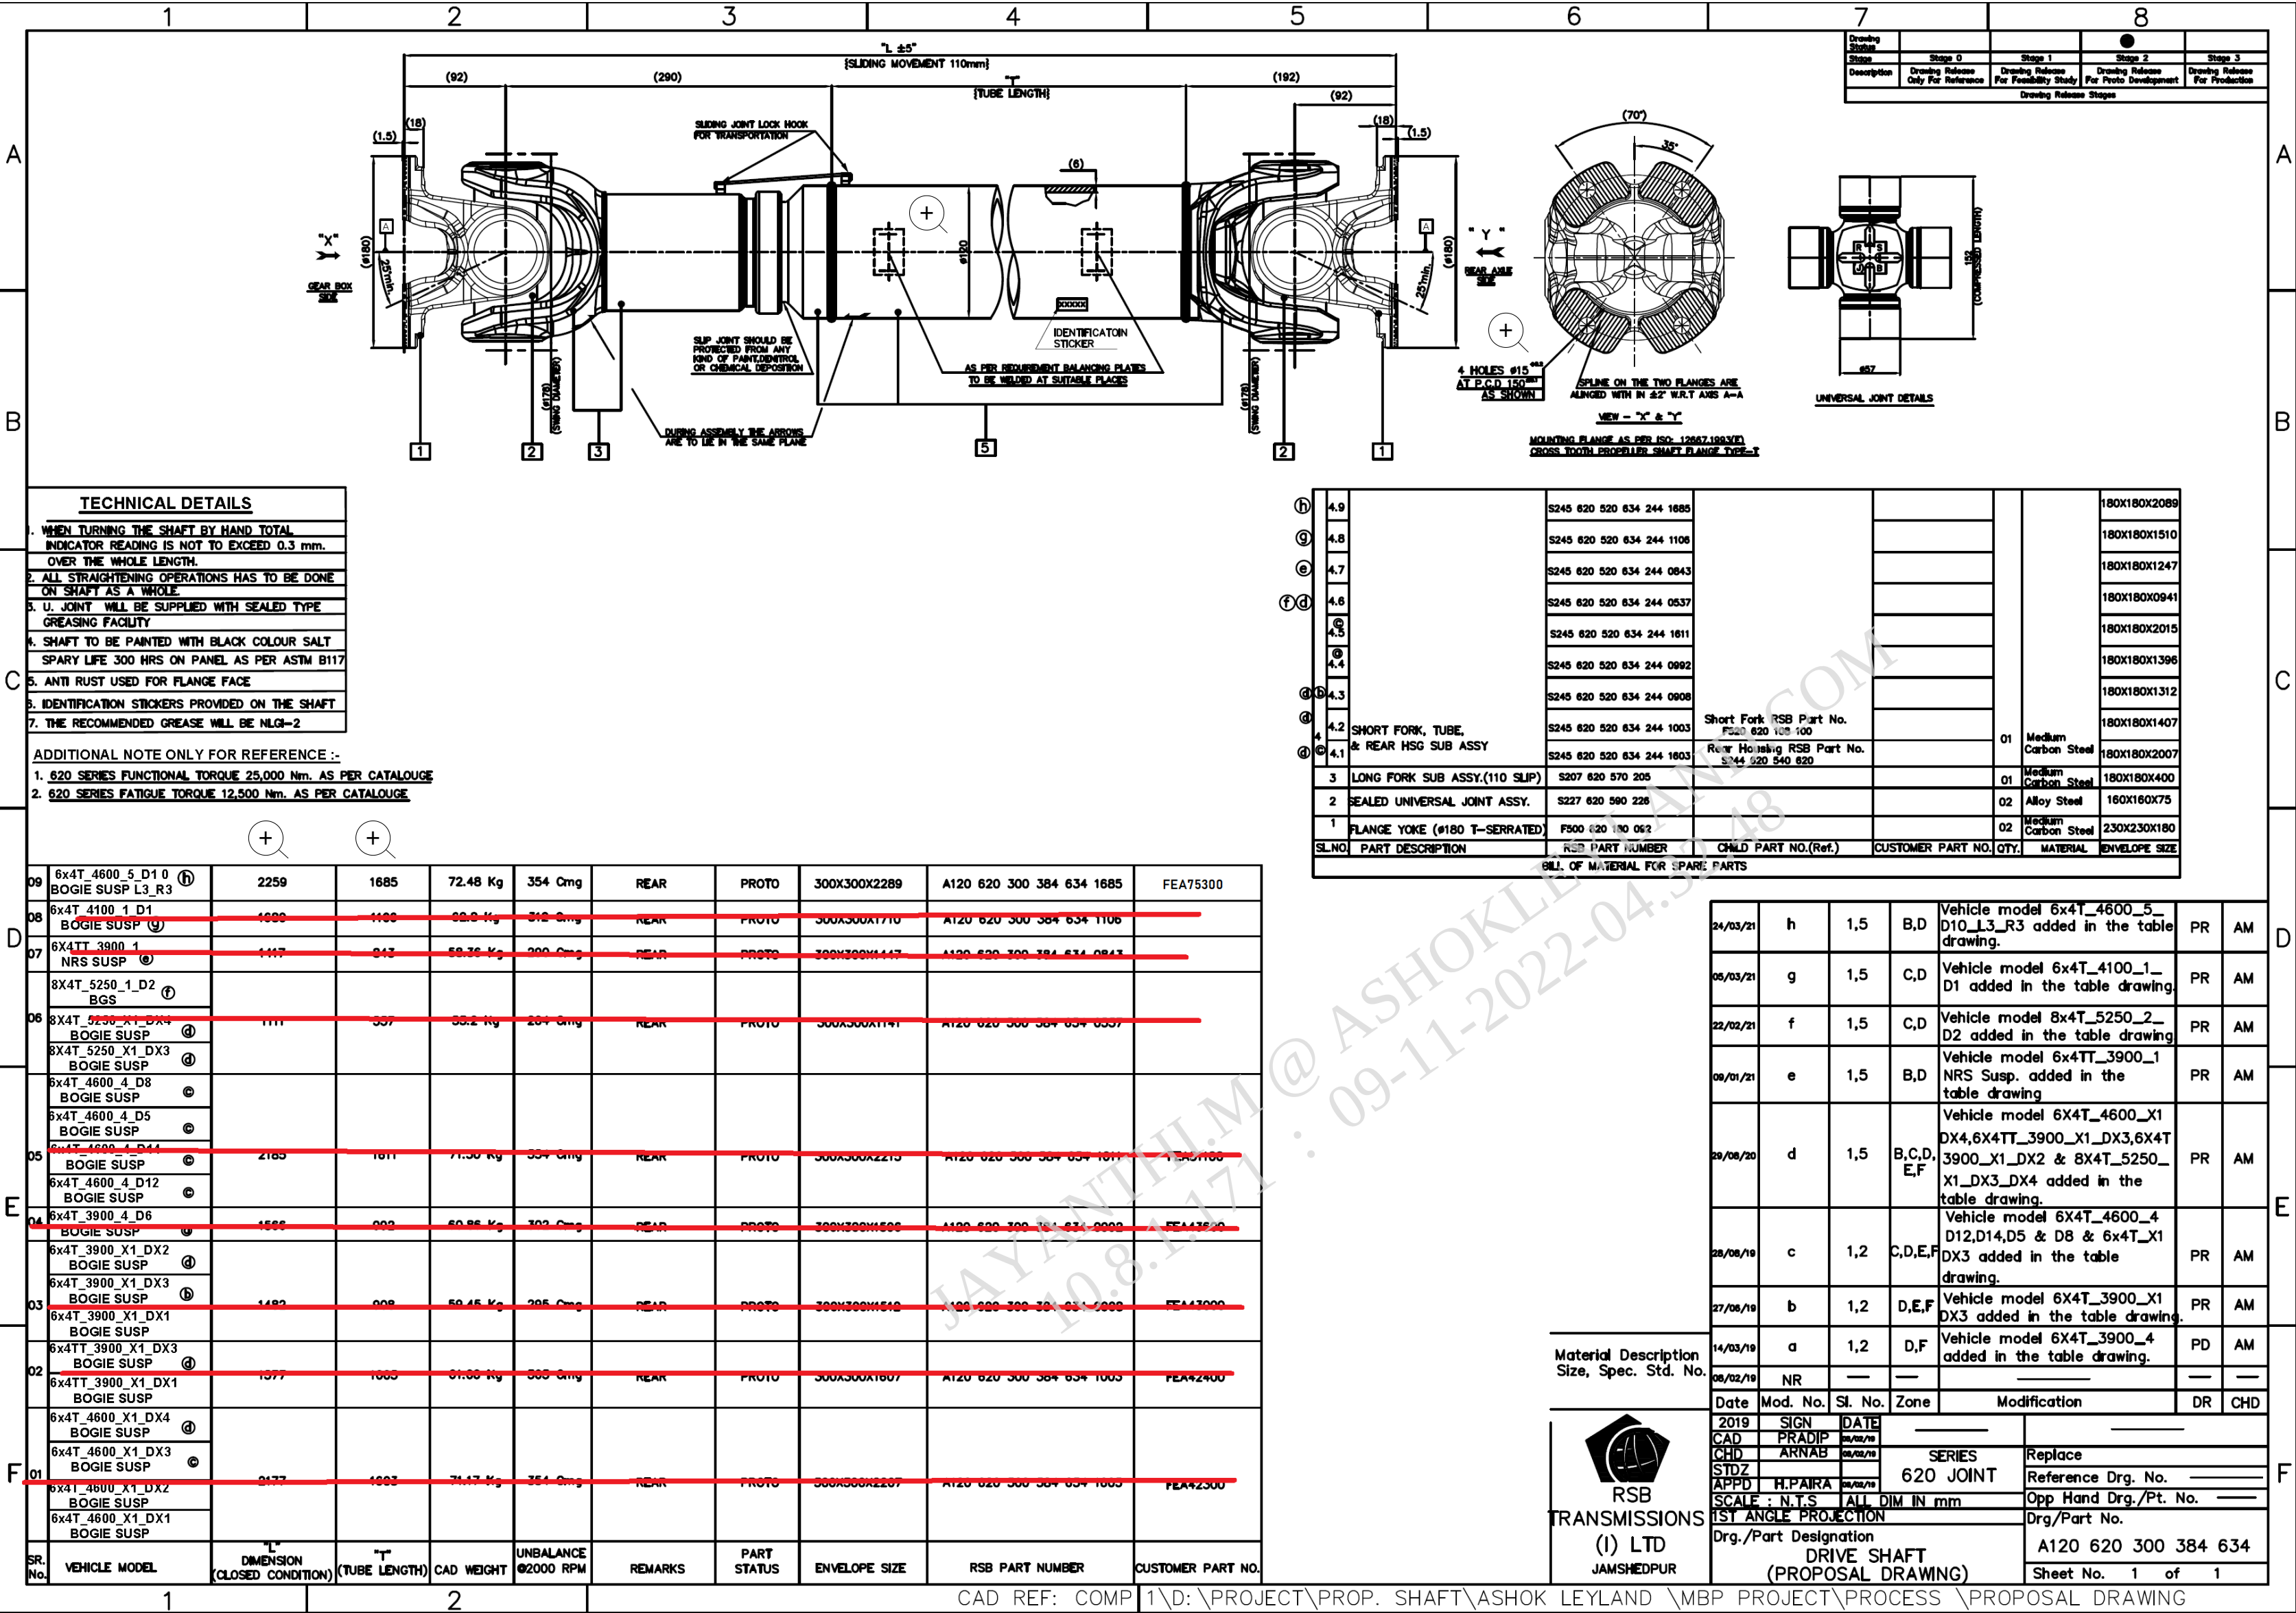

A120 620 300 384 634 1685		FEA75300	Qty : -	Qty : -	-
Supplier Part No		AL Part No	Sample	Pilot	 Production
SURFACE PROTECTION		CLASS C AS PER ALS.268.03			
THIS DRG.CONTAINS ( @ CRITICAL  @ SAFETY  @ IMPORTANT) CHARACTERISTICS					
UNLESS OTHERWISE SPECIFIED					
TOLERANCES		REFER IS:2102; MEDIUM FOR MACHINING AND COARSE FOR FABRICATION			
SURFACE PROTECTION		TO MEET THE REQUIREMENT OF ALS.268.03			
SURFACE FINISH AS PER IS:3073(CLA VALUE) 		METRIC SCREW THREADS SHALL CONFORM TO THE LIMITS AND TOLERANCES SPECIFIED IN THE CURRENT IS:4218 CLASS 6g EXTERNAL OR 5H INTERNAL			SHARP EDGES TO BE REMOVED DIMENSIONS ARE IN MM DO NOT SCALE DRAWING

SPECIAL INSTRUCTIONS/NOTE:

- 1)NO PAINTING ALLOWED IN ASSEMBLY INSTALLATION AT SLIP JOINT,GREASE NIPPLE, CB AND UJ JOINTS.
- 2)THE ORIENTATION OF MOUNTING HOLE PATTERN IN FRONT END CONNECTING FLANGE AND REAR END CONNECTING FLANGE SHOULD BE SAME.

BILL OF MATERIALS			
APPEARANCE ITEM	ER-DIN	DATE	
-YES-	NO	CA-0083912	05.05.2022
FINISHED WEIGHT(APPROX)	REF PART NO:	---	
72.48 Kgs	S/A PART NO:	---	
SCALE	SUPERSEDES	---	
NTS	SPEC NO:	---	

ALTERATIONS			ER-DIN DATE		GRADE	SUFFIX
---			---		-	--