

INFRA.MARKET PLYWOOD

ply mein hai dum



OUR VISION

REBUILDING THE FUTURE OF CONSTRUCTION THROUGH INNOVATION AND TECHNOLOGY.

ABOUT INFRA.MARKET

Founded in 2016 and valued at \$3 billion, Infra.Market is India's leading construction materials company. Bolstered by strategic investments in companies including RDC Concrete and Shalimar Paints, and equipped with 10,000+ retail touchpoints, 25 flagship stores, 50+ warehouses, 200+ concrete plants, and 50+ manufacturing units, Infra.Market is integrating technology throughout the construction industry's value chain to enhance operational efficiency. It is the only company to seamlessly supply over 15 different product categories, including Concrete, AAC Blocks, Steel, Pipes & Fittings, MDF, Plywood, Laminates, Tiles, Bath Fittings & Sanitaryware, Fans, Lights, Appliances, Modular Kitchens, Designer Hardware, and Paints.

OUR STRENGTHS



Tech Enabled.




Pan India presence.



India's widest multi-product, multi-category brand in the construction material industry.

OUR BUSINESS

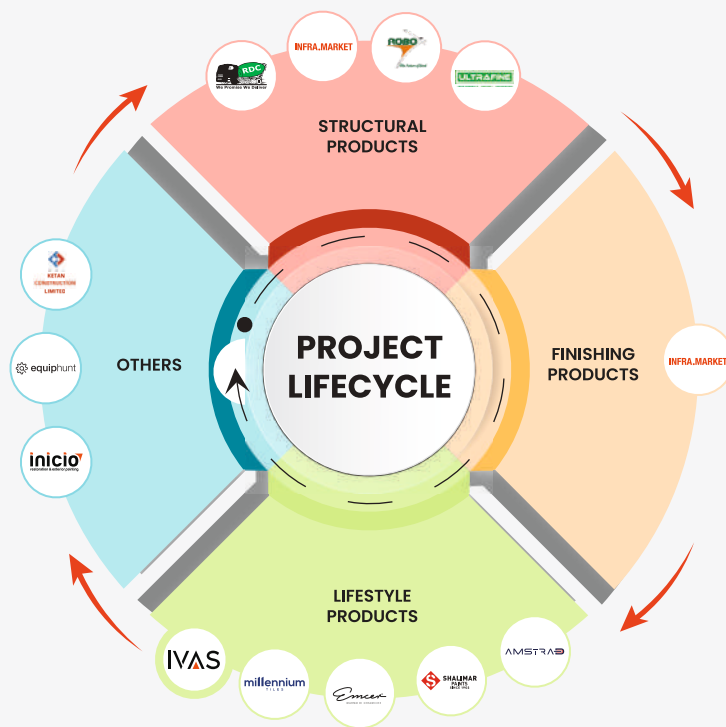

STRUCTURAL PRODUCTS



Concrete



Aggregates



Steel



Construction Chemicals



Cementitious Products

FINISHING PRODUCTS



AAC Blocks



Pipes & Fittings




MDF | Plywood Laminates



Roofing Products

LIFESTYLE PRODUCTS




Tiles | Bath Fittings
Sanitaryware




Paints



Modular
Kitchens &
Hardware



Fans | Lighting



Big & Small
Appliances



Consumer
Durables

OTHERS



Rental
Equipment



Chemicals



Painting
Services



Construction
Services

AWARDS & RECOGNITION

Great
Place
To
Work®

Certified

JAN 2024 - JAN 2025

INDIA




How Infra.Market Intends To Stay In The Fast Lane As Sales, Profit Jump



Infra.Market achieved the rare feat of turning in profits year after year since it started operations

Streaming exclusively on



Watch Episode #5 of the Great Indian Disruptors Season 1



Construction Materials Startup Infra.Market Divests About 10% Of Its Stake In RDC Concrete For \$20 M

Infra.Market recently divested around 10% of its stake in RDC Concrete, a subsidiary, for \$20 million, as part of preparations for RDC Concrete's IPO. This move aims to raise funds and values RDC Concrete significantly



Infra.Market posts 5 times jump in net profit to Rs 186 crore in FY22

New Delhi, Oct 13 (PTI) Construction focussed e-commerce unicorn Infra.Market has recorded over five-fold jump in profit after tax to Rs 186 crore in the financial year ended on March 31, 2022, the company said on Thursday. The company had registered a profit after tax of Rs 36 crore in 2020-21.



Infra.Market launches its first all-women RMC plant in Pune



The fastest growing unicorn transforming an industry by Building Revolutions


OUR GROWTH STORY

Infra Market is a one-stop construction solutions company with a vision to create India's largest multi-product construction materials brand. Through tech innovations and ingenuity, we strive to change the construction eco-system, in India and around the world.

We take products everyone's familiar with, and fuse with unconventional thinking to give our patrons a range of offerings. Think Steel, Cement, RMC, AAC Blocks, MDF, Plywood, Laminates, Plumbing, Paints, Electricals as well as Walling, Roofing and Flooring Solutions and many more.

After building a diverse global clientele across infrastructure and manufacturing sectors, the company has grown strength to strength, category by category. With a growing supply to retail outlets, Infra.Market has a presence in 17 states with 3500+ retail touchpoints and 30+Intra.Market stores.

Infra.Market products are the perfect synthesis of design, novelty, affordability, and convenience. Our curated collections are designed to match the tastes and aspirations of our esteemed customers. Every design caters to the senses in terms of aesthetics, and sensibilities in terms of just how perfectly functional they are.

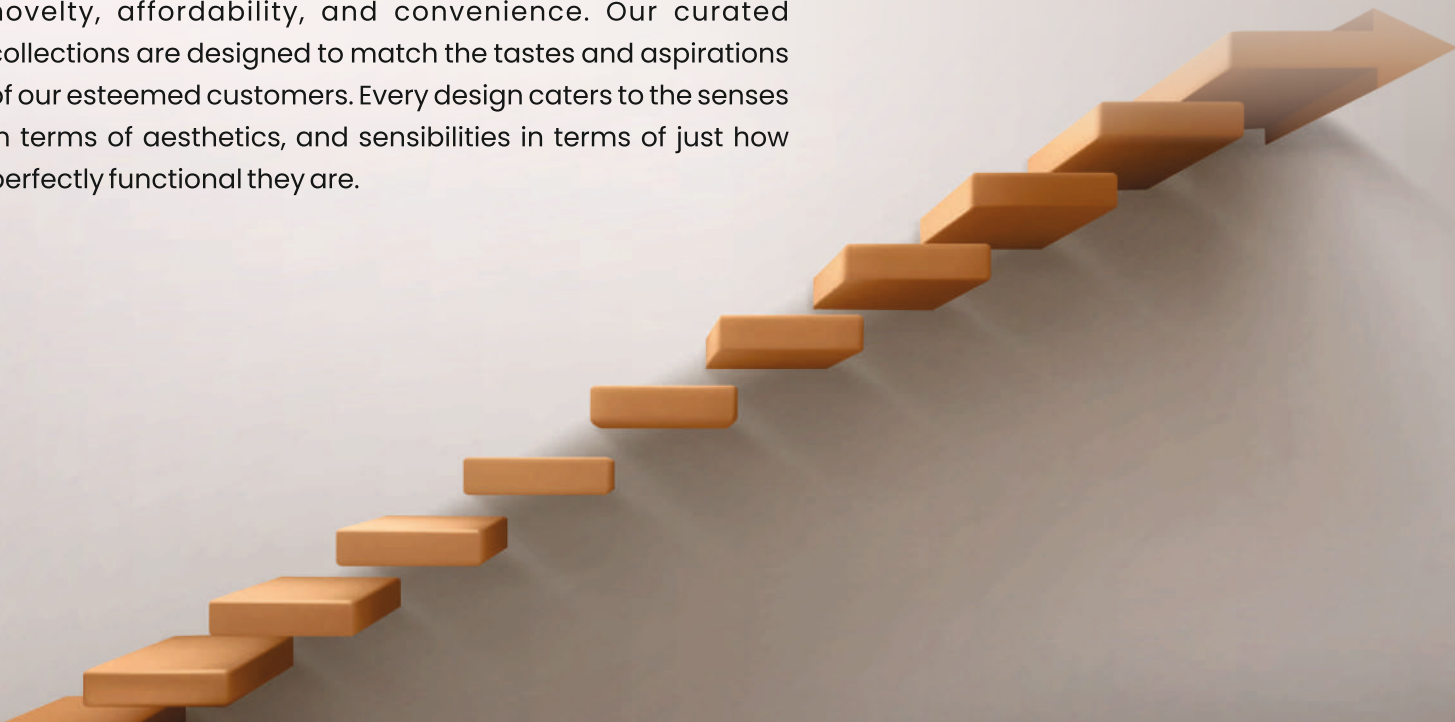

Why Infra.Market Plywood?



Innovation

Innovation has always been at the heart of everything at Infra Market. And we've now applied our passion for innovation in our entry into the plywood category. Precision in crafting, attention to the minutest detail, and utmost care in handling are some of the key features that every Infra.Market plywood stand out and outperform the rest.

We care for Mother Earth

We owe a lot to nature. And that's why we give back more than what we take from mother earth with our CSR activities and special drives to improve and sustain plantation. Every product is made using renewable wood resources only.

Certifications

The Infra.Market name spells trust. That's why every product undergoes multiple levels of testing at our NABL testing lab to ensure our customers get only the best of the best. We are CARB, ISO, FSC, CE certified.

Our Products

Plywood from Infra.Market boast of features such, MR, BWP grade with high calibration, E0 Emission, Microbes resistant and Partial fireproof.

INDEX

1	Timba Gold MR	9
2	Timba Gold 710	11
3	MarinaQuadro BWP	13
4	MarinaQuadro Plus	15
5	Calibrum MR	17
6	Calibrum BWR	19
7	Calibrum Plus	21
8	Technical Specifications	23
9	Precautions Need to be Taken	30
10	Know Your Plywood	31

CERTIFICATIONS



Comes with the most important feature

– Peace of Mind

Best quality, proven safety, value for money... when a plywood can boast of these features, it automatically allows you to let go of all your worries.



Typically wood products are known to emit naturally occurring formaldehyde that has a pungent smell. It's an eye irritant and is also known to be harmful to human health. Infra.Market plywood complies with the standard European norms of formaldehyde emissions (EO & EI), emitting negligible amounts of formaldehyde, making your interiors a safer space. The mind is at peace when we feel safe.





Tastefully designed furniture adds style and elegance to our interiors. But living spaces are not just about aesthetics. Protecting our spaces from unforeseen calamities such as fire is of utmost importance. Infra.Market also sell FR plywoods as they re specially treated with TCP (Tri Chrysyl Phosphate), thereby providing unmatched protection against fire.



Whether it's moisture, termite, borer, or fungus, wood has its foes too. But if it's Infra.Market plywood, you can be rest assured that the plywood is immune to it all, and performs like new for years to come.



With Infra.Market you are always assured of best quality. But we don't just want you to take our word for it... that's why every Infra.Market plywood is backed by warranties ranging from 5 years to a lifetime.



APPLICATIONS



Office File
Cabinets



Wardrobe



TV Unit



TIMBA GOLD MR

MR grade plywood, made with 100% hardwood. It is most suited panel for interior furniture, wardrobe, office cabinets etc with E1 emission. It offers immunity against termite & borer.

FEATURES



EMISSION
LEVEL E-1



IS 303



BORER PROOF &
TERMITE RESISTANT



FULLY
CALIBRATED



100%
HARDWOOD



MATT
PLY



MOISTURE
RESISTANT




11 YEARS
WARRANTY*

AVAILABLE IN:

6 MM, 8 MM, 12 MM,
15 MM & 18 MM

Also available Timba Gold MR Block Board (19MM & 25MM)
with Pine Frame & Selected Wood Filler.

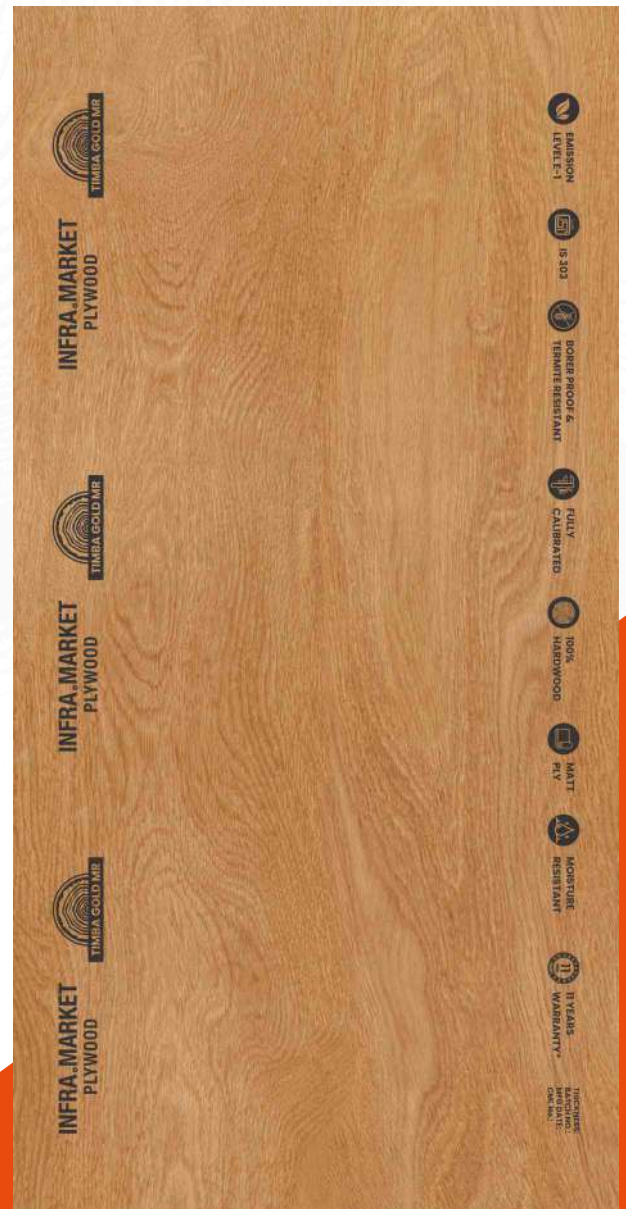



APPLICATIONS



Storage
Cabinets



Sofa



Bed



TIMBA GOLD 710

Built gap-free with non overlapping layers, it comes with a 21-year "Peace of mind" warranty. Made from selected hardwood species and 100% composed core, Timba Gold 710 is MUF resin ply. Owing to least formaldehyde emissions (E1 Level), it promises no teary eyes or breathing suffocation. Furthermore, it provides total protection against termites, borer, and fungus, ensuring a long, hassle-free life for your home and office furniture.

FEATURES



**WATER PROOF
PLY**



**MFG. IN ACC.
TO 710**



**FULLY
CALIBRATED**



**MATT
PLY**



**BORER &
TERMITE PROOF**



**MUF - GLUE LINE
PROTECTION**



**EMISSION
LEVEL - E1**



**100%
HARDWOOD**




**21 YEARS
WARRANTY***

AVAILABLE IN:

**6 MM, 9 MM, 12 MM,
16 MM & 19 MM**

Also available Timba Gold 710 Block Board (19MM & 25MM)
in MUF Resin, Full Pine Frame & Pine Filler.

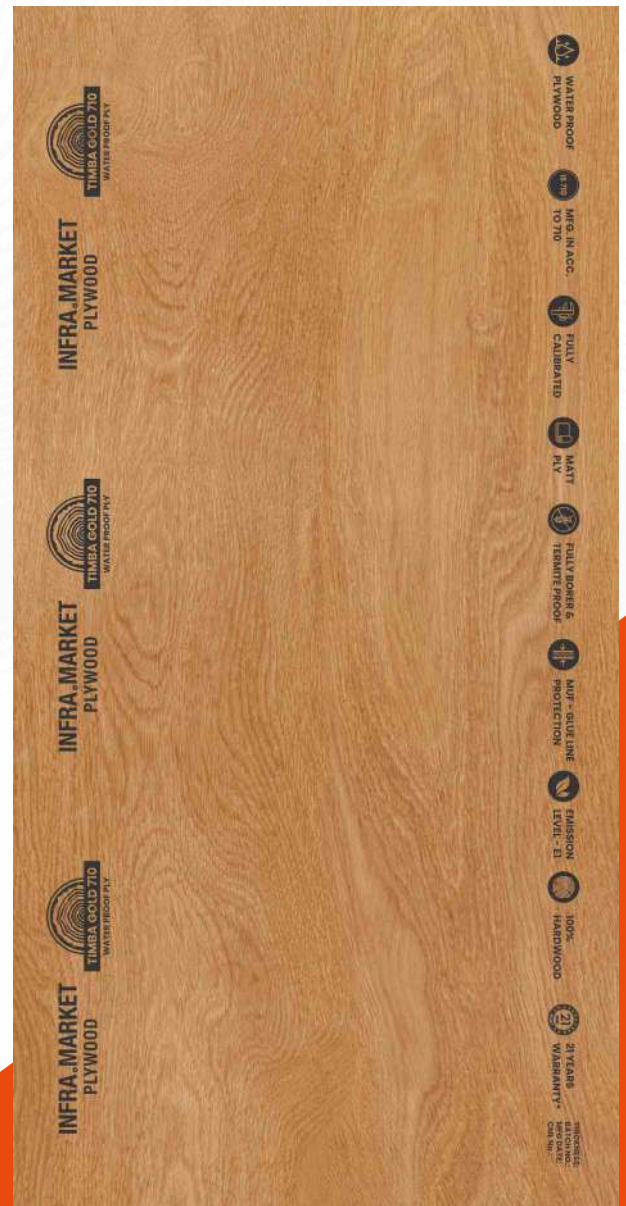



APPLICATIONS



Structural
Home Building



Kitchen



MARINAQUADRO BWP

A marine-grade plywood complying with E0 emission norms, emitting negligible amounts of formaldehyde, making your interiors a safe space. Our VierPro technology with 4 steps of Hot and Cold pressing lends uniformity and is compressed to give extra strength.

Being Marine BWP grade ply it is naturally immune to termite attacks, borer, and fungus. Backed by a solid 30-year warranty, MarinaQuadro BWP is the most preferred plywood, and can be used for making best-in-class and long-enduring furniture, modular kitchen cabinets.

FEATURES



**BOILING
WATERPROOF**



**EMISSION
LEVEL E-0**



IS 710



**VIERPRO
TECHNOLOGY**



**BORER &
TERMITE PROOF**



**30 YEARS
WARRANTY***



**FULLY
CALIBRATED**



**MATT
PLY**



**PREMIUM
GURJAN FACE**




**PF - GLUE LINE
PROTECTION**

AVAILABLE IN:

**6 MM, 9 MM, 12 MM,
16 MM & 19MM**

Also available MarinaQuadro BWP Block Board (19MM)
in BWP Resin, Full Pine Frame & Pine Filler.

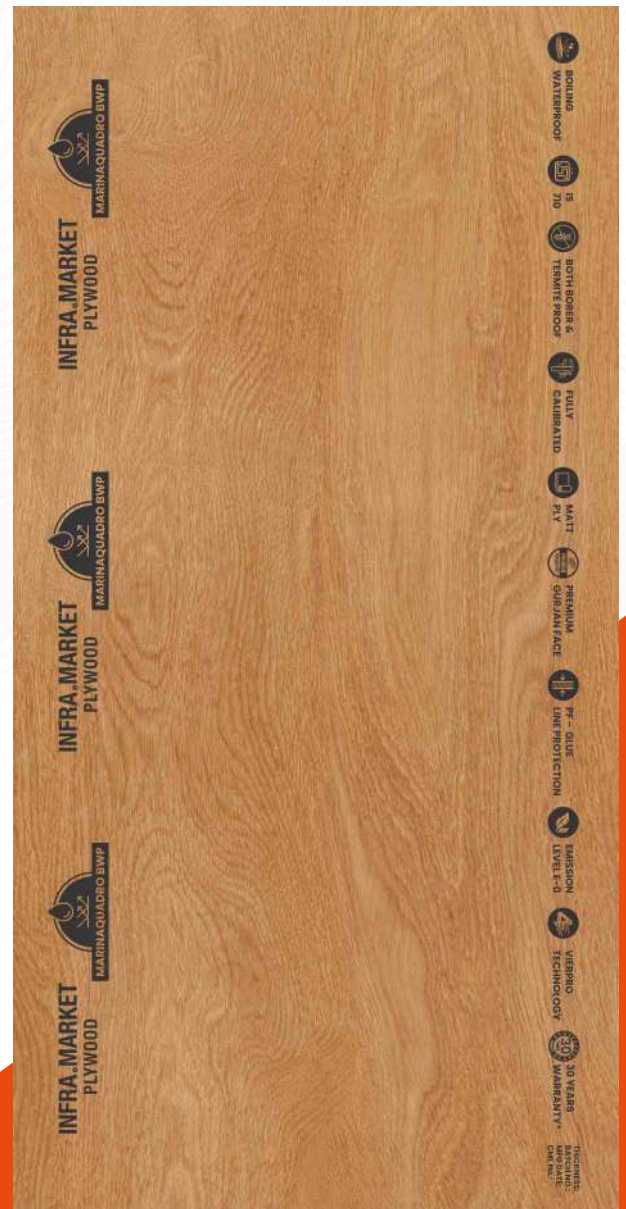



APPLICATIONS



Premium
Villas



Highrise
Buildings



Auditorium



Restaurants



MARINAQUADRO PLUS



Think of it as insurance for your luxury furniture. It comes with fire-retardant technology which can delay spreading of fire. Its E0 emission compliance, bacteria and fungi proof qualities make it one of the safest plywoods ever. Made with thicker face veneer, MQ Plus is additionally pressed for extra strength and precision. It comes with a 100% money-back guarantee, against manufacturing defects.

FEATURES



**FIRE
RETARDANT**



**VIERPRO
TECHNOLOGY**



**BOILING
WATERPROOF**



**EMISSION
LEVEL E-0**



IS 710/5509



**100% LIFETIME
WARRANTY**



**FULLY
CALIBRATED**



**MATT
PLY**



**PREMIUM
GURJAN FACE**




**BOTH BORER &
TERMITE PROOF**



**PF - ALL GLUE LINE
PROTECTION**

AVAILABLE IN:

6 MM, 9 MM, 12 MM,
16 MM & 19 MM

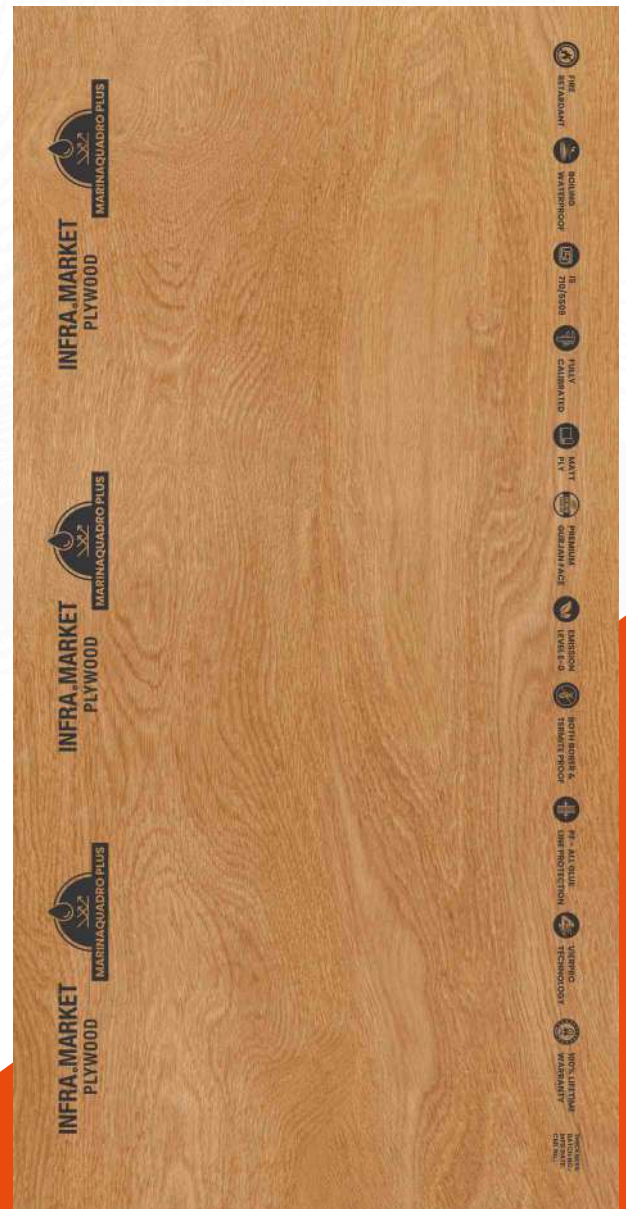



APPLICATIONS



Office File
Cabinets



Wardrobe



TV Unit



CALIBRUM MR

16 MM CALIBRATED



100% fully calibrated with composed core giving the precision required without any bend or warps, the matt finish gives it extra smooth surface to find the best designs of laminates of your choice. It is IS 303 certified MR grade plywood, is the best for use in Luxury modular kitchen, high precision furniture, Wardrobes, Doors.

FEATURES



EMISSION
LEVEL E-1



IS 303



BORER PROOF &
TERMITE RESISTANT



FULLY
CALIBRATED



100%
HARDWOOD



MATT
PLY




MOISTURE
RESISTANT



11 YEARS
WARRANTY*

AVAILABLE IN:

16 MM

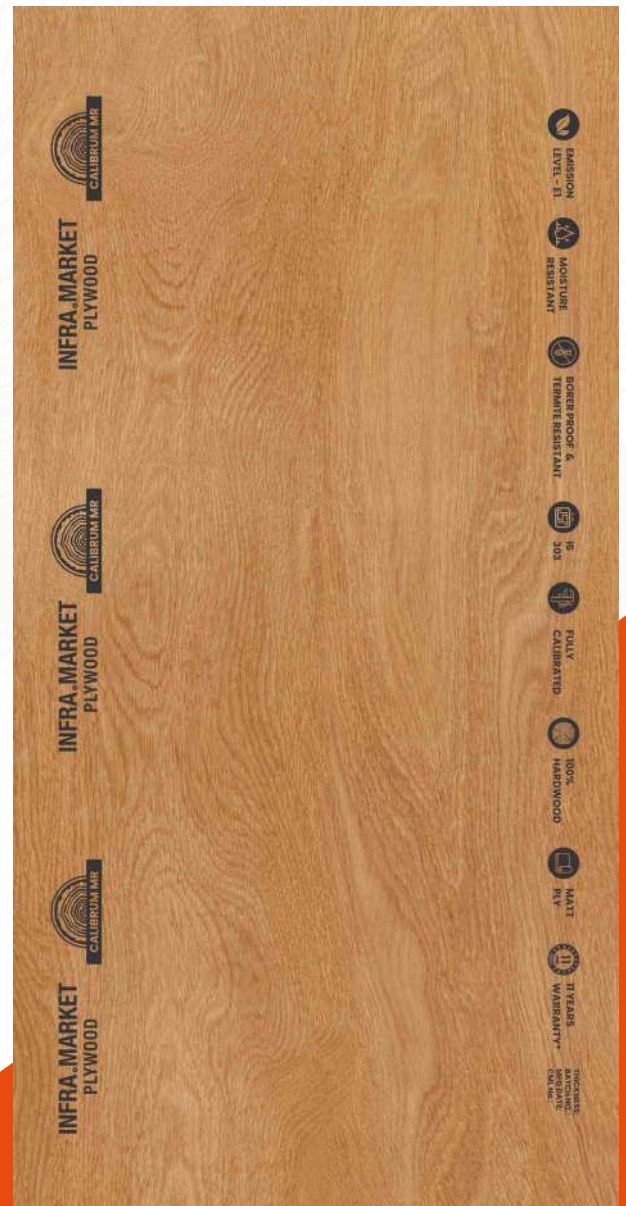



APPLICATIONS



Storage
Cabinets



Sofa



Bed



CALIBRUM BWR

16 MM CALIBRATED



Built gap-free with non overlapping layers, it comes with a 15-year "Peace of mind" warranty. Made from selected hardwood species and 100% composed core, Calibrum BWR grade is MUF resin ply. Owing to least formaldehyde emissions (E1 Level), it promises no teary eyes or breathing suffocation. Furthermore, it provides total protection against termites, fungus, ensuring a long, hassle-free life for your home and office furniture.

FEATURES



**BOILING WATER
RESISTANT**



**VIERPRO
TECHNOLOGY**



**FULLY
CALIBRATED**



**MATT
PLY**



**FULLY BORER &
TERMITE FREE**



**MUF - GLUE LINE
PROTECTION**



**EMISSION
LEVEL - E1**



**100%
HARDWOOD**



**15 YEARS
WARRANTY***

AVAILABLE IN:

16 MM





APPLICATIONS



Furniture



Kitchen



Wardrobe



Bathroom
Cabinets



CALIBRUM PLUS

16 MM CALIBRATED

100% fully calibrated with composed core, and is boiling waterproof. It gives consumers giving the precision required without any bend or warps and can be used with full confidence at places exposed to moisture. The matt process gives it extra smooth surface to find the best designs of laminates of your choice. This is IS 710 certified BWP grade plywood is the best for use in Luxury modular kitchen, high precision furniture, Wardrobe, Doors.

FEATURES

**FULLY
CALIBRATED****MATT
PLY****BOILING
WATERPROOF****21 YEARS
WARRANTY*****BORER & TERMITE
PROOF****IS 710****EMISSION
LEVEL - E0****GLUE LINE
PROTECTION**

AVAILABLE IN:

16 MM

Technical Specifications



Sr. No.	Tests Method	ISI Requirements	Observed Values
1	Dimension Squareness	Length: +6mm	Length- 2441 mm
		Width: +3mm	Width- 1221 mm
		Thickness: +/- 5 %	Thickness: 18 mm
		Max: 0.20%	Squareness - 0.14 %
2	Moisture Content	Moisture should not be less than 5% and Do not more than 15%	7.5%
3	Glue Adhesion & Water Resistance Test (cyclic test followed by knife test: A cycle of 3 hrs. submerged at 60°C +/- 2 °C and 8 hrs. drying at 65°C +/- 2 °C)	After 3 cycles	Satisfactory
4	Modulus of Elasticity a) Along the grains of the face Veneer	Average: 4000 N/mm ² Min. Individual-3600 N/mm ²	4355 N/mm ² 3780 N/mm ²
	b) Across the grain of the Face Veneer	Average: 2000 N/mm ² Min. Individual-1800 N/mm ²	2190 N/mm ² 2040 N/mm ²
5	Modulus of Rupture a) Along the grains of the face Veneer	Average: 30 N/mm ² Min. Individual-27 N/mm ²	34 N/mm ² 29 N/mm ²
	b) Across the grain of the face Veneer	Average: 15 N/mm ² Min. Individual-13	18 N/mm ² 13.9 N/mm ²


TIMBA GOLD 710

Sr. No.	Tests Method	ISI Requirements	Observed Values
1	Dimension Squareness	Length: +6mm	Length- 2442 mm
		Width: +3mm	Width- 1221 mm
		Thickness: +/- 5 %	Thickness: 19 mm
		Max: 0.20%	Squareness - 0.13 %
2	Moisture Content	Moisture content should not be less than 5% and not more than 15%	9.4%
3	Glue Adhesion in a) Dry State	Minmum Individual: 1100 Avg.: 1350 N	1401 N
	b) Wet Strength	Minm Individual: 800 N Avg.: 1000 N	1110 N
	c) Adhesion of Plies	Bond shall show minimum Pass Standard, Poor or Excellent	Satisfactory
4	Glue Adhesion & Water Resistance Test (cyclic test followed by knife test: A cycle of 8 hrs. submerged at 60°C +/- 2 °C and 8 hrs. drying at 65°C +/- 2 °C)	After 4 cycles	Satisfactory
5	Mycological Test a) Glue Shear Strength	Average 1000 N Minimum Individual : 800 N	Satisfactory
	b) Adhesion of Plies	Test piece shall show no appreciation signs of separation at the edges of the Veneers	Satisfactory
6	Modulus of Elasticity a) Along the grains of the face Veneer	Average: 5000 N/mm ² Min. Individual- 4500 N/mm ²	5534 N/mm ² 4850 N/mm ²
	b) Across the grain of the Face Veneer	Average: 2500 N/mm ² Min. Individual- 2200 N/mm ²	2800 N/mm ² 2630 N/mm ²
7	Modulus of Rupture a) Along the grains of the face Veneer	Average: 40 N/mm ² Min. Individual- 36 N/mm ²	45 N/mm ² 39 N/mm ²
	b) Across the grain of the face Veneer	Average: 20 N/mm ² Min. Individual- 18	22 N/mm ² 20 N/mm ²

Sr. No.	Tests Method	ISI Requirements	Observed Values
1	Dimension Squareness	Length: +6mm	Length- 2442 mm
		Width: +3mm	Width- 1221 mm
		Thickness: +/- 5 %	Thickness: 19 mm
		Max: 0.20%	Squareness - 0.16 %
2	Moisture Content	Moisture content should not be less than 5% and not more than 15%	7.65%
3	Glue Adhesion in Dry State a) Glue Shear Strength	Avg.: 1350 N Min. Individual: Avg.: 1100 N	1411 N 1176 N
	b) Adhesion of Plies	Bond shall show minimum Pass Standard, Poor or Excellent	Satisfactory
4	Water Resistance Test (After 72 hours boiling in water) a) Glue Shear Strength	Average : 1000 N Minimum Individual : 800 N	1249 N 915 N
	b) Adhesion of Plies	Bond shall show minimum Pass Standard, Poor or Excellent	Satisfactory
5	Tensile Strength a) Along the grain direction	Should not be less than 42.0 N/mm ²	54.20 N/mm ²
	b) Across the grain direction	Should not be less than 25.0 N/mm ²	41.82 N/mm ²
	c) Sum of both the direction	Should not be less than 84.5 N/mm ²	96.02 N/mm ²
6	Mycological Test a) Glue Shear Strength	Average 1000 N Minimum Individual : 800 N	1250 N 1010 N
	b) Adhesion of Plies	Adherent fibre distributed more or less uniformly	Excellent
7	STATIC BENDING STRENGTH (DRY STATE)		
	Modulus of Elasticity a) Along the grains of the face Veneer	Average: 7500 N/mm ² Min. Individual-6700 N/mm ²	7950 N/mm ² 7270 N/mm ²
	b) Across the grain of the Face Veneer	Average: 4000 N/mm ² Min. Individual-3600 N/mm ²	4845 N/mm ² 4115 N/mm ²
	Modulus of Rupture a) Along the grains of the face Veneer	Average: 50 N/mm ² Min. Individual-45 N/mm ²	60 N/mm ² 55 N/mm ²
	b) Across the grain of the face Veneer	Average: 30 N/mm ² Min. Individual-27 N/mm ²	36 N/mm ² 29 N/mm ²
8	STATIC BENDING STRENGTH (WET STATE)		
	Modulus of Elasticity a) Along the grains of the face Veneer	Average: 3570 N/mm ² Min. Individual- 3400 N/mm ²	4525 N/mm ² 3770 N/mm ²
	b) Across the grains of the face Veener	Average: 2000 N/mm ² Min. Individual-1800 N/mm ²	2845 N/mm ² 2215 N/mm ²
	Modulus of Rupture a) Along the grains of the face Veneer	Average: 25 N/mm ² Min. Individual- 22 N/mm ²	30 N/mm ² 25 N/mm ²
	b) Across the grains of the face Veener	Average: 15 N/mm ² Min. Individual-13	21 N/mm ² 15 N/mm ²

Sr. No.	Tests Method	ISI requirements	Observed Values
1	Dimension Squareness	Length: + 6 mm	Length- 2442 mm
		Width: +3 mm	Width- 1221 mm
		Thickness: + / - 5 %	Thickness: 19 mm
		Max: 0.20%	Squareness: 0.13 %
2	Moisture Content	Moisture content should not be less than 5% and not more than 15%	8.3%
3	Glue Adhesion in Dry State (a) Glue Shear Strength	Average: 1350 N Minimum Individual: 1100 N	1401 N 1110 N
	(b) Adhesion of Plies	Bond shall show minimum Pass Standard, Poor or Excellent	Satisfactory
4	Water Resistance test (After 72 hours boiling in water) (a) Glue Shear Strength	Average: 1000 N Minimum Individual: 800 N	1099 N 1002 N
	(b) Adhesion of Plies	Bond shall show minimum Pass Standard, Poor or Excellent	Satisfactory
5	Tensile Strength (a) Parallel to the grain direction	Should not be less than 42.0 N/mm ²	57.93 N/mm ²
	(b) Perpendicular to the grain direction	Should not be less than 25.0 N/mm ²	40.12 N/mm ²
	(c) Sum of both the direction	Should not be less than 84.5 N/mm ²	98.05 N/mm ²
6	Mycological Test (a) Glue Shear Strength	Average 1000 N Minimum Individual: 800 N	1310 N 1260 N
	(b) Adhesion of Plies	Test piece shall show no appreciation signs of separation at the edges of the Veneers	No appreciation sign of separation at the edges of the Veneers
7	Modulus of Elasticity (a) Along the grains of the face Veneer	Average: 5000 N/mm ² Min. Individual- 4500N/mm ²	7820 N/mm ² 7200 N/mm ²
	(b) Across the grains of the face Veneer	Average: 2500 N/mm ² Min. Individual- 2200 N/mm ²	4750 N/mm ² 3840 N/mm ²
8	Modulus of Rupture (a) Along the grains of the face Veneer	Average: 40 N/mm ² Min. Individual - 36 N/mm ²	54 N/mm ² 48 N/mm ²
	(b) Across the grains of the face Veneer	Average: 20 N/mm ² Min. Individual - 18	36 N/mm ² 30 N/mm ²
9	Horizontal rate of burning	The result of the test shall be considered satisfactory if taking the worst test results into account, the horizontal burning rate is not more than 100 mm / min or if the flame extinguishes before reaching the last measuring point	Satisfactory
10	Vertical rate of burning	The result of the test described in Annex B shall be considered satisfactory if taking the worst test results into account the vertical burning rate is not more than 100 mm / min	Satisfactory

Technical Specifications



Sr. No.	Tests Method	ISI Requirements	Observed Values
1	Dimension Squareness	Length: +6mm	Length- 2441 mm
		Width: +3mm	Width- 1221 mm
		Thickness: +/- 5 %	Thickness: 16 mm
		Max: 0.20%	Squareness - 0.14 %
2	Moisture Content	Moisture should not be less than 5% and Do not more than 15%	7.5%
3	Glue Adhesion & Water Resistance Test (cyclic test followed by knife test: A cycle of 3 hrs. submerged at 60°C +/-2 °C and 8 hrs. drying at 65°C +/- 2 °C)	After 3 cycles	Satisfactory
4	Modulus of Elasticity a) Along the grains of the face Veneer	Average: 4000 N/mm ² Min. Individual-3600 N/mm ²	4355 N/mm ² 3780 N/mm ²
	b) Across the grain of the Face Veneer	Average: 2000 N/mm ² Min. Individual-1800 N/mm ²	2190 N/mm ² 2040 N/mm ²
5	Modulus of Rupture a) Along the grains of the face Veneer	Average: 30 N/mm ² Min. Individual-27 N/mm ²	34 N/mm ² 29 N/mm ²
	b) Across the grain of the face Veneer	Average: 15 N/mm ² Min. Individual-13	18 N/mm ² 13.9 N/mm ²



Sr. No.	Tests Method	ISI Requirements	Observed Values
1	Dimension Squareness	Length: +6mm	Length- 2442 mm
		Width: +3mm	Width- 1221 mm
		Thickness: +/- 5 %	Thickness: 16 mm
		Max: 0.20%	Squareness - 0.13 %
2	Moisture Content	Moisture content should not be less than 5% and not more than 15%	9.4%
3	Glue Adhesion in a) Dry State	Minmum Individual: 1100 Avg.: 1350 N	1401 N
	b) Wet Strength	Minm Individual: 800 N Avg.: 1000 N	1110 N
	c) Adhesion of Plies	Bond shall show minimum Pass Standard, Poor or Excellent	Satisfactory
4	Glue Adhesion & Water Resistance Test (cyclic test followed by knife test: A cycle of 8 hrs. submerged at 60°C +/- 2 °C and 8 hrs. drying at 65°C +/- 2 °C)	After 4 cycles	Satisfactory
5	MycologicalTest a) Glue Shear Strength	Average 1000 N Minimum Individual : 800 N	Satisfactory
	b) Adhesion of Plies	Test piece shall show no appreciation signs of separation at the edges of the Veneers	Satisfactory
6	Modulus of Elasticity a) Along the grains of the face Veneer	Average: 5000 N/mm ² Min. Individual- 4500 N/mm ²	5534 N/mm ² 4850 N/mm ²
	b) Across the grain of the Face Veneer	Average: 2500 N/mm ² Min. Individual- 2200 N/mm ²	2800 N/mm ² 2630 N/mm ²
7	Modulus of Rupture a) Along the grains of the face Veneer	Average: 40 N/mm ² Min. Individual- 36 N/mm ²	45 N/mm ² 39 N/mm ²
	b) Across the grain of the face Veneer	Average: 20 N/mm ² Min. Individual- 18	22 N/mm ² 20 N/mm ²

Technical Specifications



Sr. No.	Tests Method	ISI requirements	Observed Values
1	Dimension Squareness	Length: + 6 mm	Length: 2440 mm
		Width: +3 mm	Width- 1221 mm
		Thickness: +/- 0.25 mm	Thickness: 16 mm
		Max: 0.2%	Squareness: 0.13 %
2	Moisture Content	Moisture content should not be less than 5% and not more than 15%	8.8%
3	Glue Adhesion in (a) Dry State (b) Wet State	Minmum Individual: 1100 Avg.: 1350 N Minm Individual: 800 N Avg.: 1000 N	1422 N 1105 N
	(c) Adhesion of Plies	Bond shall show minimum Pass Standard, Poor or Excellent	Satisfactory
4	Glue Adhesion & Water Resistance Test (cyclic test followed by knife test: A cycle of 72 hrs. submerged at 100°C +/- 2 °C	72 hours boiling in water Single Cycle	Satisfactory
5	Tensile Strength (a) Parallel to the grain direction	Should not be less than 42.0 N/mm ²	56.12 N/mm ²
	(b) Prependicular to the grain direction	Should not be less than 25.0 N/mm ²	40.30 N/mm ²
	(c) Sum of both the direction	Should not be less than 84.5 N/mm ²	96.42 N/mm ²
6	Mycological Test (a) Glue Shear Strength	Average 1000 N Minimum Individual: 800 N	Satisfactory
	(b) Adhesion of Plies	Test piece shall show no appreciation signs of separation at the edges of the Veneers	Satisfactory
7	Modulus of Elasticity (a) Along the grains of the face Veneer	Average: 7500 N/mm ² Min. Individual-6700 N/mm ²	8070 N/mm ² 7430 N/mm ²
	(b) Across the grains of the face Veneer	Average: 4000 N/mm ² Min. Individual-3600 N/mm ²	4280 N/mm ² 4170 N/mm ²
8	Modulus of Rupture (a) Along the grains of the face Veneer	Average: 50 N/mm ² Min. Individual-45 N/mm ²	56.3 N/mm ² 47.9 N/mm ²
	(b) Across the grains of the face Veneer	Average: 30 N/mm ² Min. Individual-27	32.7 N/mm ² 28.5 N/mm ²

For Calibrium MR & BWR available on request

Precautions Need To Be Taken

- ☑ Plywood should not be kept in high humid atmosphere to resist fungus and insects attack.
- ☑ Plywood should be kept in horizontal flat surface giving full bottom support; otherwise the plywood may get warped, cupped or twisted.
- ☑ Infra.Market brand plywood should not be used with plywood of any other brand, because it may not be treated or may be of less concentration.
- ☑ Plywood should not be come in contact with soil to keep away from the risk of termite infestation.
- ☑ Do not use any kind of acids or hard cleaning agents.
- ☑ Plywood should not be used in damp and moist area.
- ☑ Avoid constant and direct exposure to sunlight, make best attempt to minimize the intensity of the direct exposure.
- ☑ Soil and wall treatment is advisable to prevent the risk of insect infestation before starting fabrication work.
- ☑ When our plywood is being used with solid timber that must be treated with wood preservative.



An ISO 9001,14001 & OHSAS 18001 Certified Company

Know Your Plywood

How To calculate Notional Area :

$$1 \text{ NA (Notional Area)} = \frac{\text{Length (M)} \times \text{Width (M)} \times \text{Thickness (mm)} \times \text{no. of ply}}{4}$$

Example :

For an 8 X 4 ft plywood sheet with 19 mm thickness, the NA would be:
8 ft = 2.44 M & 4 ft = 1.22 M

$$1 \text{ NA (Notional Area)} = \frac{2.44 \times 1.22 \times 19 \times 1}{4} = 14.14$$

NOTIONAL AREA & WEIGHT IN KG FOR 1 SHEET OF MARINAQUADRO PLUS OR MARINAQUADRO LUXE

THICKNESS	8X4	
	NA	KG
4 MM	2.98	8.42
6 MM	4.47	12.64
9 MM	6.70	18.95
12 MM	8.93	25.27
16 MM	11.19	33.70
19 MM	14.14	40.02
19 MM BB	14.14	31.11

1 tonne = 1000 kg

Vehicle weight capacity : 9 tonnes / 18 tonnes / 21 tonnes / 25 tonnes

Example :

How to calculate 18 tones load for 1 truck of MarinaQuadro & above

THICKNESS	No. of 8x4 sheet	NA	KG
6 MM	50	446.52	632
9 MM	100	669.78	1895
12 MM	120	1071.65	3032.76
19 MM	300	4241.94	12004.69
Total	570	6429.89	17564.45

How to calculate 18 tones load for 1 truck of MarinaQuadro & above

THICKNESS	CORE	PANEL	FACE	GLUE LINE
6 MM	2	1	2	2
9 MM	3	2	2	3
12 MM	4	3	2	4
16 MM	5	4	2	5
19 MM	6	5	2	6

[illegible]

NOTES:

[illegible]

[illegible]

INFRA.MARKET PLYWOOD

ply mein hai dum

INFRA.MARKET

HELLA INFRA MARKET WOOD PRODUCTS PRIVATE LIMITED

INFRA.MARKET HOUSE:

Olethia Business Spaces, Road No 16Z, Opp. Ashar IT Park,
Wagle Industrial Estate, Thane (W), Maharashtra - 400604

Bengaluru:

2nd Floor, Du Parc Trinity, Mahatma Gandhi Road,
Bengaluru - 560001, Karnataka

Ahmedabad:

1703 - 1707, 17th Floor, Westgate Block-D,
S. G. Highway, Near YMCA Club, Makarba,
Ahmedabad - 380051, Gujarat

Kolkata:

Raj Premiere, Plot # 37, Block - EN SECTOR V,
Salt Lake City, Kolkata - 700091, West Bengal

Noida:

Discovery Tower, 4th Floor, Block-A, Plot No - 17,
Sector 62 Noida - 201309, Uttar Pradesh

Indore:

Unit No. 208, Princes Business Park, Block No. 22 to 24,
Scheme No. 54, PU-3 Commercial, A. B Road,
Indore - 452001, Madhya Pradesh

Mohali (sas):

Plot No: F-464, Ground Floor, NP Tower, Phase 8-B,
Industrial Area, Sector 90, Mohali (SAS) -160055, Punjab

Pune:

61/B, Shree Chambers, 4 Mumbai Pune Road,
Wakedi Wadi, Pune - 411005, Maharashtra

Chennai:

Survey No-1075/8, Block 22, Dr. Radhakrishnan Salai Road,
Mylapore, Triplicane, Chennai - 600004, Tamil Nadu

Nagpur:

Ram Hi-Tech Pvt. Ltd, 14/3, MIDC- IT Park, Gayatri Nagar,
Nagpur - 440022, Maharashtra

Hyderabad:

14th Floor, Dallas Center, Hitech City Main Road,
Hyderabad - 500032, Telangana