


MODUS OPERANDI:

- In order to provide power to LED lights in MPD hollow, main power cable is splitted through 3-Way FLP junction box.
- One cable for powering MPD, other to Light up Back Lit LED in MPD hollows.



- Power cable for Backlit LED is taken through MPD side to MPD hollow space by drilling through plate. It is same as Copper tubing done for return Vapor Line for VRS Stage II.
- Proper flameproof gland to be used while taking cable through drilled hole.

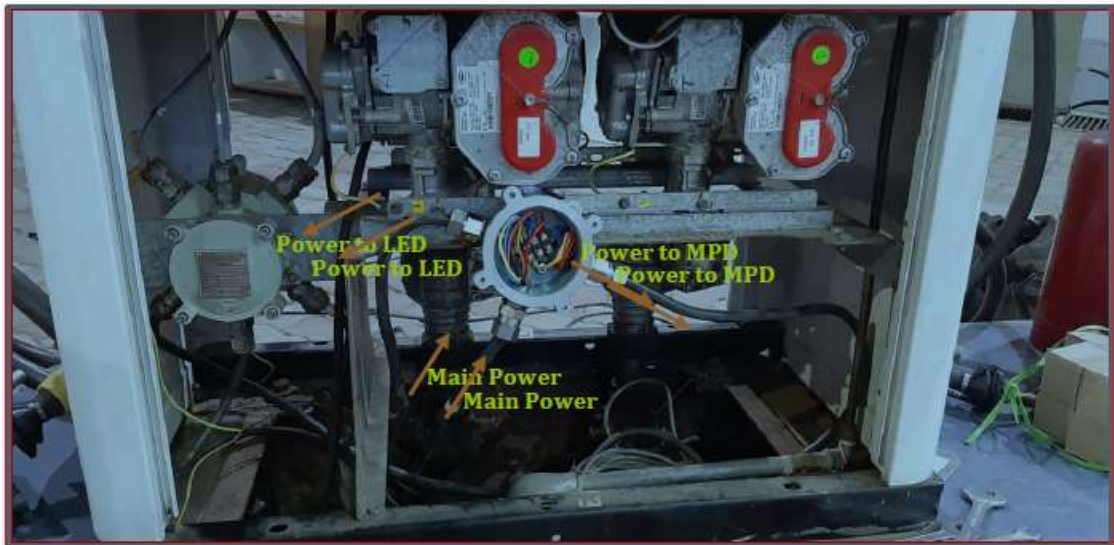

- Polycarbonate Junction box is used for incorporating Fuse in setup so that in case of power surge or short circuit, fuse blows up and surge doesn't reaches UPS and trip the MPD.

