


BRICK - ON - EDGE DRIVEWAY

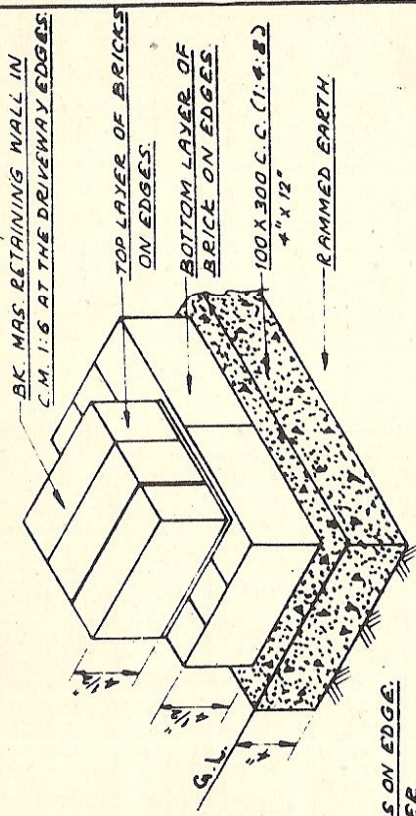


NOTE :-
PERMISSIBLE GAP BETWEEN
BRICKS - 6 mm TO 9 mm
($\frac{1}{4}$ " TO $\frac{3}{8}$ ")

1ST. LAYER OF BRICKS ON EDGE.
1" TH. SAND LAYER.


2ND. LAYER OF
BRICKS ON EDGE.
2" TH. SAND/GRAVEL
ON WELL RAMMED EARTH.

TOP LAYER OF BRICKS ON EDGE.
1" TH. SAND LAYER

BOTTOM LAYER
OF BRICKS

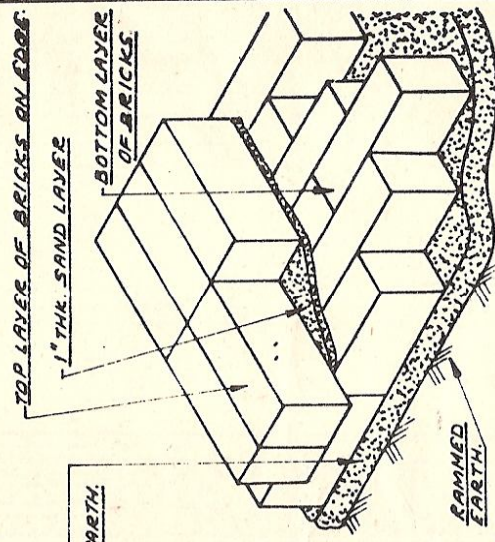

BRICK MAS. IN C.M. 1:6 TO GUARD THE DRIVEWAY EDGE.

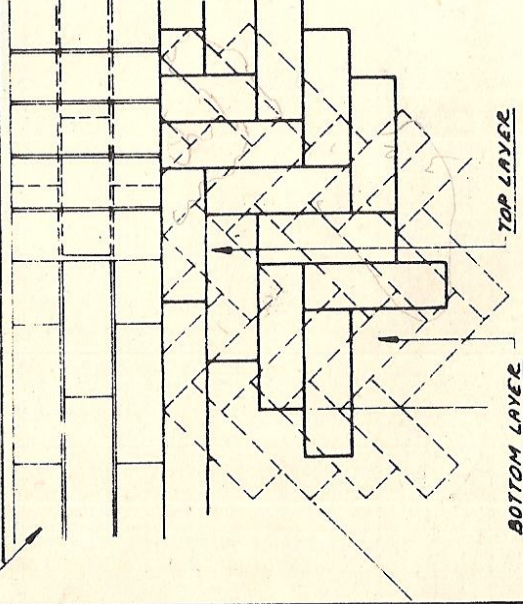

BOTTOM LAYER

TOP LAYER

HERRING BONE TYPE BRICK LAYING
THROUGHOUT THE DRIVEWAY.

ALTERNATIVE (TO HERRING BONE TYPE)
BRICK LAYING THROUGHOUT THE
DRIVEWAY.

BHARAT PETROLEUM.

DRN. MSH
DATE 1-9-87

GM (ELP)

C.O. R-52

FEB. 88

E.9S.01.033

DATE

DRG. NO.

SEPTEMBER 1989