



CHEVRON MARKING FOR DECELERATION ROAD

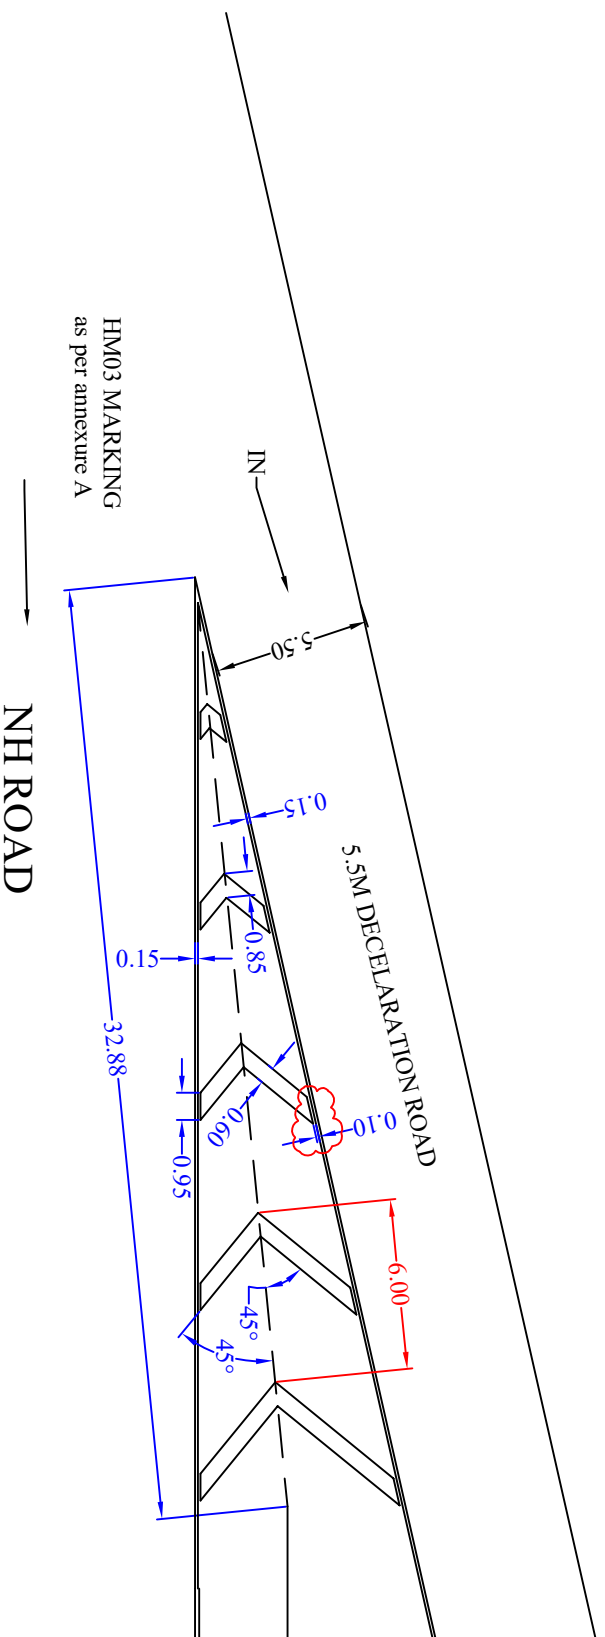


NOTE:

1. Width of all chevrons measured at right angles to the diagonals or chevrons is **600 mm**.
2. The spacing between chevrons is 6 m (on the total length of chevron provided at a given location is 32.88 m).
3. Minimum gap of 100 mm to be provided between continuous line and chevron.
4. Marking abbreviation: [Chevron (DIVERGING) marking:- HM03 as per Annexure A].
5. color filling: white.

Minimum gap of 100 mm to be provided between continuous line and chevron.

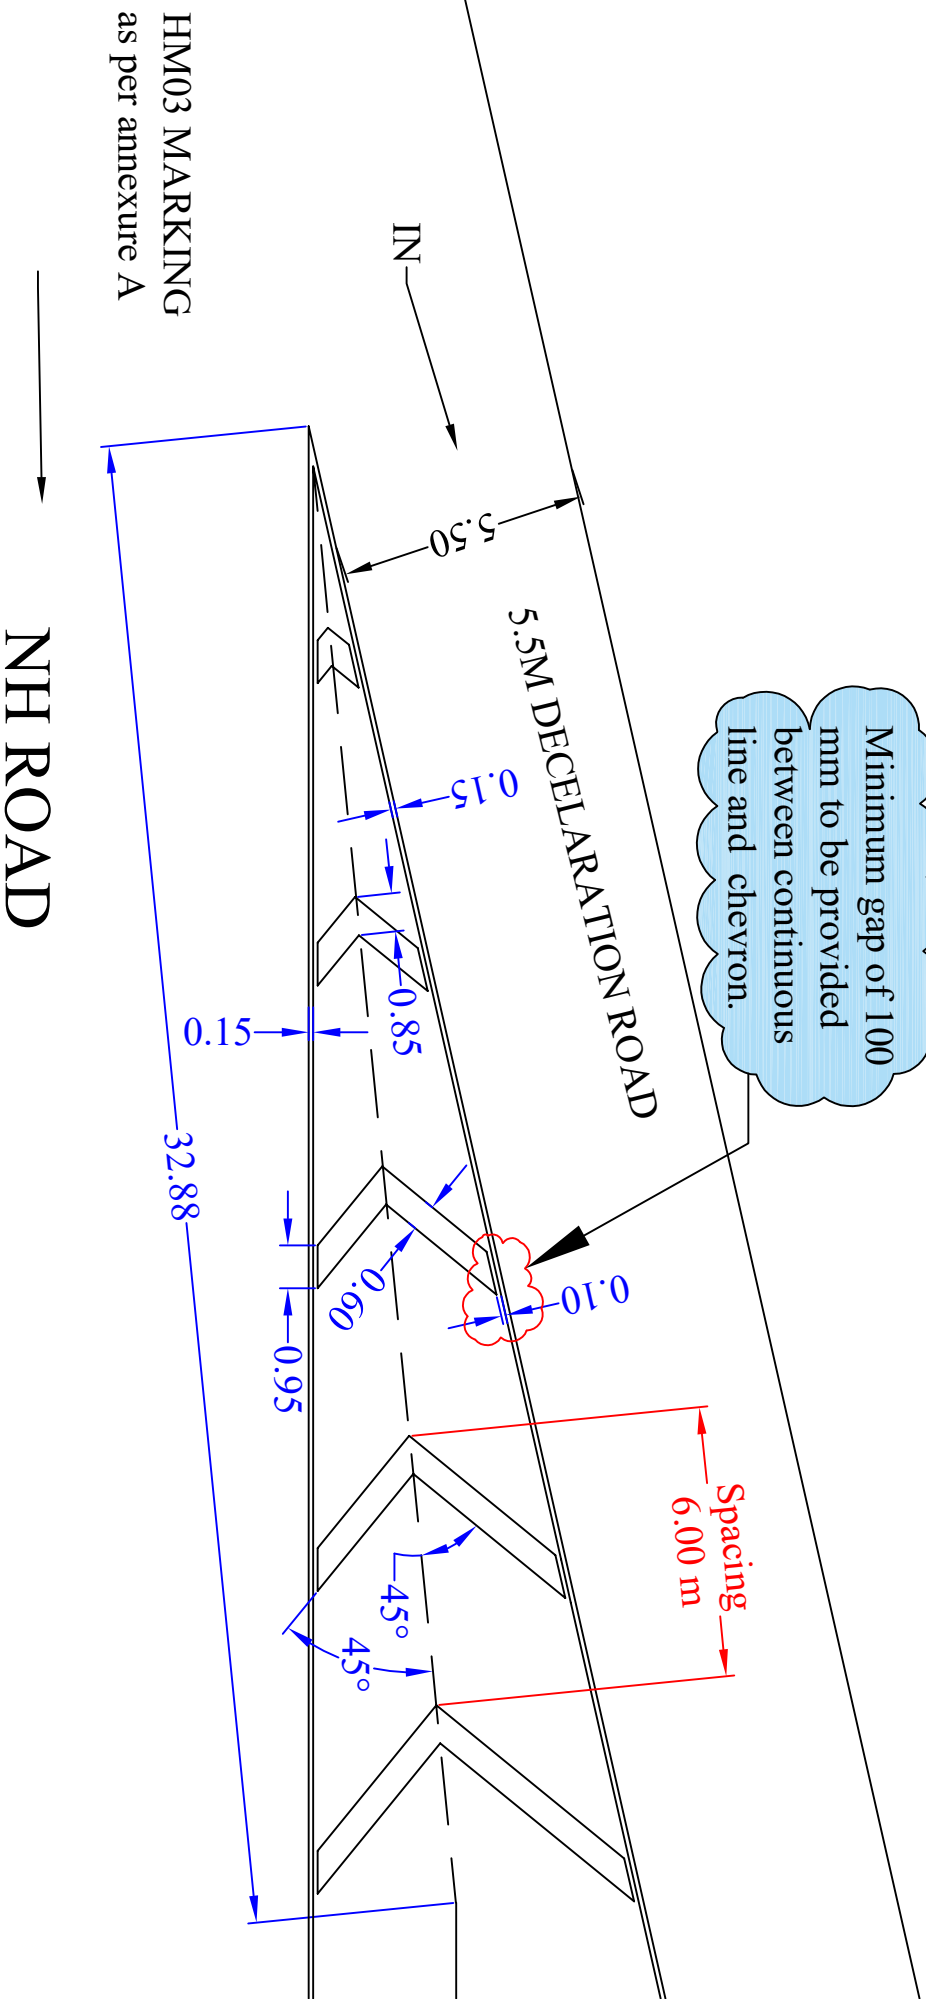

CHEVRON MARKING FOR ACCELERATION ROAD

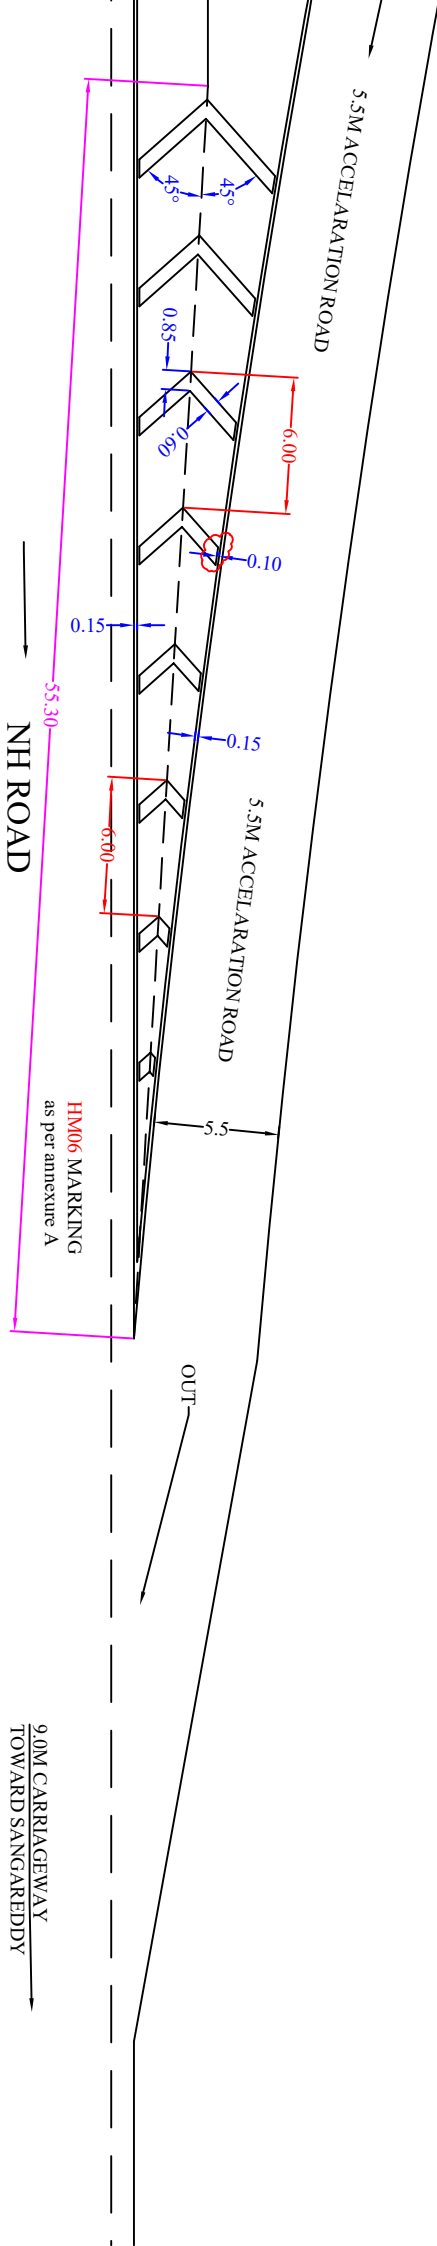

NOTE:

1. Width of all chevrons measured at right angles to the diagonals or chevrons is **600 mm**.
2. The spacing between chevrons is 6 m (on the total length of chevron provided at a given location is **55.3 m**).
3. Minimum gap of 100 mm to be provided between continuous line and chevron.
4. Marking abbreviation: [Chevron (CONVERGING) marking:- **HM06** as per Annexure A].
5. color filling: white.

