




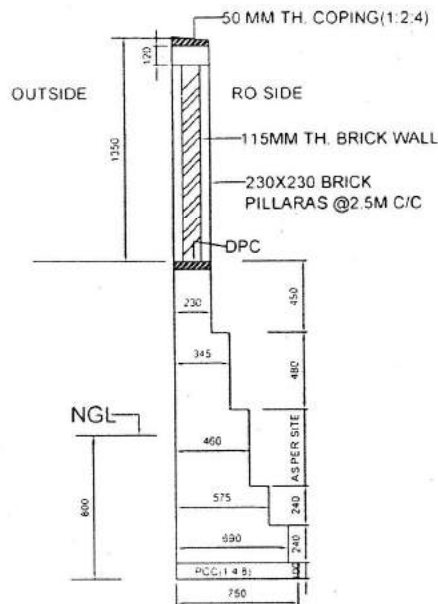


SECTION OF COMPOUND WALL (FILLING UPTO 1200MM)

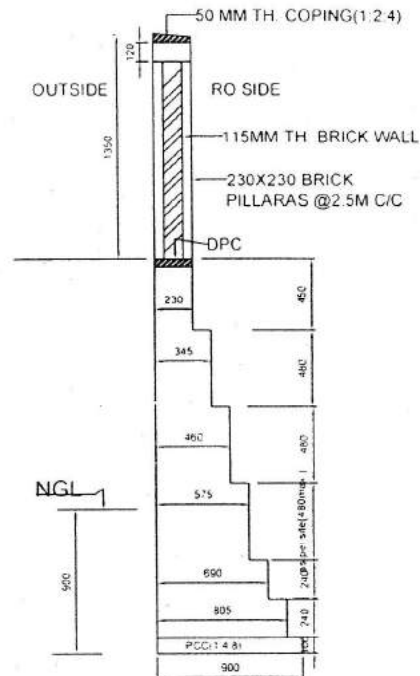

SECTION OF COMPOUND WALL (FILLING UPTO 1800MM)

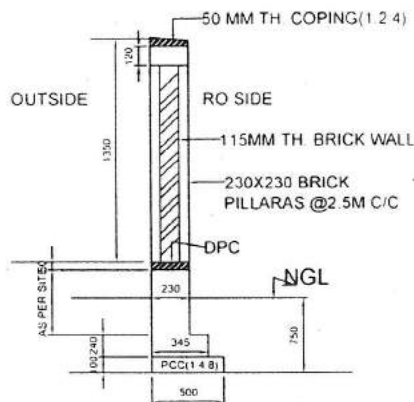

SECTION OF COMPOUND WALL WITHOUT ANY FILLING

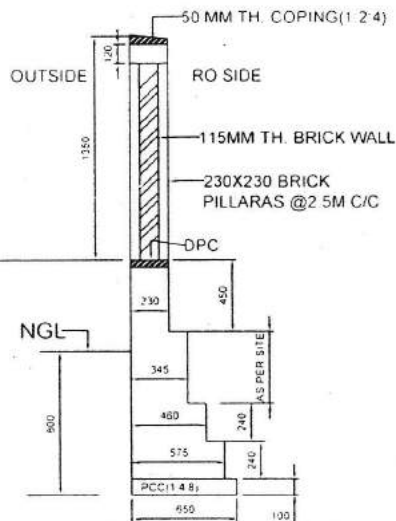

SECTION OF COMPOUND WALL (FILLING UP TO 600MM)

Notes:

1. Weap holes to be provided at horizontally at 1000 c/c and vertically 450 c/c in staggered form.
2. Expansion joint of 25mm thick filled with shalite board provided at every 15m interval. Expansion joint to start 300 mm below original ground lev.
3. Plan of B/W above ground lev. shall be as per std. drg no. E.1s.01.001, dt. Feb 88.

BHARAT PETROLEUM	
SUBJECT :- RETAIL OUTLET FACILITIES	
DETAIL OF COMPOUND WALL	