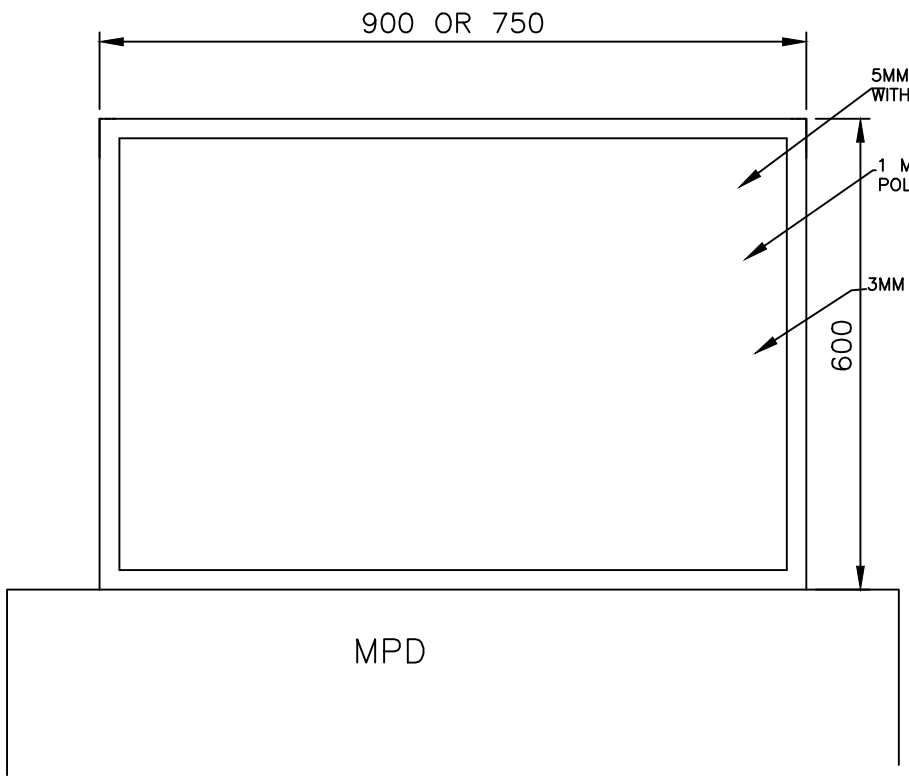



LED STRIPS ARE
PLACED ON LONGER SIDE

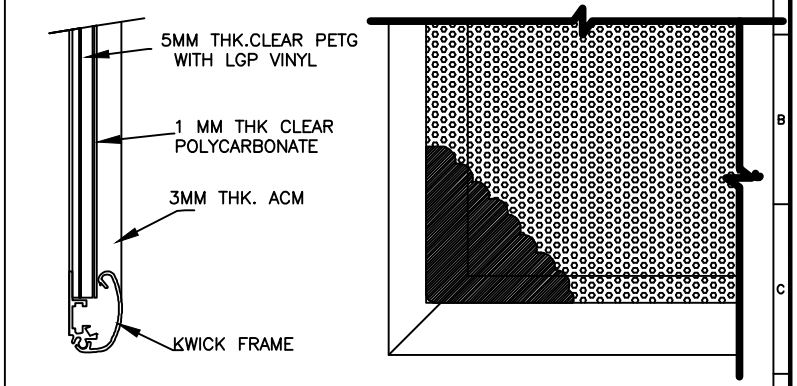

NOTE– CHECK THE DIMENSIONS AT
SITE BEFORE FABRICATION.

A

ALL DIMENSIONS ARE IN MM.

B	WAS CLEAR ACRYLIC 3/5/19
A	REVISED 11/10/18
	REVISION

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

MPD EDGELIT DISPLAY

SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
DATE : 7/6/18	GM.RE		1 OF 1	BP.RVI.MPD–A01

DATE	DRAWING NO.
–	–
–	–

DIN A2

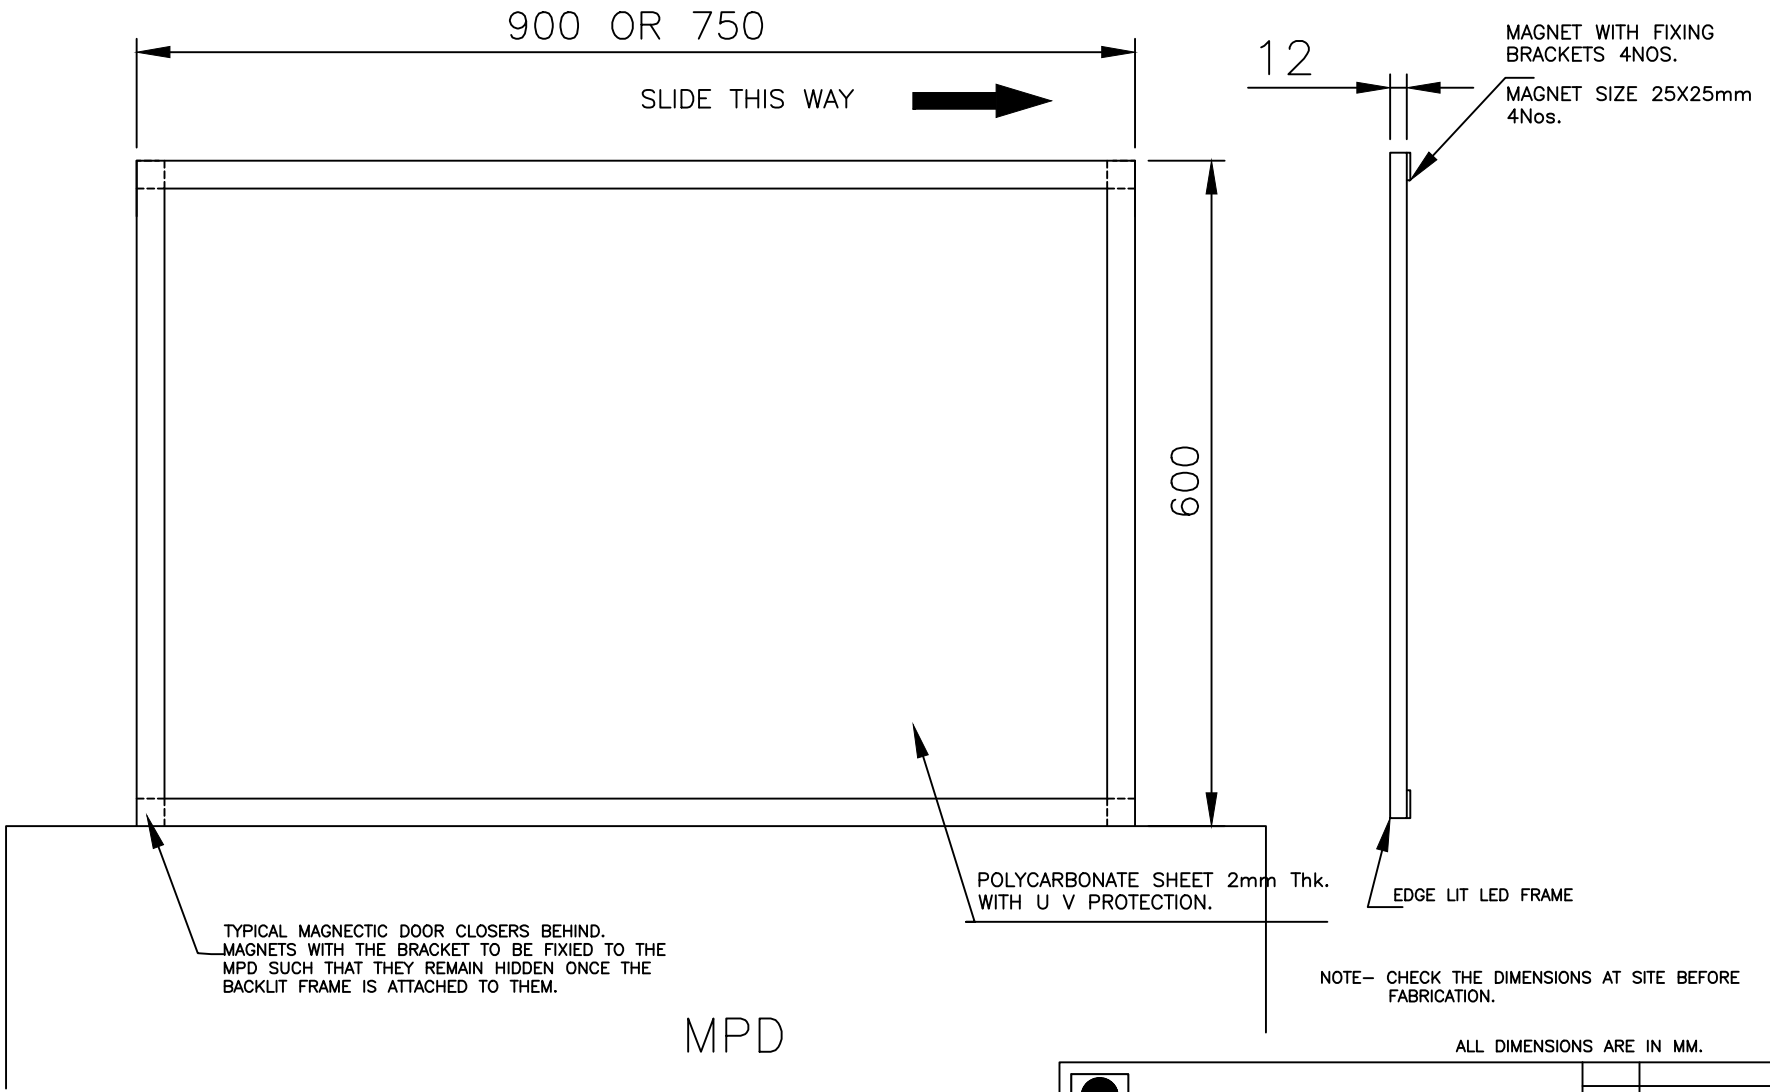

NOTE– CHECK THE DIMENSIONS AT SITE BEFORE FABRICATION.

ALL DIMENSIONS ARE IN MM.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

MPD EDGELIT DISPLAY

A REVISED 11/10/18	SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
REVISION	DATE : 7/6/18	GM.RE		1 OF 1	BP.RVI.MPD–A01

DIN A2

MODUS OPERANDI:

- In order to provide power to LED lights in MPD hollow, main power cable is splitted through 3-Way FLP junction box.
- One cable for powering MPD, other to Light up Back Lit LED in MPD hollows.

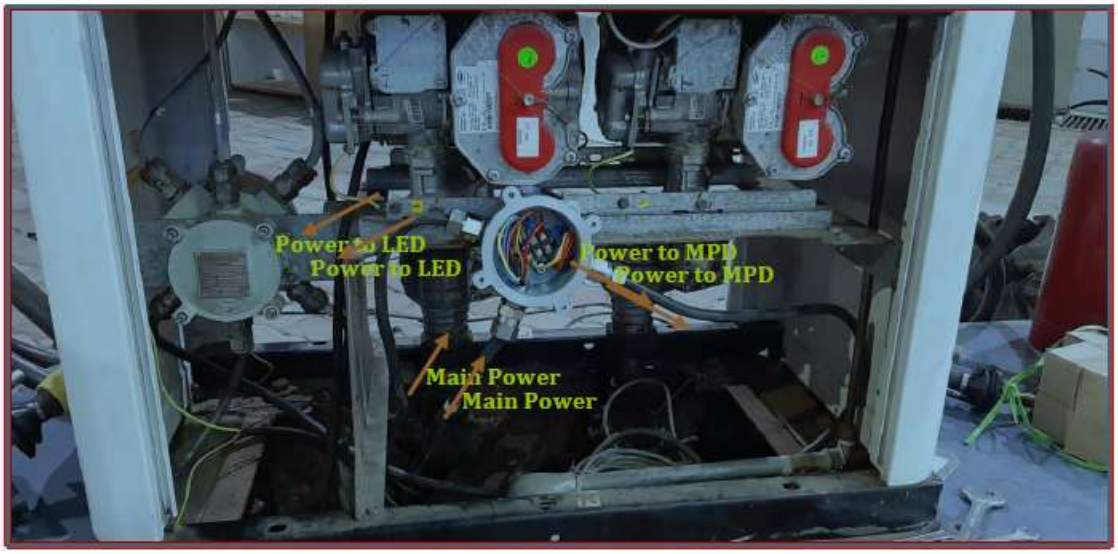

- Power cable for Backlit LED is taken through MPD side to MPD hollow space by drilling through plate. It is same as Copper tubing done for return Vapor Line for VRS Stage II.
- Proper flameproof gland to be used while taking cable through drilled hole.

- Polycarbonate Junction box is used for incorporating Fuse in setup so that in case of power surge or short circuit, fuse blows up and surge doesn't reaches UPS and trip the MPD.

MPD HOLLOW BACKLIT RETROFIT

OBJECTIVE:

As per the requirement of Retrofit RVI, MPD hollow space is to be lit up by backlit LED. This requires electrical connection through the MPD to provide power supply to LED Adaptor placed at MPD hollow.

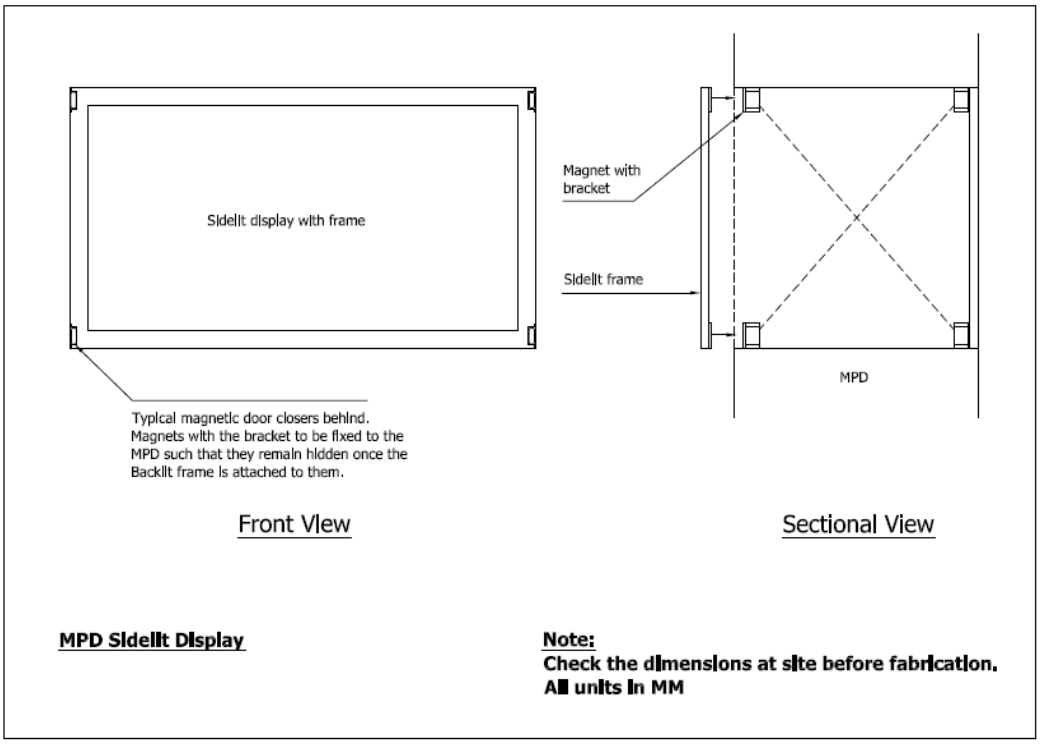

ISSUES:

- Loose wiring outside MPD/Hanging Cables from spreader gives shabby look and also cause safety threat in fuelling zone
- Cable taken through MPD requires drilling on the plate of MPD which compromises its safety. Even if taken along MPD Body does post safety issues in Zone 0.
- Laying Separate Cable to each MPD thru conduit shall be capital intensive and also affects Sale at running site owing to Driveway work

MODUS OPERANDI:

- In order to provide power to LED lights in MPD hollow, main power cable is splitted through 3-Way FLP junction box.
- One cable for powering MPD, other to Light up Back Lit LED in MPD hollows.

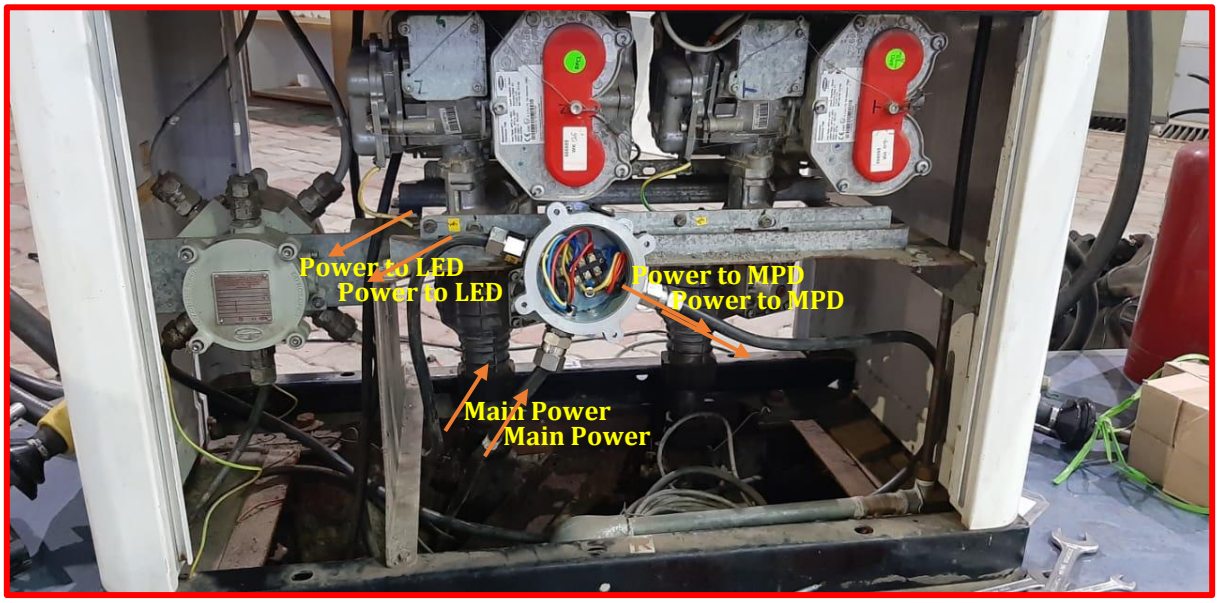

- Power cable for Backlit LED is taken through MPD side to MPD hollow space by drilling through plate. It is same as Copper tubing done for return Vapor Line for VRS Stage II.
- Proper flameproof gland to be used while taking cable through drilled hole.

- Polycarbonate Junction box is used for incorporating Fuse in setup so that in case of power surge or short circuit, fuse blows up and surge doesn't reaches UPS and trip the MPD.

- LED Backlit Power Adaptor is connected after fuse through 1.5x3 cable.

DETAILS OF SERVICE NO. USED IN PROVIDING POWER TO MPD BACKLIT LED:

Sr. No.	Service No	Description of Item	Qty. Requisite
1	7006458	3 way FLP Junction Box	One per MPD
2	7006488	3 x 1.5 sq. mm Cu Conduction armoured cable	As per requirement
3	7006543	FLP Cable Gland	As per requirement
4	9016152	Nylon Cable Gland 20 mm	As per requirement
5	9016063	Polycarbonate junction box	One per MPD
6	7006788	Fuse unit	One per MPD

SAFETY PRECAUTIONS:

- MPD should not be in operation while setting up power connection
- Glands should be properly tightened over the cable
- No loose joints must be kept during connection
- Proper precaution like secluding the area should be done while drilling in MPD cover to restrict the spark movement, if any.
- All MPD Panels should be OPEN to ventilate before doing connection
- Junction box should be firmly tightened on MPD frame by clamps
- While connecting power cable to LED Driver/adapter, proper connection should be maintained to avoid any loose connection and power failure

Digital Price Display Board

- Technical Specification

Product Technical Specifications		
S no	**Parameter**	**Value**
1	Display Type	Full Thru hole LED
3	Brightness	6000 cd/SQM or more after calibration
4	Viewing Angle	Horizontal 140° / Vertical 120°
5	Input Power Rating	230V +- 10%
6	Input Power Frequency	50 Hz +- 10%
7	Power Consumption	Average 300 W/SQM
8	Frame Frequency	50/60 Hz
9	Grey Level	>16K Grade
10	Colour Temperature	6000-6500K
11	Working Temperature	(-)10° to 60°
12	Communication Interface	Serial Communication Protocol
13	Humidity	0-90%
14	Number of LEDs	Minimum 3072 LEDs,
15	Display Height	320 mm
16	Display Width	160 mm
17	Ingress Protection	IP65
18	ACM	Alucobond, Alcoa, Alcan
19	Price display control	Smart phone controlled android based using IEEE 802.11a/b/e/f/g/h/i/j/k/n/s/ac/ad/af/ah
20	SIZE OF PANEL	1200MMX750 MMX75MM
21	Sticker –Vinyl	Avery,LG,3M
22	LED Type	Super bright white - outdoor type-CREE/ NICHIA/ OSRAM/ SAMSUNG/ CITIZEN/ PHILIPS (Lumileds)/SEOUL

Dealer Code : xxxxxxx
TODAY'S PRICE
20/05
Petrol
78.65
Diesel
64.12
TO VERIFY PRICE SMS
bpclprice<space>(Dealer Code) to

Dealer Code: xxxxxxxx
TODAYS' PRICE
Speed
Petrol
Diesel
TO VERIFY PRICE SMS
bpclprice<space>(Dealer Code) to

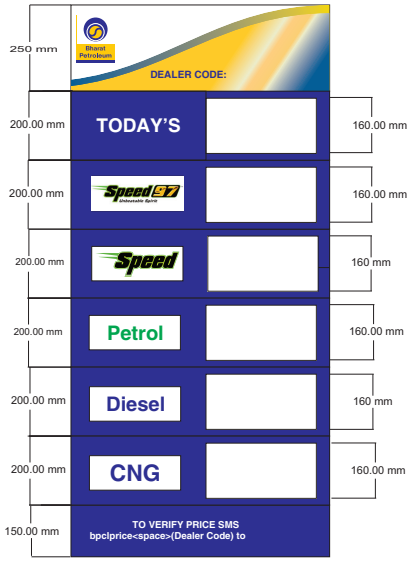
250 mm
DEALER CODE:
200.00 mm
TODAY'S
160.00 mm
200.00 mm
Speed 97
160.00 mm
200.00 mm
Speed
160 mm
200.00 mm
Petrol
160.00 mm
200.00 mm
Diesel
160 mm
200.00 mm
CNG
160.00 mm
150.00 mm
TO VERIFY PRICE SMS
bpclprice<space>(Dealer Code) to

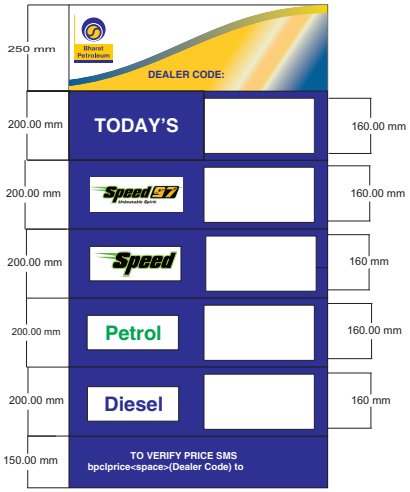
250 mm
DEALER CODE:
200.00 mm
TODAY'S
160.00 mm
200.00 mm
Speed 97
160.00 mm
200.00 mm
Speed
160 mm
200.00 mm
Petrol
160.00 mm
200.00 mm
Diesel
160 mm
150.00 mm
TO VERIFY PRICE SMS
bpclprice<space>(Dealer Code) to

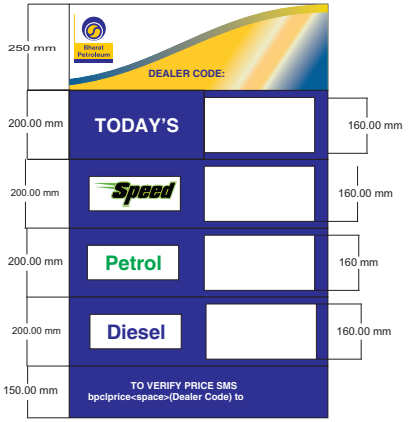
250 mm
DEALER CODE:
200.00 mm
TODAY'S
160.00 mm
200.00 mm
Speed
160.00 mm
200.00 mm
Petrol
160 mm
200.00 mm
Diesel
160.00 mm
150.00 mm
TO VERIFY PRICE SMS
bpclprice<space>(Dealer Code) to

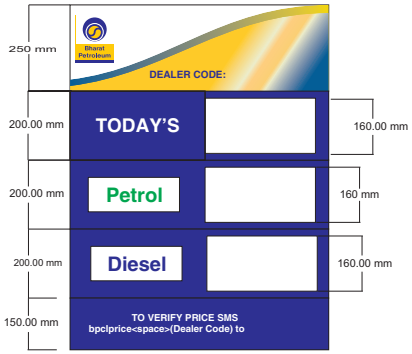
250 mm
DEALER CODE:
200.00 mm
TODAY'S
160.00 mm
200.00 mm
Petrol
160 mm
200.00 mm
Diesel
160.00 mm
150.00 mm
TO VERIFY PRICE SMS
bpclprice<space>(Dealer Code) to

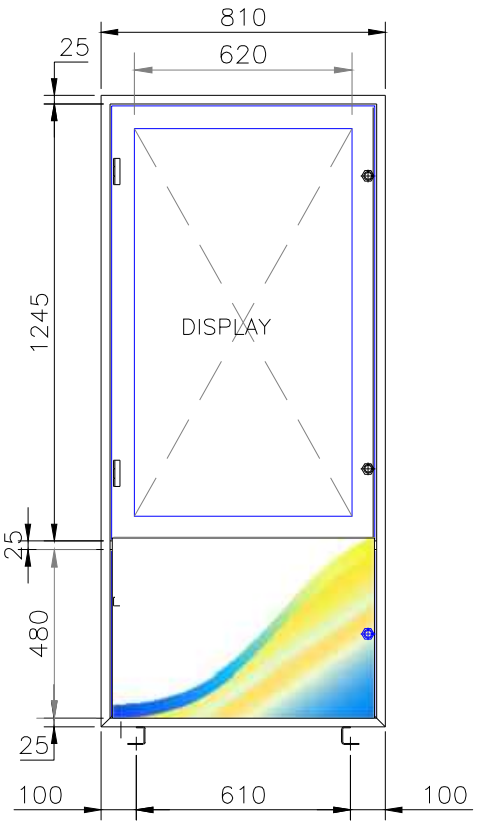

FRONT SIDE

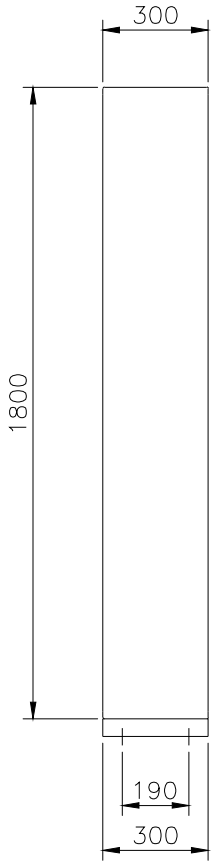

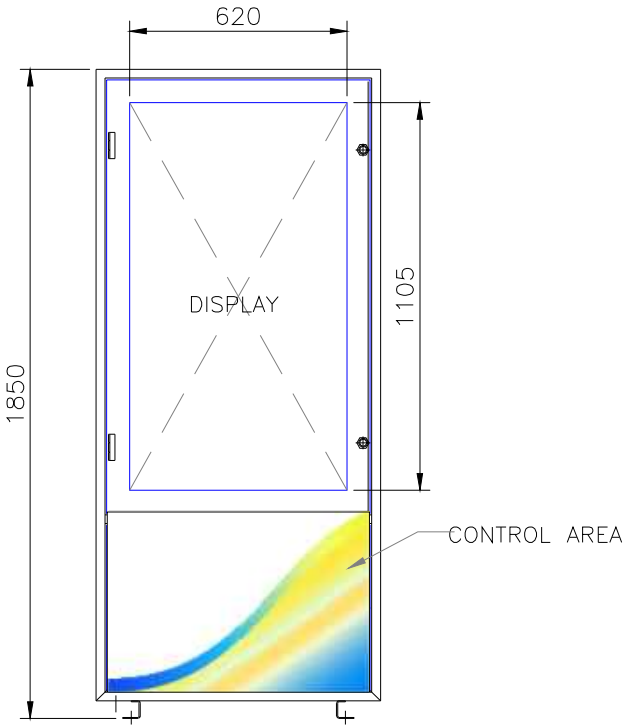

BACK SIDE

ALL DIMENSIONS ARE IN MM.

SURFACE TREATMENT–ZINC PHOSPHATE TREATED & POWDER COATED PURE POLYESTER WHITE 50 MICRON.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

ASSLY DRG. DIGITAL POSTER UNIT

REVISION	SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
	DATE : 24/05/18	CM.RE		1 of 6	BP.RVI.DPU–A01

DIN A2

SR NO	SIZE	QTY.
12	SWITCH BOARD WITH 2 PLUG	1
12	LED DISPLAY	1
11	KEY LOCK	3
10	HINGE	8
9	PARTITION	1
8	FLEX FIXING ROD	2
7	LED DISPLAY FIXING BRACKETS	4
6	GLASS FIXING BRACKES	12
5	LED TV FIXING ANGLE	2
4	GLASS	2
3	BOTTOM DOOR	2
2	TOP DOOR	2
1	BODY	1

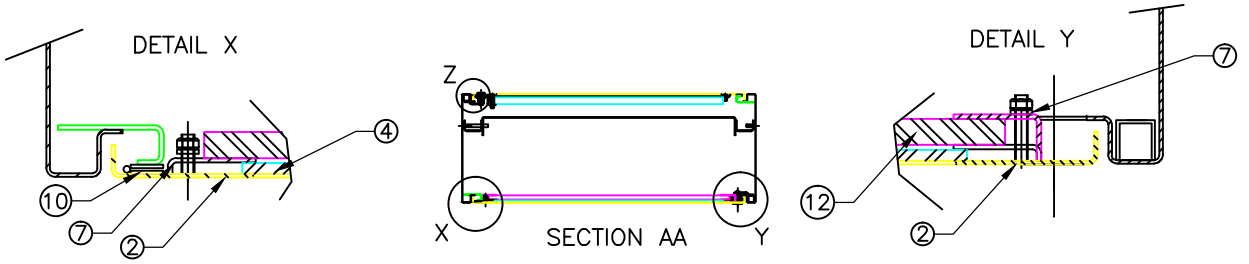

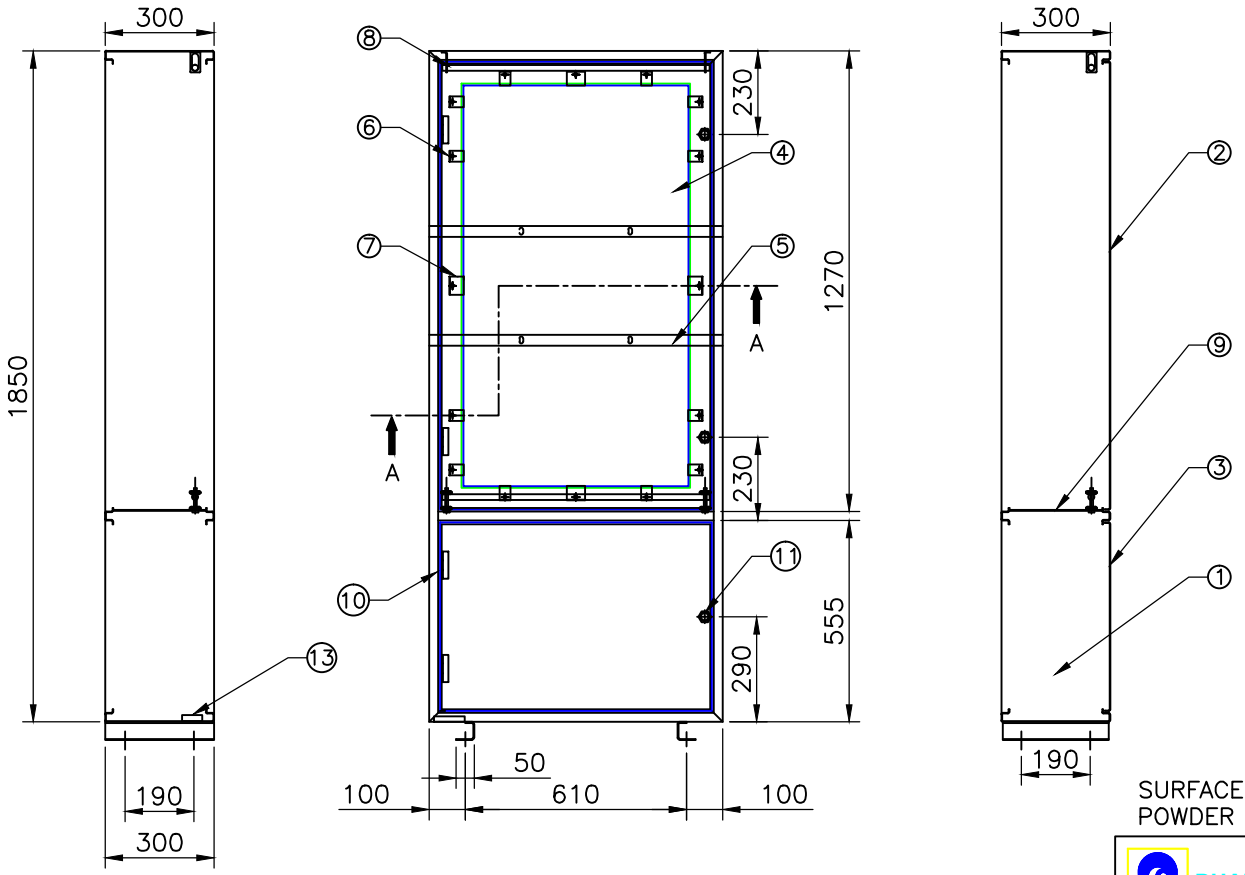



SURFACE TREATMENT–ZINC PHOSPHATE TREATED & POWDER COATED PURE POLYESTER WHITE 50 MICRON.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

ASSLY DRG. DIGITAL POSTER UNIT

DATE | DRAWING NO.

REVISION	SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
	DATE : 24/05/18	GM.RE		2 of 2	BP.RVI.DPU–A02

DIN A2

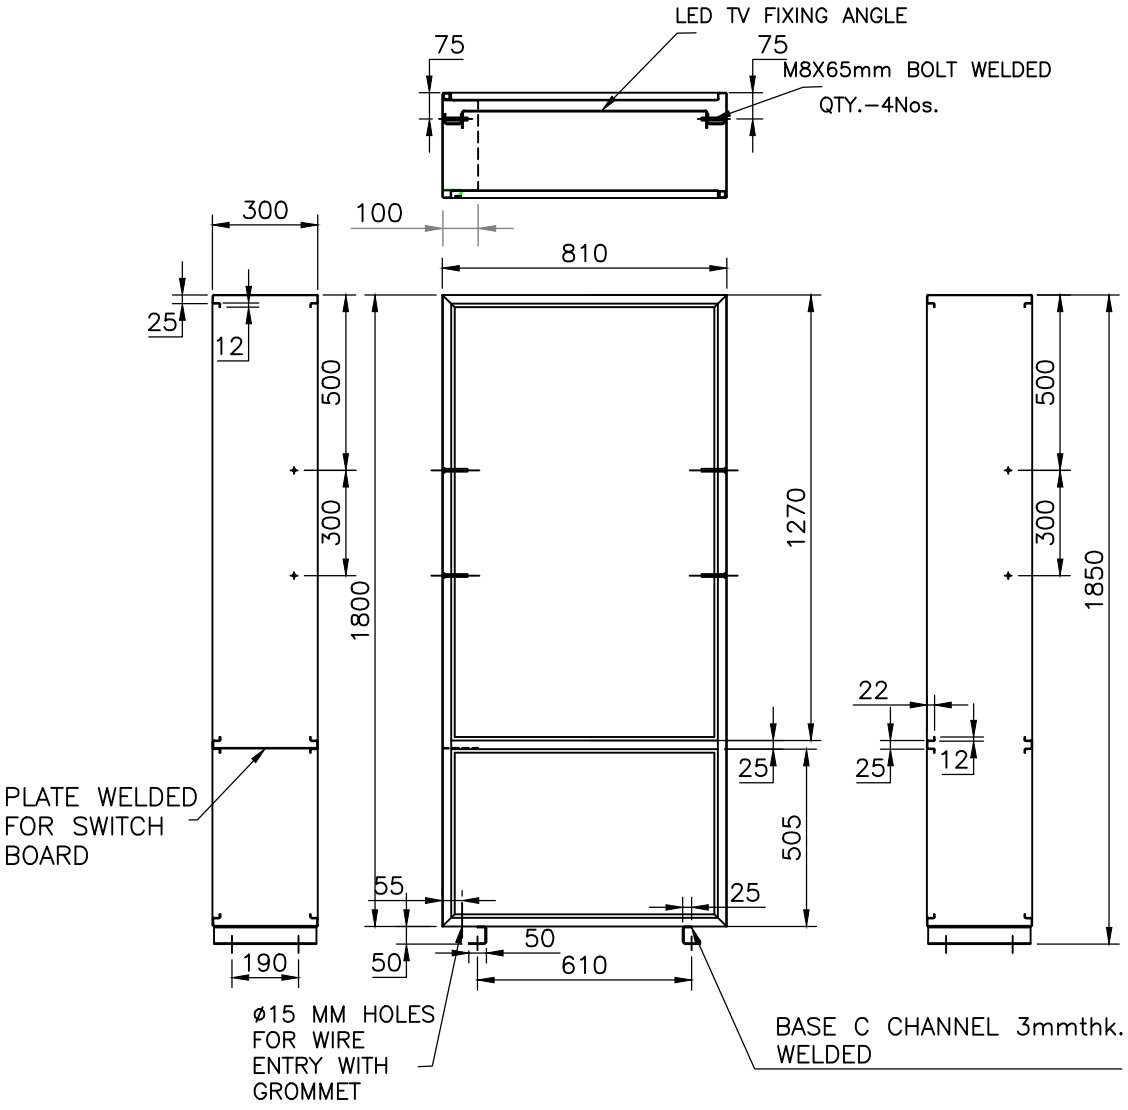

BODY STRUCTURE

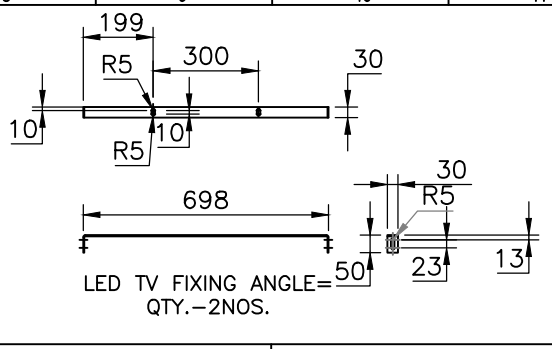

LED TV FIXING ANGLE= QTY.–2NOS.



LED TV FIXING SIDE BRACKET = 4NOS.

MATERIAL–STEEL SHEET 1.6mm thk.IS:513.

SURFACE TREATMENT–ZINC PHOSPHATE TREATED & POWDER COATED PURE POLYESTER WHITE 50 MICRON.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :
ASSLY FOR DIGITAL POSTER UNIT BODY

REVISION	SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
	DATE : 24/05/18	GM.RE		3 of 6	BP.RVI.DPU–A03

DATE | DRAWING NO.

DIN A2

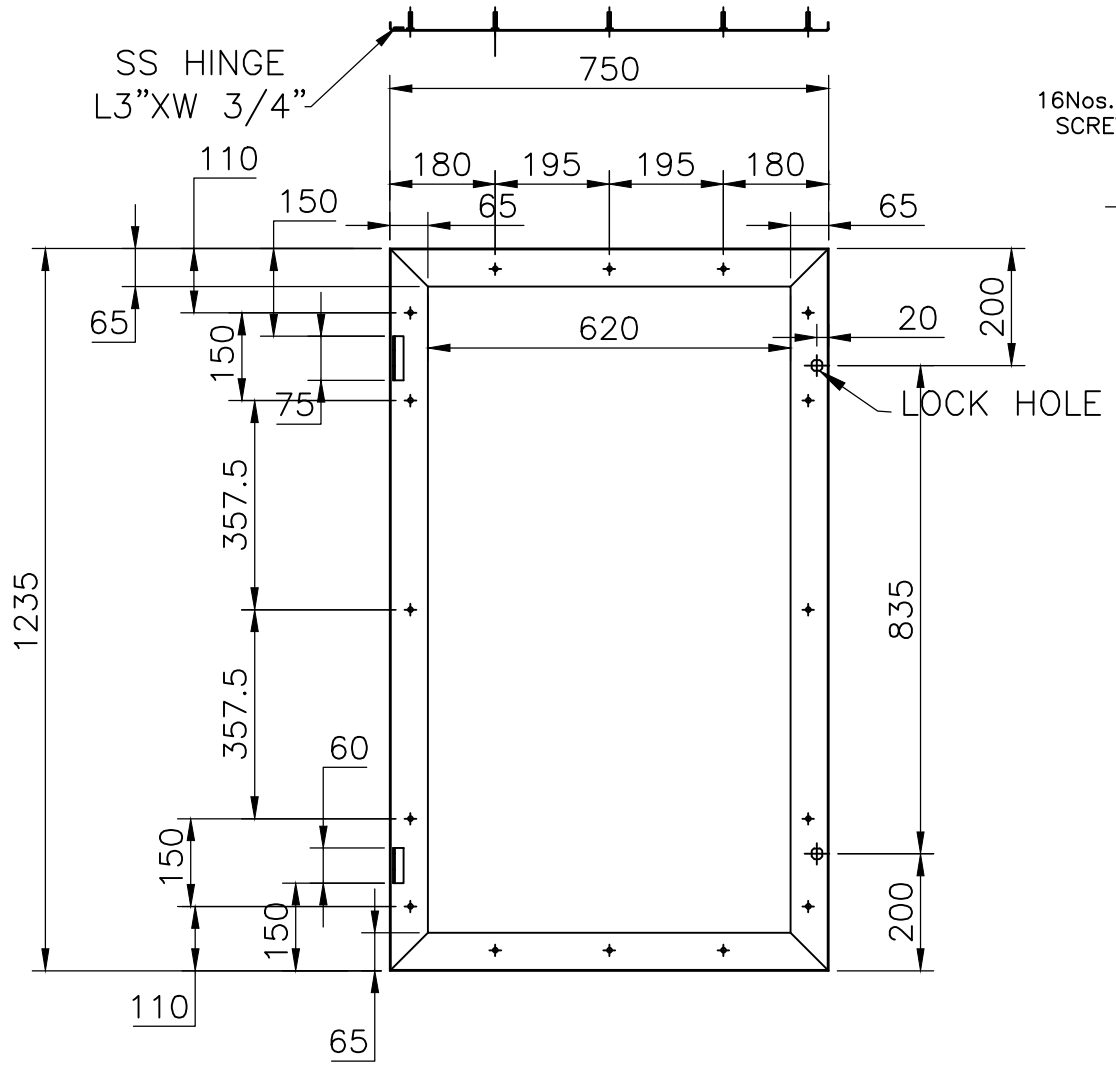

QTY.–2NOS.

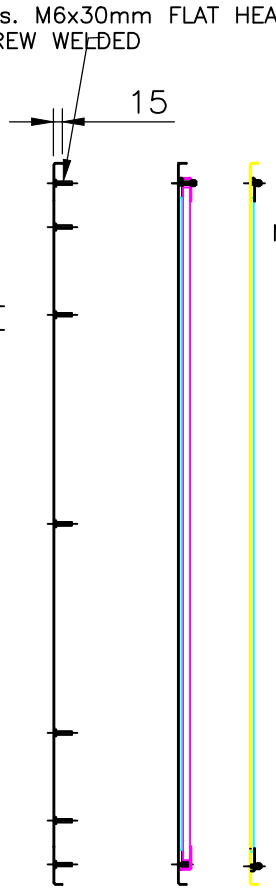



MATERIAL–STEEL SHEET 2mm thk.IS:513.
GLASS FIXING BRACKET
QTY.–12NOS.

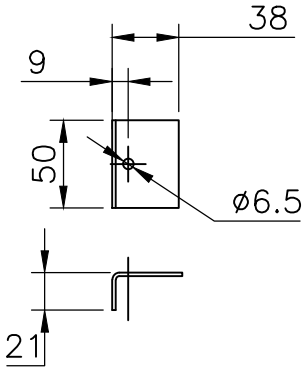

MATERIAL–STEEL SHEET 2mm thk.IS:513.
LED DISPLAY FIXING BRACKETS
QTY.–4NOS.

MATERIAL–STEEL SHEET 1.6mm thk.IS:513.
SURFACE TREATMENT–ZINC PHOSPHATE TREATED &
POWDER COATED PURE POLYESTER WHITE 50 MICRON.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :
TOP DOOR ASSLY

SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
REVISION	DATE : 24/05/18	GM.RE	4 of 6	BP.RVI.DPU–P04

DATE | DRAWING NO.

DIN A2

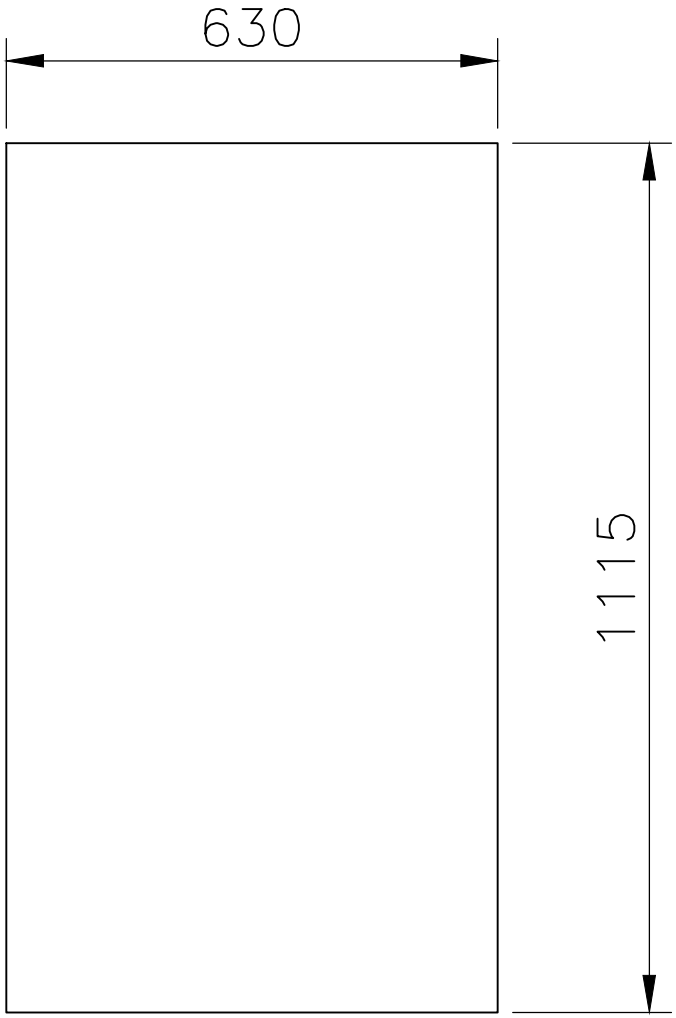

MATERIAL –TOUGHEN GLASS 5mm thk.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

TOUGHEN GLASS

SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
DATE : 24/05/18	GM.RE		6 of 6	BP.RVI.DPU–P06

REVISION	DATE	DRAWING NO.
–	–	
–	–	

DIN A2

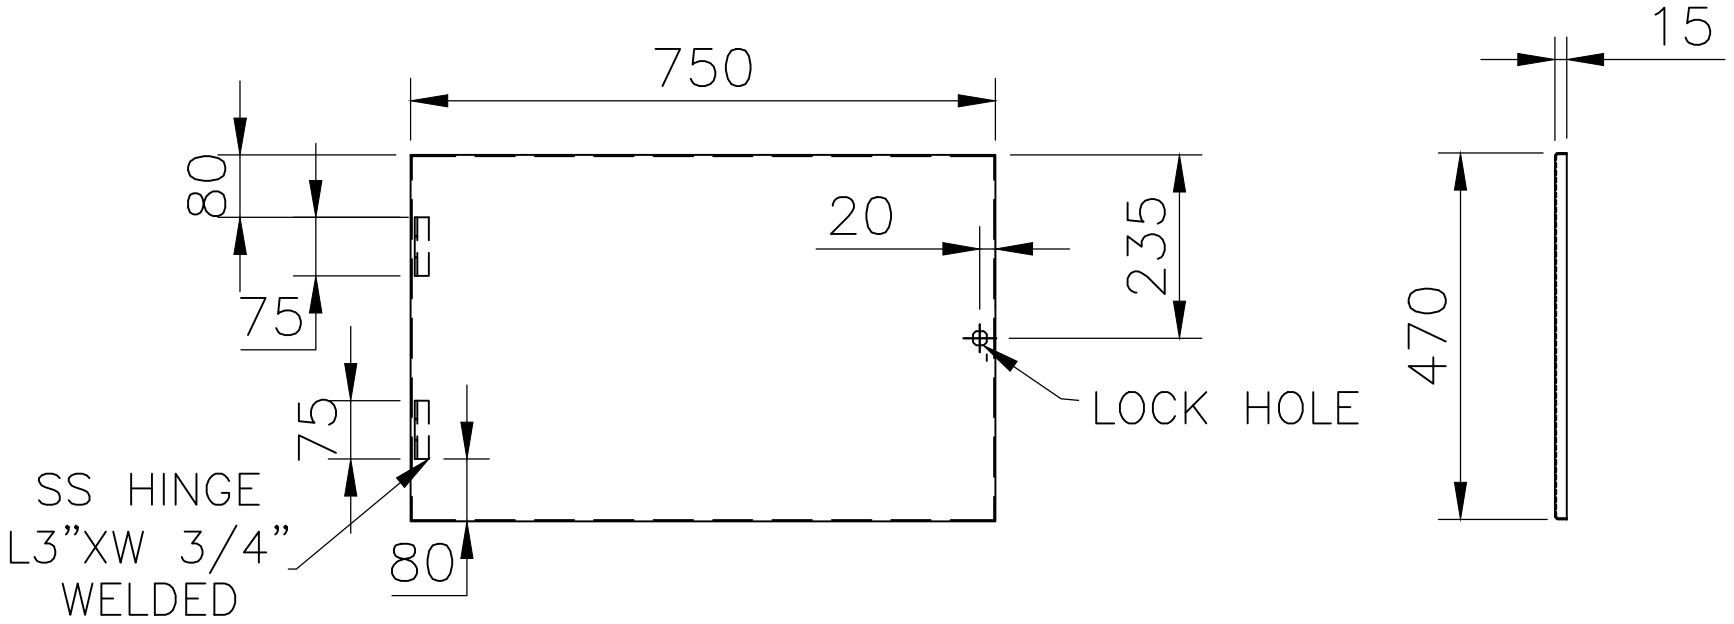

MATERIAL–STEEL SHEET 1.6mm thk.IS:513.

SURFACE TREATMENT–ZINC PHOSPHATE TREATED & POWDER COATED PURE POLYESTER WHITE 50 MICRON.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

BOTTOM DOOR

REVISION	SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
	DATE : 24/05/18	GM.RE		5 of 6	BP.RVI.DPU–P05

–	–
–	–
DATE	DRAWING NO.

DIN A2

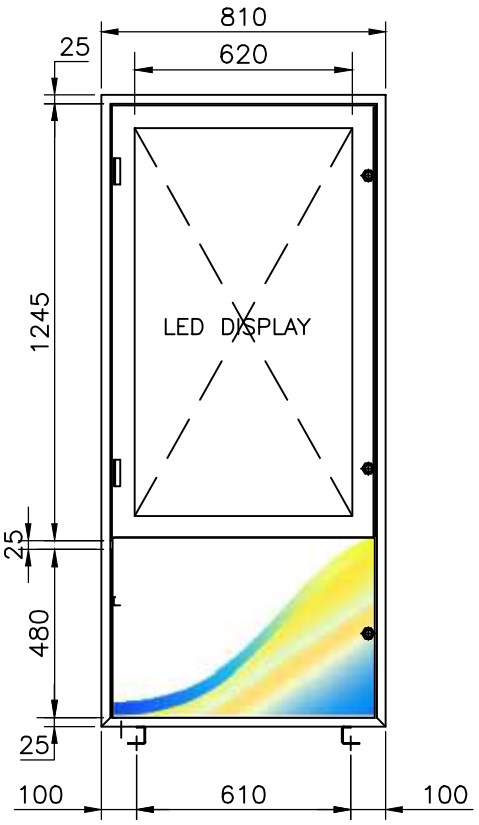

FRONT SIDE

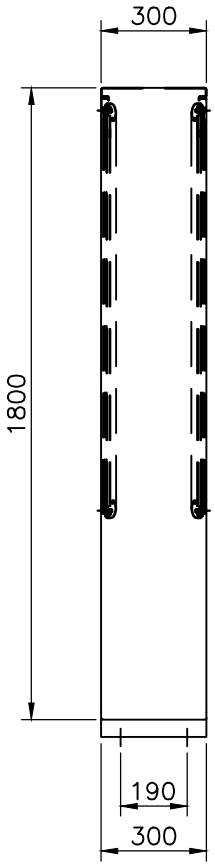

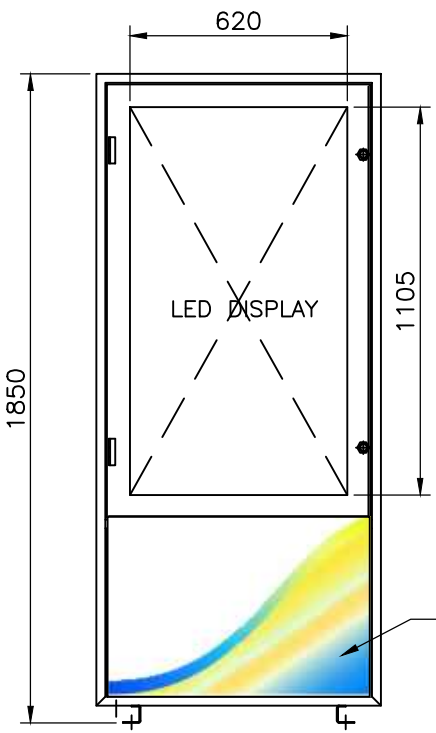

BACK SIDE

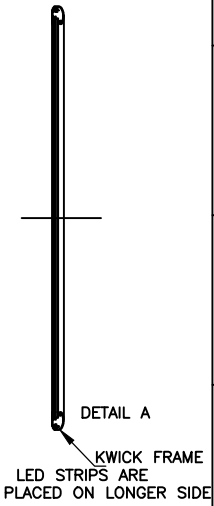

ALL DIMENSIONS ARE IN MM.

DETAIL A

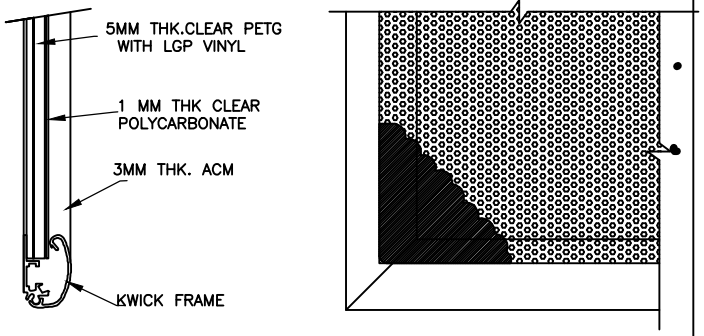

SURFACE TREATMENT–ZINC PHOSPHATE TREATED &
POWDER COATED PURE POLYESTER WHITE 50 MICRON.

BHARAT PETROLEUM CORPORATION LTD.					
TITLE : ASSLY DRG. DIGITAL POSTER UNIT				DATE	DRAWING NO.
A ADDED DETAIL A 3/5/19	SCALE :	DRAWN:	CHECKED	SHEET NO. 1 of 6	DRAWING NO : BP.RVI.DPU–A01
REVISION	DATE : 24/05/18	GM.RE			

DIN A2

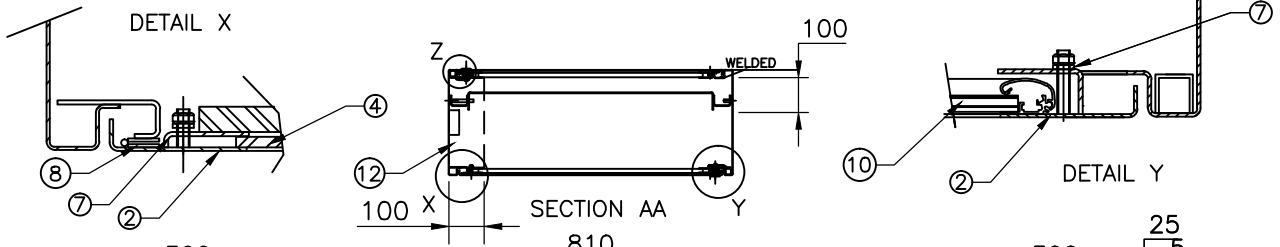

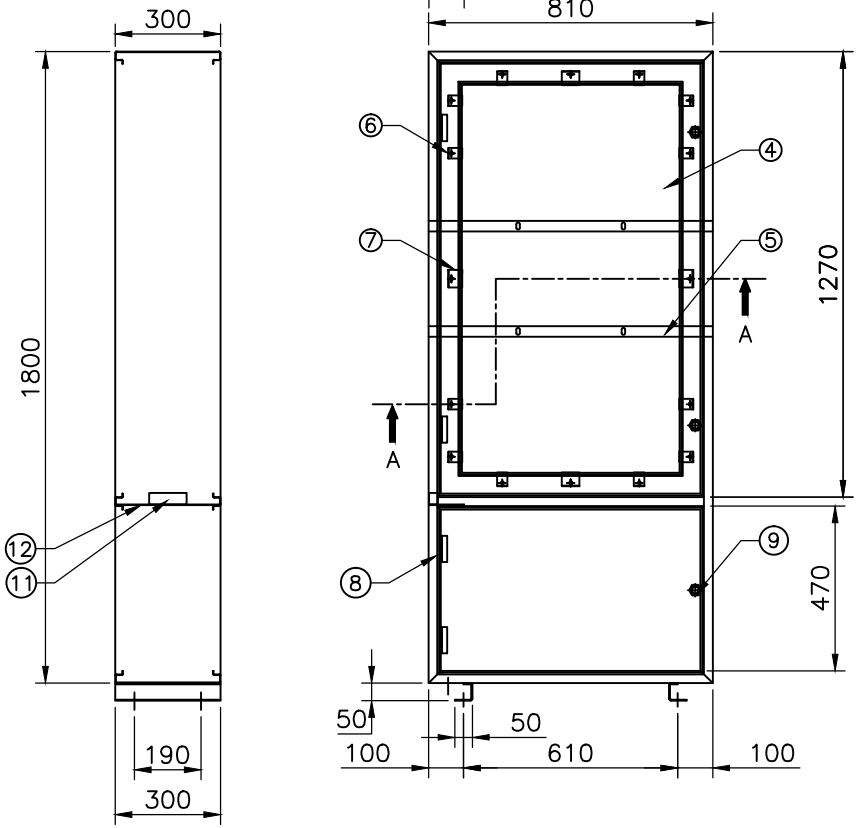

13	SIGNATURE GRAPHIC	2
12	SWITCH MOUNTING PLATE	1
11	SWITCH BOARD WITH 2 PLUG	1
10	LED DISPLAY	2
9	KEY LOCK	6
8	SS HINGE L3"X3/4"	8
7	LED DISPLAY FIXING BRACKETS	8
6	GLASS FIXING BRACKES	24
5	LED TV FIXING ANGLE	2
4	TOUGHEN GLASS	2
3	BOTTOM DOOR	2
2	TOP DOOR	2
1	BODY	1
SR.NO	SIZE	QTY.



DETAIL Z

ALL DIMENSIONS ARE IN MM.

SURFACE TREATMENT–ZINC PHOSPHATE TREATED &
POWDER COATED PURE POLYESTER WHITE 50 MICRON.



A	ADDED DETAIL A
	3/5/19
	REVISION

BHARAT PETROLEUM CORPORATION LTD.

TITLE :
ASSLY DRG. DIGITAL POSTER UNIT
INTERNAL

SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
DATE : 24/05/18	GM.RE		2 of 6	BP.RVI.DPU–A02

–	–
–	–
DATE	DRAWING NO.

DIN A2

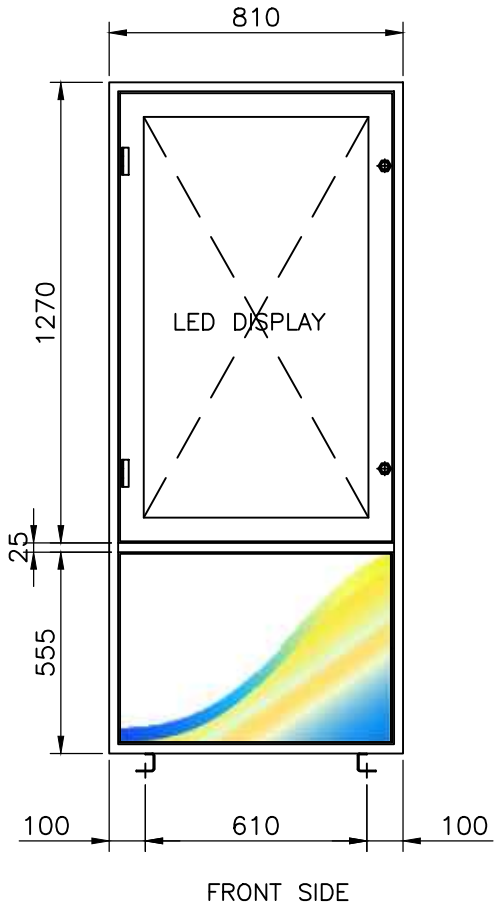

FRONT SIDE

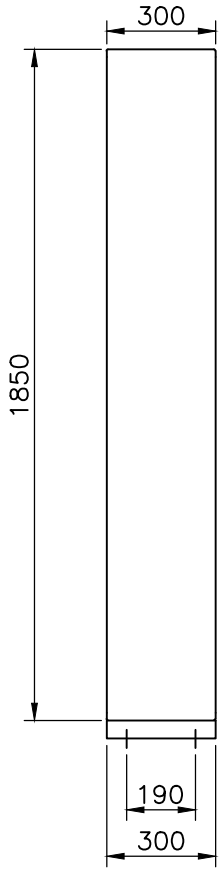

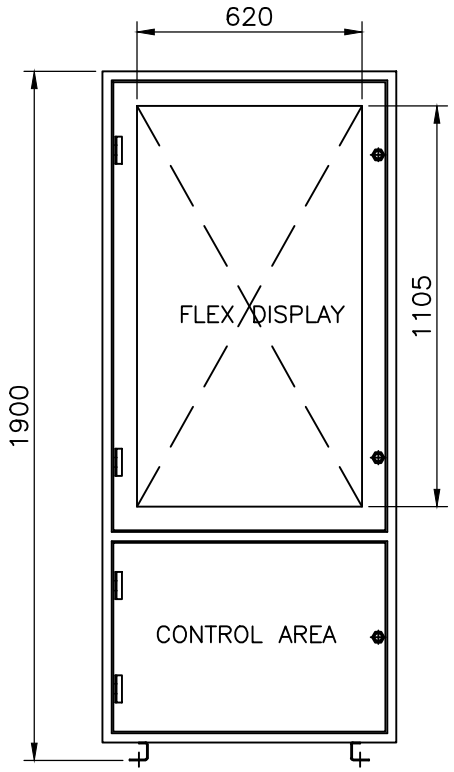

BACK SIDE

SURFACE TREATMENT–ZINC PHOSPHATE TREATED &
POWDER COATED PURE POLYESTER WHITE 50 MICRON.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

ASSLY DRG. DIGITAL POSTER UNIT

DATE	DRAWING NO.
–	–
–	–

REVISION	SCALE :	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
	DATE : 24/05/18	GM.RE		1 of 2	BP.RVI.DPU–A01

DIN A2

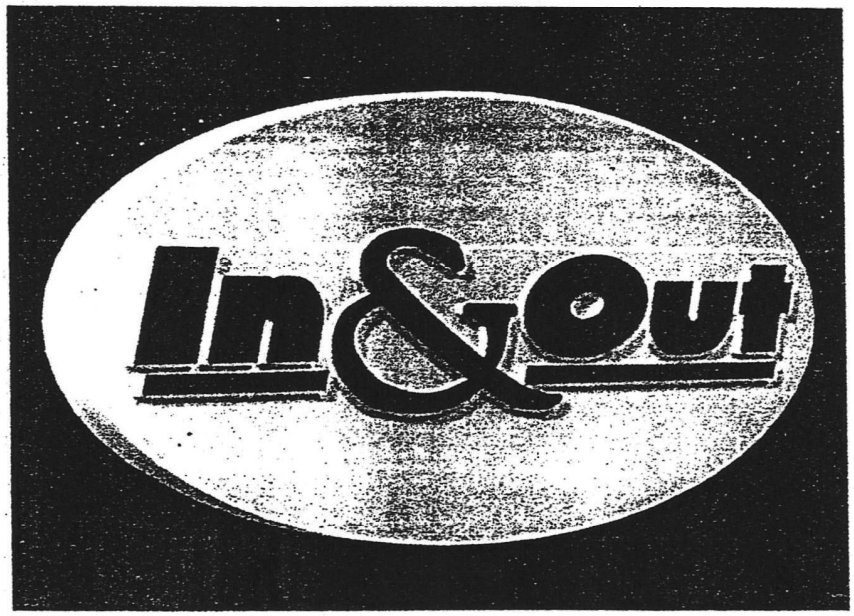

In & Out Sign

- In & Out Sign displays the shop orientation. It is fixed to the white portion above the entrance to the shop
- Materials used are aluminium, and PET-G letter moulds.
- In & Out sign is backlit.
- The dimensions are 1830x800mm (600mm over white and 200mm over sales room Blue fascia).

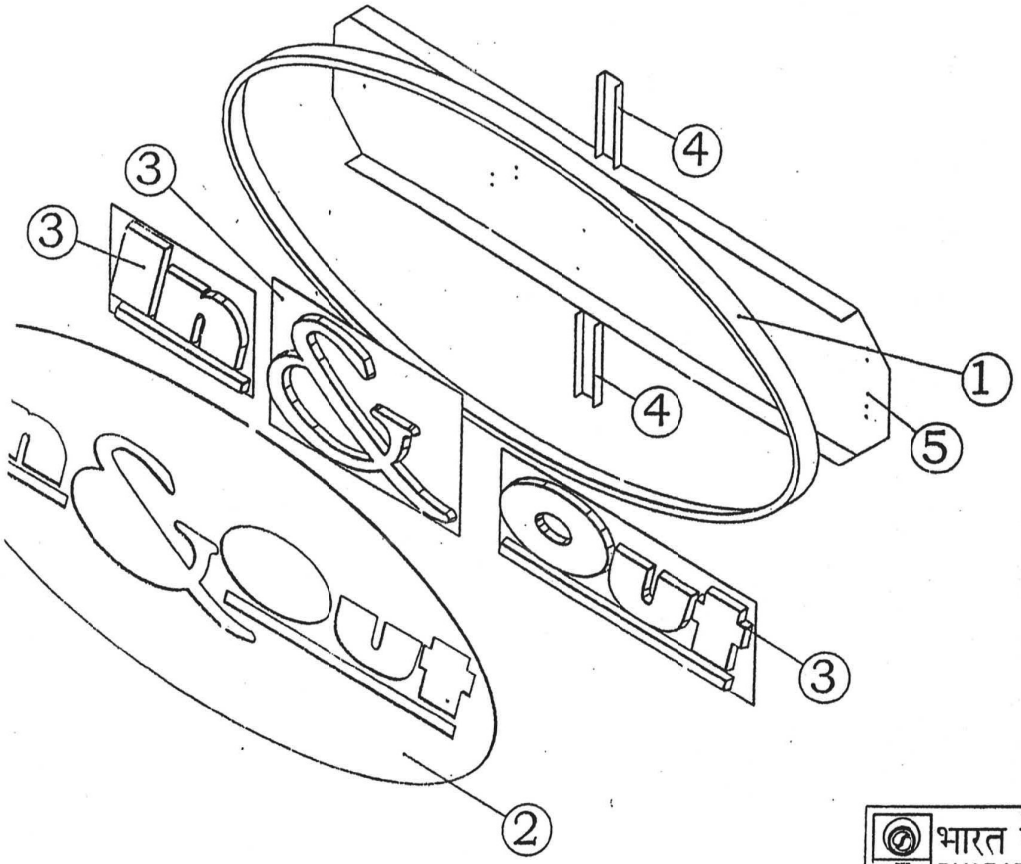

SR.NO	NAME OF COMPONENT	QTY
5	GEAR TREY	1
4	C-CHANNEL	2
3	PET-G LETTERS	1SET
2	DISPLAY SHEET	1
1	FRAME	1

भारत पेट्रोलियम कॉर्पोरेशन लिमिटेड
BHARAT PETROLEUM CORPORATION LTD.

SUBJECT : RVM

TITLE : IN & OUT SIGN

DATE | DRAWING NO.

NUMBERS CROSSED OUT ARE SUPERSEDED DRAWINGS

SCALE: 1:10	DRAWN	TRACED	CHECKED
DATE : 12/8/04	CHIEF MGR. (RE) HO		SHEET NO :1 OF 4

DRAWING NO. BP.RVI.IO-A01

DIN A3

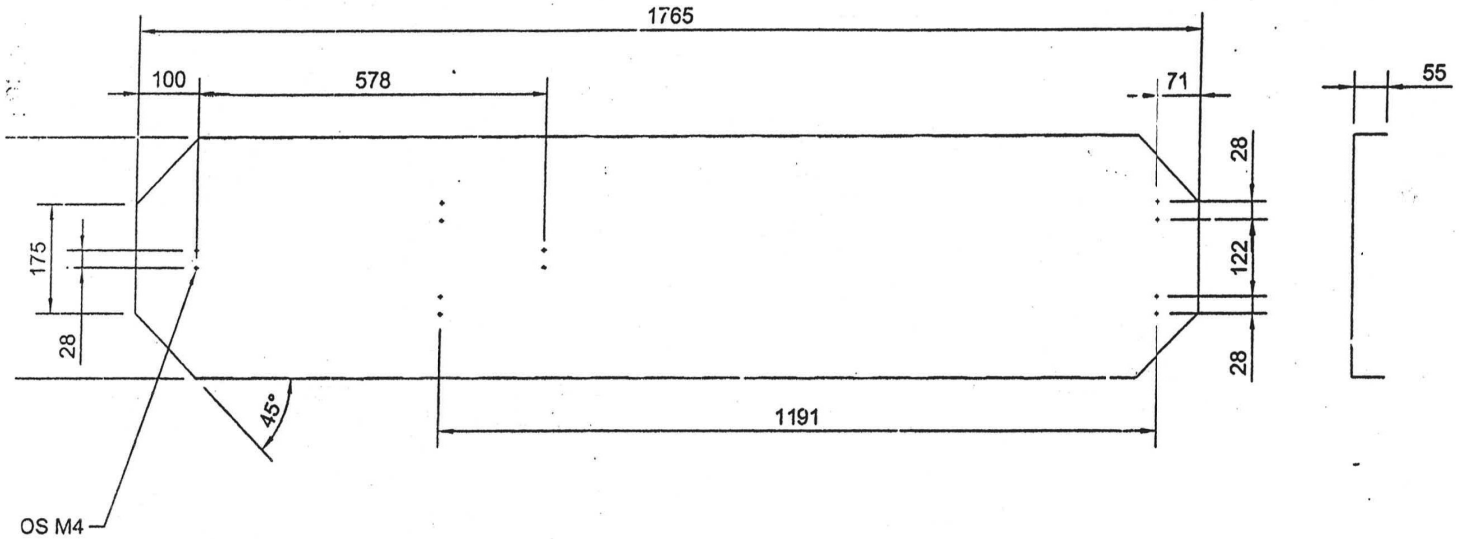

MATERIAL-CRCA STEEL SHEET 1.2mmTHK.IS:513.

SURFACE TREATMENT-PP WHITE POWDER COATED 50 MICRON.

भारत पेट्रोलियम कॉर्पोरेशन लिमिटेड BHARAT PETROLEUM CORPORATION LTD.				
SUBJECT: RVM				DATE / DRAWING NO.
TITLE: GEAR TRAY FOR IN&OUT				NUMBERS CROSSED OUT ARE SUPERSEDED DRAWINGS
SCALE:	DRAWN	TRACED	CHECKED	DRAWING NO. BP.RVI.IO-P03
DATE : 12/8/04	CHIEF MGR. (RE) HQ		SHEET NO :3 OF 4	

DIN A2

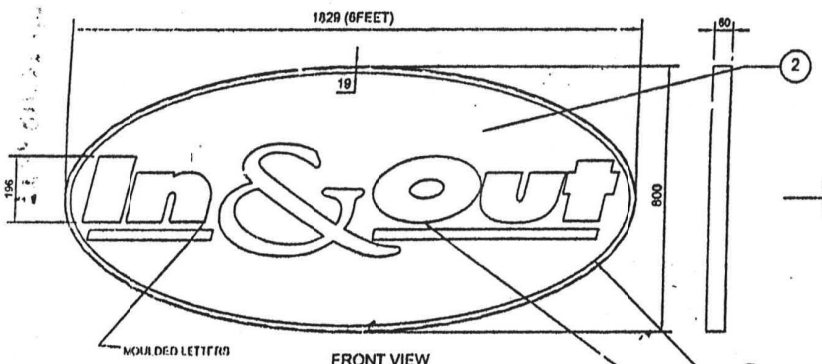

FRONT VIEW

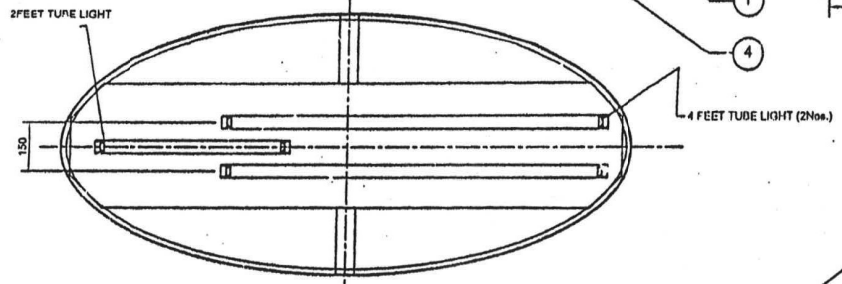

FRONT VIEW WITHOUT FRONT SHEET

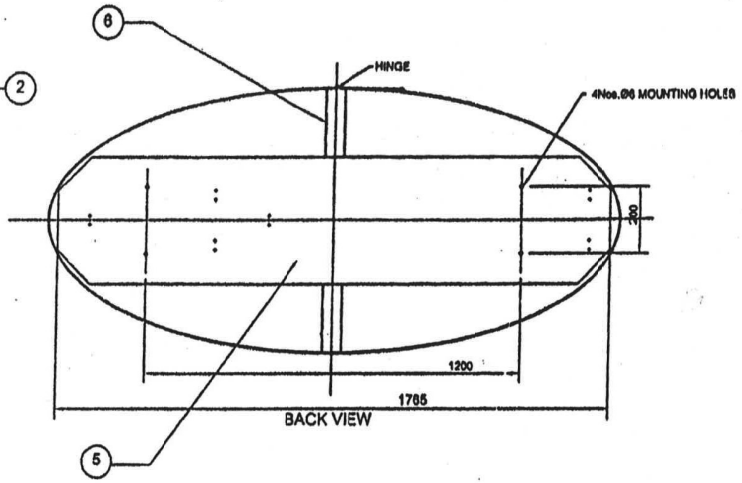

BACK VIEW

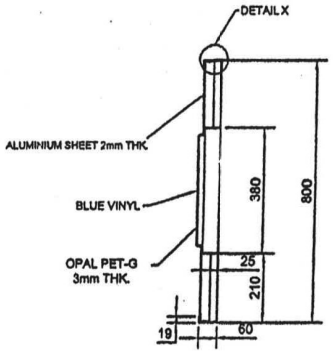



SCALE 6:1 DETAIL X

BACK VIEW

ITEM NO.	DESCRIPTION	MATERIAL/SPECIFICATION	QTY.
15	HINGE		1
14	CONNECTOR	2WAY 15 AMP	1
13	CONNECTOR	2WAY 10 AMP	2
12	CONNECTOR	4WAY 5 AMP	2
11	BRACKET HOLDER		6
10	BALLAST	ELECTRONIC BALLAST 20W	1
9	BALLAST	ELECTRONIC BALLAST 40W PHILIPS MAKE	2
8	TUBE LIGHT	2 FEET	1
7	TUBE LIGHT	4 FEET	2
6	C CHANNEL 25X60X210mm	CRCA STEEL SHEET 1.2 mm THK.IS:513 PP WHITE POWDER COATED 50 MICRON.	2
5	GEAR TRAY		1
4	FORMED LETTERS	OPAL PET-G 3mm THK.FORMED	
3	ANGLE	ALUMINIUM SHEET 1.6mm THK.IS:737	4
2	DISPLAY SHEET	ALUMINIUM SHEET 2mm THK.IS:737 CROMATE TREATED & PP BPCL YELLOW POWDER COATED 50micron.	1
1	FRAME	ALUMINIUM SHEET 3mm THK.IS:737 PP WHITE POWDER COATED 50micron.	1

भारत पेट्रोलियम कॉर्पोरेशन लिमिटेड
BHARAT PETROLEUM CORPORATION LTD.

SUBJECT :	RVM
TITLE :	IN & OUT SIGN
DATE	DRAWING NO.
	NUMBERS CROSSED OUT ARE SUPERSEDED DRAWINGS
SCALE :	
DRAWN	
TRACED	
CHECKED	
DATE : 12/6/04	CHIEF MGR. (RE) HQ
SHEET NO :2 OF 4	
DRAWING NO.	BP.RVI.IO-A02

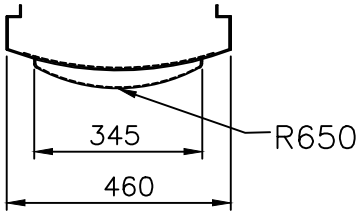

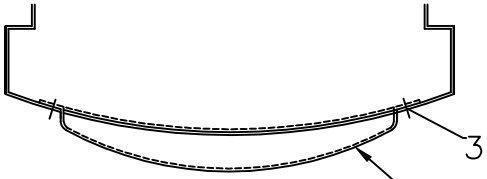

② VACUUM FORMED PET–G

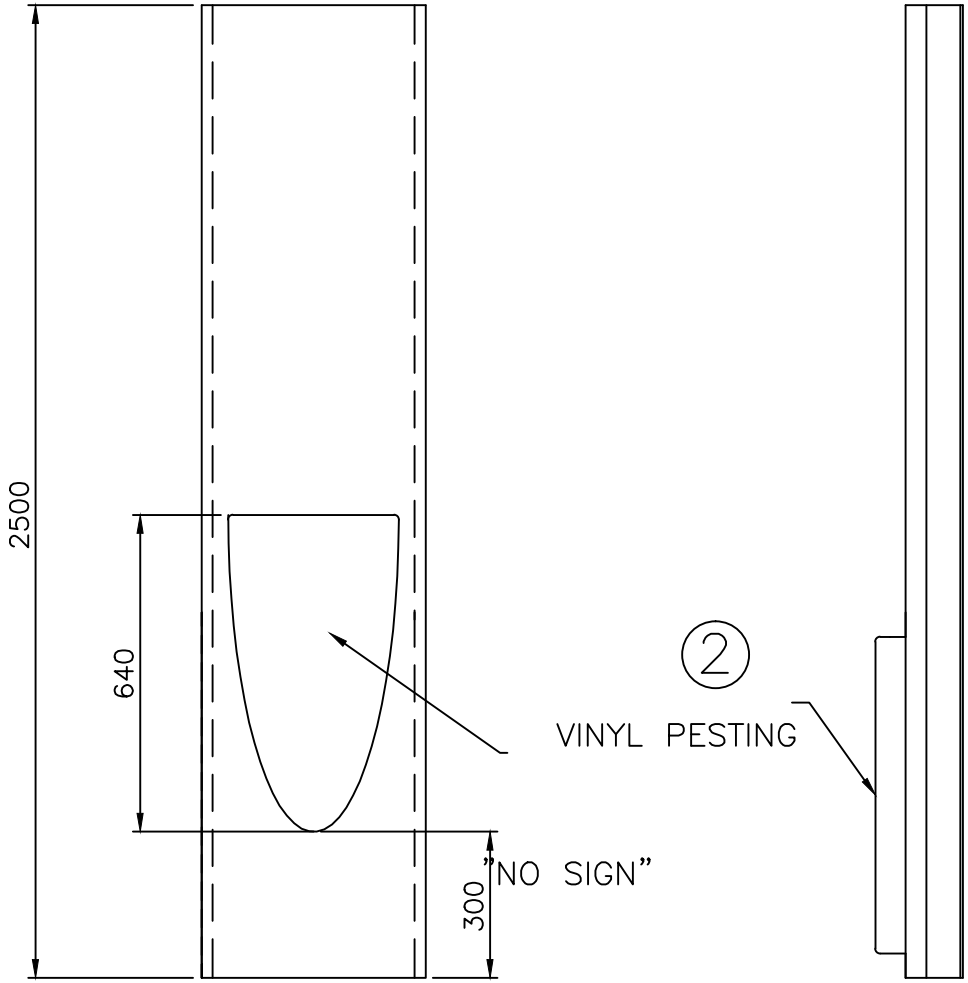

SR.NO	DESCRIPTION	QTY.
2	VINYL	
1	PET–G	1

ALL DIMS ARE IN mm.

BHARAT PETROLEUM CORPORATION LTD.

TITLE : "NO SIGN"

SCALE : 1:12	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
DATE : 17/5/18	GM. RE.		1 of 2	BP.RVI.NS–A01

DATE | DRAWING NO.

NUMBERS CROSSED OUT ARE SUPERSEDED DRAWINGS

DIN A2

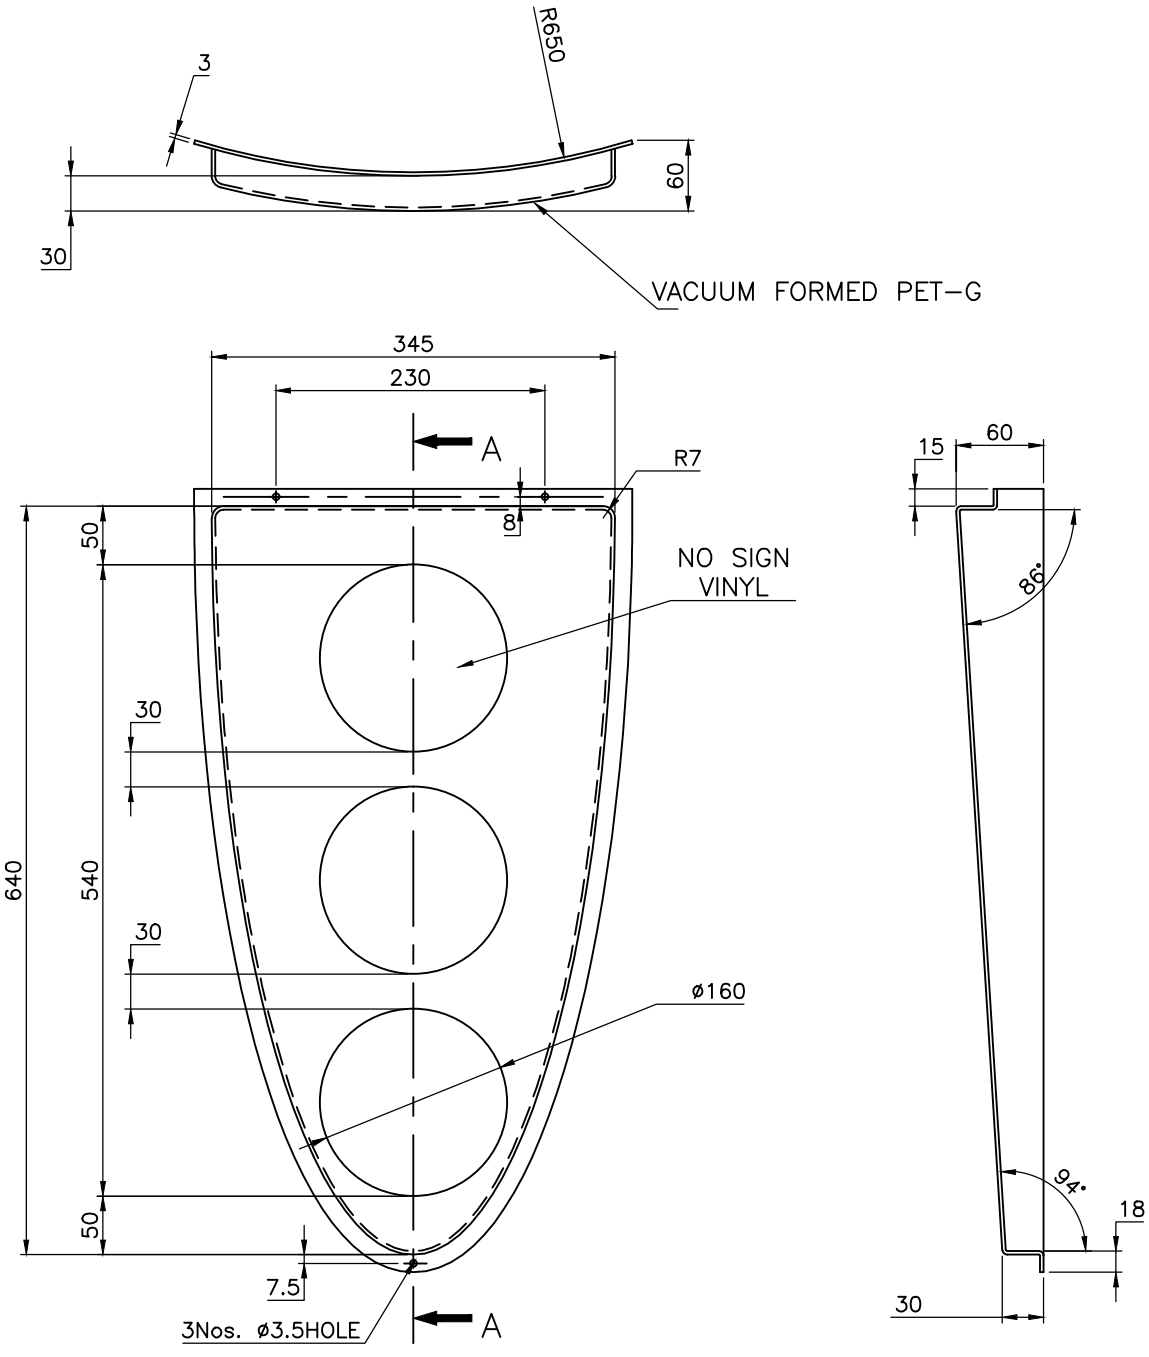

SECTION AA

MATERIAL–OPAL PET–G 3mmTHK. VACUUM FORMED

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

DISPLAY PANEL "NO" SIGN

–	–
–	–
DATE	DRAWING NO.

NUMBERS CROSSED OUT ARE SUPERSEDED DRAWINGS

SCALE : 1:6	DRAWN:	CHECKED	SHEET NO.	DRAWING NO :
REVISIONS	DATE : 17/5/18	GM.RE	2 OF 2	BP.RVI.NS–P02

DIN A2

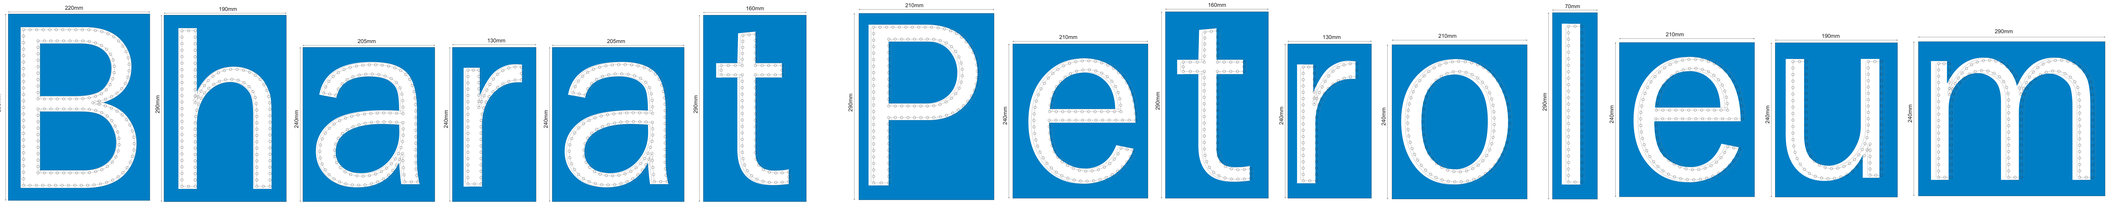
220mm
190mm
205mm
130mm
205mm
160mm
210mm
210mm
160mm
130mm
210mm
70mm
210mm
190mm
290mm
290mm
240mm
240mm
240mm
290mm
290mm
240mm
290mm
240mm
240mm
240mm
245mm

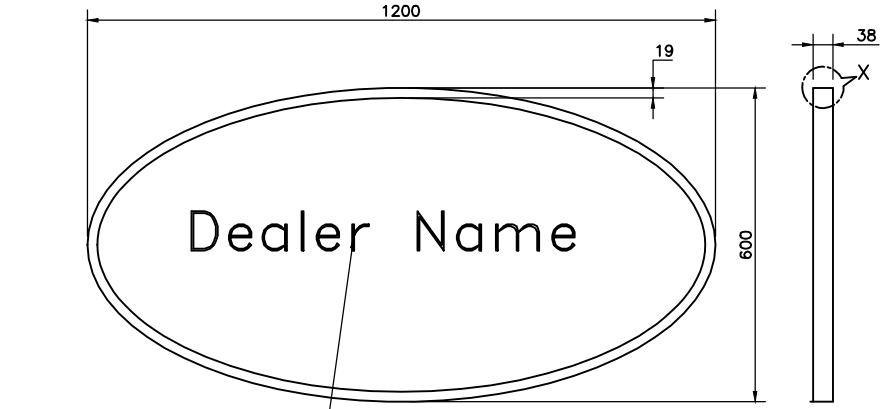

FRONT VIEW

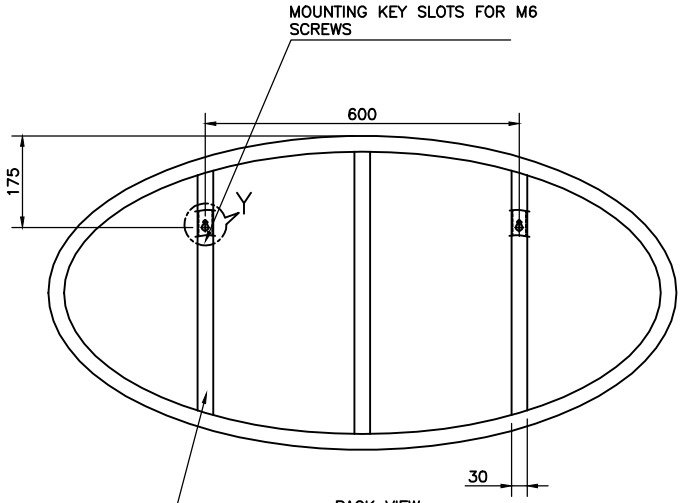

BACK VIEW

⑤ LETTERS IN ALUMINIUM SHEET 3mm thk.IS:737.
PP WHITE POWDER COATED.

TEXT FONT–ARIAL NARROW REGULAR.

TEXT HEIGHT 75mm THK.

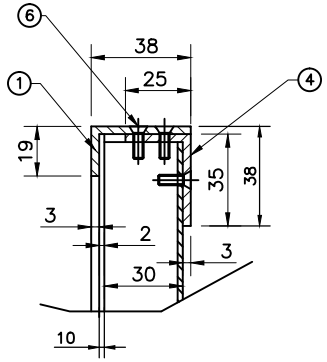

SCALE 5:1
DETAIL X



SCALE 5:1
MOUNTING KEY SLOTS FOR M6 SCREWS

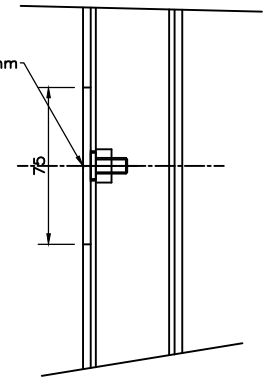

ITEM NO	DESCRIPTION	MATERIAL & SPECIFICATION	ITEM NO
6	COUNTER SUNK SCREW	STAINLESS STEEL M4X10	
5	MESSAGES	ALUMINUM SHEET 3mm THK IS:737.	*
4	ANGLE	CRCA STEEL SHEET 3 mm THK.IS:513 PRETREATED & PAINTED IN WHITE 40 MICRON.	
3	STRUTS	CRCA STEEL SHEET 2 mm THK.IS:513 PRETREATED & PAINTED IN WHITE 40 MICRON.	3
2	DISPLAY SHEET	ALUMINIUM SHEET 2mm THK.IS:737. PP BPCL BLUE POWDER COATED 50MICRON.	1
1	FRAME	ALUMINIUM SHEET 3mm THK.IS:737 PP WHITE POWDER COATED 50 MICRON.	1

ALL DIMS ARE IN MM.

BHARAT PETROLEUM CORPORATION LTD.

TITLE :

DEALER NAME

SCALE : 1:20	DRAWN:	CHECKED	SHEET NO.
DATE : 12/6/04	GM.RE.		1 OF 1

DATE	DRAWING NO.
–	–
–	–

NUMBERS CROSSED OUT ARE SUPERSEDED DRAWINGS

DRAWING NO : BP.RVI.DN–A01

DIN A2