



**Prochista**  
S m a r t   T e c h n o l o g y

# Leak Rope Sensor


(Dry Contact)

Part No. PCT-DC05DLQ0123

Document No. 951216123-1

This sensor enables your monitoring system to provide early detection of fluid in your data center or network closet along the entire length.

Using dry contact this sensor can be integrated with many different tools.

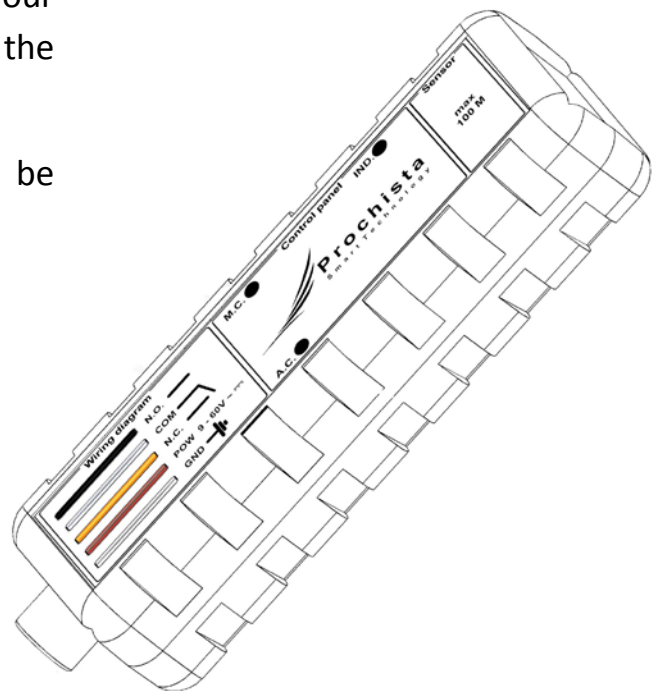

- The unit can operate with external 12~48VDC power supply.
- Customize each sensor with a differentiating name and location.
- Design for surface mounted installation.
- You can extend the total length of the Rope Leak Sensor up to 30 m.



## Specifications

Electrical	
External Input voltage	12~48 VDC ( $\pm 10\%$ )
Input current	Max 10 mA
Power consumption	Max 0.5 W
Environmental conditions	
Operation Temperature Range	0°C – 50°C
Operation Humidity Range	95%RH or less (without dew condensation)
Recommended Storage Temperature	-20°C – 85°C

## Mechanical Dimension

