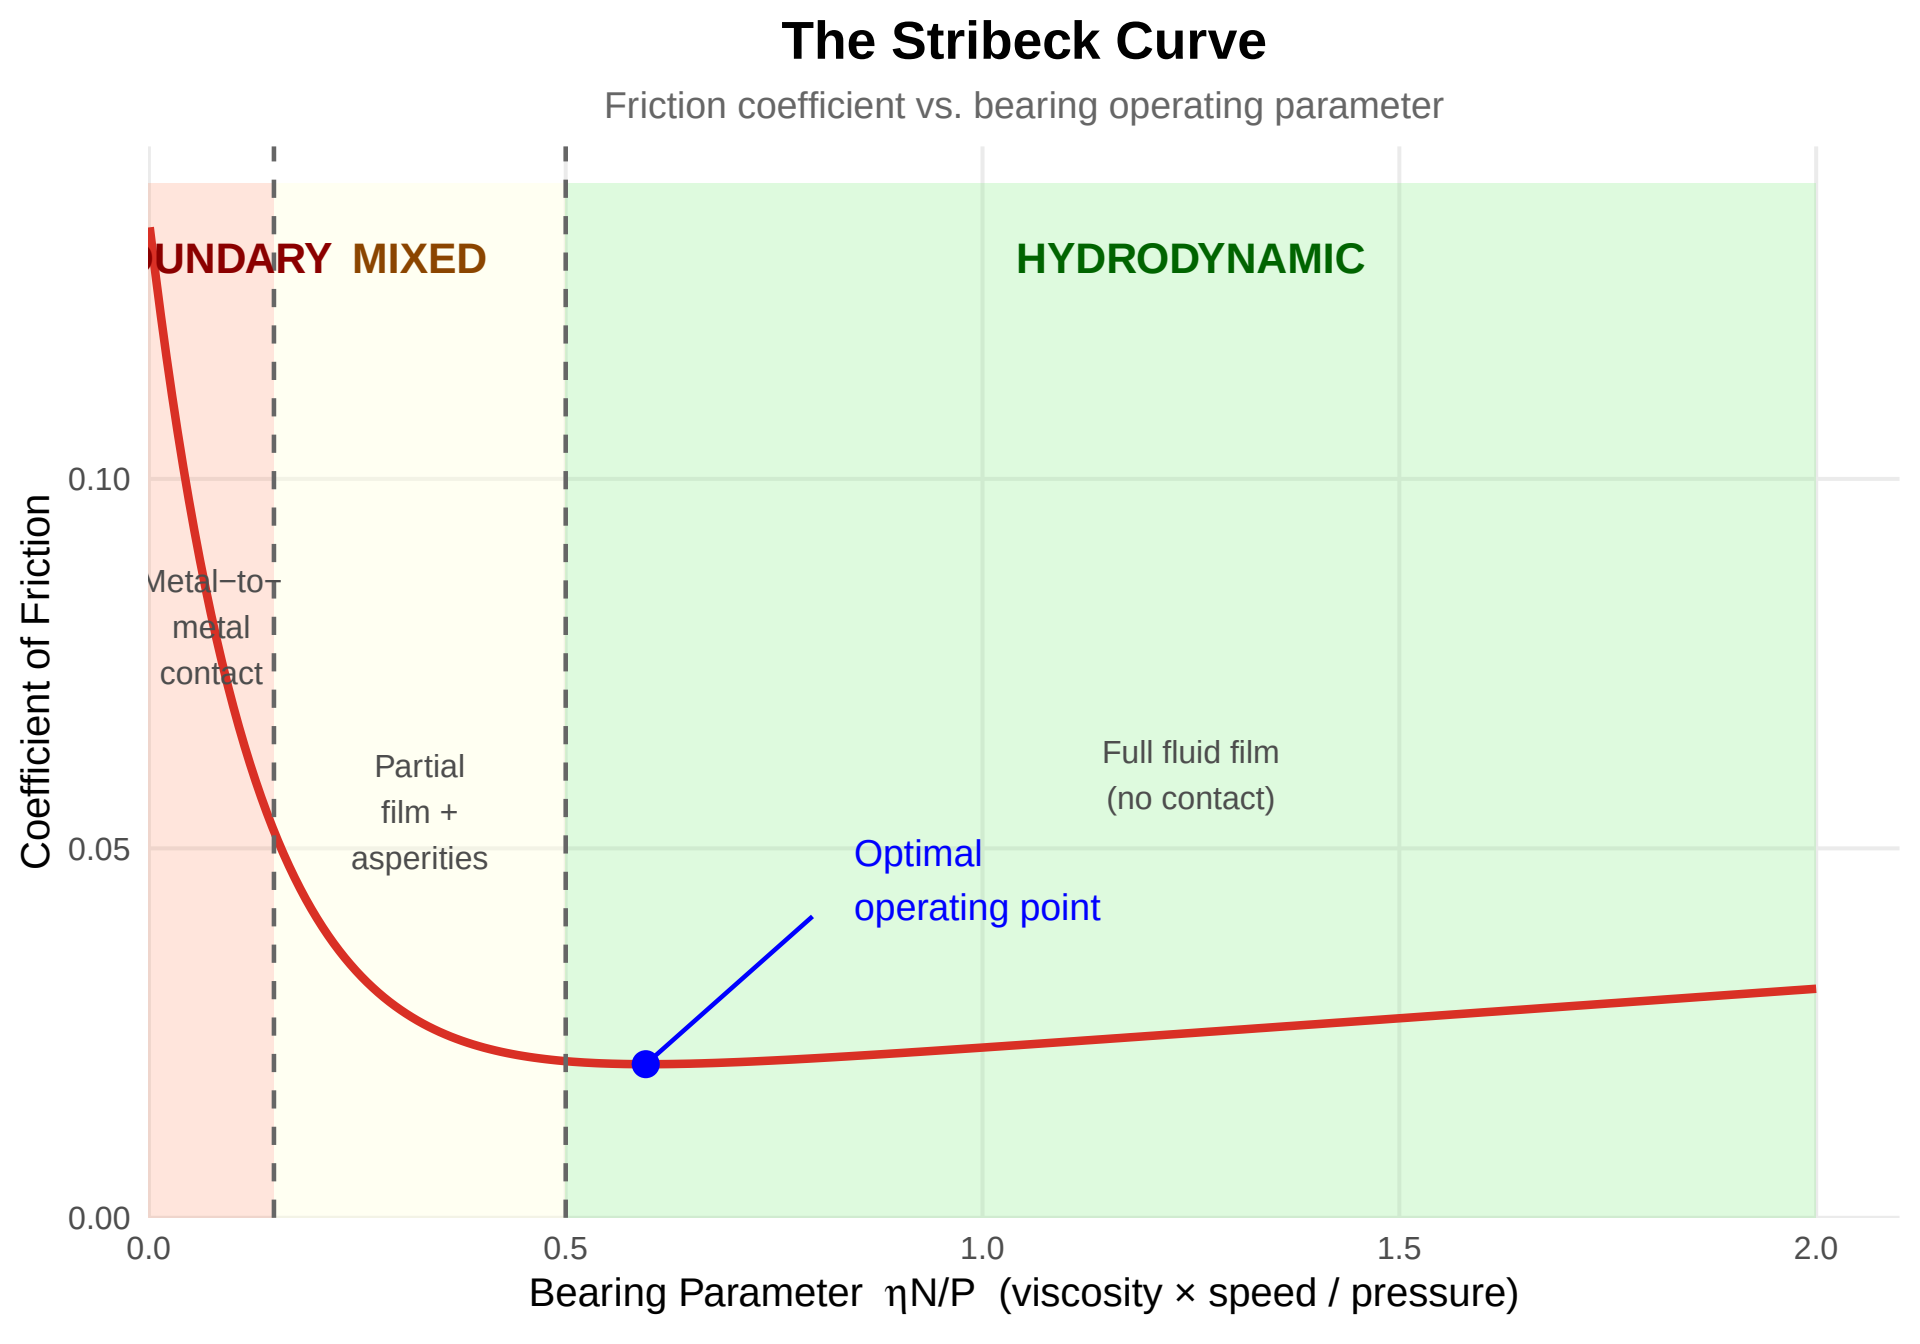
The Stribeck Curve
Friction coefficient vs. bearing operating parameter
UNDARY
MIXED
HYDRODYNAMIC
Metal−to−metal contact
Partial film + asperities
Full fluid film (no contact)
Optimal operating point
Coefficient of Friction
0.10
0.05
0.00
0.0
0.5
1.0
1.5
2.0
Bearing Parameter ηN/P (viscosity × speed / pressure)