DOUBLE−CRANK (DRAG−LINK)

Key Feature:

Non−uniform output velocity from uniform input

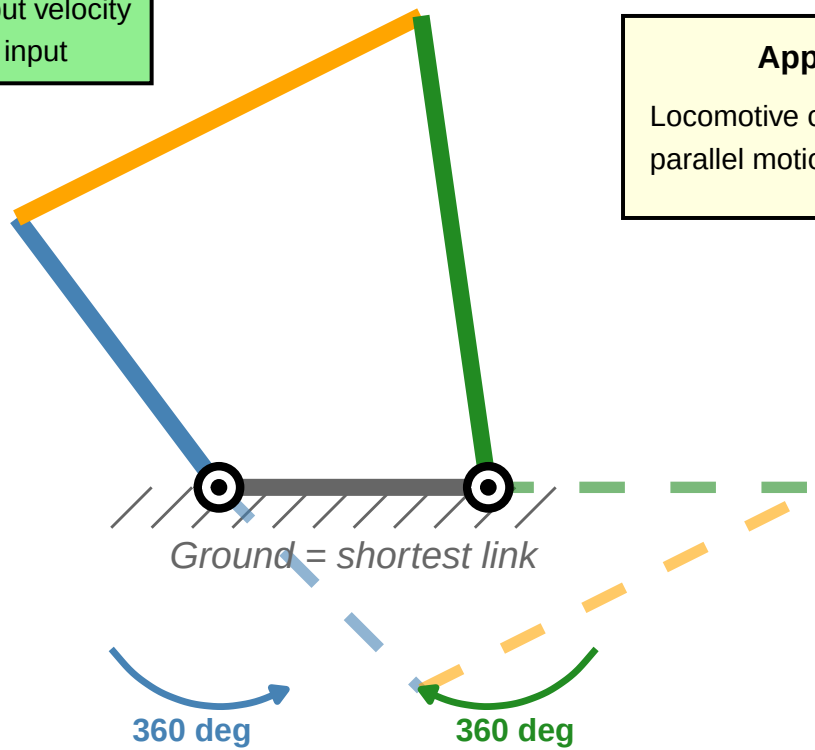

Applications:

Locomotive coupling rods, parallel motion linkages