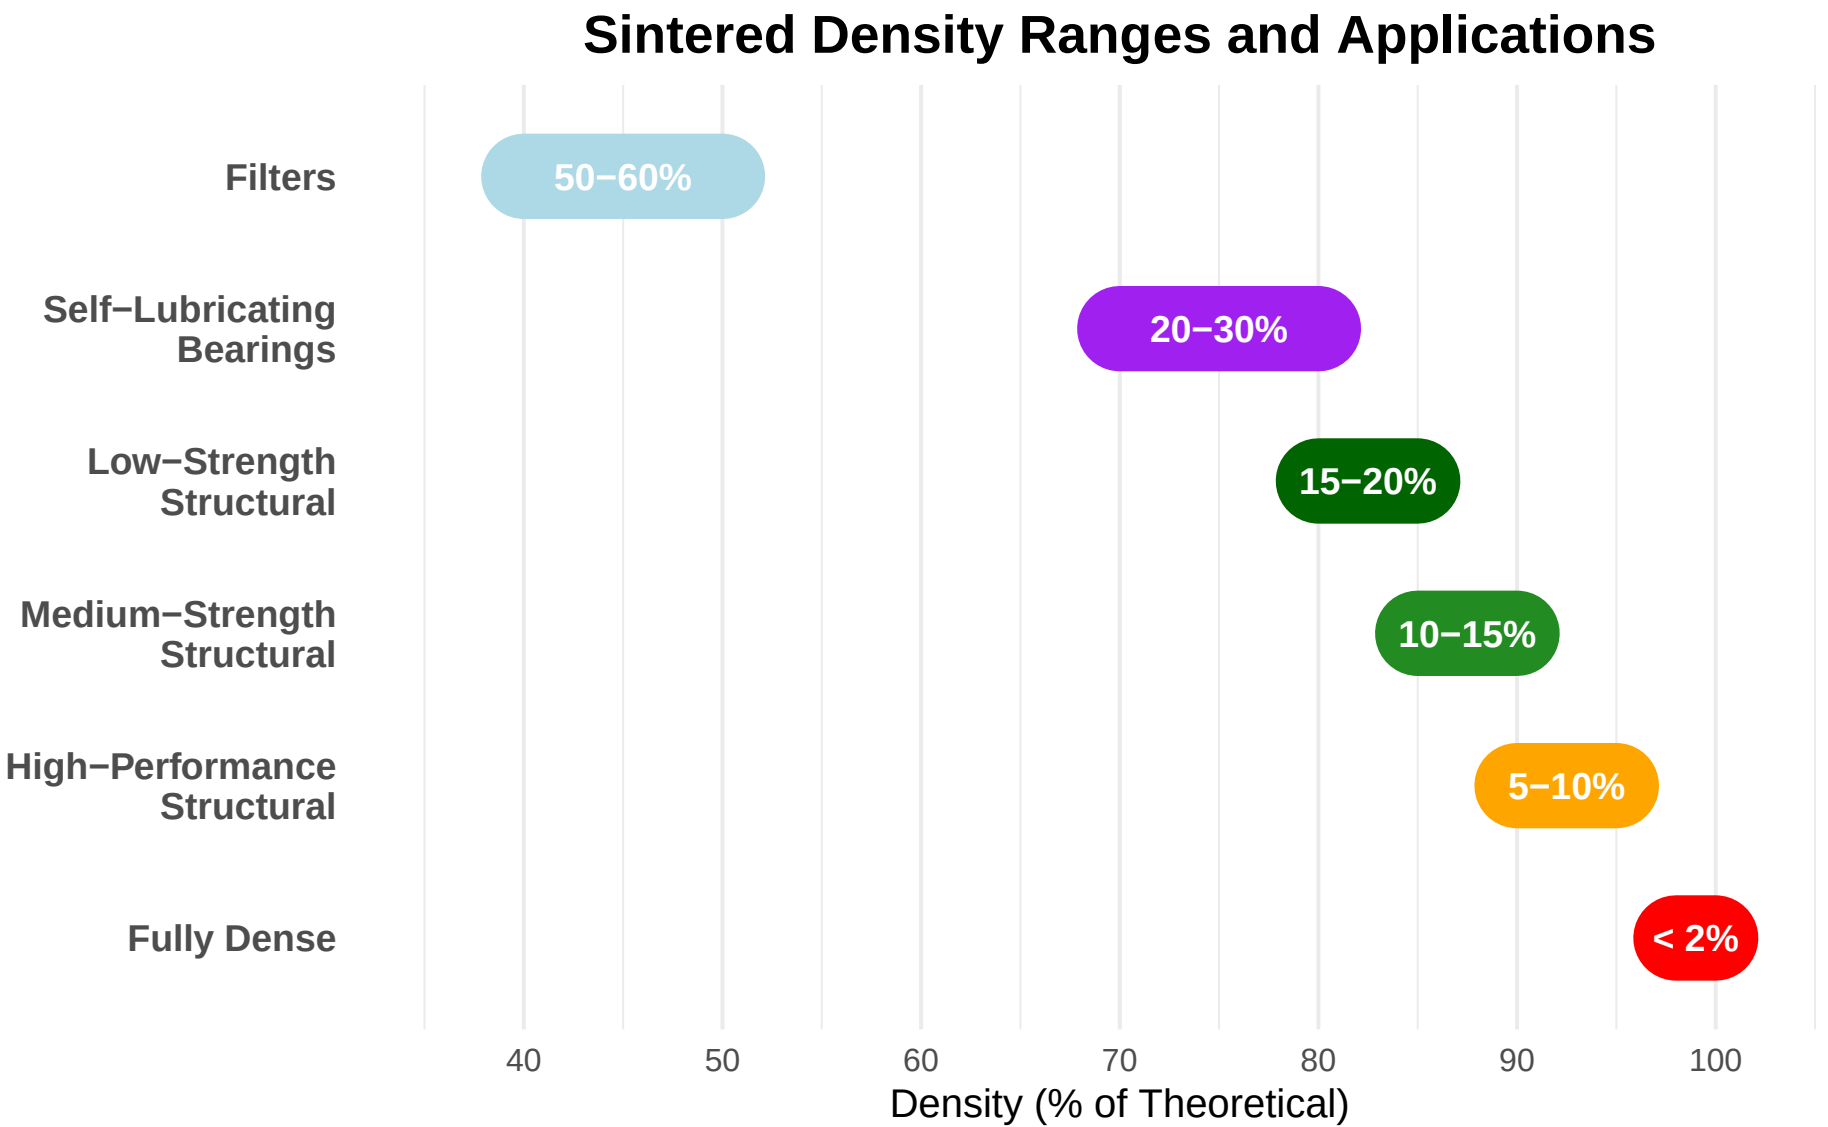
Sintered Density Ranges and Applications
Filters
50–60%
Self–Lubricating Bearings
20–30%
Low–Strength Structural
15–20%
Medium–Strength Structural
10–15%
High–Performance Structural
5–10%
Fully Dense
< 2%
40
50
60
70
80
90
100
Density (% of Theoretical)