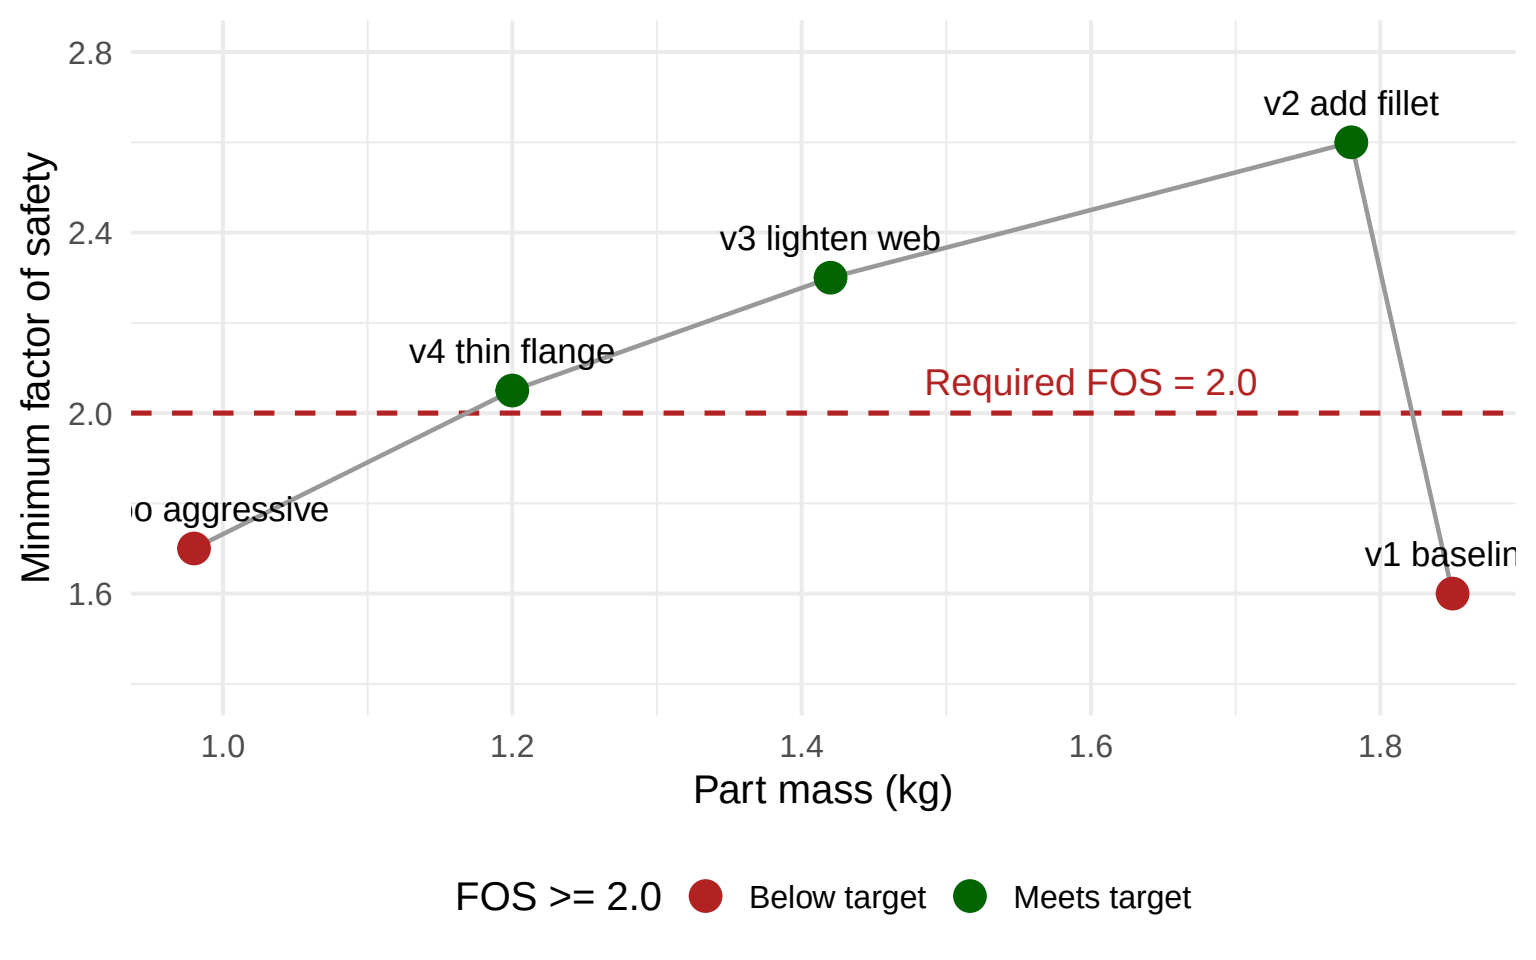
2.8
2.4
2.0
1.6
Minimum factor of safety
v2 add fillet
v3 lighten web
v4 thin flange
Required FOS = 2.0
o aggressive
v1 baselin
1.0
1.2
1.4
1.6
1.8
Part mass (kg)
FOS >= 2.0
Below target
Meets target