


Signal Error vs. Cable Length

18 AWG copper, round-trip wire resistance -- current loop error stays at zero

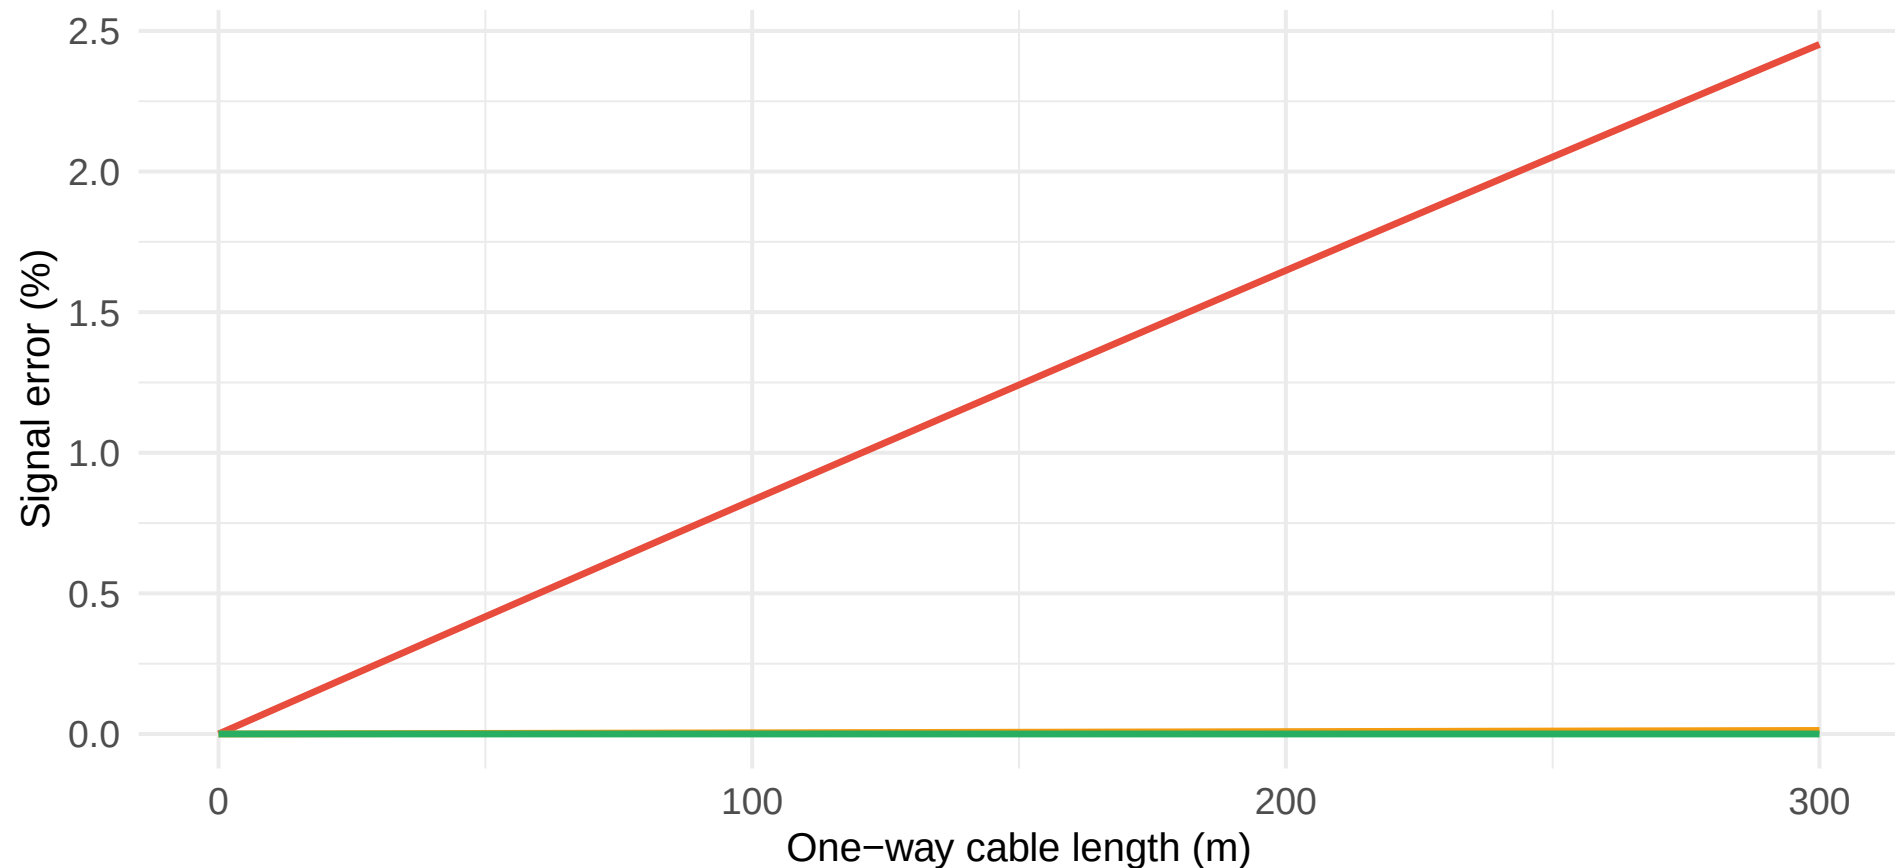

— 0-10V, 500 ohm effective load — 0-10V, 100 kohm input impedance — 4-20 mA current loop