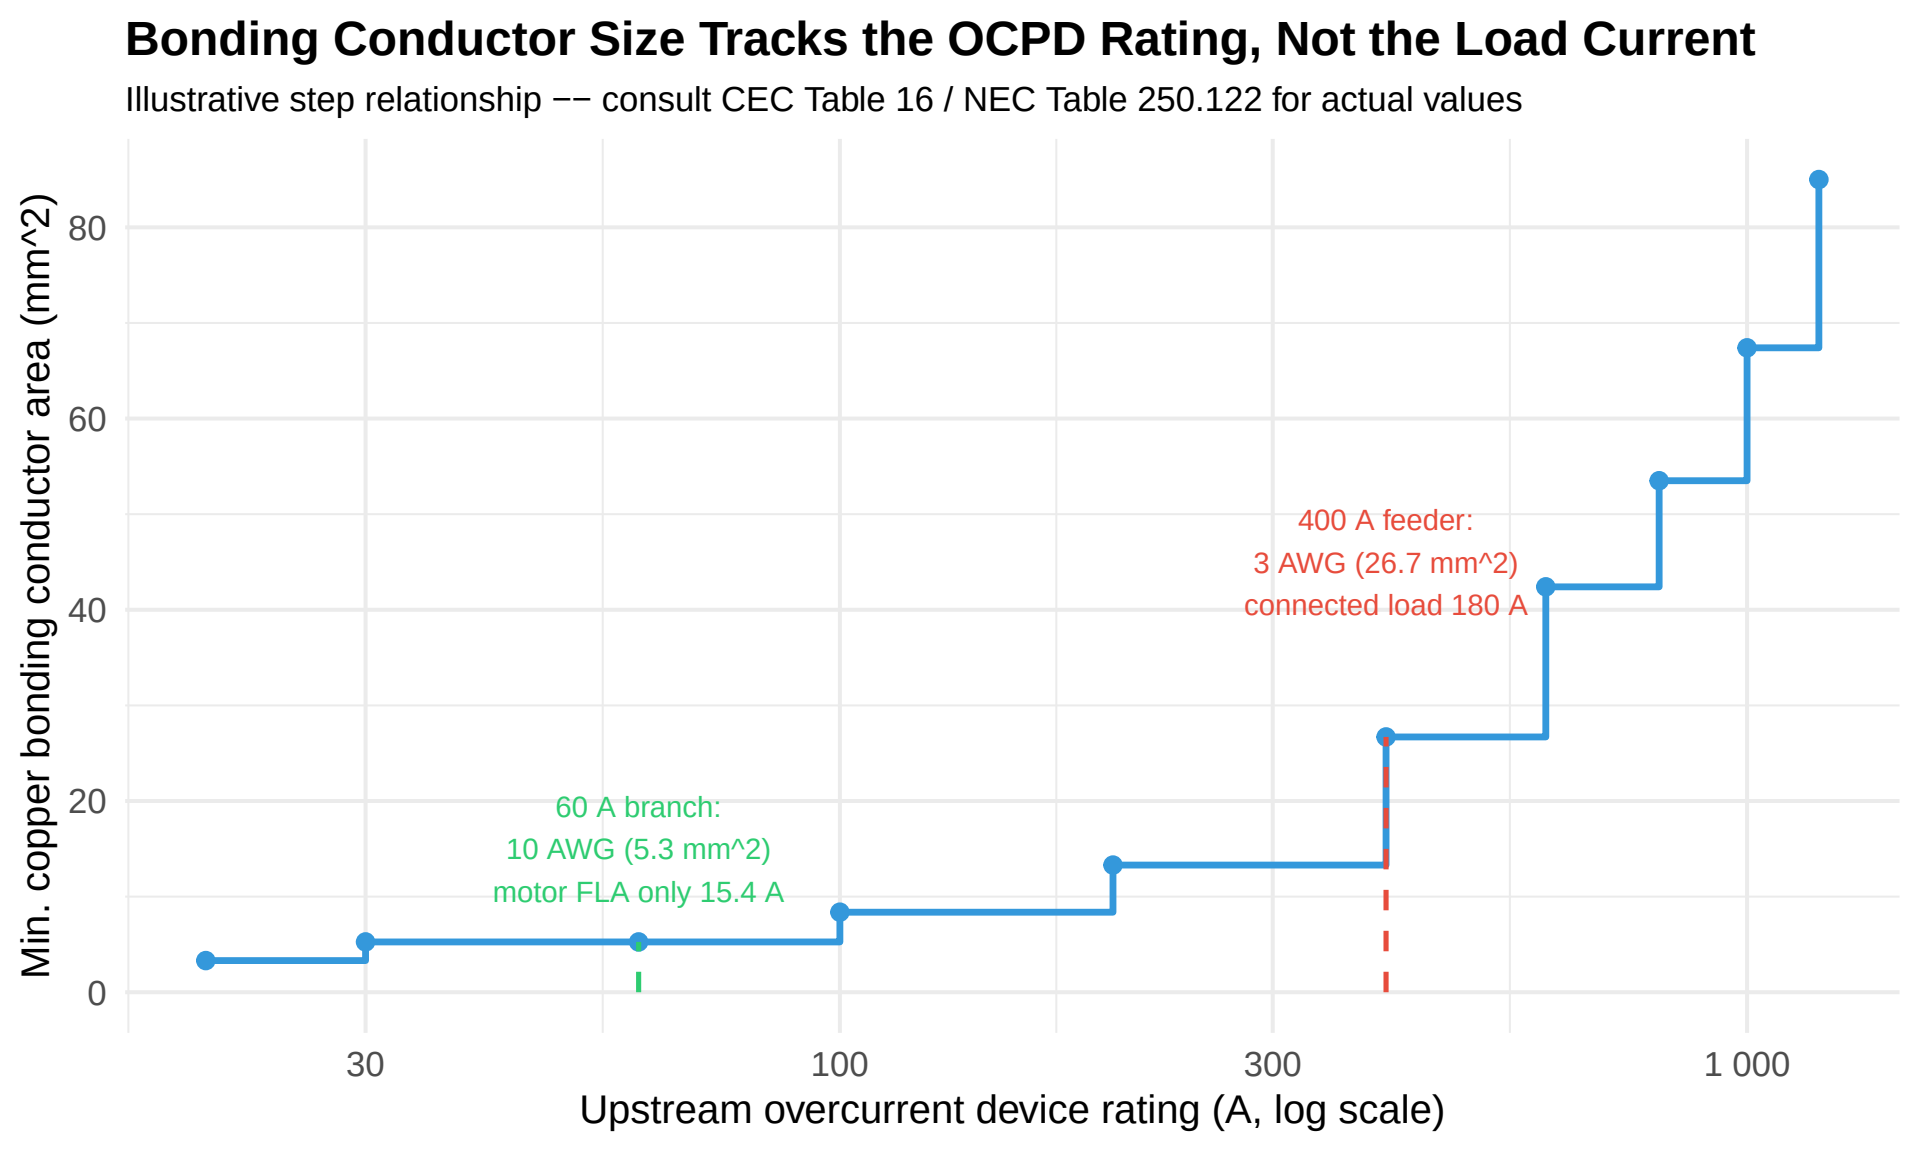
Bonding Conductor Size Tracks the OCPD Rating, Not the Load Current
Illustrative step relationship −− consult CEC Table 16 / NEC Table 250.122 for actual values
Min. copper bonding conductor area (mm^2)
0
20
40
60
80
30
100
300
1 000
Upstream overcurrent device rating (A, log scale)
60 A branch:
10 AWG (5.3 mm^2)
motor FLA only 15.4 A
400 A feeder:
3 AWG (26.7 mm^2)
connected load 180 A