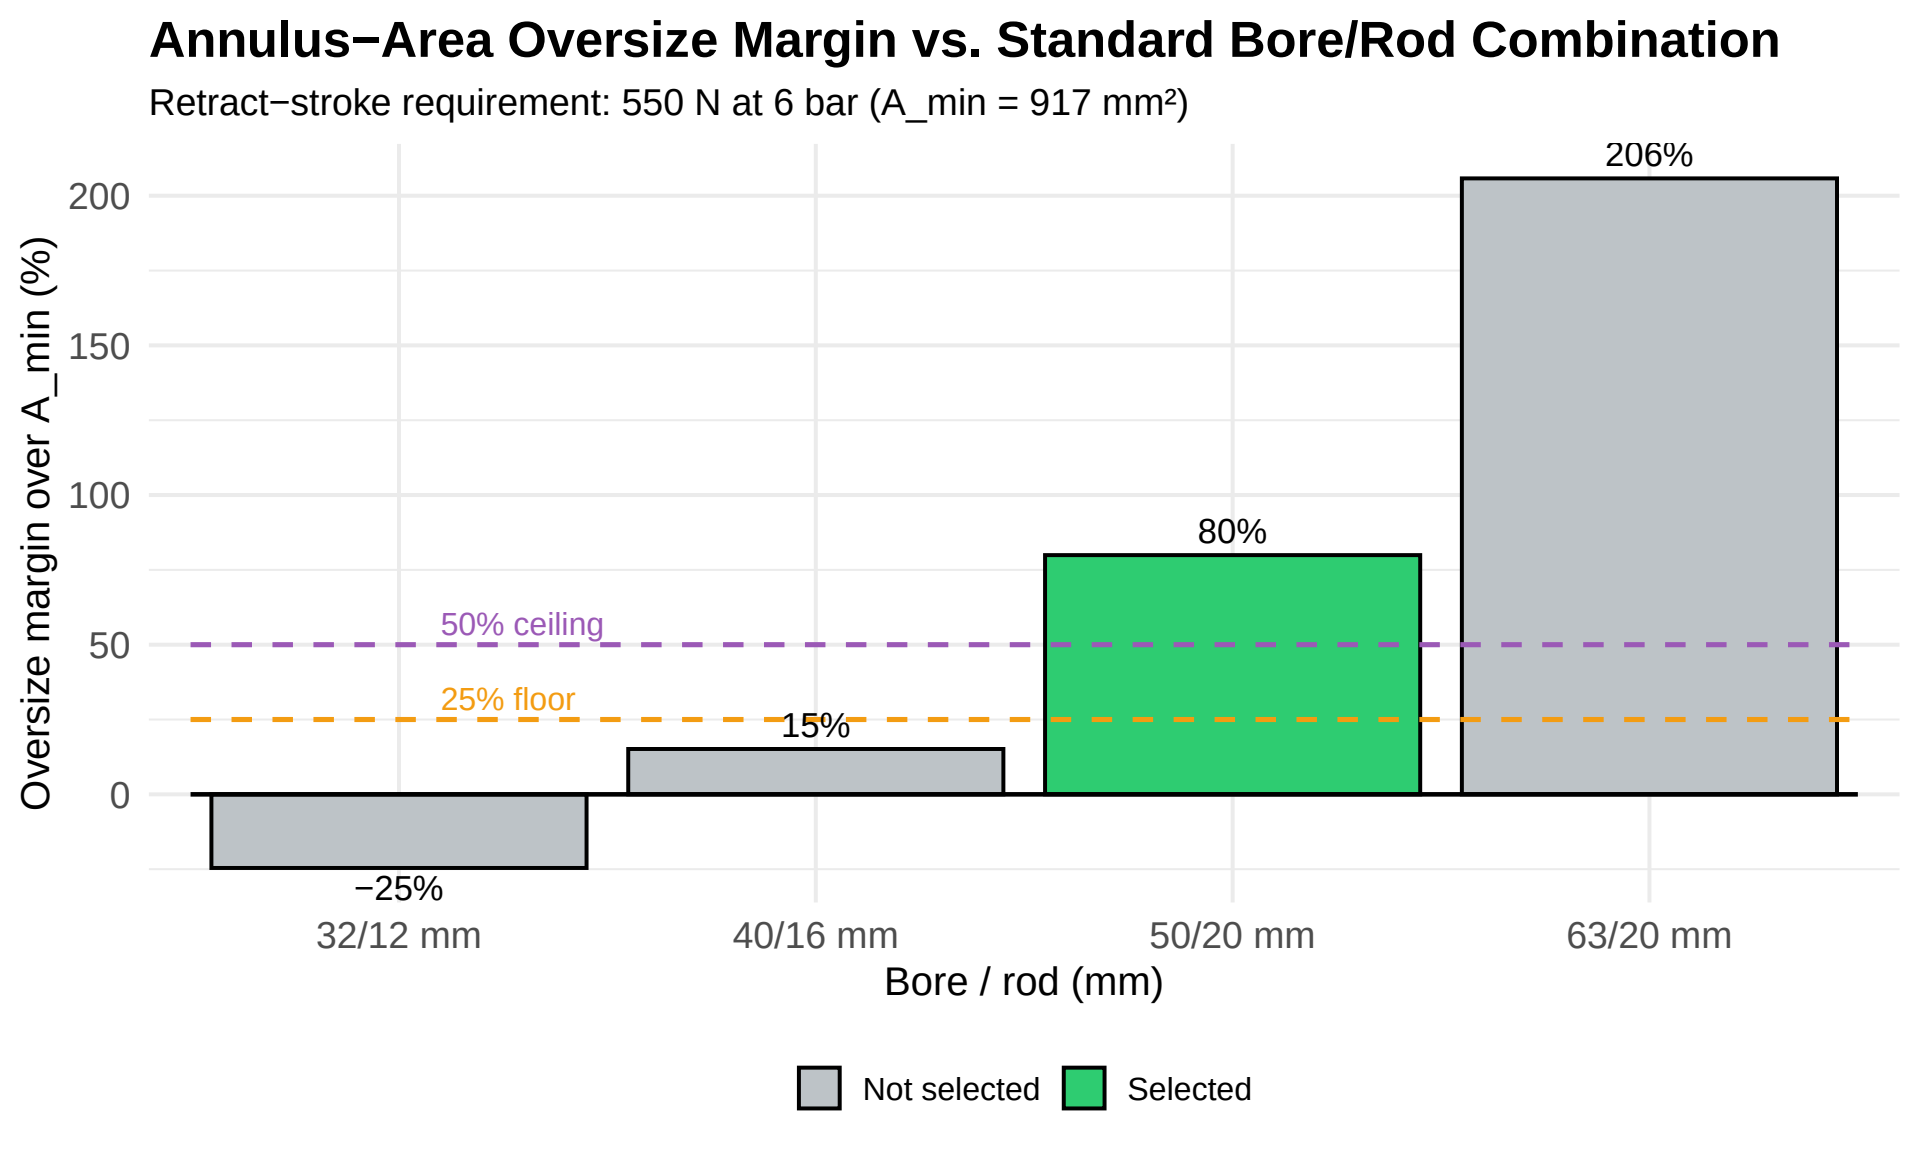
Annulus−Area Oversize Margin vs. Standard Bore/Rod Combination
Retract−stroke requirement: 550 N at 6 bar (A_min = 917 mm²)
Oversize margin over A_min (%)
200
150
100
50
0
206%
80%
50% ceiling
25% floor
15%
−25%
32/12 mm
40/16 mm
50/20 mm
63/20 mm
Bore / rod (mm)
Not selected
Selected