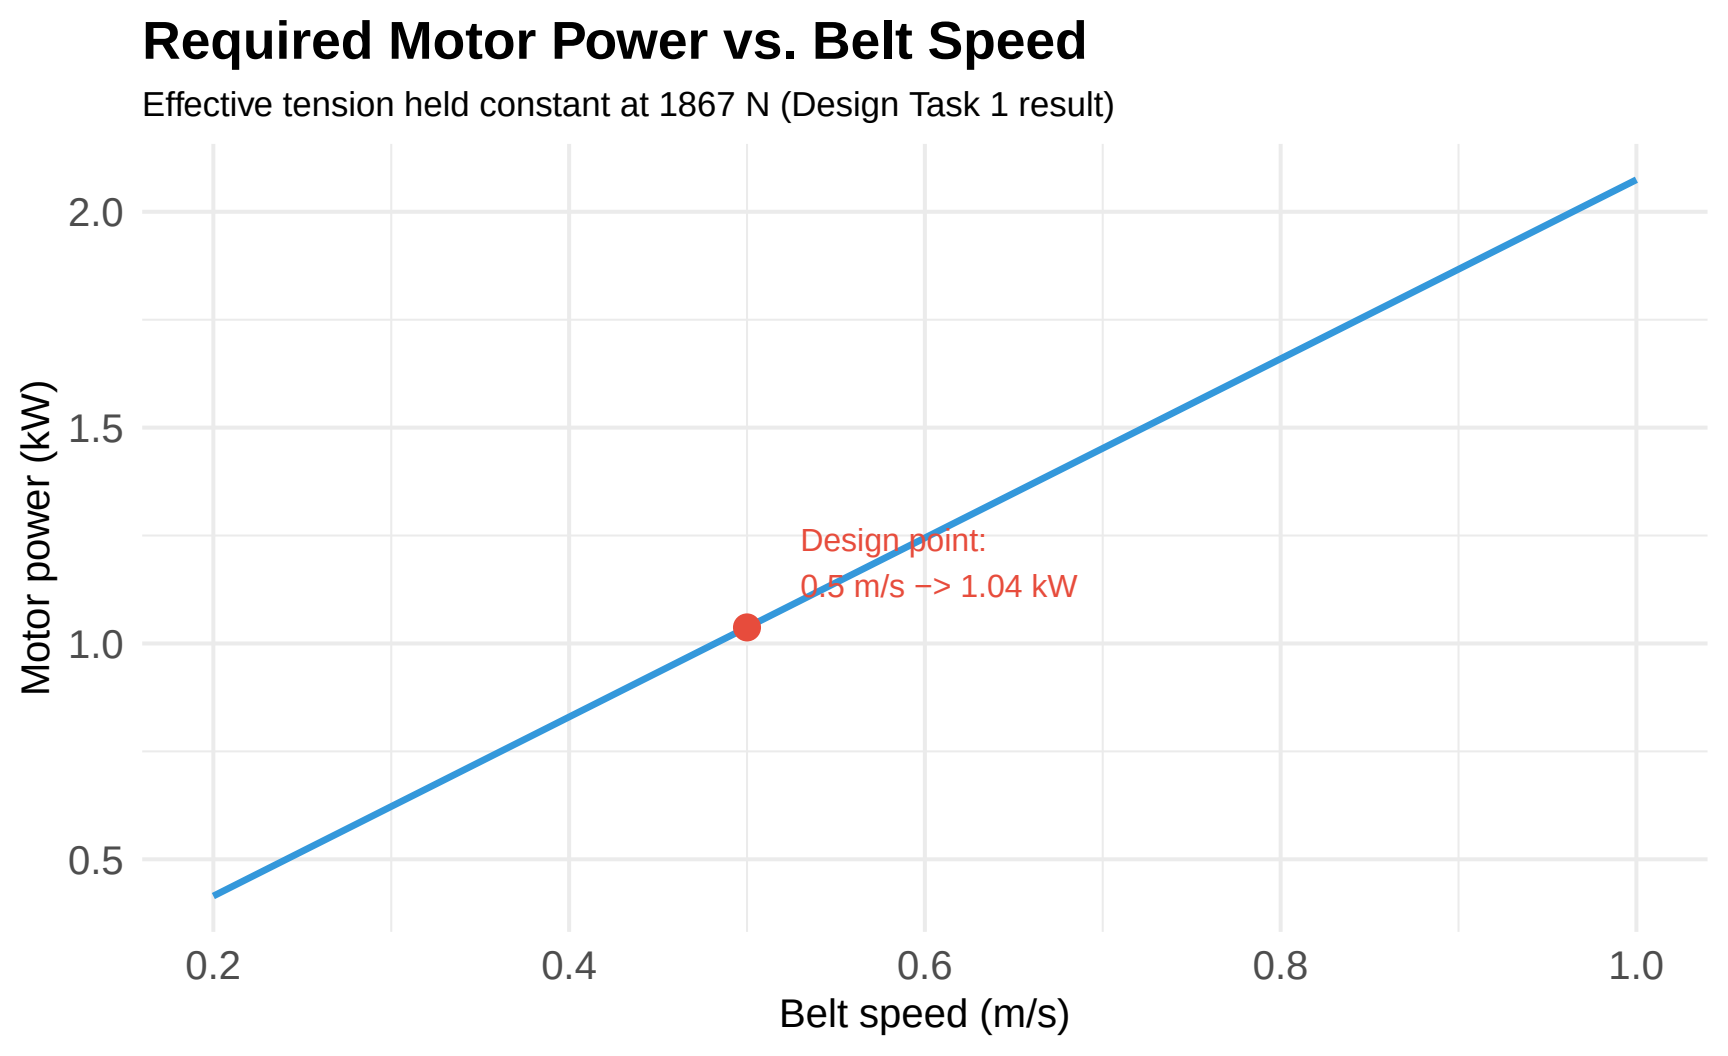
Required Motor Power vs. Belt Speed
Effective tension held constant at 1867 N (Design Task 1 result)
Motor power (kW)
2.0
1.5
1.0
0.5
Design point:
0.5 m/s –> 1.04 kW
0.2
0.4
0.6
0.8
1.0
Belt speed (m/s)