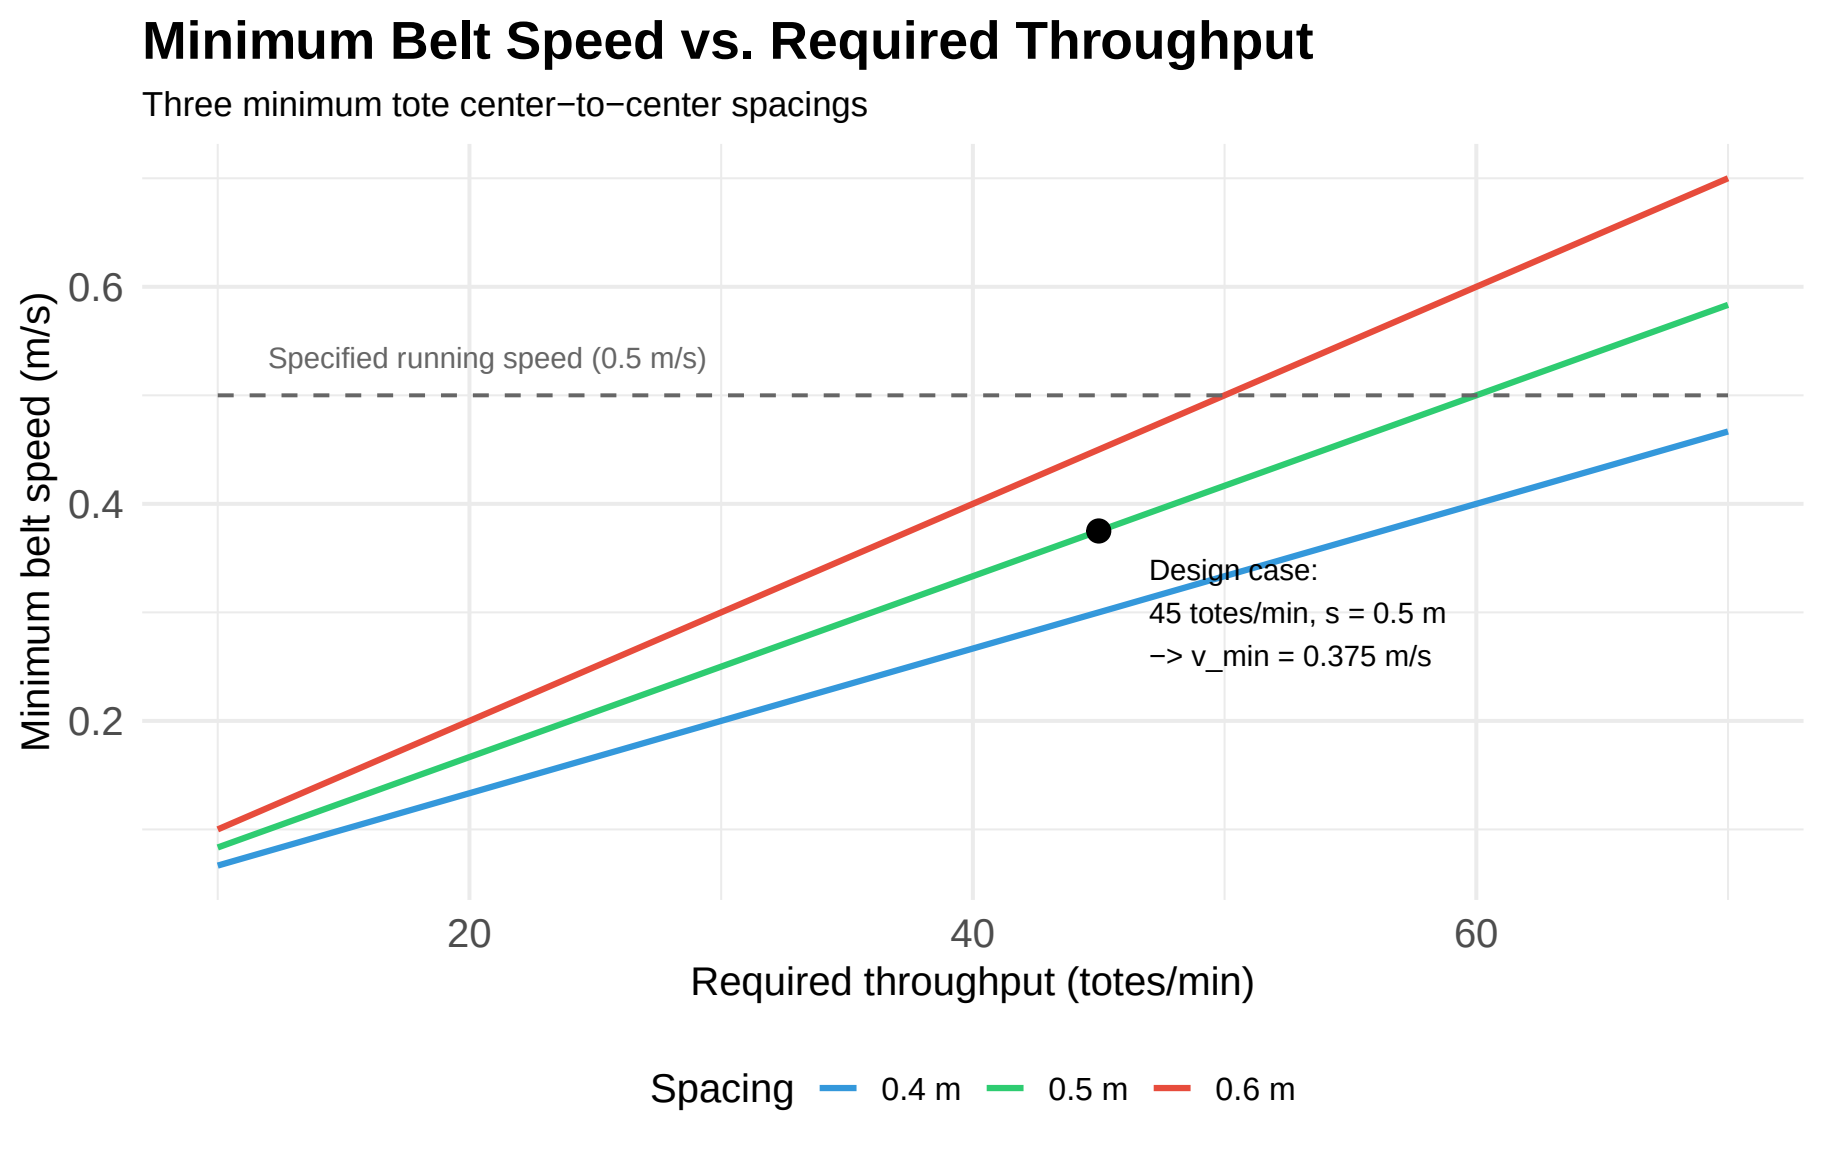
Minimum Belt Speed vs. Required Throughput
Three minimum tote center−to−center spacings
Minimum belt speed (m/s)
0.6
0.4
0.2
Specified running speed (0.5 m/s)
Design case:
45 totes/min, s = 0.5 m
−> v_min = 0.375 m/s
20
40
60
Required throughput (totes/min)
Spacing
0.4 m
0.5 m
0.6 m