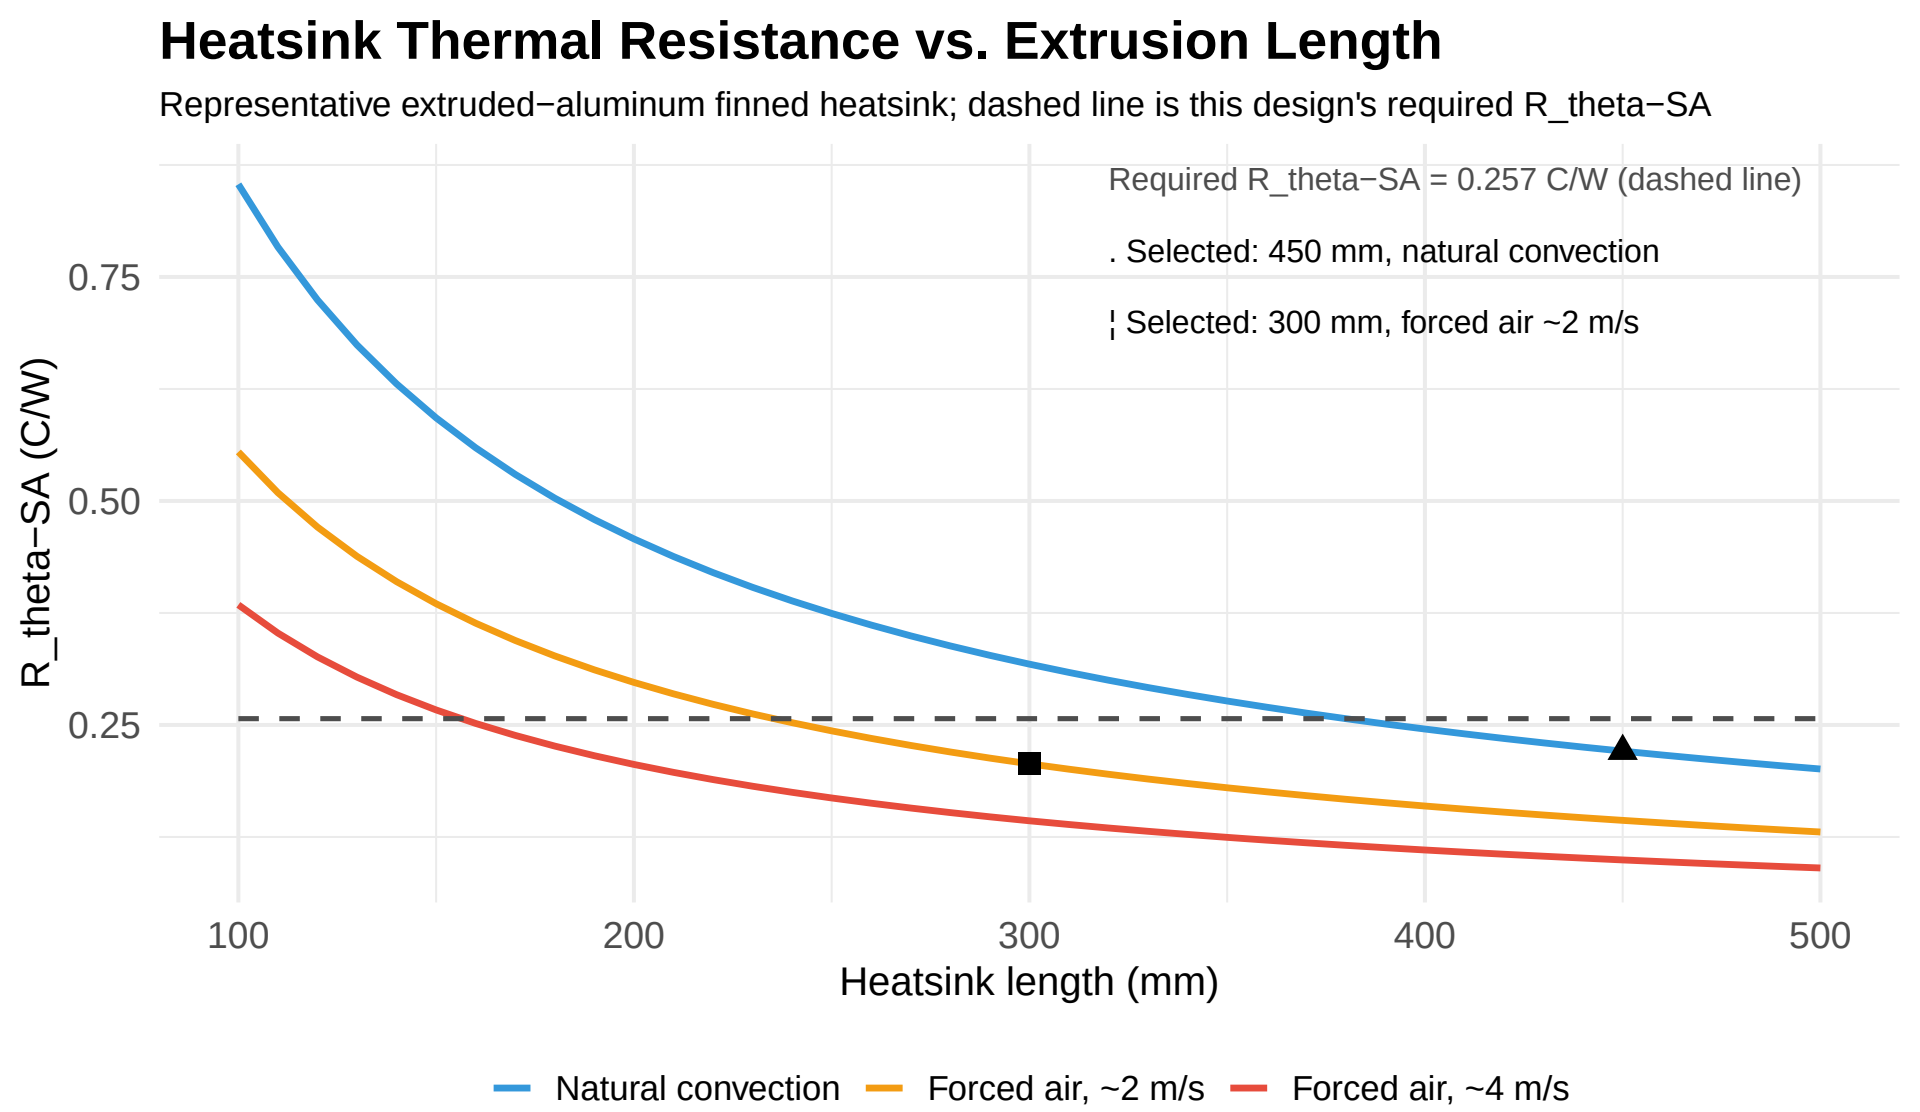
Heatsink Thermal Resistance vs. Extrusion Length
Representative extruded−aluminum finned heatsink; dashed line is this design's required R_theta−SA
Required R_theta−SA = 0.257 C/W (dashed line)
. Selected: 450 mm, natural convection
¦ Selected: 300 mm, forced air ~2 m/s
R_theta−SA (C/W)
0.75
0.50
0.25
100
200
300
400
500
Heatsink length (mm)
Natural convection
Forced air, ~2 m/s
Forced air, ~4 m/s