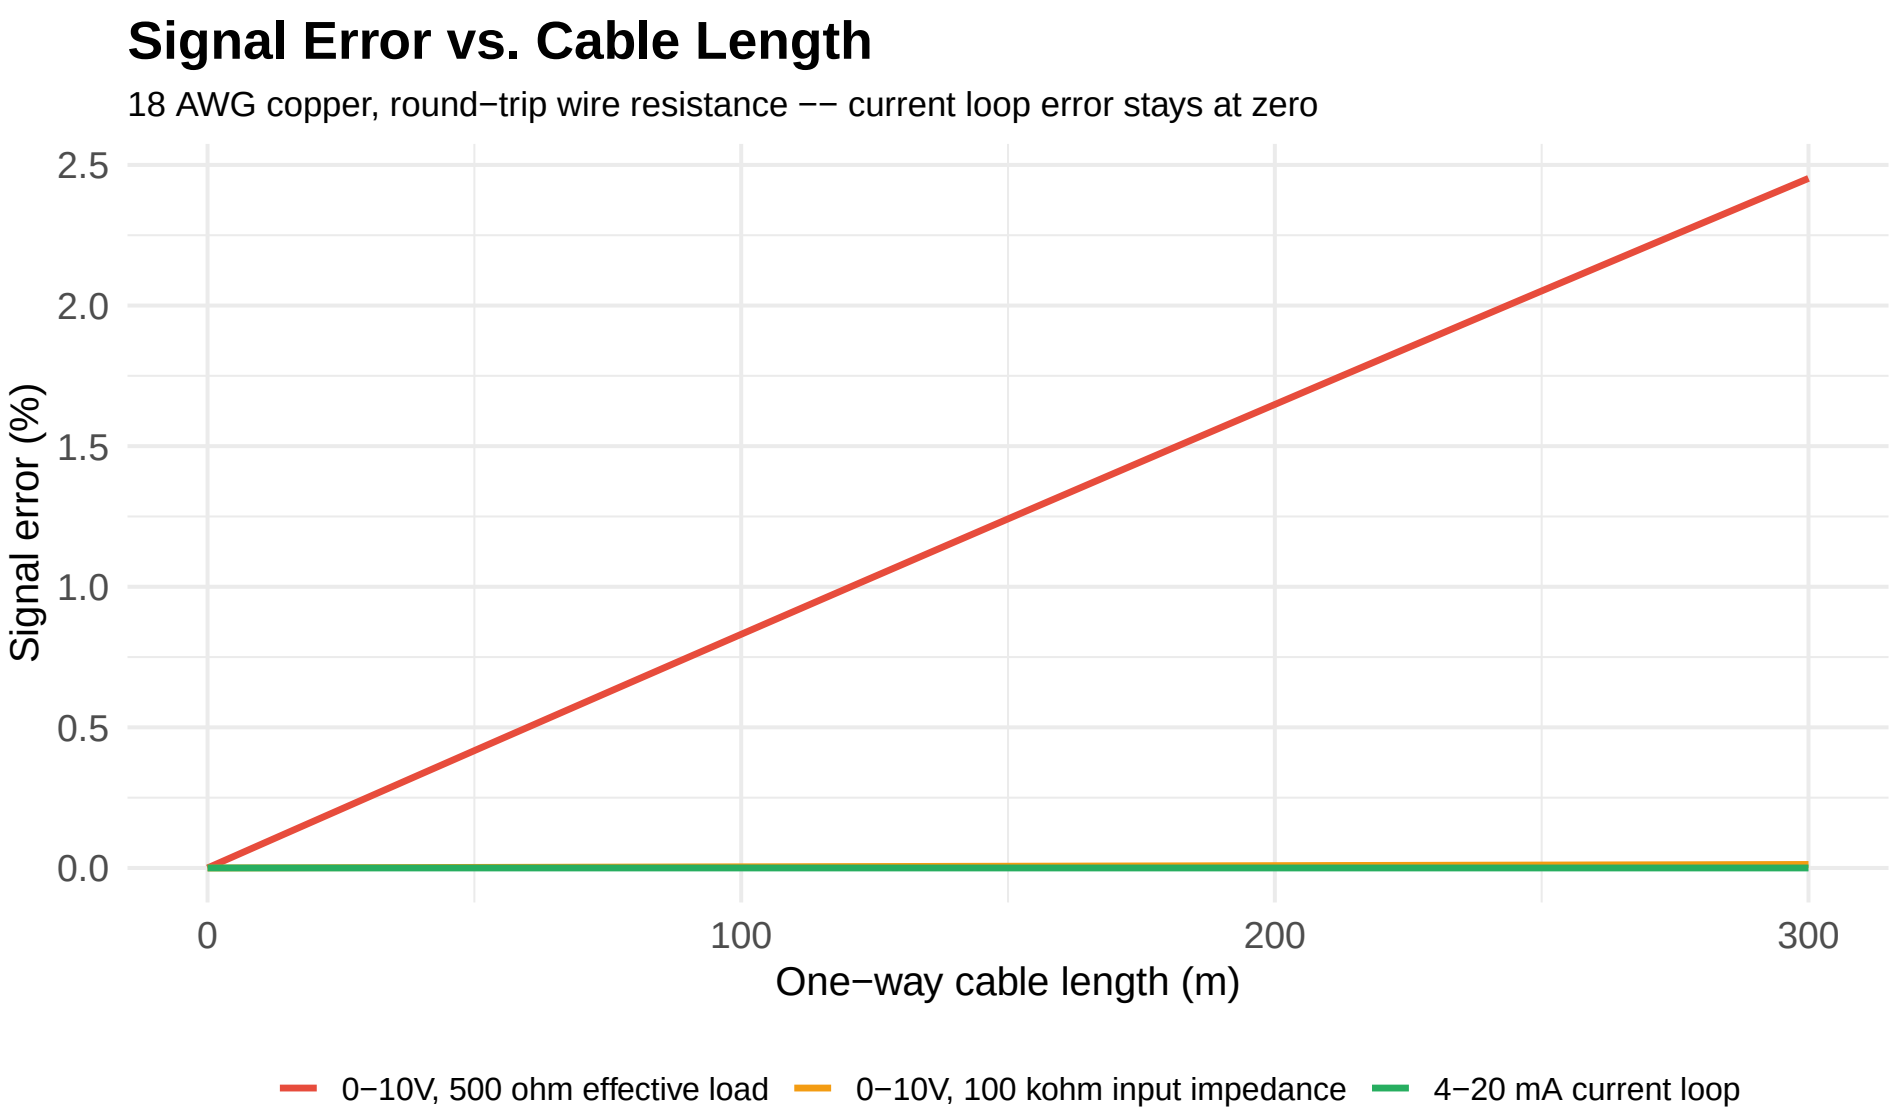
Signal Error vs. Cable Length
18 AWG copper, round−trip wire resistance −− current loop error stays at zero
Signal error (%)
2.5
2.0
1.5
1.0
0.5
0.0
0
100
200
300
One−way cable length (m)
0−10V, 500 ohm effective load
0−10V, 100 kohm input impedance
4−20 mA current loop