BD135
BD137
BD139

Plastic Medium Power Silicon NPN Transistor

. . . designed for use as audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- DC Current Gain — h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 135, 137, 139 are complementary with BD 136, 138, 140

1.5 AMPERE
POWER TRANSISTORS
NPN SILICON
45, 60, 80 VOLTS
10 WATTS



CASE 77–08
TO–225AA TYPE

MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector–Emitter Voltage	V_{CEO}	BD 135 BD 137 BD 139	45 60 80	Vdc
Collector–Base Voltage	V_{CBO}	BD 135 BD 137 BD 139	45 60 100	Vdc
Emitter–Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		1.5	Adc
Base Current	I_B		0.5	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.25 10	Watts mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		12.5 100	Watt mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		–55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	10	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	100	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector–Emitter Sustaining Voltage* (I_C = 0.03 Adc, I_B = 0)	BV_{CEO}*	BD 135 BD 137 BD 139	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0) (V_{CB} = 30 Vdc, I_E = 0, T_C = 125°C)	I_{CBO}		— —	0.1 10	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	10	μAdc
DC Current Gain (I_C = 0.005 A, V_{CE} = 2 V) (I_C = 0.15 A, V_{CE} = 2 V) (I_C = 0.5 A V_{CE} = 2 V)	h_{FE}*		25 40 25	— 250 —	—
Collector–Emitter Saturation Voltage* (I_C = 0.5 Adc, I_B = 0.05 Adc)	$V_{CE(sat)}$*		—	0.5	Vdc
Base–Emitter On Voltage* (I_C = 0.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1	Vdc

* Pulse Test: Pulse Width ≦ 300 μs, Duty Cycle ≦ 2.0%.

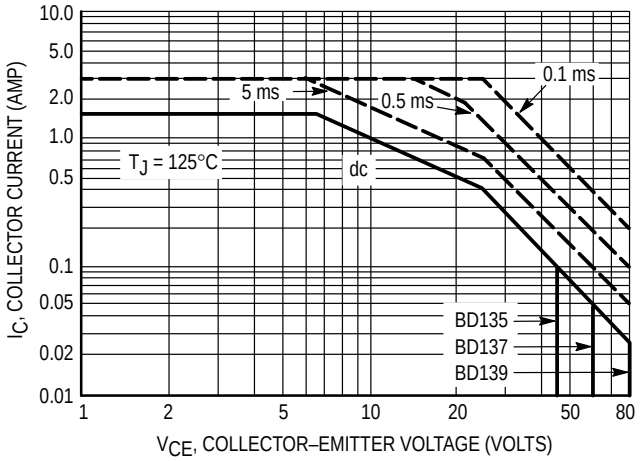

Figure 1. Active–Region Safe Operating Area

PACKAGE DIMENSIONS

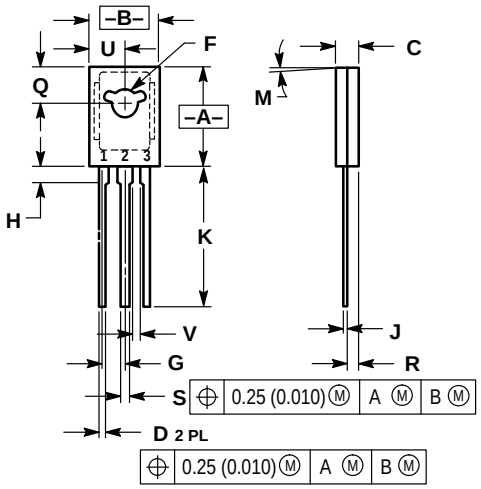

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.425	0.435	10.80	11.04
B	0.295	0.305	7.50	7.74
C	0.095	0.105	2.42	2.66
D	0.020	0.026	0.51	0.66
F	0.115	0.130	2.93	3.30
G	0.094 BSC		2.39 BSC	
H	0.050	0.095	1.27	2.41
J	0.015	0.025	0.39	0.63
K	0.575	0.655	14.61	16.63
M	5° TYP		5° TYP	
Q	0.148	0.158	3.76	4.01
R	0.045	0.055	1.15	1.39
S	0.025	0.035	0.64	0.88
U	0.145	0.155	3.69	3.93
V	0.040	—	1.02	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

CASE 77–08
TO–225AA TYPE
ISSUE V

How to reach us:
USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244–6609
INTERNET: http://Design–NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, Toshikatsu Otsuki,
6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–3521–8315

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298