

Viwoods Debug Tool user guide

Document Revision history

A - add **M** - modify **D** - delete

version	date	change type	owner	Change log	notes
1.0.0	2025.11.24	A	viwoods	Add viwoods debug log user guide	
1.0.1	2026.2.6	A	viwoods	Add Customization of handwritten assistance service instructions	

Table of Contents

Document Revision history	1
Table of Contents.....	2
1 Capture common issue logcat	3
1.1 connect to Viwoods device with usb port	3
1.2 open Viwoods debug tool	3
1.3 Confirm viwoods device connected	4
1.4 logcat save path on PC	4
1.5 Select logcat type, default is none	4
1.6 Start logcat	5
1.7 Reproduce issue	5
1.8 Stop logcat	5
1.9 Export logcat	6
1.10 Clear logcat	6
1.11 Confirm export status	7
2 Capture power performance logcat	7
3 Capture system crash logcat	8
4 Customized instructions customization	9
4.1 Customization of handwriting assistance service instruction	9

1 Capture common issue logcat

1.1 connect to Viwoods device with usb port

1.2 open Viwoods debug tool

PlatformTools	2025/10/23 14:04	文件夹	
viwoods_debug_tools.exe	2025/10/23 14:09	应用程序	100,670 KB

manner of execution: Double-click viwoods_debug_tool.exe file

on Windows.


PlatformTools	2025/12/17 16:51	文件夹	
viwoods_debug_tools	2025/12/17 16:51	文件	96,970 KB

manner of execution: First, in the Linux system, grant the executable permission to the "viwoods_debug_tool" program, and then execute the program as follows: (refer to the attached figure for the specific steps).

```
~/viwoods_debug_tools-linux$ ls
PlatformTools  viwoods_debug_tools
~/viwoods_debug_tools-linux$ sudo chmod +x viwoods_debug_tools
[sudo] password for :
~/viwoods_debug_tools-linux$ ./viwoods_debug_tools
```


If the launch succeeds, the debug tool window will appear as

follows:

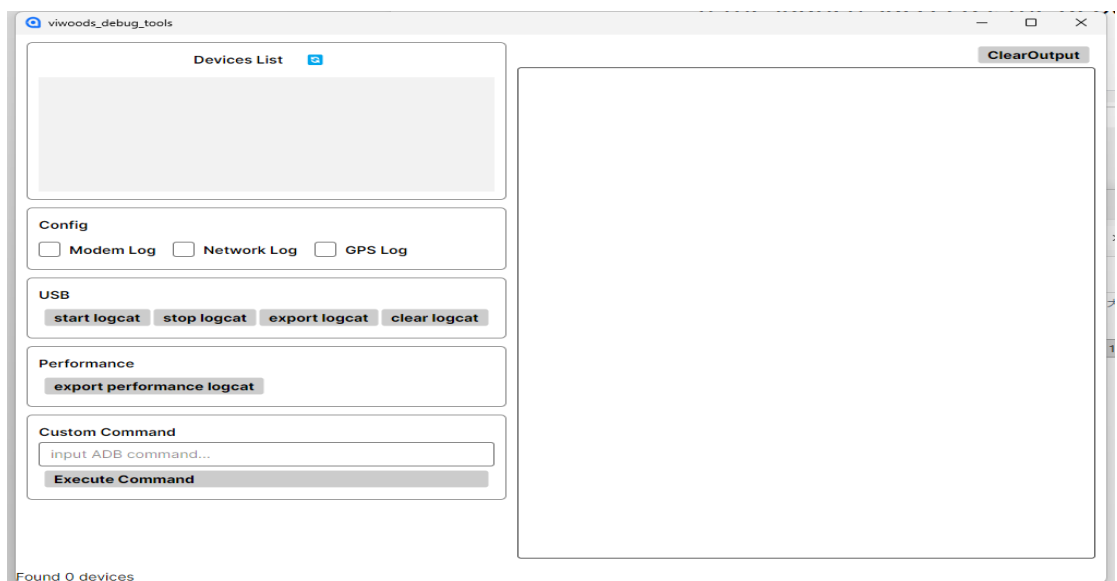

1.3 Confirm viwoods device connected

If the device connection is successful, you will see the device serial number (SN) as shown below. Selecting the device will have a blue background. Additionally, you can connect multiple devices. By clicking the device number in the device list, you can connect to several devices. The blue refresh button can refresh the PC's connection to multiple devices..

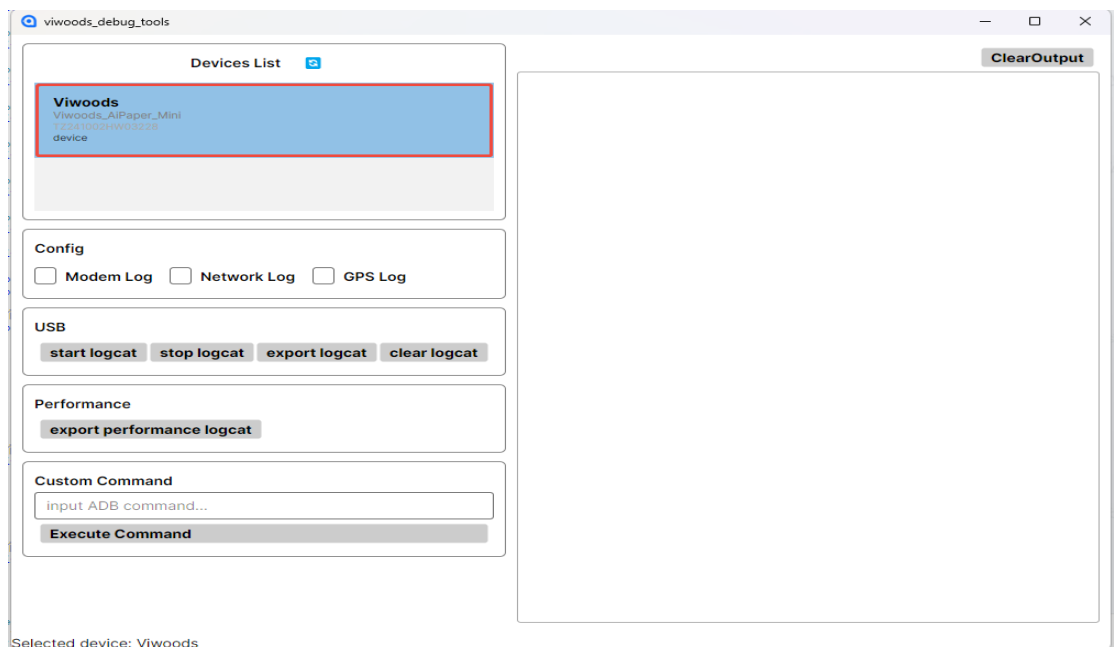

1.4 logcat save path on PC

The log saving path is in the directory where the program is located..


1.5 Select logcat type, default is none

Modem Log – for mobile network issue.

Network Log – for wifi connect issue.

GPS Log – for gps location issue.


1.6 Start logcat

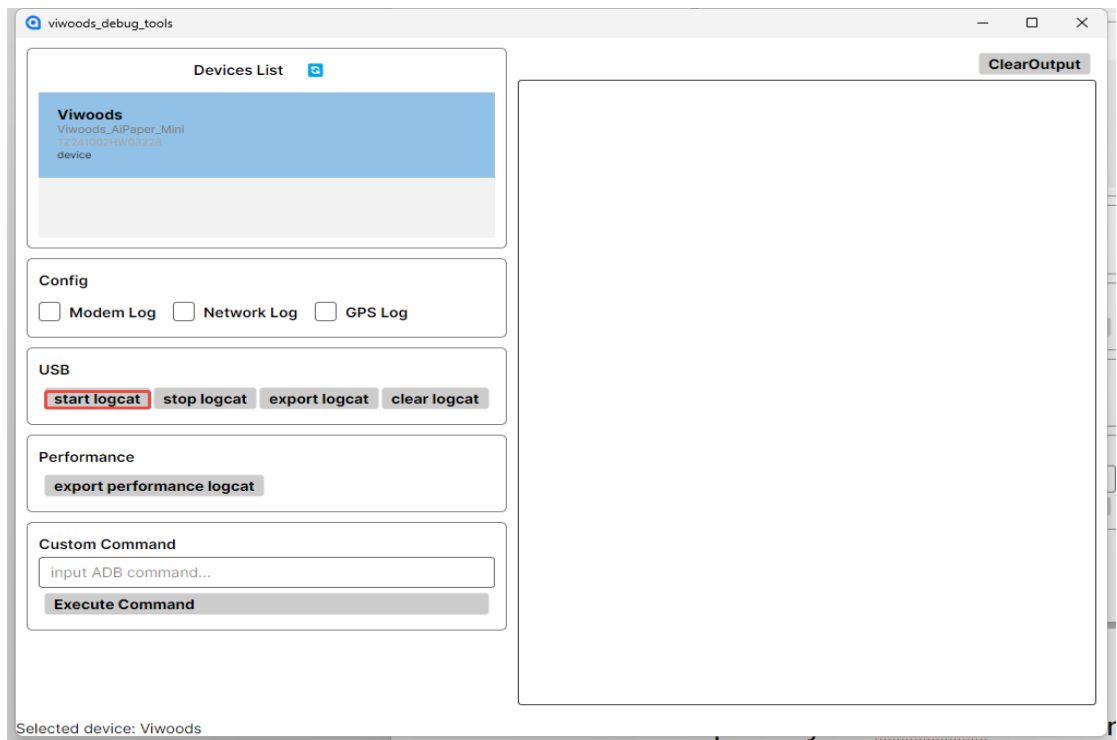

1.7 Reproduce issue


Operate your viwoods device until the issue reproduced.

1.8 Stop logcat

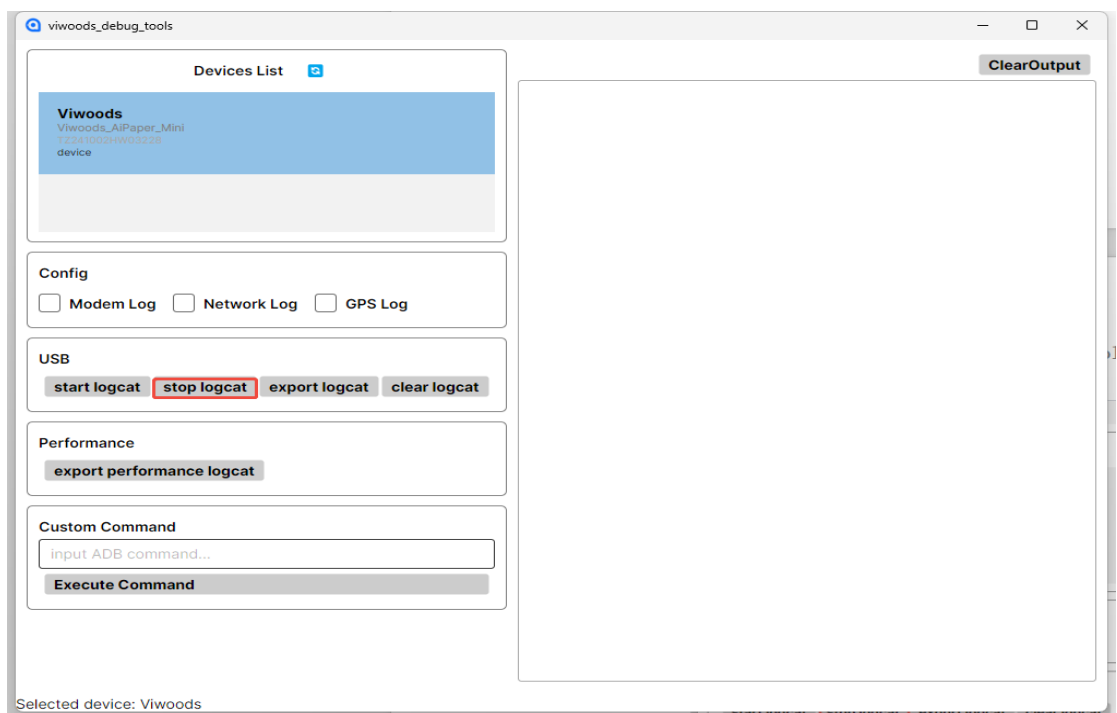


1.9 Export logcat

Export the device logcat file and save it to the specified path on your PC.

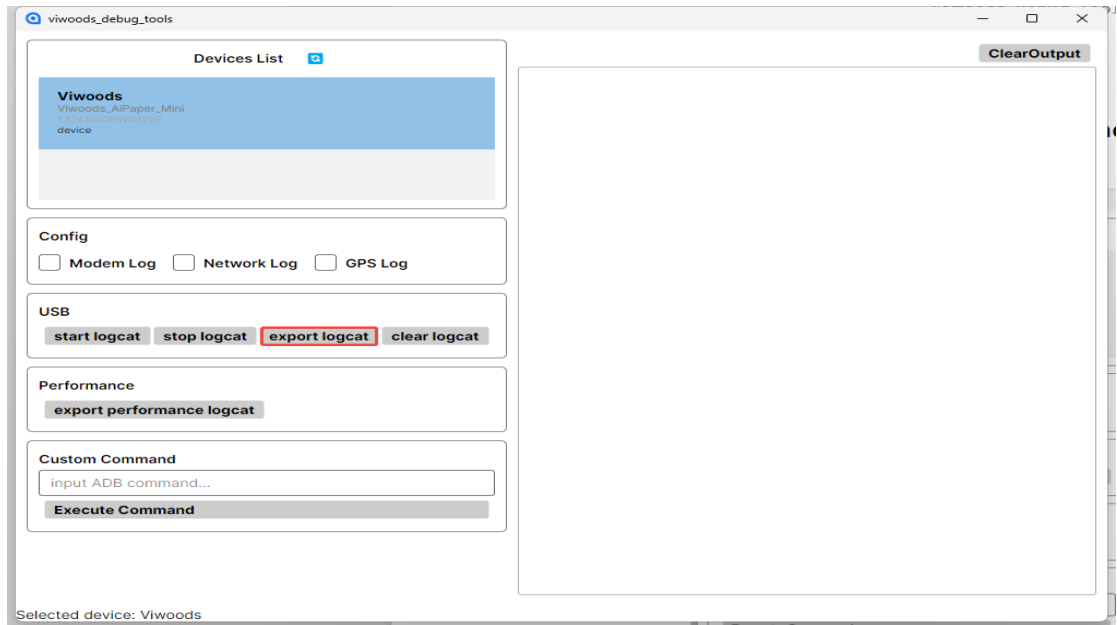

1.10 Clear logcat

Export the logcat successfully, report the exported files to us, and then clear the logcat logs on Viwoods device.

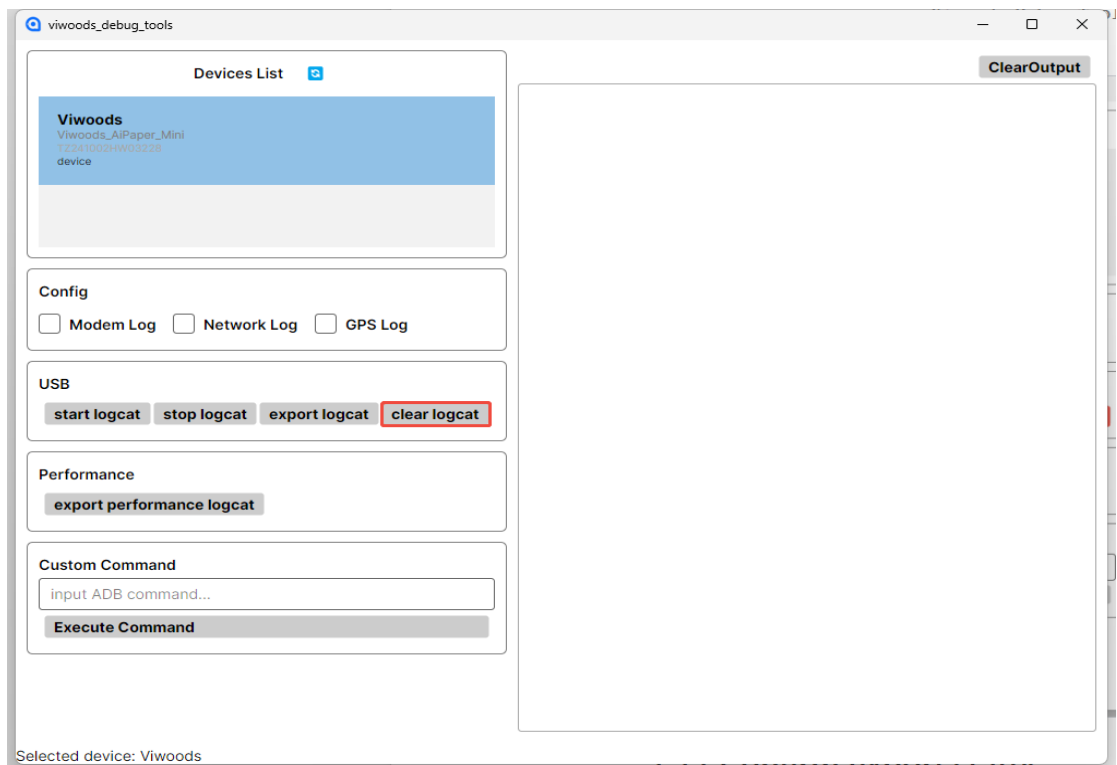

1.11 Confirm export status


If the logcat export succeeds, you will see the following files on your PC.

D:\ > 1111		
Name	Date modified	Type
aee_exp	2025-11-21 18:01	File folder
anr	2025-11-21 18:01	File folder
debuglogger	2025-11-21 18:01	File folder
tombstones	2025-11-21 18:01	File folder

2 Capture power performance logcat

2.1 Connect to the viwoods device and set the logcat save path same as the former.

2.2 After successful connection, directly export the power performance logs.

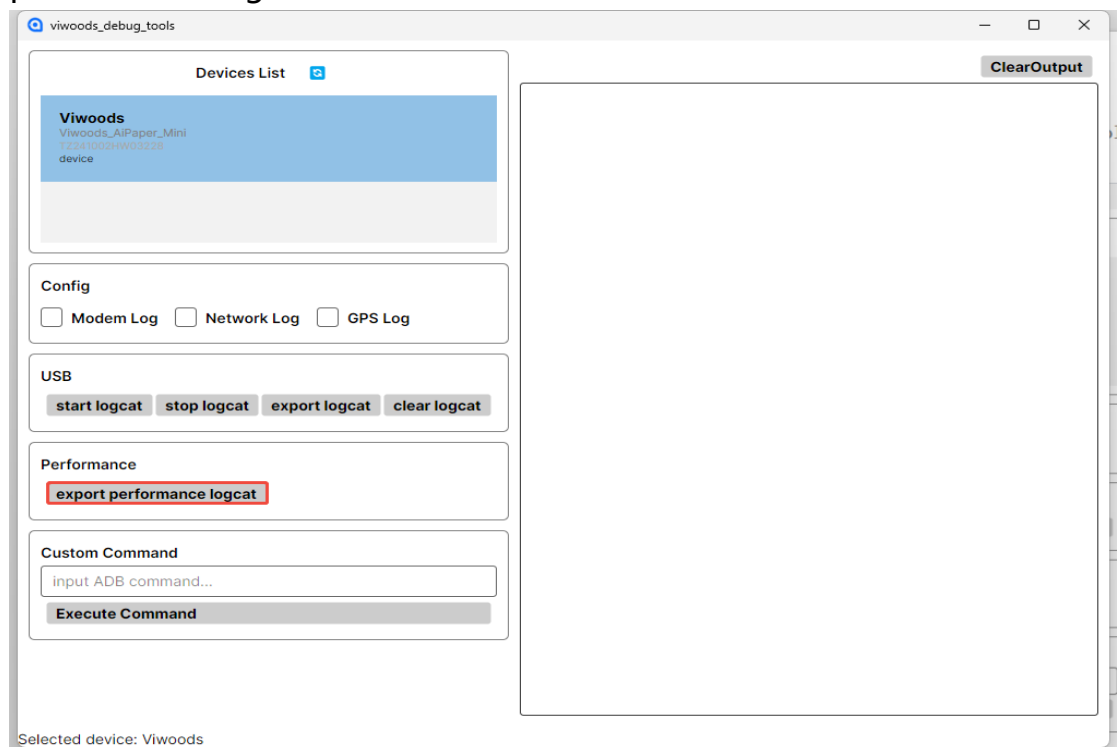

If the export succeeds, you will find the power consumption log


files in the specified save path on your PC as follows:

:(D:) > 1111			
Name	Date modified	Type	Size
battery.log	2025-11-21 18:58	Text Document	329 KB
bugreport.zip	2025-11-21 18:58	Compressed (zipp...	6,297 KB
power.log	2025-11-21 18:58	Text Document	73 KB
wakeup_sources.log	2025-11-21 18:58	Text Document	9 KB

3 Capture system crash logcat

Connect to the Viwoods device and set the logcat save path to the same as the previous one.

If a system crash or device boot failure occurs, wait for the Viwoods device to connect to the PC. During this process, you can repeatedly click the blue "Refresh" button on the left to refresh the connection status.. Export the logcat once the device is successfully connected.

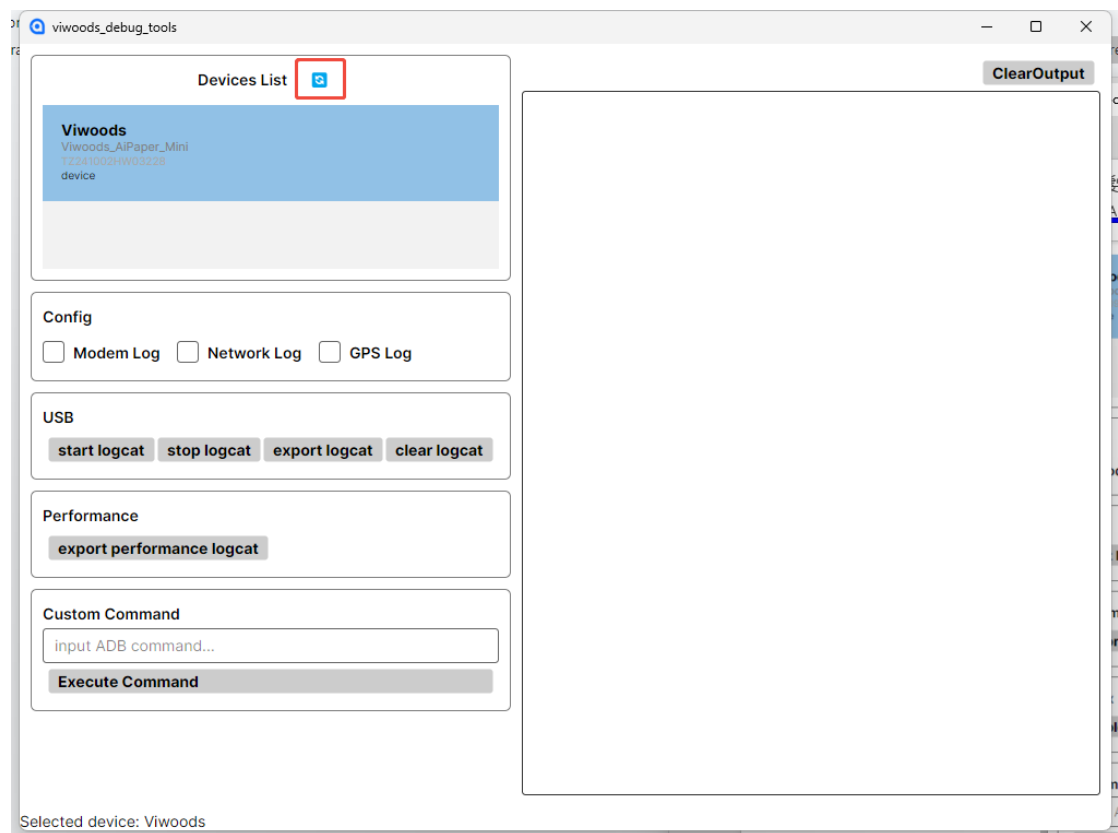

4 Customized instructions customization

The Vivos debugg tool not only supports the regular adb commands, but also has made the following customized settings for the adb commands.

4.1 Customization of handwriting assistance service

instruction

4.1.1 Enable handwriting assistance service Command:

adb enable accessibility

4.1.2 disable handwriting assistance service Command:

adb disable accessibility

Explain: Execute the handwriting assistance service enable or disable command in the viwoods debug tool. The device will restart after waiting for a few seconds. Please be patient and wait.

To execute the adb command, please enter the command in the input box in the following picture, and then click the "Execute Command" button to execute.

