


A Simple Access to the (Log/Normal) Molecular Weight Distribution Parameters of Polymers Using PGSTE NMR

Xiaoliang Gong, Eddy W. Hansen,* Qun Chen*

A log/normal MWD is characterized by two parameters, its mean molecular weight M_0 and width σ . It is demonstrated how these parameters can be obtained by model fitting a stretched exponential function (SEF), as characterized by two parameters β and D_s , to the PGSTE response curve. Based on simulations, two general empirical equations relating β and D_s to M_0 and σ are found. The model enables the MWD characteristics to be determined if the scaling law between diffusivity and molecular weight is known. The sensitivity and relative error of σ and M_0 are discussed and the applicability of the model is illustrated by analyzing experimental NMR response curve of some PEO samples. The key advantages of this technique are its simplicity, numerical robustness, and reliability.

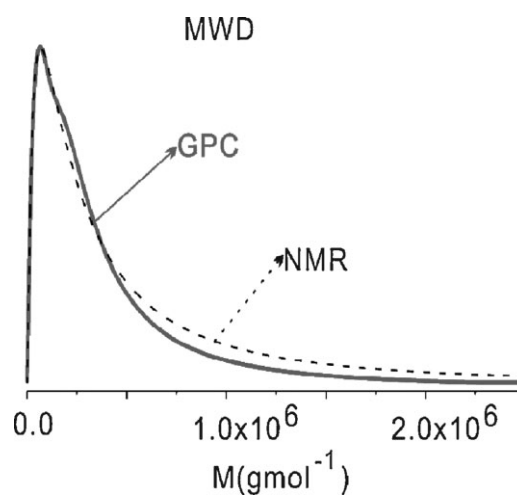

Introduction

The average molecular weight (MW) and molecular weight distribution (MWD) are two fundamental polymer characteristics that can be determined by, for instance, gel permeation chromatography (GPC), dynamic light scattering (DLS), and viscosity measurements. Also, pulsed-gradient spin echo (PGSE) NMR has been demonstrated

as a potential experimental tool^[1–3] for probing these same characteristics and is often complementary to other techniques. Unlike GPC, PGSE NMR is less dependent on the choice of solvent and has stimulated NMR researchers to explore the applicability of NMR to probe MWD of various polymeric systems.^[4,5]

A particular challenge is related to the data processing of the PGSE NMR decay curves to obtain reliable relations between the distribution of diffusivity and the MWD, e.g., bi-exponential fitting,^[6] sum of one-parameter functions (e.g., convoluted exponentials, as well as pure exponentials) using a program denoted SPLMOD,^[7] component resolved (CORE)^[8] and direct exponential curve resolution algorithm (DECRA).^[9] When dealing with complex samples showing severe peak overlap with small differences in derived diffusion coefficients, one may apply multivariate curve resolution (MCR), MCR alternating least square (MCR-ALS) analysis,^[10] MCR with non-linear least square regression

X. Gong, Q. Chen
Physics Department and Shanghai Key Laboratory of Magnetic Resonance, East China Normal University, Shanghai 200062, China
E-mail: qchen@ecnu.cn
E. W. Hansen
Department of Chemistry, UiO, P. O. Box 1033 Blindern, N-0315 Oslo, Norway
E-mail: eddywh@kjemi.uio.no

(MCR-NLR)^[11] and Maximum entropy (MaxEnt) processing techniques.^[12] To obtain the MWD of a polymer from PGSE NMR, Johnson and co-workers^[13] used a modified version of the constrained regularization program CONTIN^[14] while B. Hakansson et al. applied a nonlinear least-squares fitting (NLLS) technique to describe the distribution of D .^[15] However, these methods are complex and may frequently introduce artificial broadening of the distribution curve because of data smoothing.

In the case of a log/normal molecular weight distribution (LNMWD) we present a simple, robust and reliable numerical method in which to derive the MWD from a pulsed-gradient stimulated spin echo (PGSTE) experiment. A model frequently applied in fitting non-exponential decay curves is a stretch exponential function (SEF), which is generally known as a Kohlrausch-Williams-Watts (KWW) function:^[16,17] $I(x; \beta, D_s) = \exp[-(xD_s)^\beta]$, where x is proportional to the square of the amplitude of the gradient pulse. Based on simulations, we will present two general empirical equations relating β and D_s to the two LNMWD characteristics M_0 and σ , respectively. This approach enables the latter two parameters to be derived from PGSTE NMR measurements, if knowing the scaling law ($D = KM^{-\alpha}$) between the diffusivity D and the molecular weight M where α and K define the scaling parameters. The practical applicability of the technique will be illustrated by analyzing three poly(ethylene oxide) (PEO) samples.

Experimental Part

The reference (R1–R4) PEO samples were purchased from Tosoh in Japan. The sample characteristics will be presented in a later section. In order to obtain a small concentration of $0.5 \text{ mg} \cdot \text{mL}^{-1}$, the polymer samples were dissolved in D_2O using a Thermo Finn timer, ranging from 20 to 200 and from 100 to 1000 μL , respectively. The solutions were subsequently stirred for 24 h.

The GPC experiments were performed on an Agilent 1100 instrument with a $0.5 \text{ mL} \cdot \text{min}^{-1}$ flow speed with H_2O as a solvent.

The PGSTE NMR experiments were performed at 298 K on a Varian 700 MHz spectrometer, equipped with a 5 mm standard probe with a maximum available gradient pulse field of $70 \text{ G} \cdot \text{cm}^{-1}$. The pulse sequence^[18] is illustrated on Figure 1 and includes an offset-independent adiabatic inversion pulse (2 ms duration) in combination with a gradient pulse ($g_s = 7.26 \text{ G} \cdot \text{cm}^{-1}$) for selective excitation of a central sample region (about 0.65 cm).^[18] Under these conditions, the molecular diffusion coefficient is quantitatively determined. The recycle time was set to 10 s and gradient pulse duration of 5 ms. The “apparent” diffusion time Δ' is defined by $\Delta' = \Delta - \delta/3$. The gradient pulses were calibrated on a water sample (10% D_2O , 90% H_2O) under the same experimental conditions as used on the polymer samples.

PGSTE NMR – The Response Curve

It is often found that an LNMWD gives a reasonable approximation to many MWDs, as for instance anionically polymerized polymers and certain fractions of polyethylenes. The normalized LNMWD distribution dI/dM reads^[19]

$$\frac{dI}{dM} = \frac{1}{\sqrt{2\pi}M\sigma} \exp\left[-(\ln(M/M_0))^2 / 2\sigma^2\right] \quad (1)$$

where M_0 is the median and σ is the width of the distribution. For an LNMWD the polydispersity index (P) can be expressed by $P = \overline{M}_w / \overline{M}_n = \exp(\sigma^2)$.

By referring to the well known equation valid for Gaussian random coils, the relation between molecular diffusivity D and molecular weight M ^[20] can be expressed by:

$$D = KM^{-\alpha} \quad (2)$$

Hence, any MWD [dI/dM ; Equation (1)] can be transformed into a corresponding distribution (dI/dD) in diffusivity D , according to

$$\frac{dI}{dD} = \frac{dM}{dD} \frac{dI}{dM} \quad (3)$$

By combining Equation (1–3) and introducing a dimensionless variable $z (= D/D_0)$ where $D_0 = KM_0^{-\alpha}$ we can rewrite Equation (3) in the form (see Appendix)

$$\frac{dI}{dz} = \frac{1}{\alpha\sigma\sqrt{2\pi}z} \exp\left[-\frac{(\ln z)^2}{2\alpha^2\sigma^2}\right] \quad (4)$$

Equation (4) is useful when aiming at simplifying the expression for the PGSTE response curve $R(x)$, as defined by^[13]

$$R(x) = \int_0^\infty f(T_1, T_2) \frac{dI}{dD} \exp[-xD] dD \quad (5)$$

where $x = \gamma^2 \delta^2 g^2 (\Delta - \delta/3)$, γ is the gyromagnetic ratio, D the diffusivity (of a molecule of molecular weight M), δ the gradient pulse duration, and Δ defines the inter-pulse timing between the two successive gradient pulses of strength g . The term $f(T_1, T_2)$ represents the relaxation term and depends on the parameters

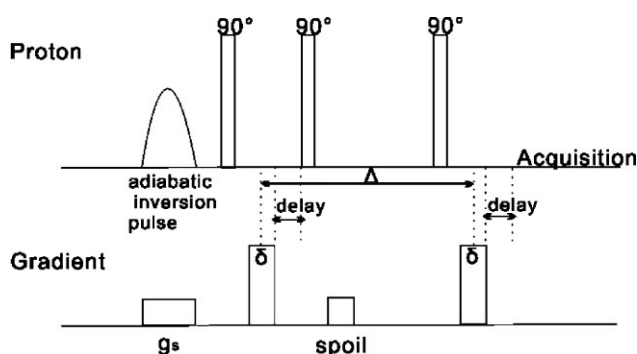


Figure 1. The PGSTE pulse sequence applied in this work where $\Delta' = \Delta - \delta/3$ represents the “apparent” diffusion time, and δ is the duration of the gradient pulse (see text for further details).

δ and Δ . For a polymer the relaxation times T_1 and T_2 are generally determined by the segmental motion (local) and are thus expected to be approximately independent of molecular weight. Also, in highly diluted polymer solutions (as in this work) the effect of intermolecular interactions can be excluded. In the following discussion we will assume the relaxation term $f(T_1, T_2)$ to be constant and independent on molecular weight, an assumption that is consistent with previous experimental reports.^[13,19] However, it must be emphasized that this assumption should be checked experimentally for any sample being investigated. Hence, the term $f(T_1, T_2)$ equals 1 and Equation (5) simplifies to (see Appendix)

$$R(x) = \int_0^\infty \frac{1}{\alpha \sigma_0 \sqrt{2\pi z}} \exp\left[-\frac{(\ln z)^2}{2\alpha^2 \sigma_0^2}\right] \exp(-x D_0 z) dz \quad (6)$$

For any specific $\sigma = \sigma_0$ and $D = D_0$, $R(x)$ is solved numerically by replacing the integral in Equation (6) by a finite sum of N terms, i.e.,

$$R(x_j) = \frac{1}{\alpha \sigma \sqrt{2\pi}} \sum_{i=1}^N \frac{1}{z_i} \exp\left[-\frac{(\ln z_i)^2}{2\sigma^2}\right] \exp[-x_j D_0 z_i] \Delta z \quad (7)$$

where $\Delta z = (z_{\max} - z_{\min})/N$, and $z_{\max}$ and $z_{\min}$ chosen so that dI/dz is close to 0 at these extreme z -values. A value of $N = 1024$ was chosen since a further doubling of N did not significantly change the calculated $R(x_j)$.

Both D_0 , σ_0 , and α [Equation (2)] were varied systematically and will be reported in this work. In order to mimic a real experiment, a random noise of 1% was added to each $R(x_j)$ before model fitting by Equation (7) [note that $R(0) = 1$; Equation (7)]. By choosing a maximum number of gradient pulses $j = j_{\max} = 128$, the resulting parameters derived by model-fitting $R(x_j)$ revealed a reproducibility better than 1%. The effect of changing $j_{\max}$ and the noise level of $R(x)$ is presently under investigation.

After generating a synthetic response curve $R(x)$, according to the above procedure, an SEF $I_S(x; \beta, D_S)$ is fitted to the synthetic response curve $R(x)$ using Equation (8)

$$I_S(x; \beta, D_S) = I_0 \exp\left[-(x D_S)^\beta\right] \quad (8)$$

The main objective is to explore the dependence of M_0 and σ on β and D_S . Depending on the concentration of polymer in the solvent, α is expected to have a value between 0.5 and 0.7.^[21] For dilute solutions (≤ 1 wt.-%) α is normally found in the region $0.5 < \alpha < 0.6$. As a consequence, synthetic response curves were derived for $\alpha = (0.2, 0.35), 0.50, 0.55, 0.60, 0.65$, and 0.70 , $D_0 = 1.00, 1.25, 1.58, 2.51, 3.98, 6.30$, and $10.00 \times 10^{11} \text{ m}^2 \cdot \text{s}^{-1}$ and $\sigma = 0.10, 0.35, 0.60, 0.85, 1.10, 1.35$, and 1.60 . If not otherwise stated in the text, the number of gradient pulses was set to 128 with a random noise of 1% added to $R(x)$ before any further analysis.

In summary, the procedure applied in this work is illustrated by the following scheme:

- (i) Specify an LNMWD [M_0 and σ ; Equation (1)]
- (ii) Calculate the PGSE response curve $R(x)$ [Equation (7)]
- (iii) Add 1% random noise to $R(x)$
- (iv) Fit an SEF [Equation (8)] to $R(x)$ and derive D_S and β .

Results and Discussion

Generating PGSTE Response Curves $R(x)$ from an LNMWD

To illustrate the technique we start with three randomly chosen distributions dI/dD with $\alpha = 0.50$, as shown in Figure 2A with $D_S \text{ (m}^2 \cdot \text{s}^{-1})/\sigma = 1.02 \times 10^{-11}/0.746$, $3.95 \times 10^{-11}/0.864$, and $9.92 \times 10^{-11}/0.967$. The corresponding response curves $R(x)$ were calculated from Equation (7) after adding 1% random noise (Figure 2B). The solid curves represent non-linear least squares fits to Equation (8). The residuals (difference between observed and calculated signal intensity) are shown in Figure 2C.

An important observation is the approximately random error-distribution between the “observed” (synthesized) and the fitted response curve, suggesting that a more fundamental relation between the inverse Laplace transform of an SEF and a log/normal function exists. Actually,

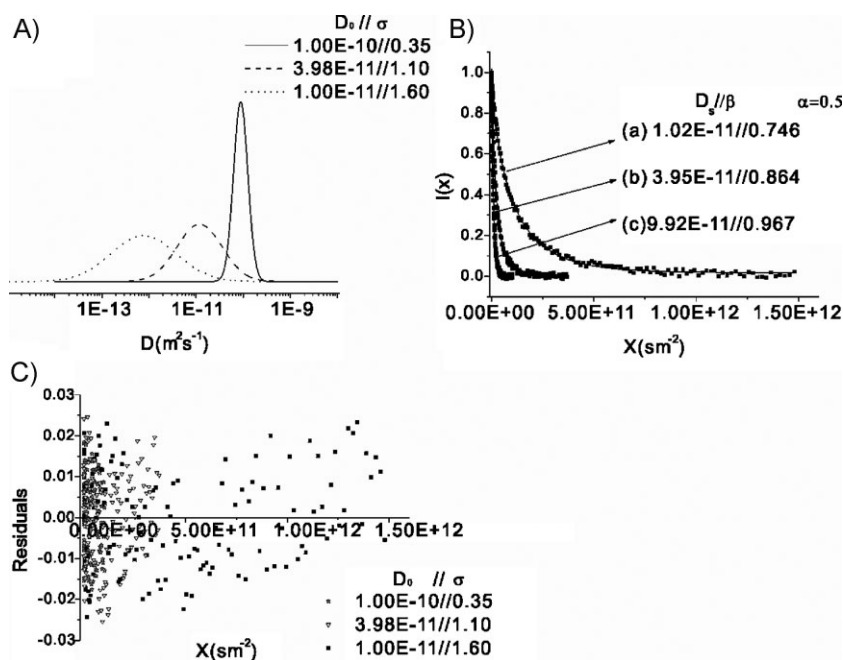


Figure 2. (A) Three randomly chosen distributions of diffusion coefficient with $D_S \text{ (m}^2 \cdot \text{s}^{-1})/\sigma = 1.02 \times 10^{-11}/0.746$, $3.95 \times 10^{-11}/0.864$, and $9.92 \times 10^{-11}/0.967$. (B) The synthetic PGSTE NMR response curves. The solid curves represent stretch exponential model fits [Equation (8)] with two adjustable parameters $D_S \text{ (m}^2 \cdot \text{s}^{-1})$ and σ . (C) Residual between synthesized and fitted response curves.

this will become more evident from the results presented in later sections.

Effect of α , D_0 , and σ on D_S

Figure 3A shows how the stretch exponential parameter D_S depends on σ , D_0 and α and suggests that D_S is independent on both α and σ . Actually, by plotting D_S versus D_0 for all α and σ (Figure 3B) we find that D_S equals D_0 . An important consequence of these results is that the average molecular weight (or more precisely, the median of the molecular weight distribution) M_0 can simply be expressed by Equation (9), by use of the scaling law, Equation (2)

$$M_0 = \left(\frac{K}{D_S} \right)^{1/\alpha} \quad (9)$$

Hence, if we know the scaling parameters α and K , the median molecular weight M_0 of the distribution is uniquely defined by the diffusivity D_S

Effect of α , D_0 , and σ on β

In order to explore the dependence of the stretch exponential factor β in Equation (8) on the parameters α , D_0 , and σ we notice from Figure 4A that – within

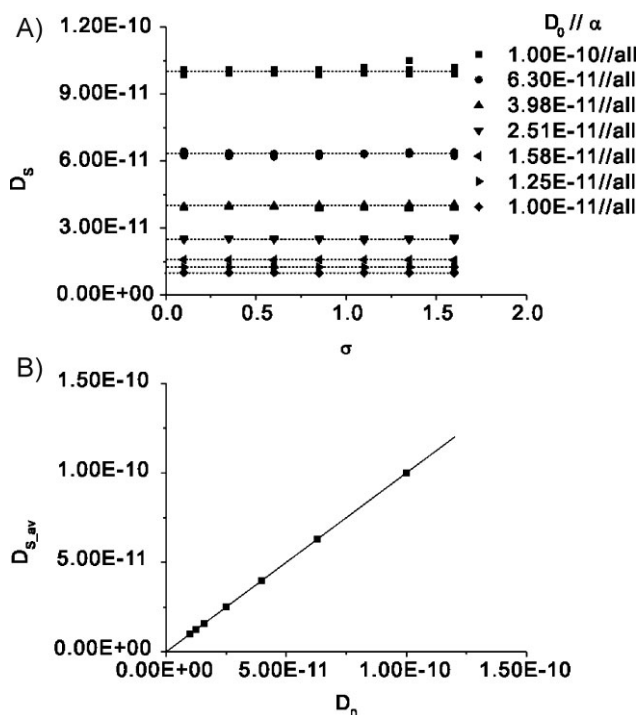


Figure 3. (A) The stretch exponential parameter D_S as a function of σ and $\alpha = (0.2, 0.35, 0.50, 0.55, 0.60, 0.65, 0.70)$. (B) D_S as a function of D_0 .

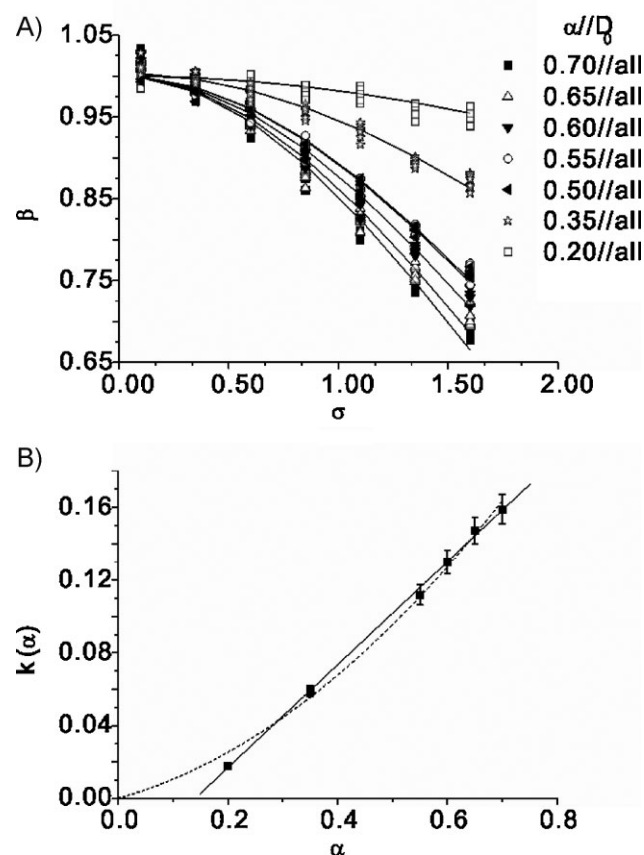


Figure 4. (A) Stretch exponential factor β as a function of σ and $D_0 = 1.00, 1.25, 1.58, 2.51, 3.98, 6.30$, and $10.00 \times 10^{11} \text{ m}^2 \cdot \text{s}^{-1}$. (B) Relationship between the constant k and α . The two curves represent polynomial function fits of order 1 (—) and 2 (---), respectively.

experimental error – β does not depend on D_0 . A closer examination of the data in Figure 4A suggest that for any α the parameter β can be approximated by a Gaussian function with respect to σ (as illustrated by the solid curves in Figure 4A) and can be expressed by

$$\beta = \exp(-k\sigma^2) \quad (10)$$

where k is a constant for each α . By extending this analysis and plotting k against α (Figure 4B) we find that k can be well approximated by a polynomial function of order 1 (—) or 2 (---). In the region $0.2 < \alpha < 0.7$, a simple linear relation ($k = -a + b\alpha$) between k and α is found with $a = 0.040 \pm 0.003$ and $b = 0.284 \pm 0.006$, respectively.

These results imply that the distribution parameter σ can be expressed by α and β according to

$$\sigma = \sqrt{\frac{\ln \beta}{a - b\alpha}} \quad (11)$$

with $a = 0.040$ and $b = 0.284$.

Equation (9 and 11) represents the main tools to be used in establishing the LNMWD from an experimental PGSTE response curve. Henceforth, the empirical Equation (9 and 11) will be referred to as the “Master” equations.

A more comprehensive evaluation of the applicability of the master equations demands for a sensitivity and error analysis and will be addressed next.

Sensitivity and Error Analysis

Sensitivity

As pointed out, the MWD characteristics (σ and M_0) of a polymer may be obtained by a stretch exponential model fit to its PGSTE response curve by applying the two “Master” equations, Equation (9 and 11). In these equations, the parameters K and α are system parameters, as defined by the scaling law [Equation (2)], and are considered constants for a particular polymer. Keeping in mind that the minimum obtainable value of D_s depends on instrumental hardware (maximum available gradient pulse power and the duration of gradient pulses) this will, according to the scaling law [Equation (2)], affect the maximum molecular

weight M_0 that can be possibly determined by the NMR technique. Moreover, Equation (9) shows that the maximum accessible value of M_0 becomes larger with increasing K . However, since K is system-dependent (type of polymer and its concentration in solution)^[22–24] it is outside instrumental and operator control. Generally K is found to be of the order of 10^{-8} .^[22] If not otherwise stated in the text we have set $K = 2.4 \times 10^{-8}$ in the subsequent calculations (see Experiment Part).

The dependence of σ and M_0 on β and D_s are shown in Figure 5A and B and suggest (for a given α and K) that the sensitivity in M_0 is constant and independent on D_s . In contrast, the sensitivity in σ increases with increasing β . A more quantitative evaluation of sensitivity can be achieved by calculating the relative change (σ_σ/σ and σ_{M_0}/M_0) in σ and M_0 at a constant relative change (of say 10%) in β and D_s . The results are plotted in Figure 6 and show that the sensitivity in M_0 (negative because M_0 decreases with increasing D_s) is independent on D_0 but dependent on α . It increases slightly from about 14% for $\alpha = 0.70$ to $\approx 20\%$ for $\alpha = 0.50$.

A corresponding analysis of the distribution width parameter σ shows that its sensitivity increases from

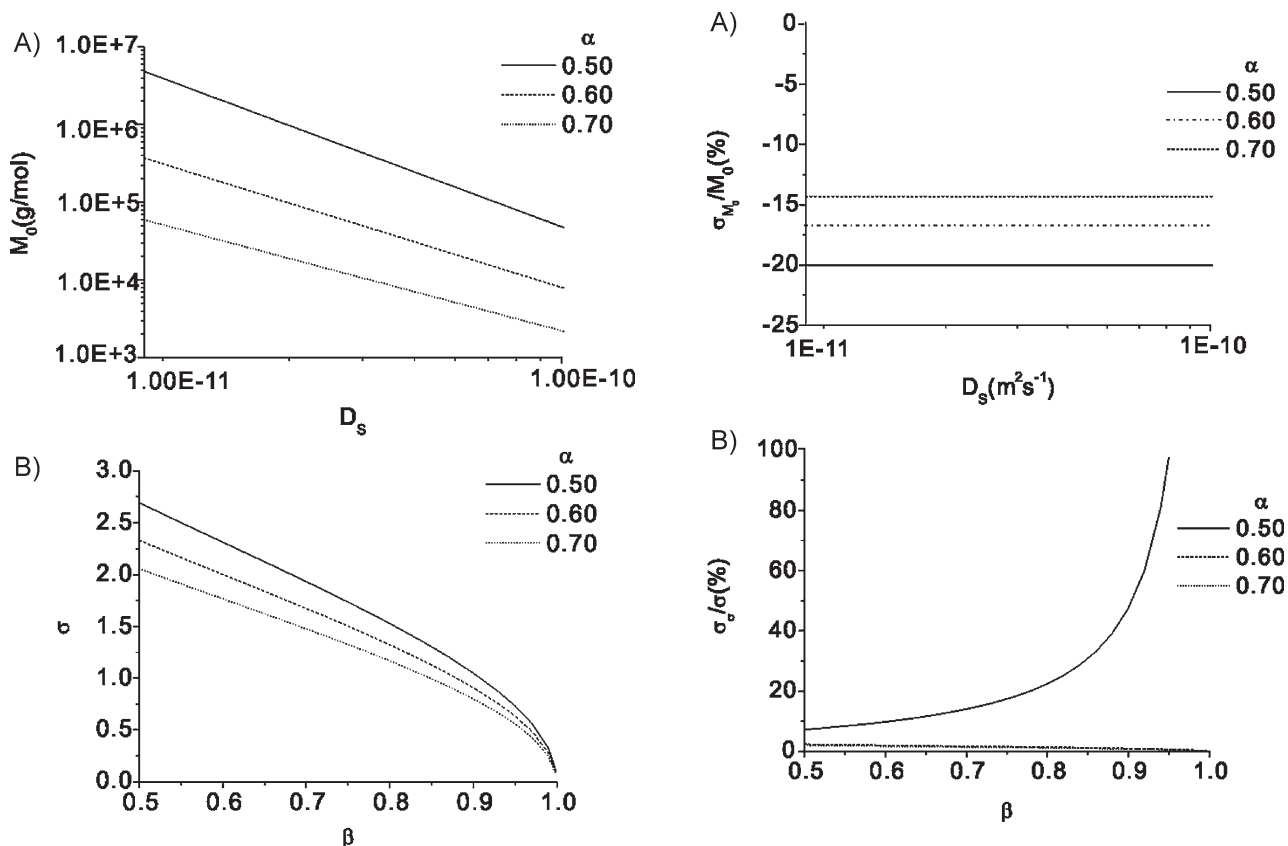


Figure 5. (A) The dependence of M_0 on D_s with $K = 2.4 \times 10^{-8}$ and $\alpha = (0.50, 0.60, 0.70)$. (B) The dependence of σ on β with the same K and α as in (A).

Figure 6. (A) Relative change in M_0 versus D_s and α when assuming a constant relative change in β of 10%. (B) Relative change in σ versus β and α when assuming a constant relative change in β of 10%.

about 7% to about 20% when β increases from 0.50 to about 0.80. At larger β the sensitivity increases more dramatically and reaches a value of 100% when β approaches 0.94. Note in particular, that the sensitivity of σ with respect to β is independent of α .

In the next section we will evaluate the relative error in σ and M_0 by applying the well known “propagation of error” technique.

Relative Error in σ and M_0

Due to the inherent noise in the PGSTE response curve this will affect the corresponding error in the derived MWD parameters σ and M_0 .

Based on Equation (9 and 11) the relative errors σ_{M_0}/M_0 and σ_σ/σ of M_0 and σ can be determined from the relative errors σ_{D_s}/D_s and σ_β/β , respectively. The results are plotted in Figure 7A and B and show that the relative error in M_0 and σ increases approximately linearly with increasing relative error of D_s and β . In particular we note that the relative error in σ is independent on α , which is in contrast to the corresponding relative error in M_0 which decreases with increasing α . In particular, the accelerating relative error in σ with increasing β partially outweighs the improved sensitivity of σ at high β (Figure 7B). In order to

obtain MWD parameters possessing a relative error of less than 10%, the parameter β must possess a relative error of less than 1%. In contrast, the relative error in M_0 is not that sensitive to error in D_s . Actually, a relative error in M_0 of less than 10% is obtained if the relative error in D_s is smaller than 5%. This means that to obtain a reliable (less than 10% error) value of the width parameter σ of a narrow MWD (β close to 0.95), a relative error in β of less than 1% must be obtained and demands for a rather low noise in the PGSTE response curve. However, a relative error in σ and M_0 of less than 10% is easily accessible for $\beta < 0.90$. A corresponding relative error of less than 10% for $\beta > 0.90$ is manageable but requires a somewhat longer experimental time.

We emphasize that the relative error of both σ and M_0 decreases with decreasing β and D_s , i.e., the relative error of the two former parameters decrease when the width and the average molecular weight of the polymer increase.

Examples

The simulations presented in this work suggest that any polymer system possessing an LNMWD can be characterized within a 10% relative error in σ and M_0 if $\overline{M}_w/\overline{M}_n [= \exp(\sigma^2)] \geq 1.28 [= \exp(0.45 \times 0.45)]$. Experimental work is in progress to evaluate these findings for a broader range of samples. However, for illustration purposes, we will present experimental results obtained on three PEO samples of which two possess relatively narrow MWDs.

In order to determine the MWD it is mandatory to establish the scaling relation between diffusivity D and molecular mass M , i.e., to identify the parameters K and α in Equation (2). More than a decade ago Johnson and co-workers^[13] used PFG NMR to determine these parameters for PEO and found $K = 10^{-7.5}$ and $\alpha = 0.6$. We have rechecked these values by performing similar NMR experiments on four commercial monodisperse PEO samples (R1–R4; Table 1) resulting in $\alpha = 0.61 \pm 0.05$ and $K = (2.4 \pm 1.2) \times 10^{-8}$ ($= 10^{-7.6 \pm 0.3}$). Hence, these values are – within experimental error – equal to the corresponding numbers presented by Johnson et al.^[13] and others.^[15,25] We note in particular that the calculated β (β_{calc} in Table 1), as obtained by applying one of the Master equations [Equation (11)] and assuming an LNMWD [$\overline{M}_w/\overline{M}_n = \exp(\sigma^2)$], are in excellent agreement with the observed β (β_{obs} in Table 1), except for sample 2. The reason for this discrepancy regarding sample R2 is at present not understood.

The MWD characteristics (Table 2) of the three PEO samples S_A , S_B , and S_C as determined by GPC, are tabulated in Table 2 and their distributions shown in Figure 8A. The results demonstrate – by visual inspection – that both the narrow MWD samples deviate from a pure log/normal distribution, sample S_B more than sample S_A .

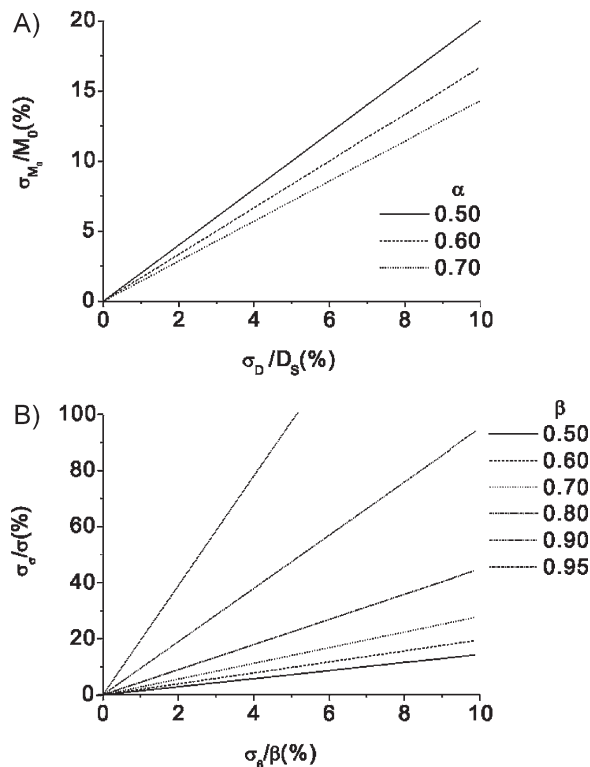


Figure 7. (A) Relative error (%) in M_0 as a function of the relative error (%) in D_s . (B) Relative error (%) in σ as a function of the relative error (%) in β .

Table 1. GPC and PGSTE NMR results (fitting a stretch exponential model to the observed response curve) obtained on four monodisperse PEO samples obtained from.

Sample	GPC		NMR			
	$\overline{M}_w$ [10^{-4} g · mol $^{-1}$]	$\overline{M}_w/\overline{M}_n$	D_s [10^{11} m 2 · s $^{-1}$]	β_{obs}	$\beta_{\text{calc}}^{\text{a)}$	r^2
R1	2.37	1.03	4.376 ± 0.010	0.998 ± 0.003	0.996	0.99994
R2	4.30	1.03	2.863 ± 0.007	0.980 ± 0.003	0.996	0.99993
R3	10.1	1.07	1.936 ± 0.004	0.989 ± 0.003	0.991	0.99993
R4	15.0	1.04	1.296 ± 0.002	0.995 ± 0.004	0.995	0.99990

^{a)}Calculated from Equation (11) by assuming a log/normal distribution, i.e., $\overline{M}_w/\overline{M}_n = \exp(\sigma^2)$.

Table 2. Sample characteristics obtained on three PEO samples by GPC and PGSTE NMR analysis.

Sample	GPC		NMR				
	M_0 [10^{-4} g · mol $^{-1}$]	$\overline{M}_w/\overline{M}_n$	D_s [10^{11} m 2 · s $^{-1}$]	β	$\sigma^{\text{a)}$	$M_0^{\text{b)}$ [10^4 g · mol $^{-1}$]	$\overline{M}_w/\overline{M}_n^{\text{c)}$
S _A	7.9	1.2	2.02 ± 0.02	0.973 ± 0.009	0.46 ± 0.07	7.98 ± 0.08	1.24 ± 0.09
S _B	1.9	1.5	5.35 ± 0.03	0.942 ± 0.007	0.62 ± 0.02	1.65 ± 0.02	1.56 ± 0.08
S _C	4.8	5.5	2.97 ± 0.03	0.794 ± 0.008	1.31 ± 0.03	4.25 ± 0.06	5.6 ± 0.4

^{a)}Calculated from Equation (9); ^{b)}Calculated from Equation (11) ^{c)}Calculated by assuming an LNMWD with $\overline{M}_w/\overline{M}_n = \exp(\sigma^2)$.

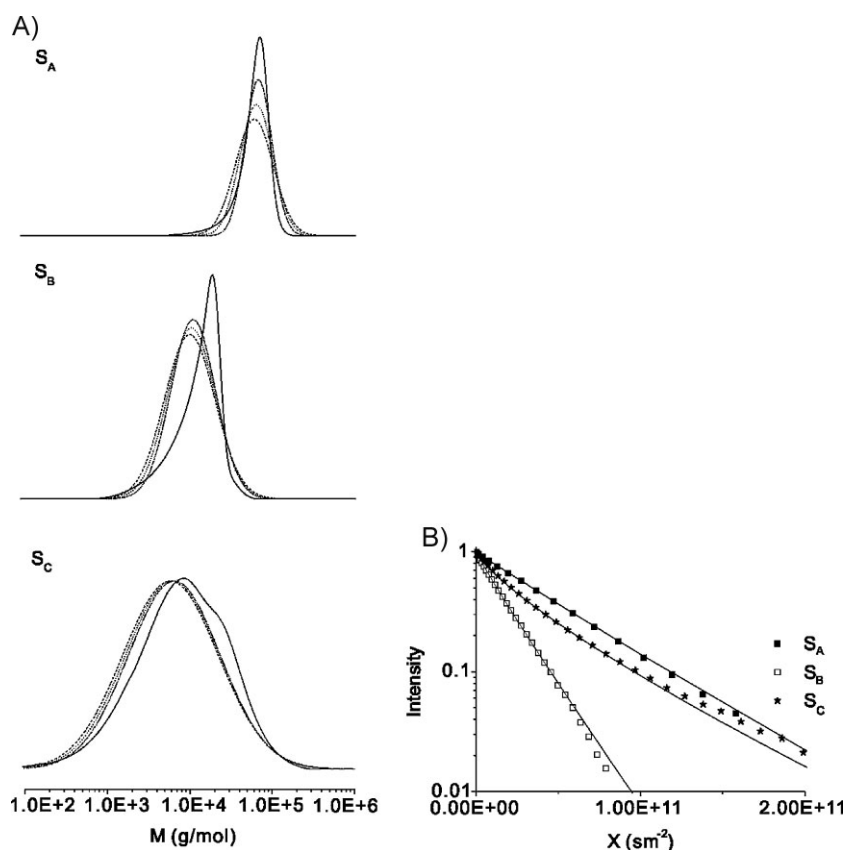


Figure 8. (A) The MWD of three PEO samples S_A, S_B, and S_C. The solid curves are derived from GPC and the dotted curves are derived from PGSTE NMR as described in the text (see Table 2). Two of the dotted curves were calculated by replacing σ with $\sigma \pm \sigma_\sigma$ and M_0 replaced by $M_0 \pm \sigma_{M_0}$. (B) PGSTE NMR data of the three PEO samples S_A, S_B, and S_C.

In order to obtain the MWD characteristic by NMR, a SEF [Equation (8)] is fitted to the observed PGSTE response curve, as illustrated on Figure 8B. The numerical values are summarized in Table 2 and show that the relative error in both β and D_s is less than $\approx 1\%$, which is a requirement for obtaining a smaller relative error of 10% in σ for these narrow MWD samples, as discussed in a previous section. The broader MWD sample S_C reveals a difference in M_0 of about 10% between the GPC and NMR derived MWDs. One should then keep in mind that the normally expected uncertainty in the GPC derived MWD is $\approx 10\%$.

The dotted curves in Figure 8A are the NMR derived MWD and were calculated from Equation (1). Moreover, by replacing σ with $\sigma \pm \sigma_\sigma$ and M_0 with $M_0 \pm \sigma_{M_0}$ in Equation (1) with σ_{M_0} and σ_σ representing the standard error in σ and M_0 , respectively, the two dotted curves for each MWD in Figure 8A appear. These “extreme” distributions thus represent a kind of confidence region for the calculated MWD. Recalling that the NMR derived MWD [using Equation (1, 9), and (11) with $\alpha = 0.61$ and $K = 2.4 \times 10^{-8}$;

Table 1) is based on the implicit assumption of an LNMWD and that the GPC derived MWDs clearly deviate from such a line shape (in particular for sample S_B) we consider the overall results to be rather encouraging. In particular when considering the rather good agreement between M_0 and $\overline{M}_w/\overline{M}_n$, as obtained with the two different experimental techniques (Table 2).

An interesting and important consequence of the above analysis is that the parameters K and α can be determined from Equation (2, 9), and (11) using a non-linear least squares algorithm, if knowing the “true” MWD of one single sample possessing an LNMWD.

In order to evaluate the practical applicability of the present experimental method a testing of a broad range of polymers covering a wider range of MWD characteristics is of importance. Also, the accuracy with which the calibration parameters K and α [Equation (2)] can be reliably determined by combining a single GPC derived MWD and PGSTE NMR is of particular relevance. Also, to what extent an MWD that deviates from a pure LNMWD will affect the analysis results needs to be addressed both by simulation and by experimental work.

Conclusion

By simulation we have shown how to obtain the two characteristic parameters (M_0 and σ) of an LNMWD by fitting the pulsed gradient stimulated echo (PGSTE) response curve to a single SEF (defined by the two parameters β and D_S). Two explicit and simple empirical equations relating the two set of parameters are derived. A critical sensitivity and error analysis suggests that the present technique represents a fast and reliable alternative (compared to the ill-posed numerical technique of an inverse Laplace transformation) to characterize the MWD of polymers possessing LNMWD.

Appendix

Equation (1) can be rewritten in the form

$$\left(\frac{M_0}{M}\right)^\alpha = \frac{D}{D_0} \Leftrightarrow \frac{M_0}{M} = \left(\frac{D}{D_0}\right)^{1/\alpha} \Leftrightarrow M = M_0 \left(\frac{D_0}{D}\right)^{1/\alpha} \\ \Leftrightarrow dM = -\frac{M_0}{\alpha} \frac{D_0^{1/\alpha}}{D^{1/\alpha+1}} dD \quad (A1)$$

Hence, by combining Equation (A1) and Equation (1 and 3) in the main text we arrive at

$$\frac{dI}{dD} = \frac{dI}{dM} \frac{dM}{dD} \\ \frac{dI}{dD} = \frac{1}{\sqrt{2\pi}M_0\sigma} \left(\frac{D}{D_0}\right)^{1/\alpha} \exp\left[-\frac{[\ln(D_0/D)]^2}{2\alpha^2\sigma^2}\right] \left[-\frac{M_0}{\alpha} \frac{D_0^{1/\alpha}}{D^{1/\alpha+1}}\right] \\ \frac{dI}{dD} = \frac{1}{\sqrt{2\pi}\alpha\sigma} \frac{1}{D} \exp\left[-\frac{[\ln(D_0/D)]^2}{2\alpha^2\sigma^2}\right] \quad (A2)$$

For practical reasons Equation (A2) can be written in a more attractive form by introducing a new dimensionless variable $z = D/D_0$ ($\Leftrightarrow dD = D_0 dz$) and noting that

$$\frac{dI}{dz} = \frac{dI}{dD} \frac{dD}{dz} = \frac{1}{\sqrt{2\pi}\alpha\sigma} \left(\frac{1}{D_0 z}\right) \exp\left[-\frac{(\ln z)^2}{2\alpha^2\sigma^2}\right] D_0 \\ = \frac{1}{\alpha\sigma\sqrt{2\pi}z} \exp\left[-\frac{(\ln z)^2}{2\alpha^2\sigma^2}\right] \quad (A3)$$

Concerning the response signal $R(x)$ from a PGSTE experiment it follows that

$$R(x) = \int_0^\infty \frac{dI}{dD} \exp(-xD) dD = \int_0^\infty \frac{dI}{dz} \frac{dz}{dD} dD \\ \exp(-xD) dD = \int_0^\infty \frac{dI}{dz} \exp(-xD_0 z) dz \quad (A4) \\ = \int_0^\infty \frac{1}{\alpha\sigma\sqrt{2\pi}z} \exp\left[-\frac{(\ln z)^2}{2\alpha^2\sigma^2}\right] \exp(-xD_0 z) dz$$

Hence, for any specified distribution characterized by $D = D_0$ and $\sigma = \sigma_0$ we obtain:

$$R(x) = \int_0^\infty \frac{1}{\alpha\sigma_0\sqrt{2\pi}z} \exp\left[-\frac{(\ln z)^2}{2\alpha^2\sigma_0^2}\right] \exp(-xD_0 z) dz \quad (A5)$$

Acknowledgements: This work was supported by *National Fundamental Research Program* (2007CB925200), the *Shanghai Leading Talent Training Program*, and the *Science & Technology Committee of Shanghai Municipality* (07DZ22937, 06DZ22922).

Received: November 14, 2010; Revised: January 10, 2011; Published online: March 10, 2011; DOI: 10.1002/macp.201000706

Keywords: diffusion; modeling; molecular weight distribution; NMR; simulations

- [1] E. O. Stejskal, J. E. Tanner, *J. Chem. Phys.* **1965**, *42*, 288.
[2] C. S. Johnson, *Prog. Nucl. Magn. Reson. Spectrosc.* **1999**, *34*, 203.
[3] S. Abrahmen-Alami, P. Stilbs, *J. Colloid Interface Sci.* **1997**, *189*, 137.
[4] D. P. Hinton, C. S. Johnson, Jr., *J. Phys. Chem.* **1993**, *97*, 9064.
[5] K. Yu, J. Ouyang, Md. B. Zaman, *J. Phys. Chem. C* **2009**, *113*, 3390.
[6] M. Nilsson, M. A. Connell, A. L. Davis, G. A. Morris, *Anal. Chem.* **2006**, *78*, 3040.
[7] R. H. Vogel, *SPLMOD Users Manual, Data Analysis Group, EMBL-DA09, EMBL*, Heidelberg, Germany 1988.
[8] J.-A. Ostlund, M. Nyden, P. Stilbs, *Energy Fuels* **2004**, *18*, 531.
[9] B. Antalek, J. M. Hewitt, *Magn. Reson. Chem.* **2002**, *40*, S60.
[10] R. Huo, R. Wehrens, J. V. Duynhoven, L. M. C. Buydens, *Anal. Chim. Acta* **2003**, *490*, 231.
[11] R. Huo, R. Wehrens, L. M. Buydens, *J. Magn. Reson.* **2004**, *169*, 257.
[12] M. A. Delsuc, T. E. Malliavin, *Anal. Chem.* **1998**, *70*, 2146.
[13] A. Chen, D. Wu, C. S. Johnson, Jr., *J. Am. Chem. Soc.* **1995**, *117*, 7965.
[14] S. W. Provencher, *Comput. Phys. Commun.* **1982**, *27*, 213.
[15] B. Hakansson, M. Nyden, O. Soderman, *Colloid Polym. Sci.* **2000**, *278*, 399.
[16] R. Kohlrausch, *Annal. Phys. Chem.* **1854**, *91*, 179.
[17] M. N. Berberan-Santos, *Lecture Series on Computer and Computational Sciences*, Vol. 4, Brill Academic Publishes, The Netherlands 2005, 4, p. 70.
[18] S. Zhang, *Chem. Phys. Chem.* **2007**, *8*, 635.
[19] G. Fleicher, *Polymer* **1985**, *26*, 1677.
[20] M. Rubinstein, R. H. Colby, *Polymer Physics*, Oxford University Press, Oxford, UK 2004, p. 309.
[21] P. T. Callaghan, J. Lelievre, *Biopolymers* **1985**, *24*, 441.
[22] G. D. J. Phillies, *Macromolecules* **1986**, *19*, 2367.
[23] G. D. J. Phillies, *Macromolecules* **1998**, *31*, 2317.
[24] G. D. J. Phillies, *Macromolecules* **2002**, *35*, 7414.
[25] M. Xu, Q. Chen, S. Zhang, *Colloid Polym. Sci.* **2010**, *288*, 85.