

THE NETHERLANDS
(N E D E R L A N D)

COMMUNICATION

Concerning ⁽¹⁾:


- approval granted
- ~~approval extended~~
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of pneumatic tyre for motor cycles and mopeds pursuant to Regulation number 75.

Approval number: E4-75R-0007905

Extension number: 00


Approval mark:



- | | | | |
|------|---|---|---|
| 1. | Manufacturer's name or trade mark(s) on the tyre type | : | SCHWALBE |
| 2. | Tyre type designation by the manufacturer | : | HS 437 |
| 3. | Manufacturer's name and address | : | PT.HUNG-A INDONESIA
Hyundai Int'l Industrial Estate Blok C5,
Cikarang, Bekasi
Indonesia |
| 4. | If applicable, name and address of the manufacturer's representative | : | Not applicable |
| 5. | Summarised description: | | |
| 5.1. | Tyre size designation | : | 2.40-16 M/C |
| 5.2. | Category of use | : | ordinary/ snow / special / moped ⁽¹⁾ |
| 5.3. | Structure | : | diagonal/ bias belted / radial |
| 5.4. | Speed category symbol | : | J |
| 5.5. | Load-capacity index | : | 42 |
| 6. | Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity | : | TÜV Rheinland Kraftfahrt GmbH
Technologiezentrum Verkehrssicherheit
Am Grauen Stein
D-51105 Köln |



7. Date of report issued by that service : July 14, 2011
8. Number of report issued by that service : 88-R75-224/11
9. Reason(s) of extension (if applicable) : Not applicable
10. Any remarks : Nota applicable
11. Place : Zoetermeer
12. Date : 27 - JUL - 2011
13. Signature :

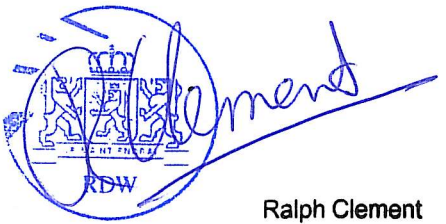

Ralph Clement

14. The list of documents in the approval files which are deposited at the administrative service having delivered the approval and which can be obtained upon request.
- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 75.
 - The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
 - The test report as mentioned in item 8.



P.T. HUNG-A INDONESIA

APPLICATION FORM FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE MOTOR CYCLES
ACCORDING TO ECE REGULATION NO. 75.00 SERIES OF AMANDEMENTS

APPROVAL NO. : E4-75R-0007905

Ref No. : 1107-01

Extension : -

- | | | | |
|------|---|---|---|
| 1 | Manufacturer's name of trade mark on the tyre | : | SCHWALBE |
| 2 | Tyre type designation by the manufacturer | : | HS 437 |
| 3 | Manufacturer's name and address | : | PT HUNG-A INDONESIA
Hyundai Int'l Industrial Estate Blok C5
Cikarang, Bekasi, West Jawa Indonesia |
| 4 | If applicable name and address of manufacturer's representative | : | Not Applicable |
| 5 | Size designation of tyre | : | 2.40 - 16 M/C |
| 6 | Category of use | : | normal/ special / new / moped |
| 7 | Structure | : | diagonal/ bias belted / radial |
| 8 | Speed category | : | J |
| 9 | Load-capacity index | : | 42 |
| 10 | Overall dimensions | : | Annex/ETRTO /Calculated |
| 10.1 | Overall Width | : | 55 mm |
| | on measuring rim | : | 8.85 Inch |
| 10.2 | Outer diameter | : | 518 mm |
| 11 | Factor X | : | 0.91 |
| 12 | Ply-rating number for motor cycle derivative tyre | : | |
| 12.1 | Tread | : | 2 Ply Rating nylon |
| 12.2 | Side wall | : | 2 Ply Rating nylon |
| 13 | Rims on which the tyre can be mounted | : | |
| 14 | Measuring rim and test rim | : | See attached test report |
| 15 | State whether tyre is | : | Tubeless/ tube type |
| 16 | State whether tyre is | : | standard/ reinforced |
| 17 | Submitted for approval on (date) | : | JUL.04.2011 |

MANUFACTURER'S STAMP



SIGNATURE



NAME : KIM JUNG HWAN
QUALITY CONTROL MANAGER

THIS APPLICATION IS ACCOMPANIED BY :

- Application form, relating to ECE approval for a pneumatic tyre pursuant Regulation No. 75.
- A drawing of tyre's side walls, tread and dimensioned cross-section.
- The test report.


OFFICE & FACTORY : HYUNDAI INT'L INDUSTRIAL ESTATE BL. C 5, CIKARANG BEKASI WEST JAWA, INDONESIA
TEL. : 62-21 - 8972071 (HUNTING) FAX. : 62-21- 8972480 E-Mail : pthunga @ indosat.net.id

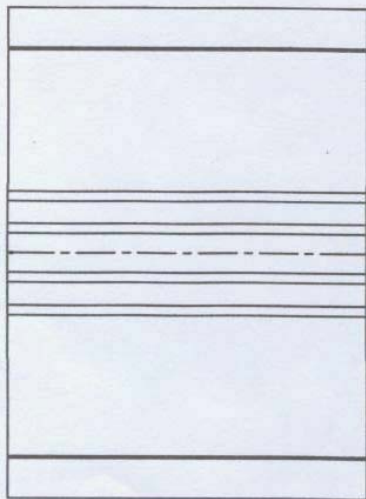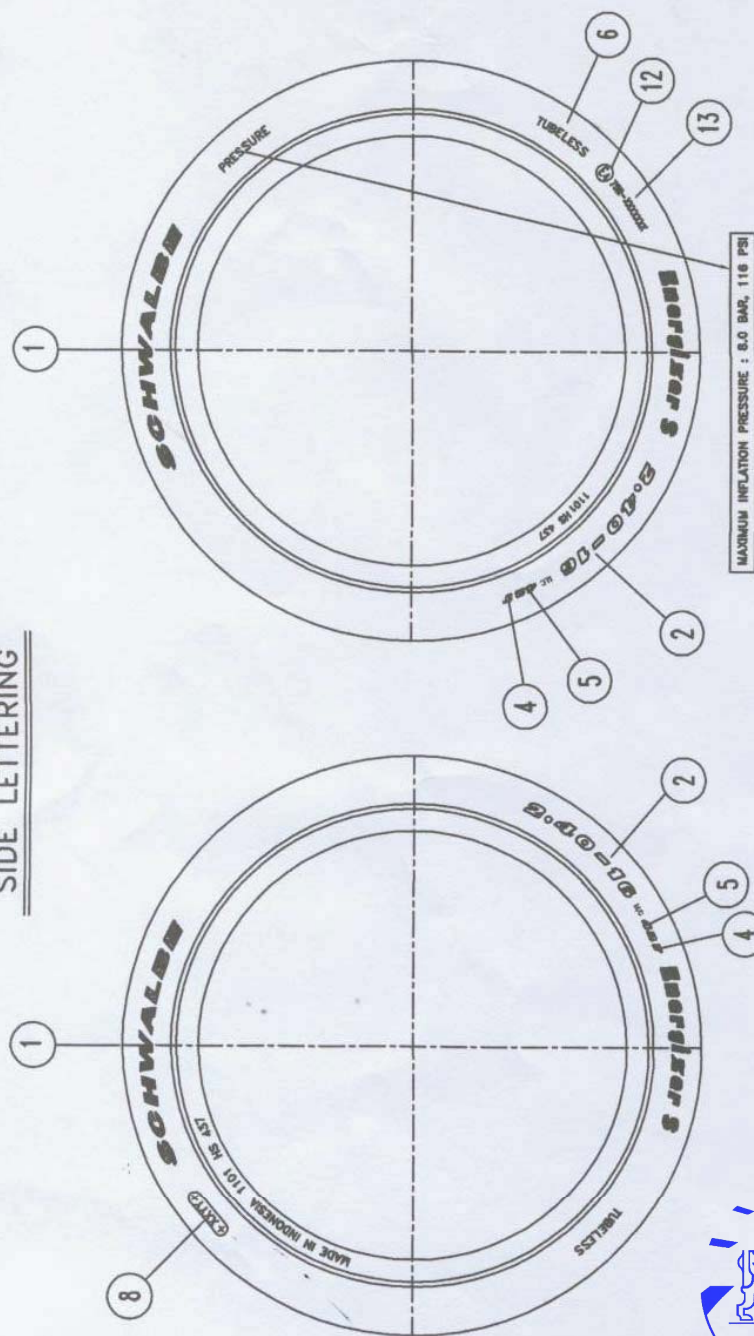

TREAD PATTERNSIDE LETTERING

[LOWER]

[UPPER]

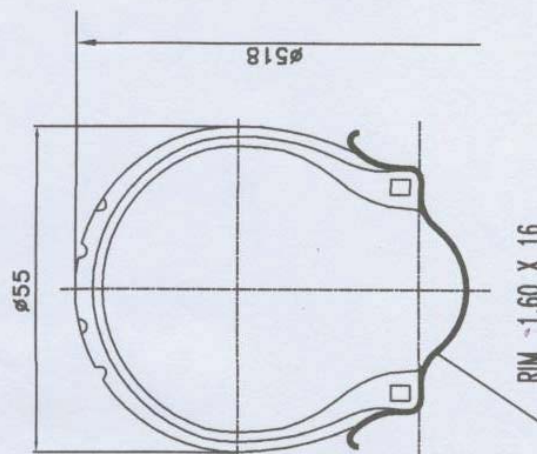TIRE SECTIONECE REGULATION NO.75 MARKING REQUIREMENT

No	ITEMS	DESCRIPTION	HEIGHT (mm)	No	ITEMS	DESCRIPTION	HEIGHT (mm)
1	MARK	SCHWALBE	: MIN. 4	10	INSCRIPTION OF MST	NON	: MIN. 4
2	THE SIZE DESIGNATION	2.40-16	: MIN. 4	11	INSCRIPTION OF MOPED TYPE	NON	: MIN. 4
3	STRUCTURE WORD	NON	: MIN. 4	12	ECE APPROVAL MARK	(E4)	: MIN. 9
4	SPEED CATEGORY SYMBOL	J	: MIN. 4	13	ECE APPROVAL NUMBER	79R-XXXXXX	: MIN. 3
5	LOAD-CAPACITY INDEX	42	: MIN. 4	14	PLY RATING	TREAD 2 PLYS NYLON	: MIN. 4
6	THE WORD TUBELESS	TUBELESS	: MIN. 4		SIDEWALL 2 PLYS NYLON		
7	THE WORD REINFORCED	NON	: MIN. 4				
8	THE DATE OF MANUFACTURE	XXYY	: MIN. 4				
9	INSCRIPTION OF SNOW TYPE	NON	: MIN. 4				

2.40-16 M/C HS 437

REGULATION MARKING REQUIREMENTS

DWG.BY ADLS

DES.BY IKLAS

CHECKED

CHILDRES

MANAG CHAE

DWG.NO EM-SC-24016437

UNIT MM

SCALE N/S

DWG.DATE 2011.07.04

PT. HUNG-A INDONESIA

Manufacturer : PT. HUNG-A INDONESIA
Size : 2.40-16 M/C

Technical report according to the Agreement of the United Nations on the approximation of the laws of the Member States relating to the component type approval ECE-R75 of pneumatic tyres for motorcycles and mopeds

1. Markings

1.1.	Trade mark	: SCHWALBE
1.2.	Tread pattern	: HS 437
1.3.	Plies	
	Tread	: 2 Nylon
	Side wall	: 2 Nylon
1.4.	Size designation	: 2.40-16 M/C
1.5.	Special protective band	: without
1.6.	Category of use	: ordinary
1.7.	Structure	: diagonal
1.8.	Speed category	: J
1.9.	Load capacity index	: 42
1.10.	Ply-rating number for diagonal (bias-ply) tyres	: 2 PR
1.11.	Indication	: tubeless
1.12.	Indication	: not reinforced
1.13.	Date of manufacture	: 2711

2. Measurement according to Annex 6

2.1.	Measuring rim	: 1.60 X 16
2.2.	Inflation pressure	: 225 kPa
2.3.	Inflation pressure (readjusted before conditioning)	: 225 kPa
2.4.	Duration of conditioning of mounted tyre pre-measuring at : ambient room temperature	: more than 24 hours

Manufacturer : PT. HUNG-A INDONESIA
Size : 2.40-16 M/C

2.5. Overall width at six equally spaced points

1.	54.3	mm
2.	54.8	mm
3.	54.8	mm
4.	54.9	mm
5.	55.1	mm
6.	55.1	mm
Max.:	55.1	mm

2.6. Circumference : 1630 mm

2.7. Outer diameter : 518.8 mm

3. Load/speed performance test according to Annex 7

3.1. Test machine	: Ohtani Kikai, Ohtani Rubber Machinery Co., Ltd., Japan SN 1862
3.2. Diameter test drum	: 1.7 m
3.3. Test rim	: 1.60 X 16
3.4. Conditioning of mounted tyre pre-testing at test-room temperature	: More than 3 hours
3.5. Test-room temperature	: 30.0 °C
3.6. Inflation pressure (readjusted before conditioning)	: 250 kPa
3.7. Inflation pressure (readjusted after conditioning)	: 250 kPa
3.8. Circumference after conditioning, before testing	: 1631 mm
3.9. Outer diameter	: 519.2 mm
3.10. Inflation pressure	: 250 kPa
3.11. Corresponding load (65 %)	: 98 kg

Step	Step-Duration [min]	Total Duration [min]	Actual speed (km/h)
1.	20	20	0-60
2.	10	30	60
3.	10	40	70
4.	10	50	80
5.	10	60	90

Manufacturer : PT. HUNG-A INDONESIA
Size : 2.40-16 M/C

3.12.	Conditioning after testing at test-room temperature	:	more than 6 hours
3.13.	Inflation pressure	:	250 kPa
3.14.	Circumference after conditioning, after testing	:	1632 mm
3.15.	Outer diameter	:	519.5 mm
3.16.	Difference outer diameter before and after testing	:	0.3 mm
	(max. 3.5 %)	:	0.1 %

3.17. Overall width at six equally spaced points after testing

1.	54.5	mm
2.	54.7	mm
3.	55.0	mm
4.	54.9	mm
5.	55.1	mm
6.	55.0	mm
Max.:	55.1	mm

4. General information

4.1.	Manufacturer's name and address	:	PT.HUNG-A INDONESIA Hyundai Int'l Industrial Estate Blok C5, Cikarang, Bekasi Indonesia
4.2.	Technical service responsible for carrying out the tests		TÜV Rheinland Kraftfahrt GmbH Technologiezentrum Verkehrssicherheit Am Grauen Stein D-51105 Köln
4.3.	Test object received		Not applicable
4.4.	Test location	:	See section 4.1
4.5.	Test date	:	July 12, 2011
4.6.	Remarks concerning tested object(s)	:	The results of the test refer exclusively to the object(s) mentioned under item 1.4 of this report

Manufacturer : PT. HUNG-A INDONESIA
Size : 2.40-16 M/C

5. Appendices

- 0 List of modifications
- 1 Information documents no: 1107-01

6. Statement of conformity

The information folder and the type described there comply with the requirements in the above-mentioned regulation.

The test laboratory is accredited for the above mentioned tests by the accreditation body - RDW, Vehicle Technology and Information Centre, as component administrative department for the Netherlands; Accreditation Number: RDW-99050014-05.

This expert report on vehicle components shall not be reproduced except in full without the permission in writing of the Technical Service. The Technical Service has been recognised by the Kraftfahrt-Bundesamt as being qualified to apply the test methods in accordance with EG-FGV within the context of the KBA type approval procedure.

Cologne-Cikarang July 14, 2011

TM/RO



Ir. Trisomo E Mulia

Manufacturer : PT. HUNG-A INDONESIA
Size : 2.40-16 M/C

List of modifications**Appendix 0**

Correction of : Not applicable

Modification of : Not applicable

Addition of : Not applicable

Deletion of : Not applicable

End of the test report-