




MPU 6050

- Roll and Pitch indicate deviation from the desired orientation, measured using the MPU-6050.
- The MPU-6050 integrates a 3-axis accelerometer and a 3-axis gyroscope on a single chip.



UI

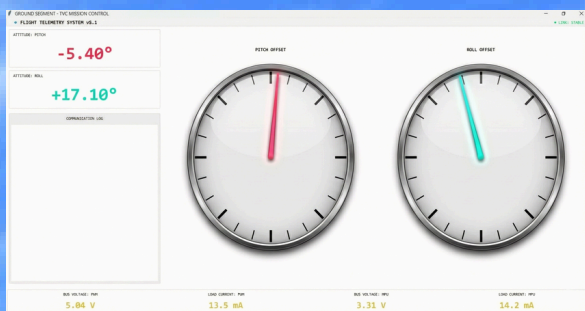

- ESP32 transmits MPU-6050 sensor data to the laptop via Bluetooth for real-time monitoring.

Team Members


Pruthvik S	1BM24EE043
Pratik Jadhav	1BM24EE040
Siddhanth Bhatt	1BM24EE069
Narendrababu N	1BM24EE033

intended to
vertically
above

deviation due to
wind current



Circuit Connections

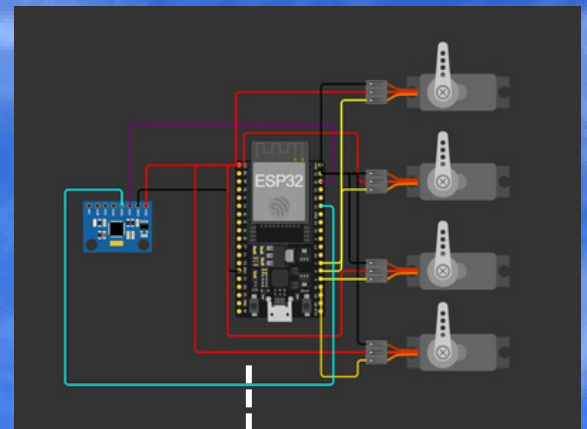

ESP-32

- ESP32 processes MPU-6050 data and generates corrections to maintain desired orientation.



servo motor and fins

- The ESP32 sends correction signals to the servo driver, which simultaneously controls four servo motors.
- Servo motors drive the fins to produce the required aerodynamic corrections.



Under Guidance :-
Chaitanya . L
Assistant Professor