Practical 7

NETWORK TOPOLOGY

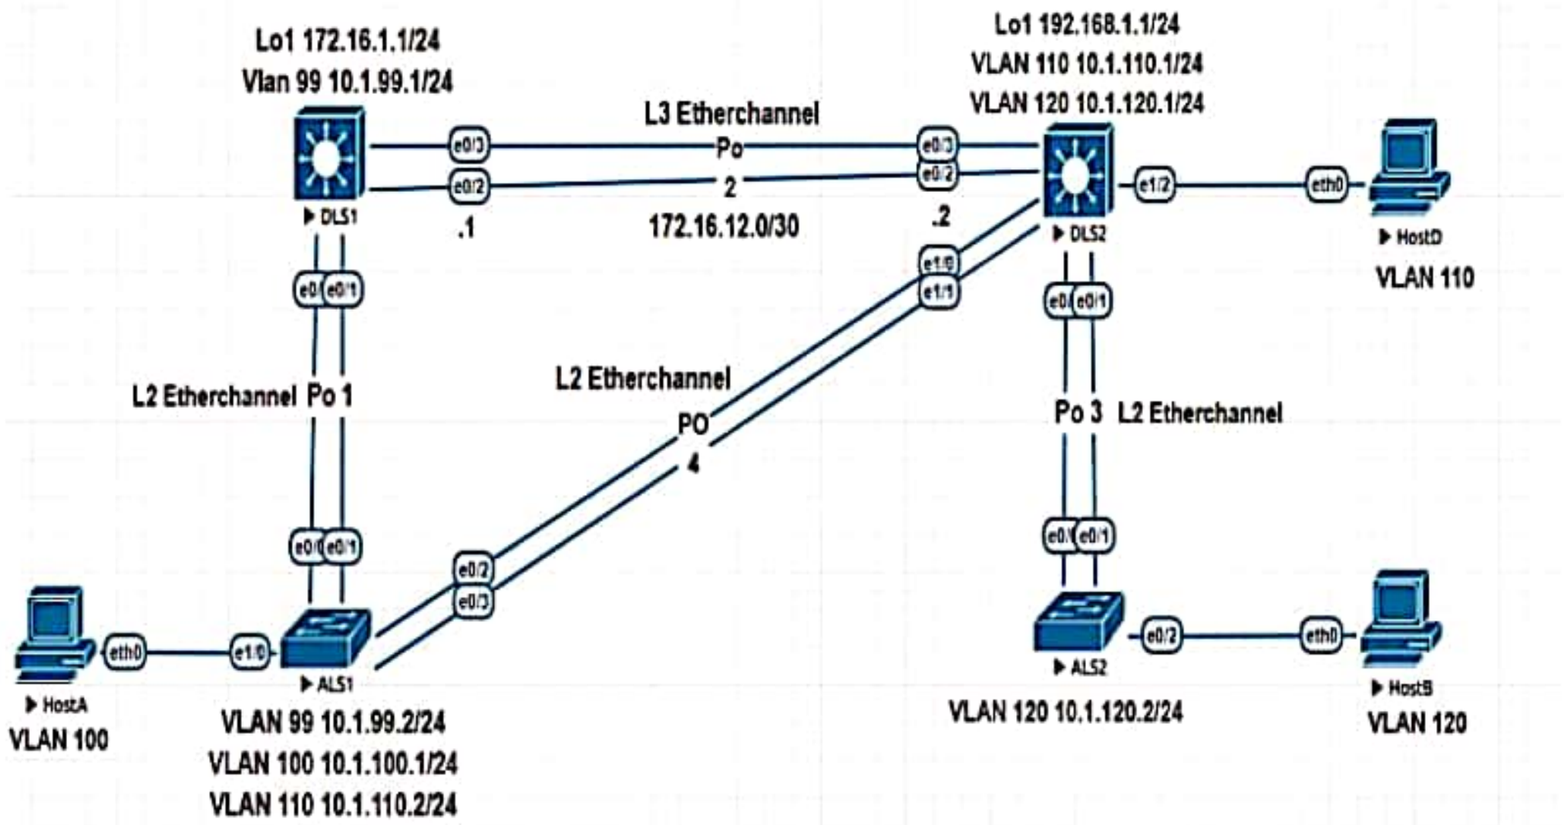

DLS1 Switch>enable
Switch#conf t
Switch(config)#hostname DLS1
DLS1(config)#interface loopback 1
DLS1(config-if)#ip address 172.16.1.1 255.255.255.0
DLS1(config-if)#exit
DLS1(config)#interface vlan 99
DLS1(config-if)#ip address 10.1.99.1 255.255.255.0
DLS1(config-if)#no shutdown
Implement a Layer 3 EtherChannel
DLS1(config)#int range e0/2-3
DLS1(config-if-range)#no switchport
DLS1(config-if-range)#no ip address
DLS1(config-if-range)#channel-group 2 mode on Creating a port-channel interface Port-channel 2 DLS1(config-if-range)#exit
DLS1(config)#interface port-channel 2
DLS1(config-if)#ip address 172.16.12.1 255.255.255.252
DLS1(config-if)#end
DLS1(config)#int range e0/0-1
DLS1(config-if-range)#switchport trunk encapsulation dot1q
DLS1(config-if-range)#switchport mode trunk
DLS1(config-if-range)#channel-group 1 mode desirable Creating a port-channel interface Port-channel 1
DLS1(config-if-range)#end

DLS1#sh interfaces trunk Port Mode Encapsulation Status Native vlan Po1 on 802.1q trunking 1 Port Vlans allowed on trunk Po1 1-4094 Port Vlans allowed and active in management domain Po1 1,99 Port Vlans in spanning tree forwarding state and not pruned Po1 1,99 Implement Static Routing
DLS1(config)#ip routing
DLS1(config)#ip route 192.168.1.0 255.255.255.252 172.16.12.2
DLS1(config)# ip route 192.168.1.0 255.255.255.0 10.1.120.1
DLS1(config)# ip route 192.168.1.0 255.255.255.0 10.1.110.1
DLS1#sh ip route Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2 E1 - OSPF external type 1, E2 - OSPF external type 2 i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2 ia - IS-IS inter area, * - candidate default, U - per-user static route o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP a - application route + - replicated route, % - next hop override
Gateway of last resort is not set 10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.1.99.0/24 is directly connected, Vlan99
L 10.1.99.1/32 is directly connected, Vlan99 172.16.0.0/16 is variably subnetted, 4 subnets, 3 masks C 172.16.1.0/24 is directly connected, Loopback1
L 172.16.1.1/32 is directly connected, Loopback1
C 172.16.12.0/30 is directly connected, Port-channel2
L 172.16.12.1/32 is directly connected, Port-channel2 192.168.1.0/30 is subnetted, 1 subnets S 192.168.1.0 [1/0] via 172.16.12.2
DLS2 Switch>en Switch#conf t
Switch(config)#hostname DLS2
DLS2(config)#interface loopback 1
DLS2(config-if)#ip address 192.168.1.1 255.255.255.0
DLS2(config-if)#exit
DLS2(config)#interface vlan 110
DLS2(config-if)#ip address 10.1.110.1 255.255.255.0
DLS2(config-if)#no shutdown
DLS2(config-if)#exi
t DLS2(config)#interface vlan 120
DLS2(config-if)#ip address 10.1.120.1 255.255.255.0
DLS2(config-if)#no shutdown
DLS2(config-if)#exit Implement a Layer 3 EtherChannel
DLS2(config)#interface range e0/2-3
DLS2(config-if-range)#no switchport

DLS2(config-if-range)#no ip
DLS2(config-if-range)#no ip address
DLS2(config-if-range)#channel-group 2 mode on Creating a port-channel interface Port-channel 2 DLS2(config-if-range)#exit
DLS2(config)#interface port-channel 2
DLS2(config-if)#ip address 172.16.12.2 255.255.255.252
DLS2(config-if)#end DLS2(config)#interface range e0/0-1
DLS2(config-if-range)#switchport trunk encapsulation dot1q
DLS2(config-if-range)#switchport mode trunk
DLS2(config-if-range)#channel-group 3 mode desirable Creating a port-channel interface Port-channel 3
DLS2(config-if-range)#exit
DLS2(config)#interface range e1/0-1
DLS2(config-if-range)#switchport trunk encapsulation dot1q
DLS2(config-if-range)#switchport mode trunk
DLS2(config-if-range)#channel-group 4 mode desirable Creating a port-channel interface Port-channel 4
DLS2(config-if-range)#end
DLS2#sh interfaces trunk Port Mode Encapsulation Status Native vlan Po3 on 802.1q trunking 1 Po4 on 802.1q trunking 1 Port Vlans allowed on trunk Po3 1-4094 Po4 1-4094 Port Vlans allowed and active in management domain Po3 1,110,120 Po4 1,110,120 Port Vlans in spanning tree forwarding state and not pruned Po3 1,110,120 Po4 1,110,120 Implement Static Routing
DLS2(config)#ip routing DLS2(config)#ip route 172.16.1.0 255.255.255.252 172.16.12.1
DLS2(config)# ip route 172.16.1.0 255.255.255.0 10.1.99.1 Configure the host ports for the appropriate VLANs according to the diagram
DLS2(config)#interface e1/2
DLS2(config-if)#switchport mode access
DLS2(config-if)#switchport access vlan 110
DLS2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2 E1 - OSPF external type 1, E2 - OSPF external type 2 i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2 ia - IS-IS inter area, * - candidate default, U - per-user static route o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP a - application route + - replicated route, % - next hop override
Gateway of last resort is not set 10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks

C 10.1.110.0/24 is directly connected, Vlan110
L 10.1.110.1/32 is directly connected, Vlan110
C 10.1.120.0/24 is directly connected, Vlan120
L 10.1.120.1/32 is directly connected, Vlan120 172.16.0.0/16 is variably subnetted, 3 subnets, 2 masks S 172.16.1.0/30 [1/0] via 172.16.12.1
C 172.16.12.0/30 is directly connected, Port-channel2
L 172.16.12.2/32 is directly connected, Port-channel2 192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.1.0/24 is directly connected, Loopback1
L 192.168.1.1/32 is directly connected, Loopback1 ALS1
Switch>en Switch#conf t S
witch(config)#hostname ALS1
ALS1(config)#ip default-gateway 10.1.99.1
ALS1(config)#ip default-gateway 10.1.110.1
ALS1(config)#ip default-gateway 10.1.100.2 Implement a Layer 3 EtherChannel
ALS1(config)#int range e0/0-1
ALS1(config-if-range)#switchport trunk encapsulation dot1q
ALS1(config-if-range)#switchport mode trunk
ALS1(config-if-range)#channel-group 1 mode desirable Creating a port-channel interface Port-channel 1
ALS1(config-if-range)#exit
ALS1(config)#int range e0/2-3
ALS1(config-if-range)#switchport trunk encapsulation dot1q
ALS1(config-if-range)#switchport mode trunk
ALS1(config-if-range)#channel-group 4 mode desirable Creating a port-channel interface Port-channel 4
ALS1(config-if-range)#end
ALS1#sh etherchannel summary
Flags: D - down P - bundled in port-channel I - stand-alone s - suspended H - Hot-standby (LACP only) R - Layer3 S - Layer2 U - in use N - not in use, no aggregation f - failed to allocate aggregator M - not in use, minimum links not met m - not in use, port not aggregated due to minimum links not met u - unsuitable for bundling w - waiting to be aggregated d - default port A - formed by Auto LAG Number of channel-groups in use: 2
Number of aggregators: 2
Group Port-channel Protocol Ports ------+-------------+-----------+-------------------- ---------- 1 Po1(SU) PAgP Et0/0(P) Et0/1(P) 4 Po4(SU) PAgP Et0/2(P) Et0/3(P)
Configure the host ports for the appropriate VLANs according to the diagram

ALS1(config)#interface e1/0
ALS1(config-if)#switchport mode access
ALS1(config-if)#switchport access vlan 100 ALS2
Switch>en Switch#conf t
Switch(config)#hostname ALS2
ALS2(config)#ip default-gateway 10.1.120.1 Implement a Layer 3 EtherChannel
ALS2(config)#int range e0/0-1
ALS2(config-if-range)#switchport trunk encapsulation dot1q
ALS2(config-if-range)#switchport mode trunk
ALS2(config-if-range)#channel-group 3 mode desirable Creating a port-channel interface Port-channel 3
ALS2(config-if-range)#end
ALS2#sh etherchannel summary
Flags: D - down P - bundled in port-channel I - stand-alone s - suspended H - Hot-standby (LACP only) R - Layer3 S - Layer2 U - in use N - not in use, no aggregation f - failed to allocate aggregator M - not in use, minimum links not met m - not in use, port not aggregated due to minimum links not met u - unsuitable for bundling w - waiting to be aggregated d - default port A - formed by Auto LAG Number of channel-groups in use: 1
Number of aggregators: 1
Group Port-channel Protocol Ports ------+-------------+-----------+-------------------- ---------- 3 Po3(SU) PAgP Et0/0(P) Et0/1(P) Configure the host ports for the appropriate VLANs according to the diagram
ALS2(config)#interface e0/2
ALS2(config-if)#switchport mode access
ALS2(config-if)#switchport access vlan 120 HOST A VPCS> ip 10.1.100.1 255.255.255.0 10.1.100.2 HOST B
VPCS> ip 10.1.120.2 255.255.255.0 10.1.120.1 HOST D
VPCS> ip 10.1.110.2 255.255.255.0 10.1.110.1