LMD18245

LMD18245 3A, 55V DMOS Full-Bridge Motor Driver

![Texas Instruments logo]

National Semiconductor

LMD18245
3A, 55V DMOS Full-Bridge Motor Driver

General Description

The LMD18245 full-bridge power amplifier incorporates all the circuit blocks required to drive and control current in a brushed type DC motor or one phase of a bipolar stepper motor. The multi-technology process used to build the device combines bipolar and CMOS control and protection circuitry with DMOS power switches on the same monolithic structure. The LMD18245 controls the motor current via a fixed off-time chopper technique.

An all DMOS H-bridge power stage delivers continuous output currents up to 3A (6A peak) at supply voltages up to 55V. The DMOS power switches feature low $R_{DS(ON)}$ for high efficiency, and a diode intrinsic to the DMOS body structure eliminates the discrete diodes typically required to clamp bipolar power stages.

An innovative current sensing method eliminates the power loss associated with a sense resistor in series with the motor. A four-bit digital-to-analog converter (DAC) provides a digital path for controlling the motor current, and, by extension, simplifies implementation of full, half and microstep stepper motor drives. For higher resolution applications, an external DAC can be used.
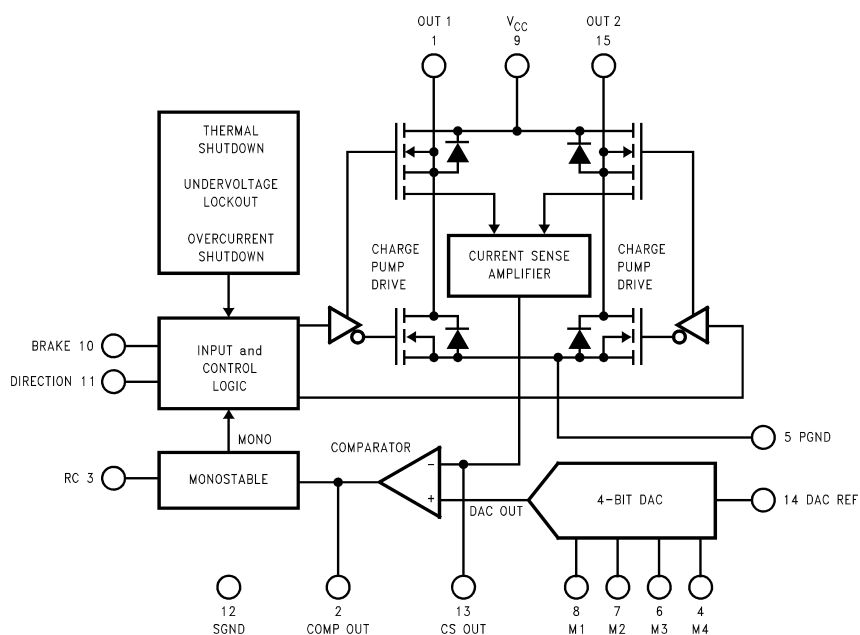
Features

- DMOS power stage rated at 55V and 3A continuous
- Low $R_{DS(ON)}$ of typically 0.3Ω per power switch
- Internal clamp diodes
- Low-loss current sensing method
- Digital or analog control of motor current
- TTL and CMOS compatible inputs
- Thermal shutdown (outputs off) at T_J = 155˚C
- Overcurrent protection
- No shoot-through currents
- 15-lead TO-220 molded power package

Applications

- Full, half and microstep stepper motor drives
- Stepper motor and brushed DC motor servo drives
- Automated factory, medical and office equipment
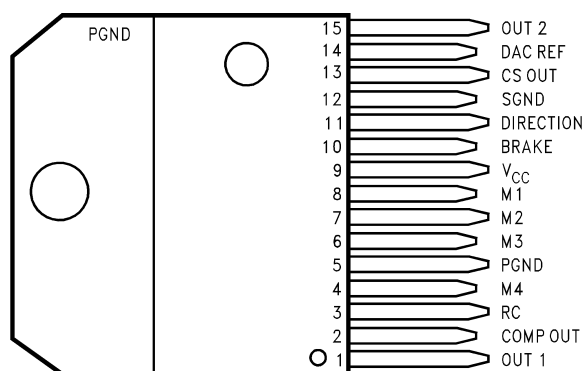
Functional Block and Connection Diagram

(15-Lead TO-220 Molded Power Package (T))

01187801

Order Number LMD18245T
See NS Package Number TA15A

Connection Diagram

15	OUT 2
14	DAC REF
13	CS OUT
12	SGND
11	DIRECTION
10	BRAKE
9	V_{CC}
8	M 1
7	M 2
6	M 3
5	PGND
4	M 4
3	RC
2	COMP OUT
1	OUT 1

PGND

01187802

Top View
15-Lead TO-220 Molded Power Package
Order Number LMD18245T
See NS Package Number TA15A

Pinout Descriptions (See Functional Block and Connection Diagrams)

Pin 1, OUT 1: Output node of the first half H-bridge.

Pin 2, COMP OUT: Output of the comparator. If the voltage at CS OUT exceeds that provided by the DAC, the comparator triggers the monostable.

Pin 3, RC: Monostable timing node. A parallel resistorcapacitor network connected between this node and ground sets the monostable timing pulse at about 1.1 RC seconds.

Pin 5, PGND: Ground return node of the power bridge. Bond wires (internal) connect PGND to the tab of the TO-220 package.

Pins 4 and 6 through 8, M4 through M1: Digital inputs of the DAC. These inputs make up a four-bit binary number with M4 as the most significant bit or MSB. The DAC provides an analog voltage directly proportional to the binary number applied at M4 through M1.

Pin 9, V_{CC}: Power supply node.

Pin 10, BRAKE: Brake logic input. Pulling the BRAKE input logic-high activates both sourcing switches of the power bridge — effectively shorting the load. See *Table 1*. Shorting the load in this manner forces the load current to recirculate and decay to zero.

Pin 11, DIRECTION: Direction logic input. The logic level at this input dictates the direction of current flow in the load. See *Table 1*.

Pin 12, SGND: Ground return node of all signal level circuits.

Pin 13, CS OUT: Output of the current sense amplifier. The current sense amplifier sources 250 µA (typical) per ampere of total forward current conducted by the upper two switches of the power bridge.

Pin 14, DAC REF: Voltage reference input of the DAC. The DAC provides an analog voltage equal to $V_{DAC\ REF}$ x D/16, where D is the decimal equivalent (0–15) of the binary number applied at M4 through M1.

Pin 15, OUT 2: Output node of the second half H-bridge.

TABLE 1. Switch Control Logic Truth Table

BRAKE	DIRECTION	MONO	Active Switches
H	X	X	Source 1, Source 2
L	H	L	Source 2
L	H	H	Source 2, Sink 1
L	L	L	Source 1
L	L	H	Source 1, Sink 2

X = don't care
MONO is the output of the monostable.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

DC Voltage at:

OUT 1, V_{CC}, and OUT 2	+60V
COMP OUT, RC, M4, M3, M2, M1, BRAKE, DIRECTION, CS OUT, and DAC REF	+12V
DC Voltage PGND to SGND	±400mV
Continuous Load Current	3A
Peak Load Current (Note 2)	6A
Junction Temperature ($T_{J(max)}$)	+150˚C
Power Dissipation (Note 3) :	
TO-220 (T_A = 25˚C, Infinite Heatsink)	25W
TO-220 (T_A = 25˚C, Free Air)	3.5W
ESD Susceptibility (Note 4)	1500V
Storage Temperature Range (T_S)	−40˚C to +150˚C
Lead Temperature (Soldering, 10 seconds)	300˚C

Operating Conditions (Note 1)

Temperature Range (T_J) (Note 3)	−40˚C to +125˚C
Supply Voltage Range (V_{CC})	+12V to +55V
CS OUT Voltage Range	0V to +5V
DAC REF Voltage Range	0V to +5V
MONOSTABLE Pulse Range	10 µs to 100 ms

Electrical Characteristics (Note 2)

The following specifications apply for V_{CC} = +42V, unless otherwise stated. **Boldface limits apply over the operating temperature range, −40˚C ≤ T_J ≤ +125˚C.** All other limits apply for T_A = T_J = 25˚C.

Symbol	Parameter	Conditions	Typical (Note 5)	Limit (Note 5)	Units (Limits)
I_{CC}	Quiescent Supply Current	DAC REF = 0V, V_{CC} = +20V	8		mA
				15	mA (max)
POWER OUTPUT STAGE					
$R_{DS(ON)}$	Switch ON Resistance	I_{LOAD} = 3A	0.3	0.4	Ω (max)
				0.6	Ω (max)
		I_{LOAD} = 6A	0.3	0.4	Ω (max)
				0.6	Ω (max)
V_{DIODE}	Body Diode Forward Voltage	I_{DIODE} = 3A	1.0		V
				1.5	V(max)
T_{rr}	Diode Reverse Recovery Time	I_{DIODE} = 1A	80		ns
Q_{rr}	Diode Reverse Recovery Charge	I_{DIODE} = 1A	40		nC
$t_{D(ON)}$	Output Turn ON Delay Time				
	Sourcing Outputs	I_{LOAD} = 3A	5		µs
	Sinking Outputs	I_{LOAD} = 3A	900		ns
$t_{D(OFF)}$	Output Turn OFF Delay Time				
	Sourcing Outputs	I_{LOAD} = 3A	600		ns
	Sinking Outputs	I_{LOAD} = 3A	400		ns
t_{ON}	Output Turn ON Switching Time				
	Sourcing Outputs	I_{LOAD} = 3A	40		µs
	Sinking Outputs	I_{LOAD} = 3A	1		µs
t_{OFF}	Output Turn OFF Switching Time				
	Sourcing Outputs	I_{LOAD} = 3A	200		ns
	Sinking Outputs	I_{LOAD} = 3A	80		ns
t_{pw}	Minimum Input Pulse Width	Pins 10 and 11	2		µs
t_{DB}	Minimum Dead Band	(Note 6)	40		ns
CURRENT SENSE AMPLIFIER					
	Current Sense Output	I_{LOAD} = 1A (Note 7)		200	µA (min)
			250	**175**	µA (min)
				300	µA (max)
				325	µA (max)
	Current Sense Linearity Error	0.5A ≤ I_{LOAD} ≤ 3A (Note 7)	±6		%
				±9	%(max)

Electrical Characteristics (Note 2) (Continued)

The following specifications apply for V_{CC} = +42V, unless otherwise stated. **Boldface limits apply over the operating temperature range, −40˚C ≤ T_J ≤ +125˚C.** All other limits apply for T_A = T_J = 25˚C.

Symbol	Parameter	Conditions	Typical (Note 5)	Limit (Note 5)	Units (Limits)
CURRENT SENSE AMPLIFIER					
	Current Sense Offset	I_{LOAD} = 0A	5		µA
				20	µA (max)
DIGITAL-TO-ANALOG CONVERTER (DAC)					
	Resolution			**4**	Bits (min)
	Monotonicity			**4**	Bits (min)
	Total Unadjusted Error		0.125	0.25	LSB (max)
				0.5	LSB (max)
	Propagation Delay		50		ns
I_{REF}	DAC REF Input Current	DAC REF = +5V	−0.5		µA
				±10	µA (max)
COMPARATOR AND MONOSTABLE					
	Comparator High Output Level		6.27		V
	Comparator Low Output Level		88		mV
	Comparator Output Current				
	Source		0.2		mA
	Sink		3.2		mA
t_{DELAY}	Monostable Turn OFF Delay	(Note 8)	1.2		µs
				2.0	µs (max)
PROTECTION AND PACKAGE THERMAL RESISTANCES					
	Undervoltage Lockout, V_{CC}			5	V (min)
				8	V (max)
T_{JSD}	Shutdown Temperature, T_J		155		˚C
	Package Thermal Resistances				
θ_{JC}	Junction-to-Case, TO-220		1.5		˚C/W
θ_{JA}	Junction-to-Ambient, TO-220		35		˚C/W
LOGIC INPUTS					
V_{IL}	Low Level Input Voltage			**−0.1**	V (min)
				0.8	V (max)
V_{IH}	High Level Input Voltage			**2**	V (min)
				12	V (max)
I_{IN}	Input Current	V_{IN} = 0V or 12V		**±10**	µA (max)

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Electrical specifications do not apply when operating the device outside the rated Operating Conditions.

Note 2: Unless otherwise stated, load currents are pulses with widths less than 2 ms and duty cycles less than 5%.

Note 3: The maximum allowable power dissipation at any ambient temperature is P_{Max} = (125 − T_A)/θ_{JA}, where 125˚C is the maximum junction temperature for operation, T_A is the ambient temperature in ˚C, and θ_{JA} is the junction-to-ambient thermal resistance in ˚C/W. Exceeding P_{max} voids the Electrical Specifications by forcing T_J above 125˚C. If the junction temperature exceeds 155˚C, internal circuitry disables the power bridge. When a heatsink is used, θ_{JA} is the sum of the junction-to-case thermal resistance of the package, θ_{JC}, and the case-to-ambient thermal resistance of the heatsink.

Note 4: ESD rating is based on the human body model of 100 pF discharged through a 1.5 kΩ resistor. M1, M2, M3 and M4, pins 8, 7, 6 and 4 are protected to 800V.

Note 5: All limits are 100% production tested at 25˚C. Temperature extreme limits are guaranteed via correlation using accepted SQC (Statistical Quality Control) methods. All limits are used to calculate AOQL (Average Outgoing Quality Level). Typicals are at T_J = 25˚C and represent the most likely parametric norm.

Note 6: Asymmetric turn OFF and ON delay times and switching times ensure a switch turns OFF before the other switch in the same half H-bridge begins to turn ON (preventing momentary short circuits between the power supply and ground). The transitional period during which both switches are OFF is commonly referred to as the dead band.

Note 7: (I_{LOAD}, I_{SENSE}) data points are taken for load currents of 0.5A, 1A, 2A and 3A. The current sense gain is specified as I_{SENSE}/I_{LOAD} for the 1A data point. The current sense linearity is specified as the slope of the line between the 0.5A and 1A data points minus the slope of the line between the 2A and 3A data points all divided by the slope of the line between the 0.5A and 1A data points.

Note 8: Turn OFF delay, t_{DELAY}, is defined as the time from the voltage at the output of the current sense amplifier reaching the DAC output voltage to the lower DMOS switch beginning to turn OFF. With V_{CC} = 32V, DIRECTION high, and 200Ω connected between OUT1 and V_{CC}, the voltage at RC is increased from 0V to 5V at 1.2V/µs, and t_{DELAY} is measured as the time from the voltage at RC reaching 2V to the time the voltage at OUT 1 reaches 3V.
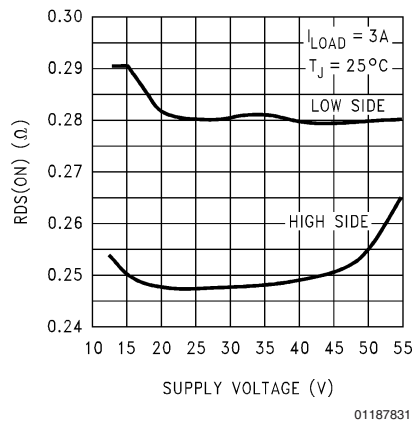
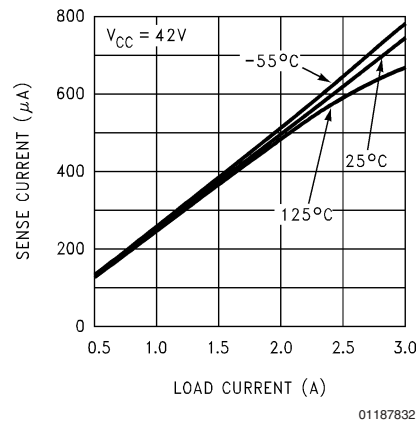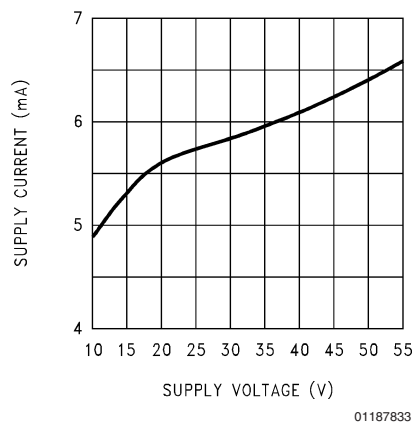# Typical Performance Characteristics

RDS(ON) vs Temperature

01187829
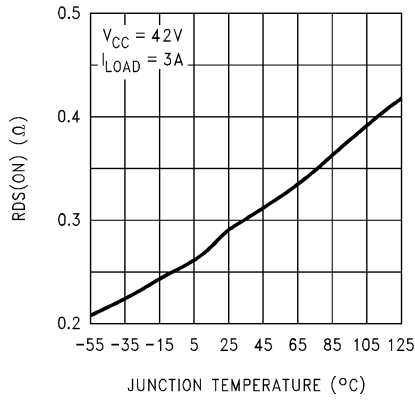
RDS(ON) vs Load Current

01187830
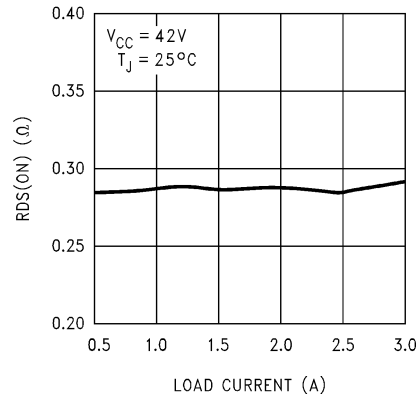
RDS(ON) vs Supply Voltage

01187831

Current Sense Output vs Load Current

01187832

Supply Current vs Supply Voltage



01187833

Supply Current vs Temperature

01187834
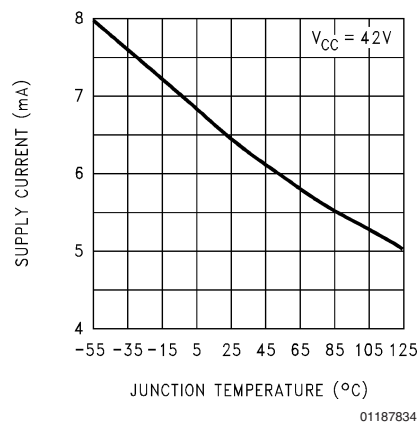
Functional Descriptions

TYPICAL OPERATION OF A CHOPPER AMPLIFIER

Chopper amplifiers employ feedback driven switching of a power bridge to control and limit current in the winding of a motor (*Figure 1*). The bridge consists of four solid state power switches and four diodes connected in an H configuration. Control circuitry (not shown) monitors the winding current and compares it to a threshold. While the winding current remains less than the threshold, a source switch and a sink switch in opposite halves of the bridge force the supply voltage across the winding, and the winding current increases rapidly towards V_{CC}/R (*Figure 1a* and *Figure 1d*). As the winding current surpasses the threshold, the control circuitry turns OFF the sink switch for a fixed period or off-time. During the off-time, the source switch and the opposite upper diode short the winding, and the winding current recirculates and decays slowly towards zero (*Figure 1b* and *Figure 1e*). At the end of the off-time, the control circuitry turns back ON the sink switch, and the winding current again increases rapidly towards V_{CC}/R (*Figure 1a* and *Figure 1d* again). The above sequence repeats to provide a current chopping action that limits the winding current to the threshold (*Figure 1g*). Chopping only occurs if the winding current reaches the threshold. During a change in the direction of the winding current, the diodes provide a decay path for the initial winding current (*Figure 1c* and *Figure 1f*). Since the bridge shorts the winding for a fixed period, this type of chopper amplifier is commonly referred to as a *fixed off-time chopper.*

Functional Descriptions (Continued)

(a)

01187803

(b)

01187804

(c)

01187805

(d)

01187806

(e)

01187807

(g)

01187809

(f)

01187808
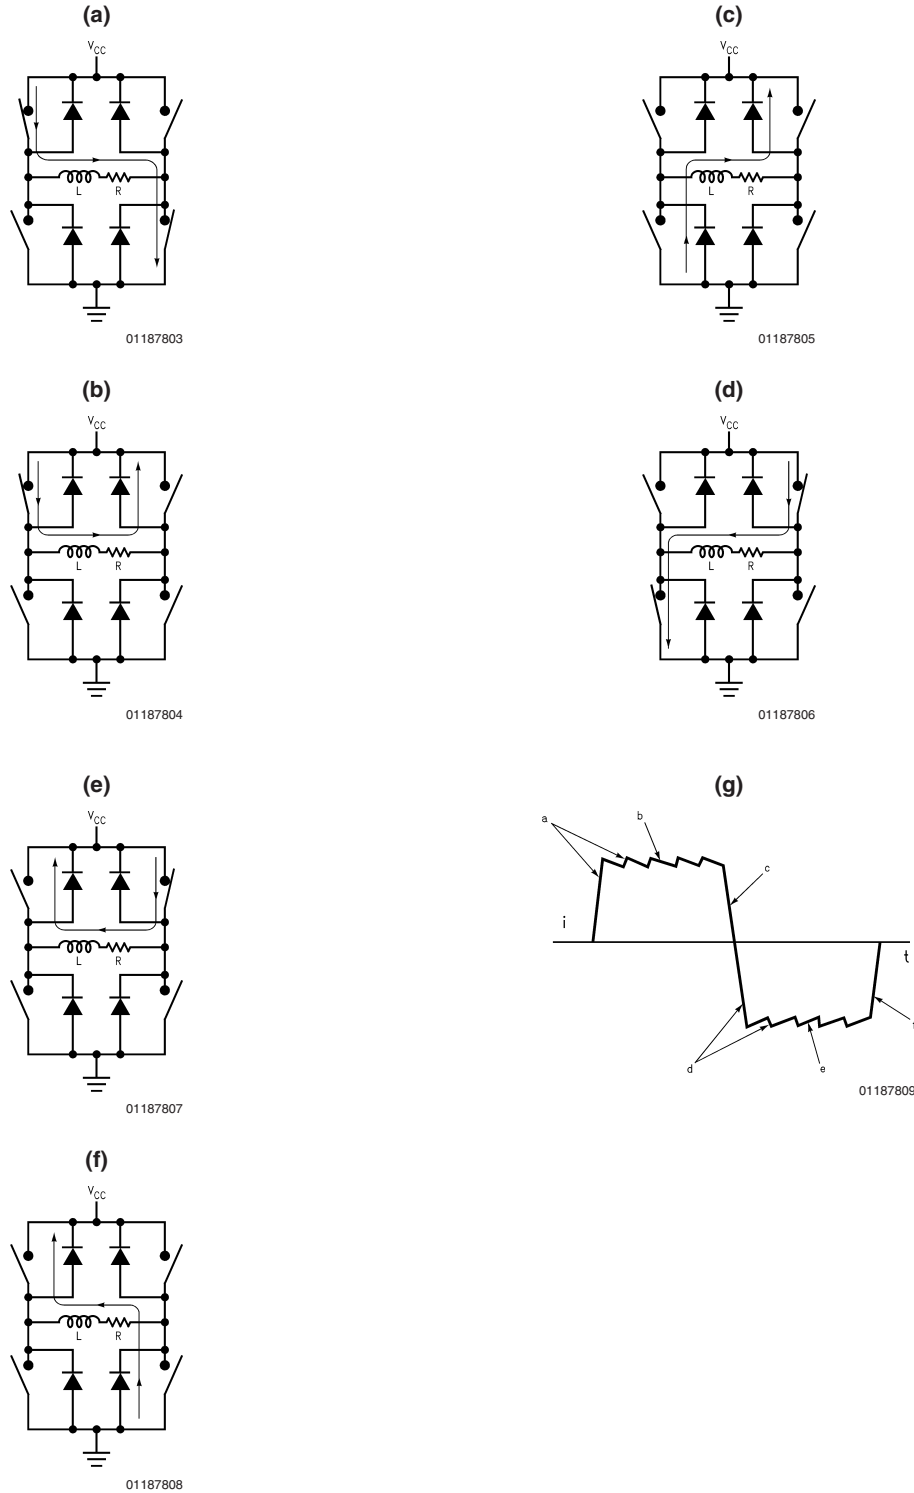
FIGURE 1. Chopper Amplifier Chopping States: Full V_{CC}Applied Across the Winding (a) and (d), Shorted Winding (b) and (e), Winding Current Decays During a Change in the Direction of the Winding Current (c) and (f), and the Chopped Winding Current (g)

Functional Descriptions (Continued)

THE LMD18245 CHOPPER AMPLIFIER

The LMD18245 incorporates all the circuit blocks needed to implement a fixed off-time chopper amplifier. These blocks include: an all DMOS, full H-bridge with clamp diodes, an amplifier for sensing the load current, a comparator, a monostable, and a DAC for digital control of the chopping threshold. Also incorporated are logic, level shifting and drive blocks for digital control of the direction of the load current and braking.

THE H-BRIDGE

The power stage consists of four DMOS power switches and associated body diodes connected in an H-bridge configuration (*Figure 2*).

The time constant to charge or discharge any inductor, in this case the motor windings, is defined as:

$$\tau = L/R$$

where L is the winding inductance, and R is the sum of the series resistance in the current path including the winding resistance.

Turning ON a source switch and a sink switch in opposite halves of the bridge forces the full supply voltage less the switch drops ($I \times R_{DS(ON)}$) across the motor winding. While the bridge remains in this state, the winding current increases exponentially towards a limit dictated by the supply voltage, the switch drops ($I \times R_{DS(ON)}$), and the winding resistance. However, the winding current exponential rate of increase will end when the current chopping circuitry becomes active.

Subsequently turning OFF the sink switch causes a voltage transient that forward biases the body diode of the other source switch. The diode clamps the transient at one diode drop above the supply voltage and provides an alternative current path. While the bridge remains in this state, it essentially shorts the winding, the winding current recirculates and decays exponentially towards zero at a rate that is defined by the L/R time constant.
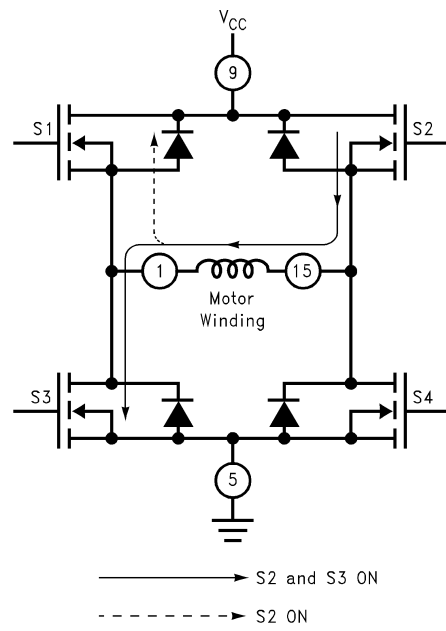
During a change in the direction of the winding current, both the switches and the body diodes provide a decay path for the initial winding current (*Figure 3*).

During actual motor operation there are many variables that can effect the motor winding magnetic behavior and performance. Resonance, eddy currents, friction, motor loading, damping, temperature coefficients of the windings, are only a few. These are all issues that are beyond the scope of the this data sheet.
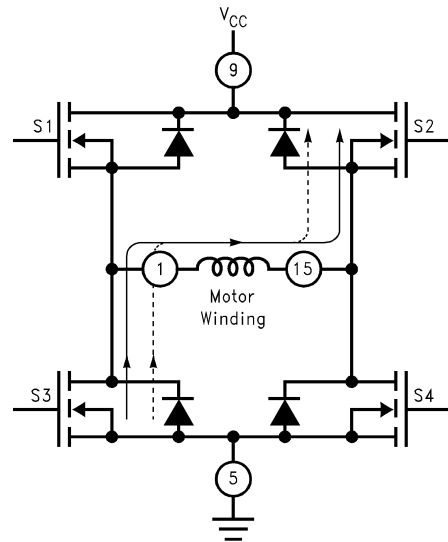
Functional Descriptions (Continued)

S1 and S4 ON
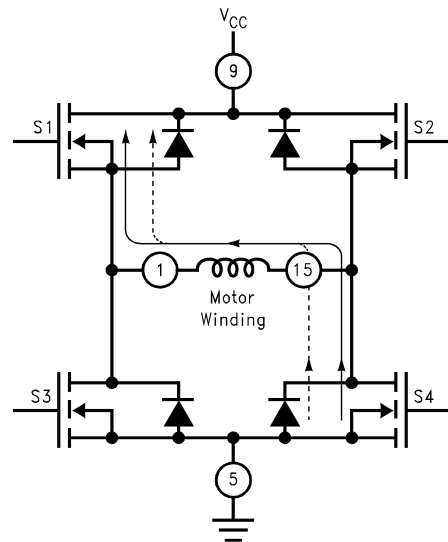
S1 ON

01187810

S2 and S3 ON

S2 ON
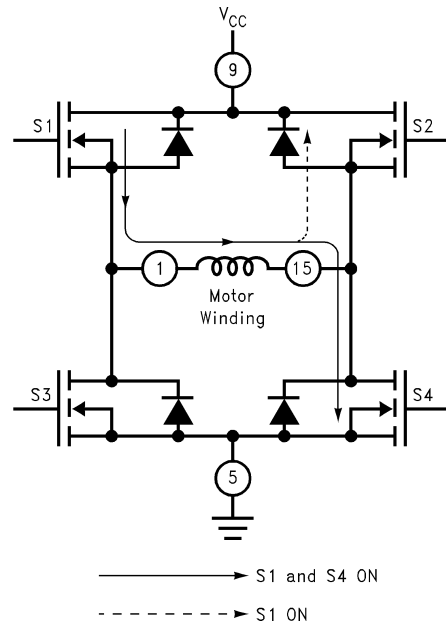
01187811

FIGURE 2. The DMOS H-Bridge

Functional Descriptions *(Continued)*

01187812

01187813

FIGURE 3. Decay Paths for Initial Winding Current During a Change in the Direction of the Winding Current

THE CURRENT SENSE AMPLIFIER

Many transistor cells in parallel make up the DMOS power switches. The current sense amplifier (*Figure 5*) uses a small fraction of the cells of both upper switches to provide a unique, low-loss means for sensing the load current. In practice, each upper switch functions as a 1x sense device in parallel with a 4000x power device. The current sense amplifier forces the voltage at the source of the sense device to equal that at the source of the power device; thus, the devices share the total drain current in proportion to the 1:4000 cell ratio. Only the current flowing from drain to source, the forward current, registers at the output of the current sense amplifier. The current sense amplifier, therefore, sources 250 µA per ampere of total forward current conducted by the upper two switches of the power bridge.

The sense current develops a potential across R_S that is proportional to the load current; for example, per ampere of load current, the sense current develops one volt across a 4 kΩ resistor (the product of 250 µA per ampere and 4 kΩ). Since chopping of the load current occurs as the voltage at CS OUT surpasses the threshold (the DAC output voltage), R_S sets the gain of the chopper amplifier; for example, a 2 kΩ resistor sets the gain at two amperes of load current per volt of the threshold (the reciprocal of the product of 250 µA per ampere and 2 kΩ). A quarter watt resistor suffices. A low value capacitor connected in parallel with R_S filters the effects of switching noise from the current sense signal.

While the specified maximum DC voltage compliance at CS OUT is 12V, the specified operating voltage range at CS OUT is 0V to 5V.

Functional Descriptions (Continued)

THE DIGITAL-TO-ANALOG CONVERTER (DAC)

The DAC sets the threshold voltage for chopping at $V_{DAC\ REF}$ x D/16, where D is the decimal equivalent (0–15) of the binary number applied at M4 through M1, the digital inputs of the DAC. M4 is the MSB or most significant bit. For applications that require higher resolution, an external DAC can drive the DAC REF input. While the specified maximum DC voltage compliance at DAC REF is 12V, the specified operating voltage range at DAC REF is 0V to 5V.

THE COMPARATOR, MONOSTABLE AND WINDING CURRENT THRESHOLD FOR CHOPPING

As the voltage at CS OUT surpasses that at the output of the DAC, the comparator triggers the monostable, and the monostable, once triggered, provides a timing pulse to the control logic. During the timing pulse, the power bridge shorts the motor winding, causing current in the winding to recirculate and decay slowly towards zero (*Figure 1b* and *Figure 1e* again). A parallel resistor-capacitor network connected between RC (pin #3) and ground sets the timing pulse or off-time at about 1.1 RC seconds.

Chopping of the winding current occurs as the voltage at CS OUT exceeds that at the output of the DAC; so chopping occurs at a winding current threshold of about

$(V_{DAC\ REF}$ x D/16$) \div ((250$ x $10^{-6}) $ x $R_S))$ amperes.

The R_S value required to set the winding current threshold at the maximum rated current of the LMD18245, with D = 15 and $V_{DAC\ REF}$ of 5.00V would be:

$(5.00V$ x 15/16$) \div ((250$ x $10^{-6}) $ x 6.25 k$\Omega)) = 3.00A$

The resulting typical DAC programmable current limit values, for different values of R_S, would be:

D	$R_S =$ 18.75 kΩ	$R_S =$ 9.375kΩ	$R_S =$ 6.250 kΩ
0	0.00A	0.00A	0.00A
1	0.07A	0.13A	0.20A
2	0.13A	0.27A	0.40A
3	0.20A	0.40A	0.60A
4	0.27A	0.53A	0.80A
5	0.33A	0.67A	1.00A
6	0.40A	0.80A	1.20A
7	0.47A	0.93A	1.40A
8	0.53A	1.07A	1.60A
9	0.60A	1.20A	1.80A
10	0.67A	1.33A	2.00A
11	0.73A	1.47A	2.20A
12	0.80A	1.60A	2.40A
13	0.87A	1.73A	2.60A
14	0.93A	1.87A	2.80A
15	1.00A	2.00A	3.00A

FIGURE 4. D to A winding current thresholds for $V_{REF\ DAC} = 5.00V$
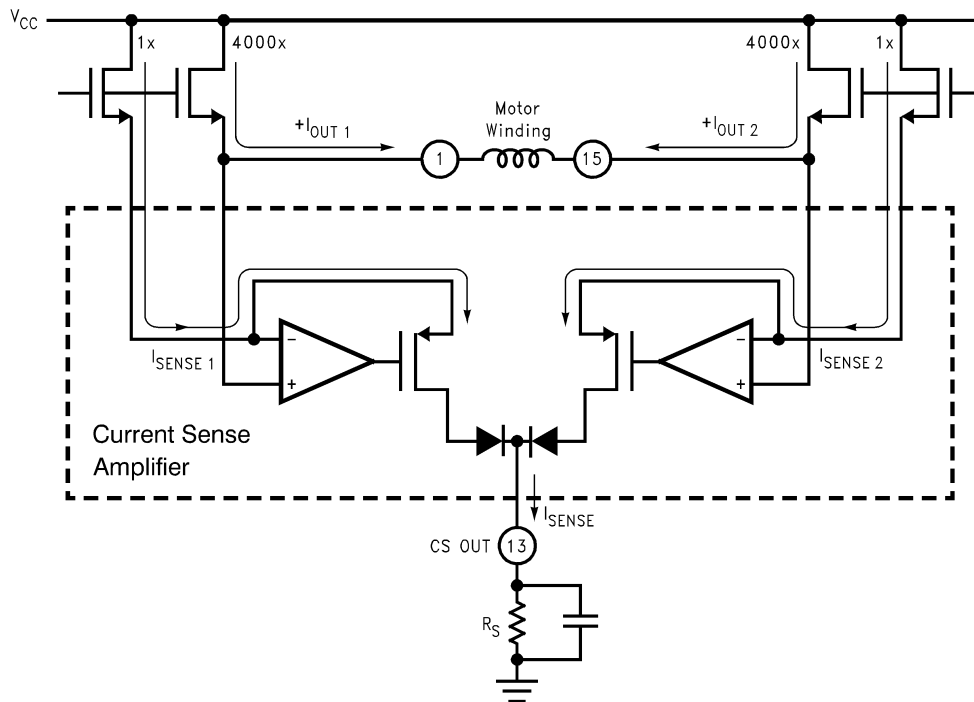
FIGURE 5. The Source Switches of the Power Bridge and the Current Sense Amplifier

01187814

Applications Information

POWER SUPPLY BYPASSING

Step changes in current drawn from the power supply occur repeatedly during normal operation and may cause large voltage spikes across inductance in the power supply line. Care must be taken to limit voltage spikes at V_{CC} to less than the 60V Absolute Maximum Rating. At a change in the direction of the load current, the initial load current tends to raise the voltage at the power supply rail (*Figure 3*) again. Current transients caused by the reverse recovery of the clamp diodes tend to pull down the voltage at the power supply rail.

Bypassing the power supply line at V_{CC} is required to protect the device and minimize the adverse effects of normal operation on the power supply rail. Using both a 1 µF high frequency ceramic capacitor and a large-value aluminum electrolytic capacitor is highly recommended. A value of 100 µF per ampere of load current usually suffices for the aluminum electrolytic capacitor. Both capacitors should have short leads and be located within one half inch of V_{CC}.

OVERCURRENT PROTECTION

If the forward current in either source switch exceeds a 12A threshold, internal circuitry disables both source switches, forcing a rapid decay of the fault current (*Figure 6*). Approximately 3 µs after the fault current reaches zero, the device restarts. Automatic restart allows an immediate return to normal operation once the fault condition has been removed. If the fault persists, the device will begin cycling into and out of thermal shutdown. Switching large fault currents may cause potentially destructive voltage spikes across induc-

tance in the power supply line; therefore, the power supply line must be properly bypassed at V_{CC} for the motor driver to survive an extended overcurrent fault.

In the case of a locked rotor, the inductance of the winding tends to limit the rate of change of the fault current to a value easily handled by the protection circuitry. In the case of a low inductance short from either output to ground or between outputs, the fault current could surge past the 12A shutdown threshold, forcing the device to dissipate a substantial amount of power for the brief period required to disable the source switches. Because the fault power must be dissipated by only one source switch, a short from output to ground represents the worst case fault. Any overcurrent fault is potentially destructive, especially while operating with high supply voltages (≥30V), so precautions are in order. Sinking V_{CC} for heat with 1 square inch of 1 ounce copper on the printed circuit board is highly recommended. The sink switches are not internally protected against shorts to V_{CC}.

THERMAL SHUTDOWN

Internal circuitry senses the junction temperature near the power bridge and disables the bridge if the junction temperature exceeds about 155˚C. When the junction temperature cools past the shutdown threshold (lowered by a slight hysteresis), the device automatically restarts.

UNDERVOLTAGE LOCKOUT

Internal circuitry disables the power bridge if the power supply voltage drops below a rough threshold between 8V and 5V. Should the power supply voltage then exceed the threshold, the device automatically restarts.
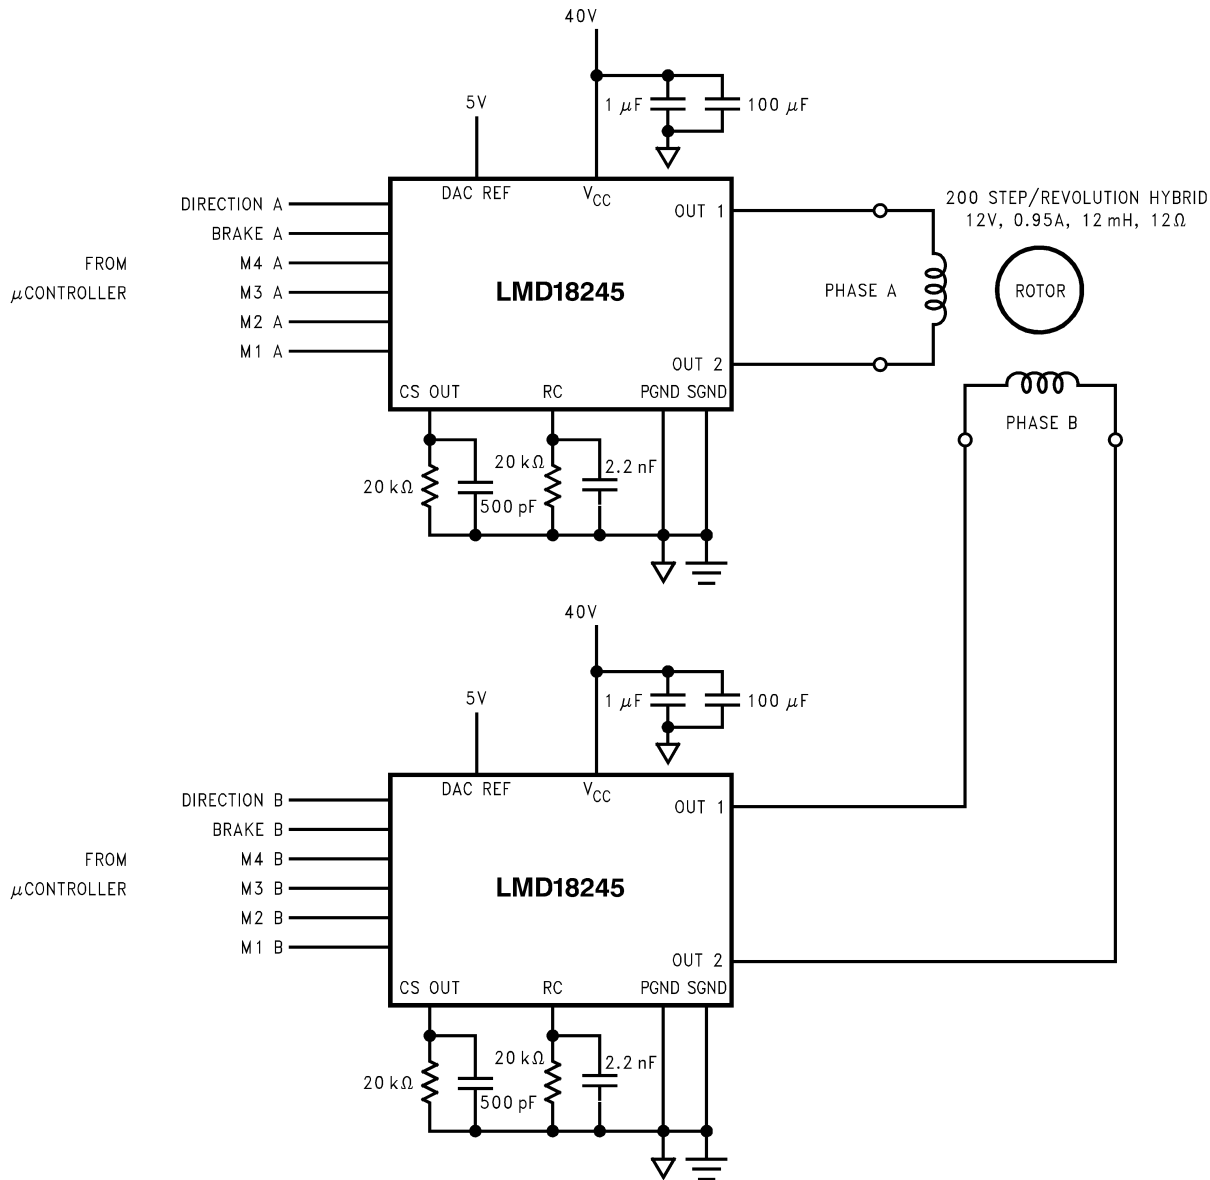

01187815
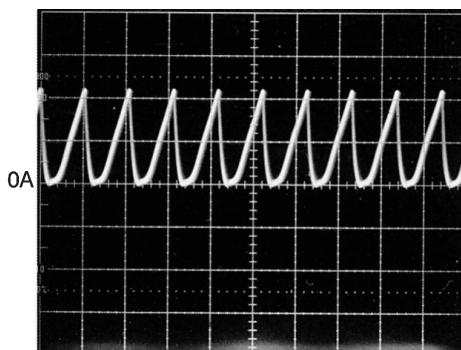
Trace: Fault Current at 5A/div

Horizontal: 20 µs/div

FIGURE 6. Fault Current with V_{CC} = 30V, OUT 1 Shorted to OUT 2, and CS OUT Grounded

The Typical Application

Figure 7 shows the typical application, the power stage of a chopper drive for bipolar stepper motors. The 20 kΩ resistor and 2.2 nF capacitor connected between RC and ground set the off-time at about 48 μs, and the 20 kΩ resistor connected between CS OUT and ground sets the gain at about 200 mA per volt of the threshold for chopping. Digital signals control the thresholds for chopping, the directions of the winding currents, and, by extension, the drive type (full step, half step, etc.). A μprocessor or μcontroller usually provides the digital control signals.

01187816

FIGURE 7. Typical Application Circuit for Driving Bipolar Stepper Motors

ONE-PHASE-ON FULL STEP DRIVE (WAVE DRIVE)

To make the motor take full steps, windings A and B can be energized in the sequence

A→B→A*→B*→A→ …,

where A represents winding A energized with current in one direction and A* represents winding A energized with current in the opposite direction. The motor takes one full step each time one winding is de-energized and the other is energized. To make the motor step in the opposite direction, the order of the above sequence must be reversed. *Figure 8* shows the winding currents and digital control signals for a wave drive application of the typical application circuit.

TWO-PHASE-ON FULL STEP DRIVE

To make the motor take full steps, windings A and B can also be energized in the sequence

AB→A*B→A*B*→AB*→AB→ …,

and because both windings are energized at all times, this sequence produces more torque than that produced with

The Typical Application (Continued)

wave drive. The motor takes one full step at each change of direction of either winding current. *Figure 9* shows the wind-

ing currents and digital control signals for this application of the typical application circuit, and *Figure 10* shows, for a single phase, the winding current and voltage at the output of the associated current sense amplifier.

0A

0A
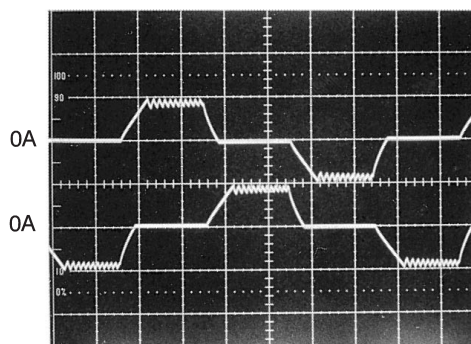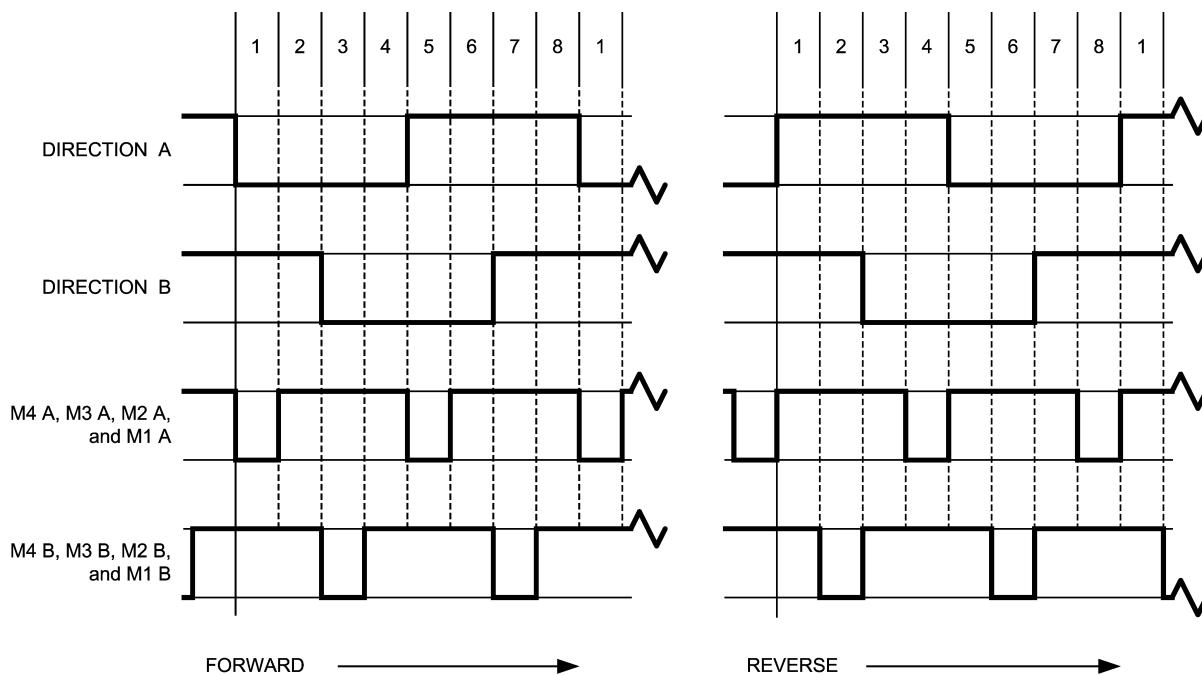
01187817

Top Trace: Phase A Winding Current at 1A/div

Bottom Trace: Phase B Winding Current at 1A/div

Horizontal: 1 ms/div

*500 steps/second

DIRECTION A

DIRECTION B

M4 A, M3 A, M2 A, and M1 A

M4 B, M3 B, M2 B, and M1 B

FORWARD

REVERSE
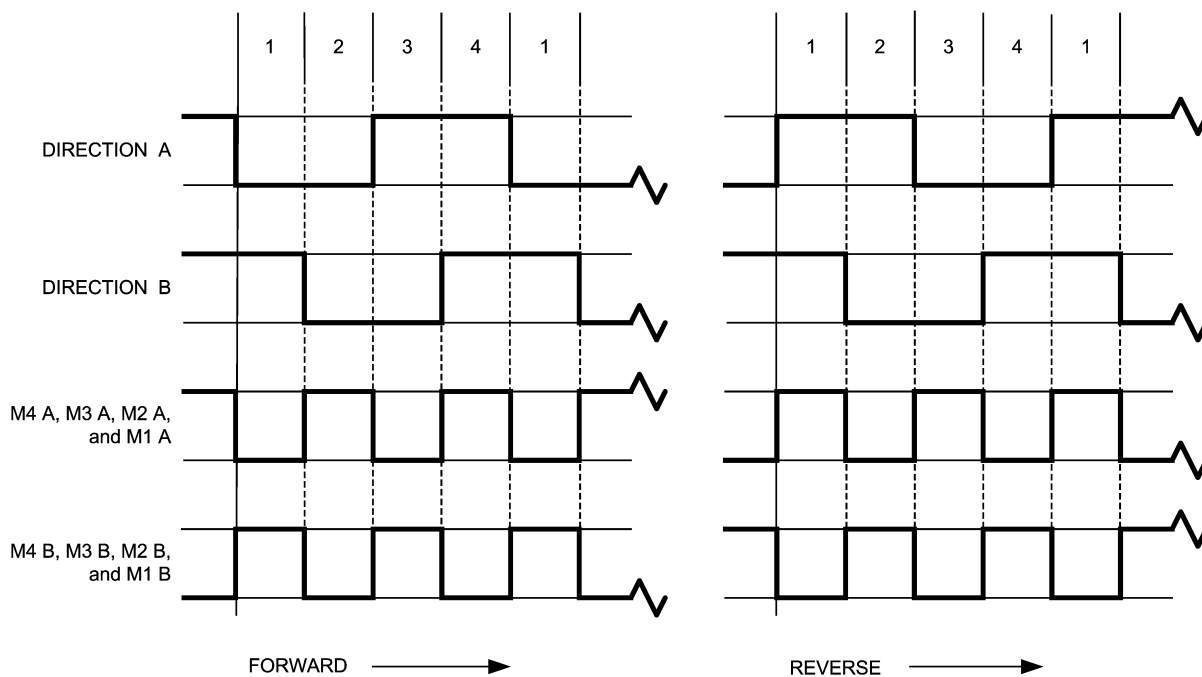
01187841

BRAKE A = BRAKE B = 0

FIGURE 8. Winding Currents and Digital Control Signals for One-Phase-On Drive (Wave Drive)

The Typical Application (Continued)
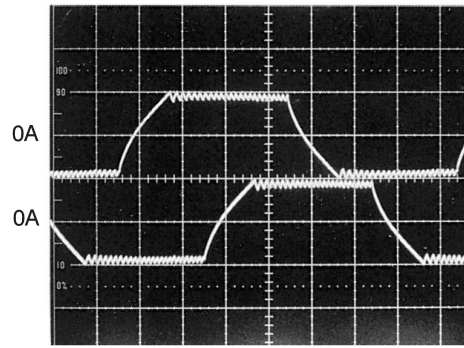
01187819

Top Trace: Phase A Winding Current at 1A/div

Bottom Trace: Phase B Winding Current at 1A/div

Horizontal: 1 ms/div

*500 steps/second

FORWARD

REVERSE
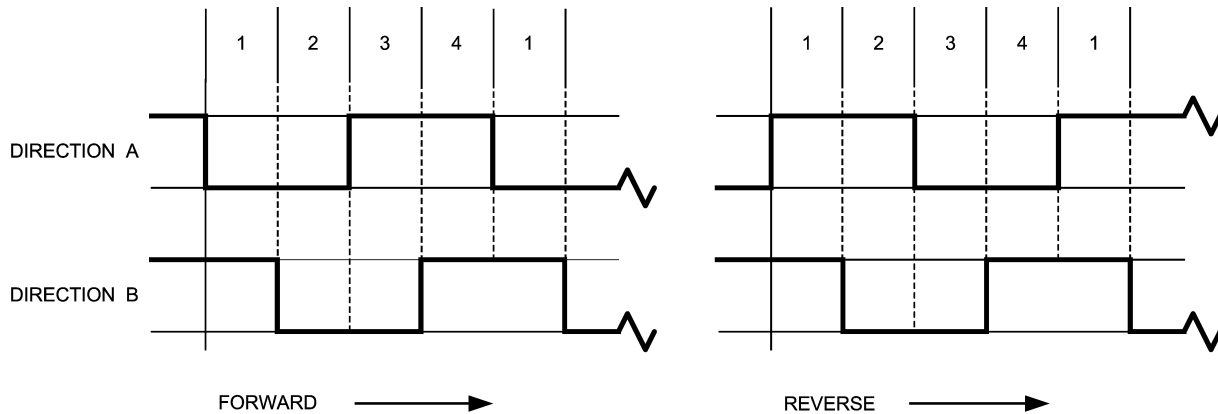
01187842

M4 A through M1 A = M4 B through M1 B = 1

BRAKE A = BRAKE B = 0

FIGURE 9. Winding Currents and Digital Control Signals for Two-Phase-On Drive
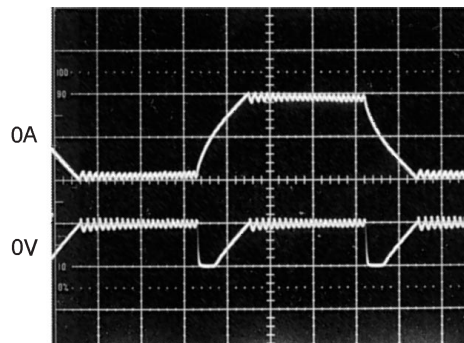
01187821

Top Trace: Phase A Winding Current at 1A/div

Bottom Trace: Phase A Sense Voltage at 5V/div

Horizontal: 1 ms/div

*500 steps/second

**FIGURE 10. Winding Current and Voltage at the Output of the Associated Current Sense Amplifier**

The Typical Application (Continued)

HALF STEP DRIVE WITHOUT TORQUE COMPENSATION

To make the motor take half steps, windings A and B can be energized in the sequence

$$A \rightarrow AB \rightarrow B \rightarrow A^*B \rightarrow A^* \rightarrow$$

$$A^*B^* \rightarrow B^* \rightarrow AB^* \rightarrow A \rightarrow \dots$$

The motor takes one half step each time the number of energized windings changes. It is important to note that although half stepping doubles the step resolution, changing the number of energized windings from two to one decreases (one to two increases) torque by about 40%, resulting in significant torque ripple and possibly noisy operation. *Figure 11* shows the winding currents and digital control signals for this half step application of the typical application circuit.

Top Trace: Phase A Winding Current at 1A/div

Bottom Trace: Phase B Winding Current at 1A/div

Horizontal: 1 ms/div

*500 steps/second

BRAKE A = BRAKE B = 0

FIGURE 11. Winding Currents and Digital Control Signals for Half Step Drive without Torque Compensation

The Typical Application (Continued)

HALF STEP DRIVE WITH TORQUE COMPENSATION

To make the motor take half steps, the windings can also be energized with sinusoidal currents (*Figure 12*). Controlling the winding currents in the fashion shown doubles the step resolution without the significant torque ripple of the prior drive technique. The motor takes one half step each time the level of either winding current changes. Half step drive with torque compensation is microstepping drive. Along with the obvious advantage of increased step resolution, microstepping reduces both full step oscillations and resonances that occur as the motor and load combination is driven at its natural resonant frequency or subharmonics thereof. Both of these advantages are obtained by replacing full steps with bursts of microsteps. When compared to full step drive, the motor runs smoother and quieter.

Figure 13 shows the lookup table for this application of the typical application circuit. Dividing 90˚ electrical per full step by two microsteps per full step yields 45˚ electrical per microstep. α, therefore, increases from 0 to 315˚ in increments of 45˚. Each full 360˚ cycle comprises eight half steps. Rounding |cosα| to four bits gives D A, the decimal equivalent of the binary number applied at M4 A through M1 A. DIRECTION A controls the polarity of the current in winding A. *Figure 12* shows the sinusoidal winding currents.
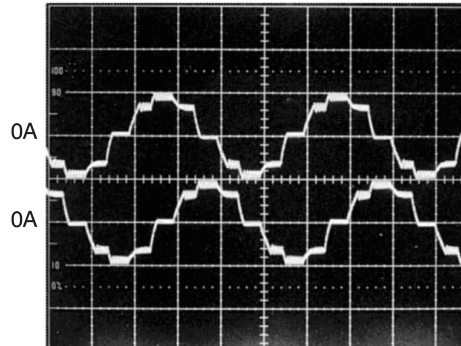
01187824

Top Trace: Phase A Winding Current at 1A/div

Bottom Trace: Phase B Winding Current at 1A/div

Horizontal: 2 ms/div

*500 steps/second
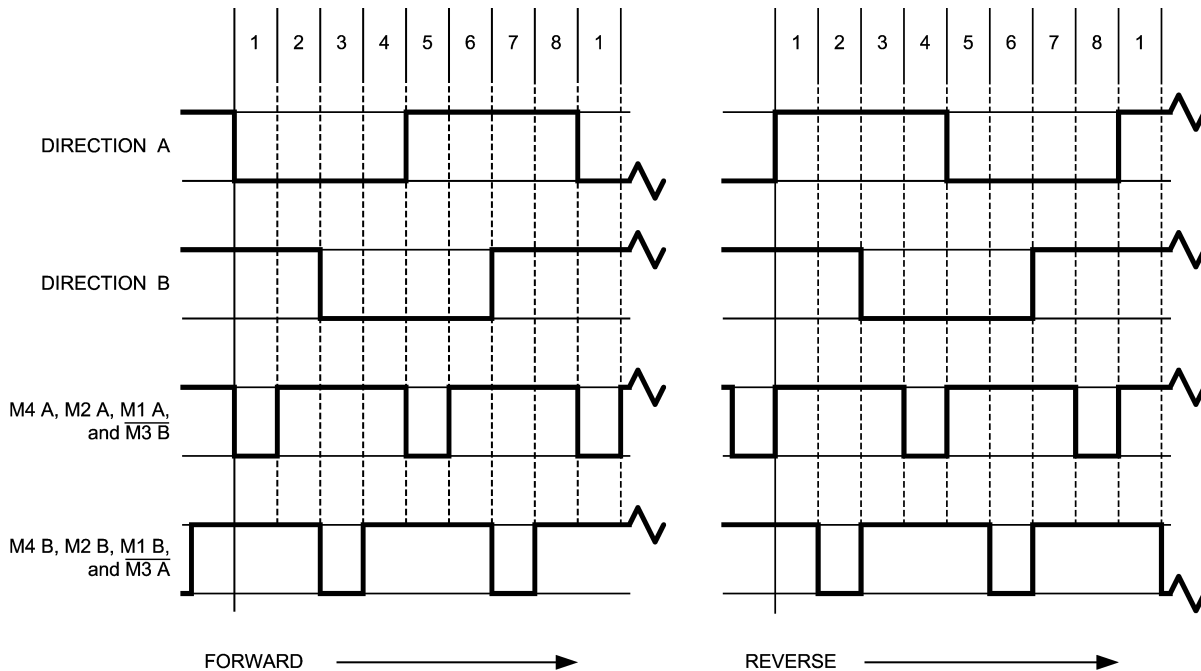
01187844

90˚ ELECTRICAL/FULL STEP ÷ 2 MICROSTEPS/FULL STEP = 45˚ ELECTRICAL/MICROSTEP

FIGURE 12. Winding Currents and Digital Control Signals for Half Step Drive with Torque Compensation

BRAKE A = BRAKE B = 0

The Typical Application (Continued)

	α	|cos(α)|	D A	DIRECTION A	|sin(α)|	D B	DIRECTION B
I	0˚	1	15	1	0	0	1
FORWARD	45˚	0.707	11	1	0.707	11	1
↓	90˚	0	0	0	1	15	1
	135˚	0.707	11	0	0.707	11	1
	180˚	1	15	0	0	0	0
↑	225˚	0.707	11	0	0.707	11	0
REVERSE	270˚	0	0	1	1	15	0
I	315˚	0.707	11	1	0.707	11	0
	REPEAT						

FIGURE 13. Lookup Table for Half Step Drive with Torque Compensation

The Typical Application (Continued)

QUARTER STEP DRIVE WITH TORQUE COMPENSATION

Figure 14 shows the winding currents and lookup table for a quarter step drive (four microsteps per full step) with torque compensation.
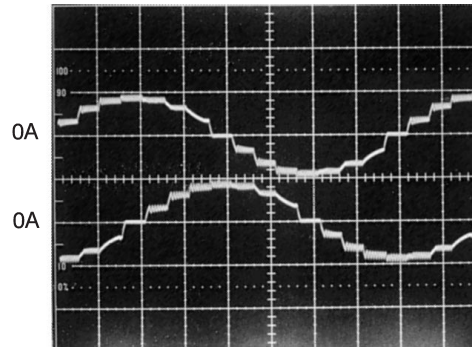
01187826

Top Trace: Phase A Winding Current at 1A/div

Bottom Trace: Phase B Winding Current at 1A/div

Horizontal: 2ms/div

*250 steps/second

90° ELECTRICAL/FULL STEP ÷ 4 MICROSTEPS/FULL STEP = 22.5° ELECTRICAL/MICROSTEP

	α	$|\cos(\alpha)|$	D A	DIRECTION A	$|\sin(\alpha)|$	D B	DIRECTION B
I	0.0°	1	15	1	0	0	1
FORWARD	22.5°	0.924	14	1	0.383	6	1
↓	45.0°	0.707	11	1	0.707	11	1
	67.5°	0.383	6	1	0.924	14	1
	90.0°	0	0	0	1	15	1
	112.5°	0.383	6	0	0.924	14	1
	135.0°	0.707	11	0	0.707	11	1
	157.5°	0.924	14	0	0.383	6	1
	180.0°	1	15	0	0	0	0
	202.5°	0.924	14	0	0.383	6	0
	225.0°	0.707	11	0	0.707	11	0
	247.5°	0.383	6	0	0.924	14	0
	270.0°	0	0	1	1	15	0
↑	292.5°	0.383	6	1	0.924	14	0
REVERSE	315.0°	0.707	11	1	0.707	11	0
I	337.5°	0.924	14	1	0.383	6	0
	REPEAT						

BRAKE A = BRAKE B = 0

FIGURE 14. Winding Currents and Lookup Table for Quarter Step Drive with Torque Compensation

Test Circuit and Switching Time Definitions
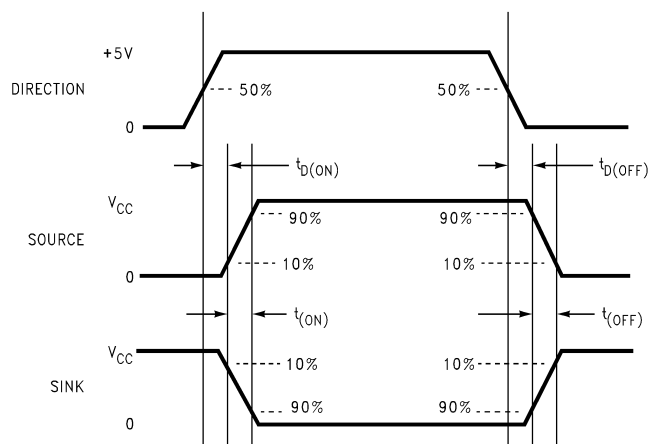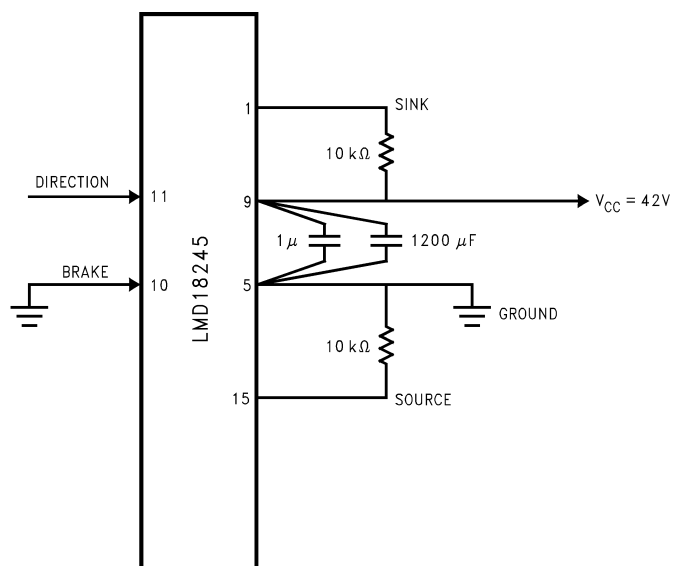
01187828

Physical Dimensions inches (millimeters) unless otherwise noted
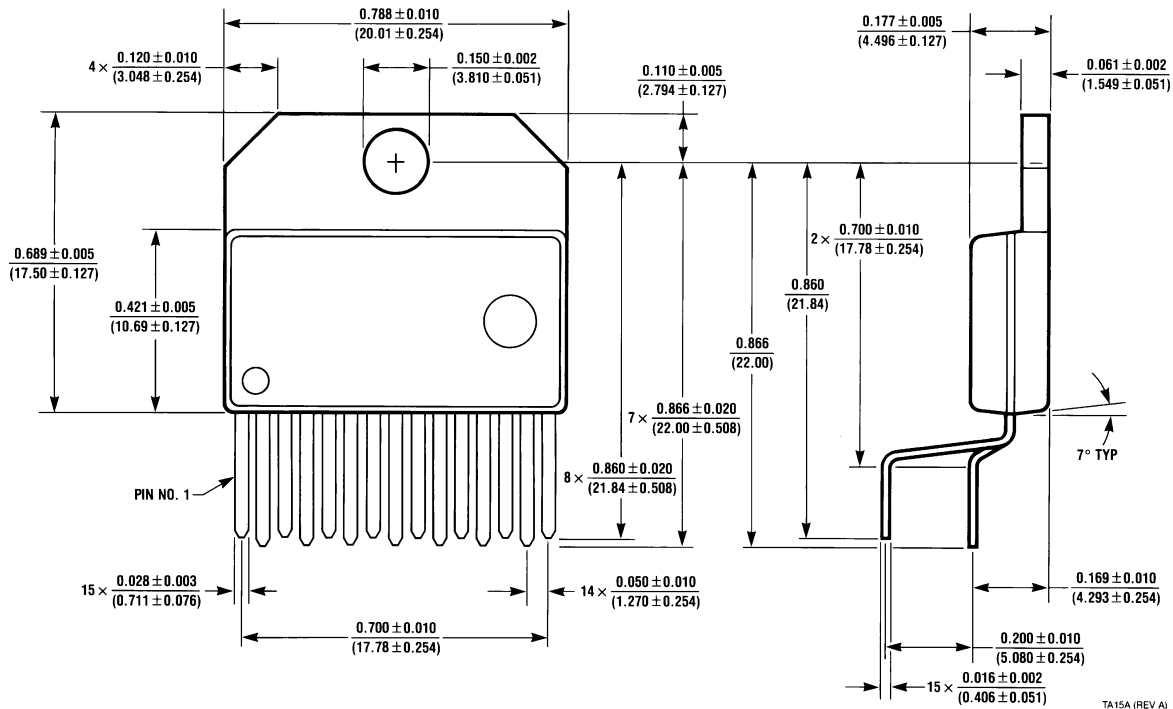
15-Lead TO-220 Power Package (T)
Order Number LMD18245T
NS Package Number TA15A

TA15A (REV A)

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

BANNED SUBSTANCE COMPLIANCE

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Audio	www.ti.com/audio	Communications and Telecom	www.ti.com/communications
Amplifiers	amplifier.ti.com	Computers and Peripherals	www.ti.com/computers
Data Converters	dataconverter.ti.com	Consumer Electronics	www.ti.com/consumer-apps
DLP® Products	www.dlp.com	Energy and Lighting	www.ti.com/energy
DSP	dsp.ti.com	Industrial	www.ti.com/industrial
Clocks and Timers	www.ti.com/clocks	Medical	www.ti.com/medical
Interface	interface.ti.com	Security	www.ti.com/security
Logic	logic.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Power Mgmt	power.ti.com	Transportation and Automotive	www.ti.com/automotive
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Mobile Processors	www.ti.com/omap		
Wireless Connectivity	www.ti.com/wirelessconnectivity		

TI E2E Community Home Page   e2e.ti.com