

2 Cell configuration:  
R53, R52 and R76 are placed  
R73 and R65 are not placed  
JP10 is in position B



3 Cell configuration:  
R65 and R73 are placed  
R52, R53 and B3 are not placed  
JP10 is in position B

4 Cell configuration:  
R65 is placed  
R52, R53, R73, R76 is not placed  
JP10 is in position A

JP2-4 can also be used so that the connection can have current flow measured

All ports are power connections with bidirectional current flow. VC\_1 and VC\_5 will experience high currents, the others will not.

VC1-5 provide direct connections to the cells

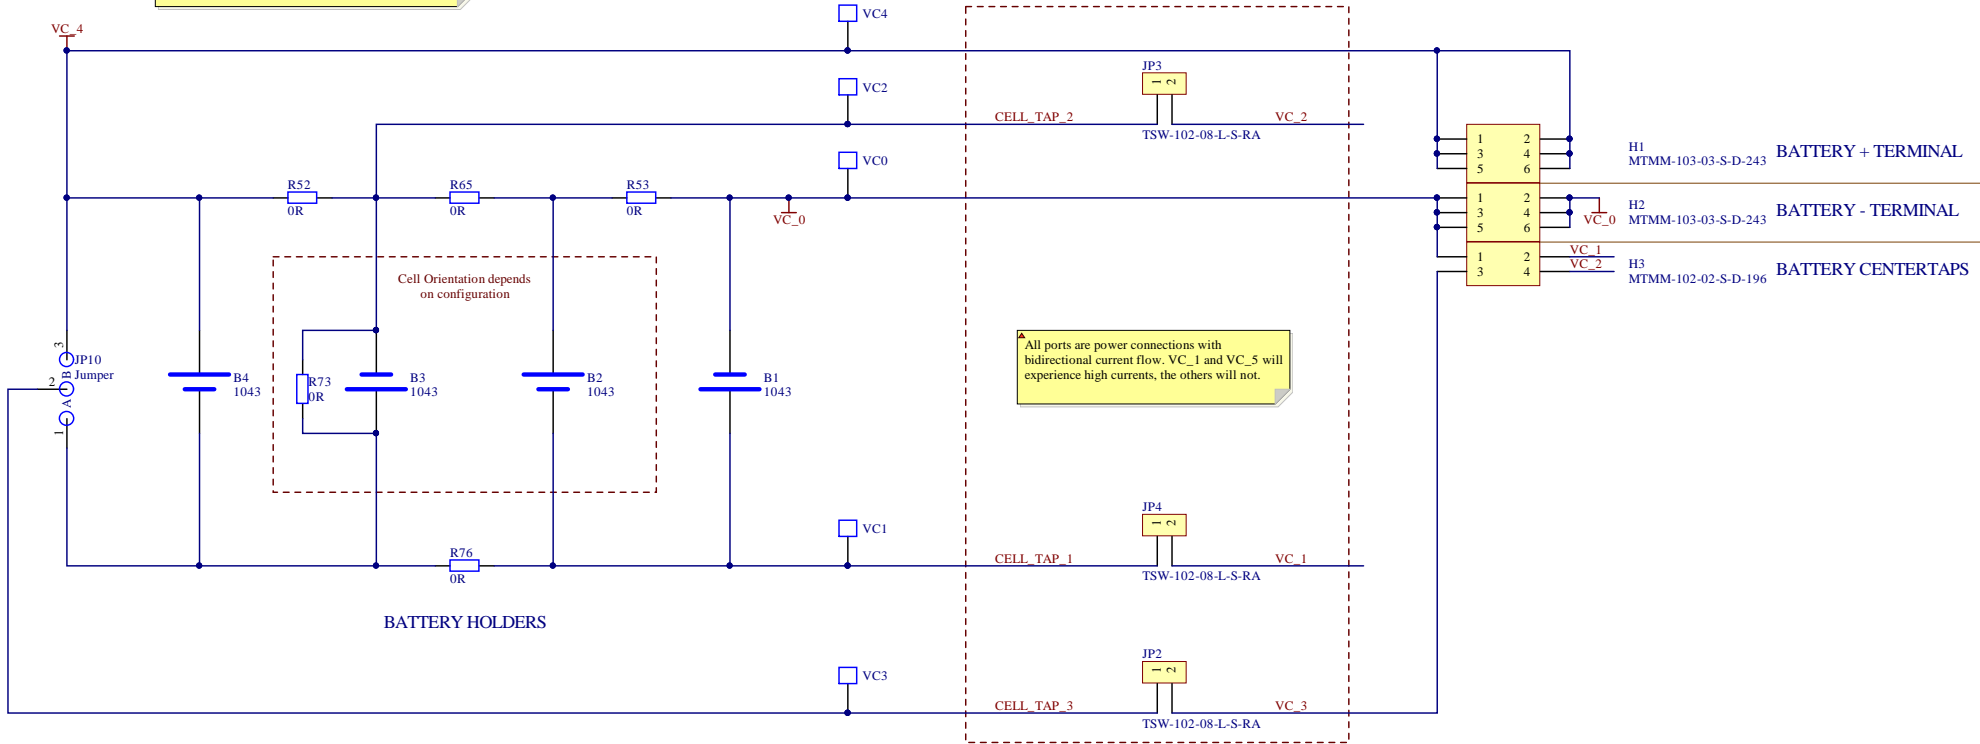

U\_MOD  
MOD.SchDoc



Title: Battery Module Development Board Cells - Battery Connections			
Part Number:	705-02190	Revision:	A0
File:	Battery_Module_Dev_Contacts.SchDoc	Sheet:	9 of 17
Date:	25/03/2021	Size:	B
		Drawn By:	DJW

Doc. Rev: 01  
(C) 2001-2018 Pumpkin, Inc.