



# FEASA™ OPTICAL HEAD OH7LT-RGB Product Datasheet

## OH7LT-RGB





### Application

**For Testing Medium Intensity RGB LEDs that are located as close as 5mm centre to centre on a PCB.**

**For use with 1.1mm Glass Optical Fiber.**

**Temperature Range -65°C to +100°C**

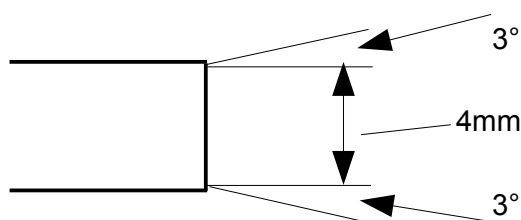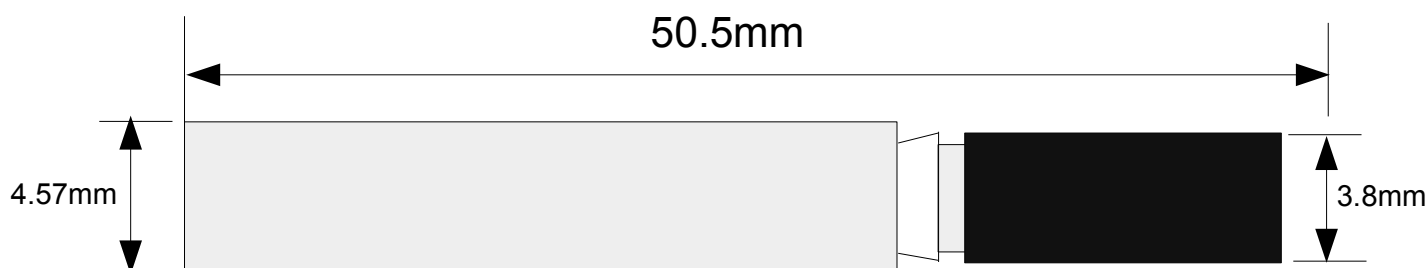

Acceptance Angle

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH7LT-RGB	0.180 ±0.002"	4.57 ±0.05	4.55mm	50.5mm	5mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: [www.feasa.ie](http://www.feasa.ie)

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.