

## FEASA™ OPTICAL HEAD OH-19RF Product Datasheet

## OH-19RF




## **Application**

For Testing Side-Emitting LEDs in an RF Chamber that are located as close as 7mm centre to centre on a PCB.

For use with 1mm POF Fiber.

Temperature Range 0°C - 70°C

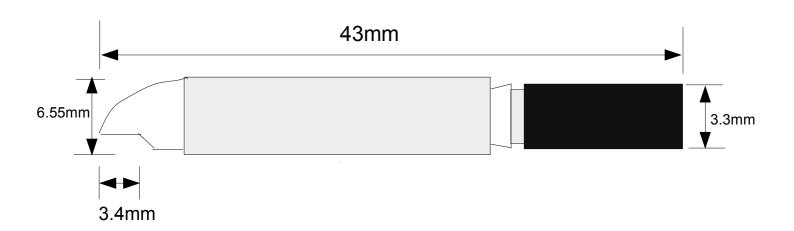

## © Feasa Enterprises Ltd All rights reserved

Part No.	PVC Body Diameter Imperial		Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-19RF	0.257 ±0.002"	6.55mm ±0.05	6.55mm	43mm	7mm

Feasa Enterprises Ltd.