




FEASA™ OPTICAL HEAD OH-10G-XXX

Product Datasheet


OH-10G-XXX

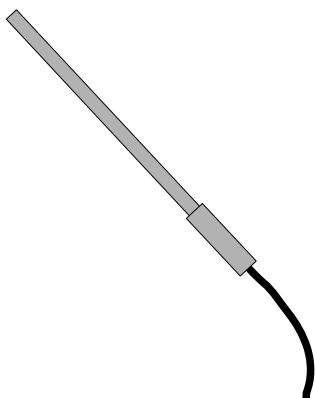

Application

For Testing High Intensity LEDs that are located as close as 1.5mm centre to centre on a PCB.

**Supplied with 1.1mm Glass Fiber.
Temperature Range -65° C - +125° C**

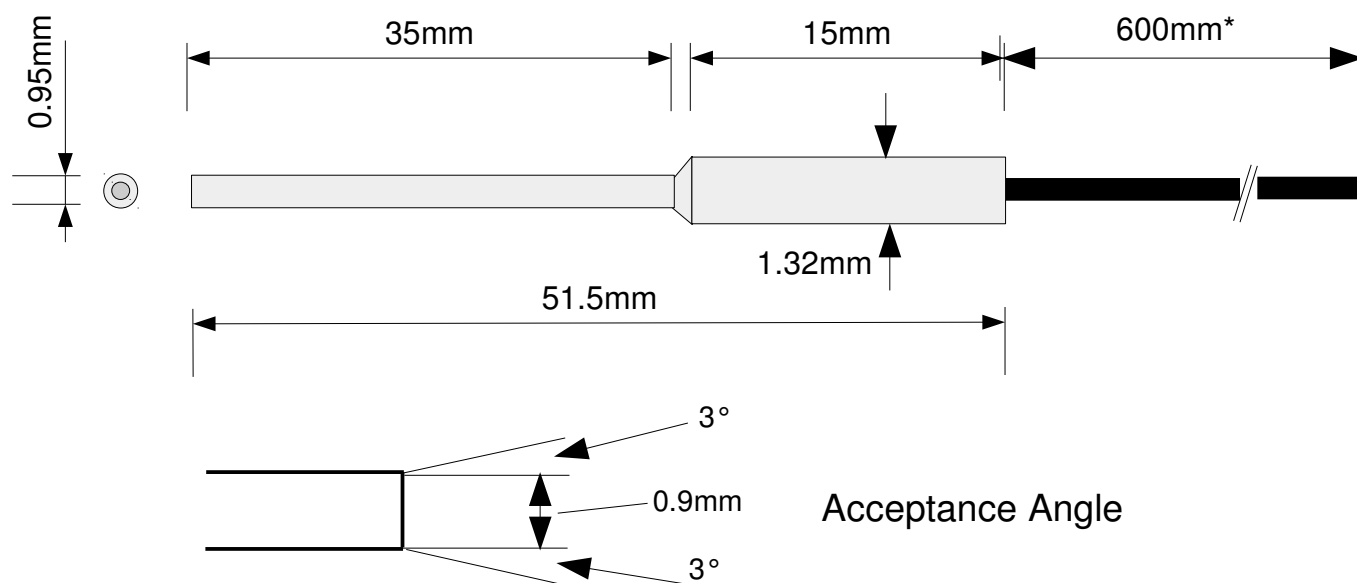

© Feasa Enterprises Ltd All rights reserved

* Custom Lengths Available

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length not Including Fiber	Minimum Centre to Centre Distance
OH-10G-XXX	0.037 ±0.0025"	0.94 ±0.060	1.0mm	51.5mm	1.5mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.