




The Feasa Luminance Head has been specifically designed to measure the Luminance/Radiance and colour of Automotive Displays.

- ◆ Used in conjunction with the Feasa Spectrometer to generate absolute and traceable measurements for Chromaticity and Luminance (cd/m²).
- Uses Industry Standard Fiber Optic Connectors and Patch Cords.
- Various Aperture sizes available.



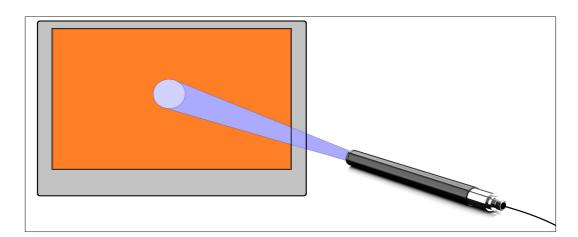

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland. Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.

## **ORDERING INFORMATION**

## **Luminance Head**

Part Number	Dimensions	Minimum Measuring Area	Connector	Acceptance Angle
LU01	Diameter 12mm Length 147mm	1mm	SMA	1.7°
LU02	Diameter 12mm Length 147mm	2mm	SMA	1.7°
LU04	Diameter 12mm Length 147mm	4mm	SMA	1.7°
LU07	Diameter 12mm Length 147mm	7mm	SMA	1.7°

## **Fiber Optic Patch Cords**

Part Number	Length	Connector A	Connector B	Fiber Diameter
FP02	600mm	FC-PC Plug	SMA-Plug	5.1mm

