

FEASA™ OPTICAL HEAD OH-21 Product Datasheet

OH-21




Application


For Testing Medium Intensity LEDs that are located as close as 2.8mm centre to centre on a PCB.

Designed to fit where space is limited. For use with 1mm Plastic Fiber.

Fiber is attached using Epoxy Glue.

Temperature Range 0°C to +70°C

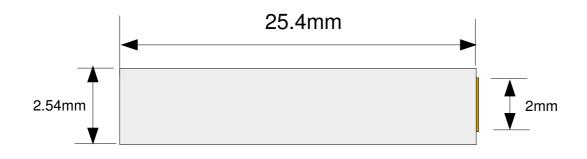



Acceptance Angle

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Overall Length	Minimum Centre to Centre Distance
OH-21	0.1 ±0.002"	2.54 ±0.05	2.5mm	25.4mm	2.8mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax: + 353 61 330452 - Website: www.feasa.ie