




Feasa's Luminous
Intensity Head is
specifically designed for
measuring Luminous
Intensity.

The Feasa Luminous Intensity Head has been specifically designed to measure the luminous intensity of LEDs.

- Used in conjunction with the Feasa Spectrometer to generate absolute and traceable measurements for Chromaticity, Luminous Intensity and Radiant Intensity.
- Uses Industry Standard Fiber Optic Connectors and Patch Cords.
- Complies to CIE Condition B.

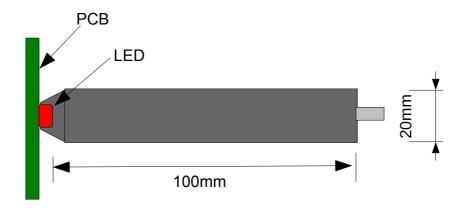



Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland. Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.

ORDERING INFORMATION

Luminous Intensity Head

Part Number	Dimensions	Maximium Measuring Area	Connector	Fiber Access
CD02	Diameter 20mm Length 130mm	2mm	SMA	Тор
CD04	Diameter 20mm Length 130mm	4mm	SMA	Тор
CD08	Diameter 20mm Length 130mm	8mm	SMA	Тор

Fiber Optic Patch Cords

Part Number	Length	Connector A	Connector B	Cable Diameter inc Cladding
FP02	600mm	FC-PC Plug	SMA-Plug	5.1mm

