Welcome to CS 3530

Computer Networks

Praveen Tammana, Kotaro Kataoka CSE Dept

Course objectives

- Understand what is Internet?
- Understand how end applications are connected to remote servers?
 - Wireless components
 - Wired components
- Understand end device network stack

Understand access point/switch/router stack

Understand the role of network security

Initial hiccups

- Overlap with other courses?
 - Please de-register and take the course next year
- Pre-requisites:
 - CS2233: Data structures or equivalent
 - ID1063: Introduction to Programming or equivalent
 - CS2323: Computer Architecture
 - If not done with both courses, please de-register

Reference books

 Computer Networking: A Top-Down Approach (8th Edition) - http://gaia.cs.umass.edu/kurose_ross/index.php

Authors:

- Kurose
- Ross
- Optional read:
 - Computer Networks: A Systems Approach (by Larry Patterson) https://book.systemsapproach.org/

Course Components

Programming/Coding assignments (~ 2)

Group project (1)

Periodic quizzes during class hours (~3)

Tentative scoring policy

- Assignments: ~30%

- Group proj: ~30%

- Quizzes: ~40%

Chapter 1 Introduction

James F. Kurose | Keith W. Ross COMPUTER A TOP-DOWN APPROACH P **Eighth Edition**

All material copyright 1996-2020 J.F Kurose and K.W. Ross, All Rights Reserved

Computer Networking: A Top-Down Approach

8th edition Jim Kurose, Keith Ross Pearson, 2020

Chapter 1: introduction

Chapter goal:

- Get "feel," "big picture," introduction to terminology
 - more depth, detail *later* in course



Overview/roadmap:

- What is the Internet? What is a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Protocol layers, service models
- Security
- History

The Internet: a "nuts and bolts" view



Billions of connected computing *devices*:

- hosts = end systems
- running network apps at Internet's "edge"





Packet switches: forward packets (chunks of data)

routers, switches




Communication links

- fiber, copper, radio, satellite
- transmission rate: bandwidth



Networks

collection of devices, routers, links: managed by an organization

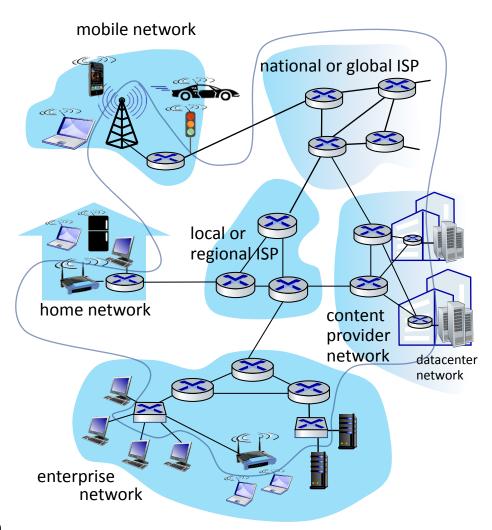

"Fun" Internet-connected devices





Internet refrigerator





IP picture frame



control cable TV



Pacemaker & Monitor



Tweet-a-watt: monitor energy use





scooters





Internet phones



Gaming devices



sensorized, bed mattress



AR devices


Web-enabled toaster +

weather forecaster

Others?


The Internet: a "nuts and bolts" view

- Internet: "network of networks"
 - Interconnected ISPs
- protocols are everywhere
 - control sending, receiving of messages
 - e.g., HTTP (Web), streaming video, Skype, TCP, IP, WiFi, 4G, Ethernet
- Internet standards
 - RFC: Request for Comments
 - IETF: Internet Engineering Task Force

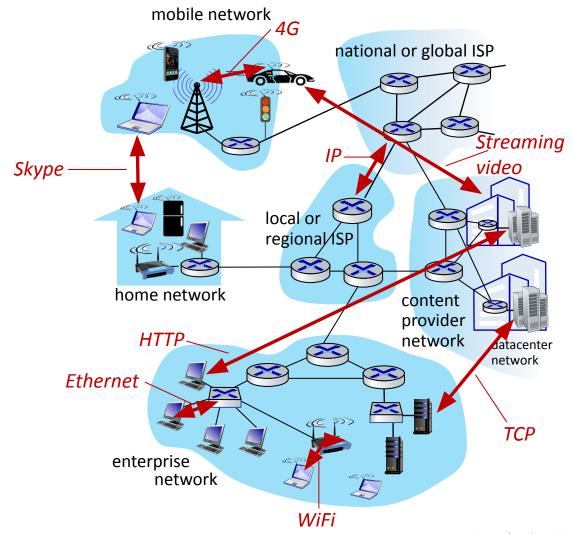

The Internet: a "services" view

- Infrastructure that provides services to applications:
 - Web, streaming video, multimedia teleconferencing, email, games, e-commerce, social media, inter-connected appliances, ...
- provides programming interface to distributed applications:
 - "hooks" allowing sending/receiving apps to "connect" to, use Internet transport service
 - provides service options, analogous to postal service

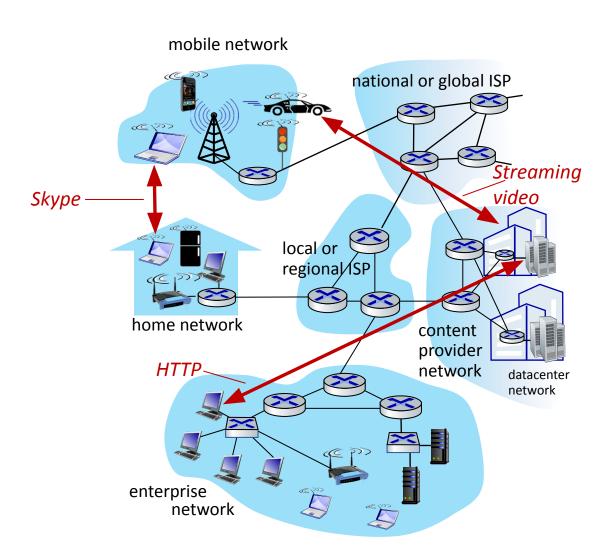

What's a protocol?

Human protocols:

- "what's the time?"
- "I have a question"
- introductions

Rules for:

- ... specific messages sent
- ... specific actions taken when message received, or other events


Network protocols:

- computers (devices) rather than humans
- all communication activity in Internet governed by protocols

Protocols define the format, order of messages sent and received among network entities, and actions taken on message transmission, receipt

What's a protocol?

A human protocol and a computer network protocol:

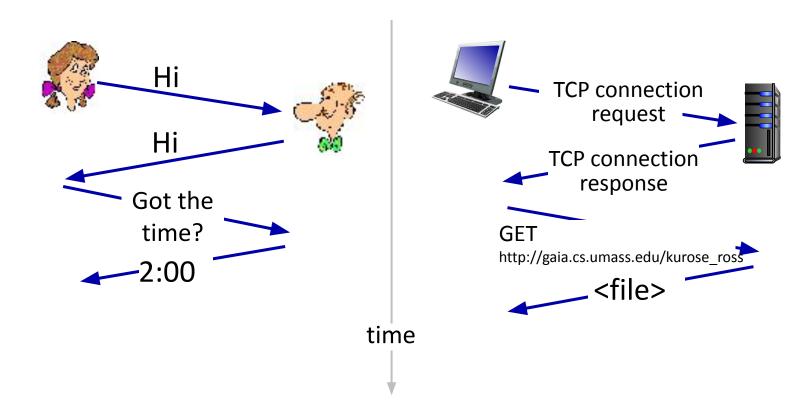

Q: other human protocols?

Chapter 1: roadmap


- What is the Internet?
- What is a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History



A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

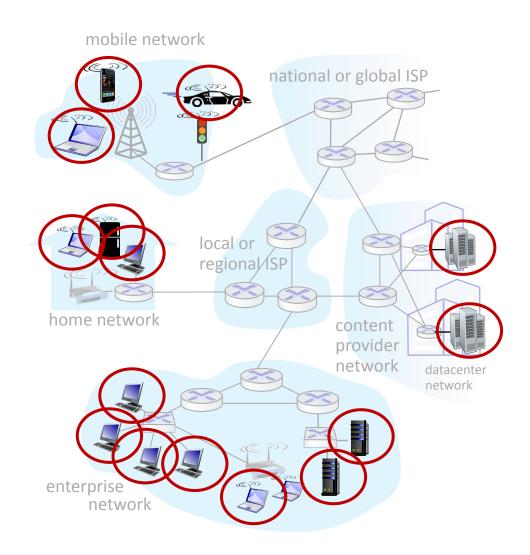


A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

•wired, wireless communication links

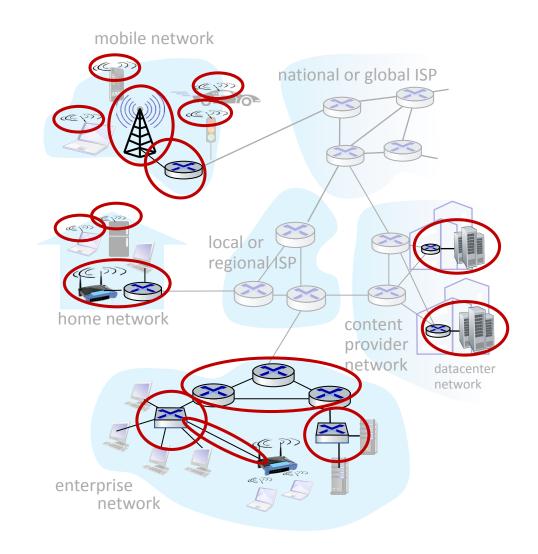

A closer look at Internet structure

Network edge:


- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

wired, wireless communication links

Network core:


- interconnected routers
- network of networks

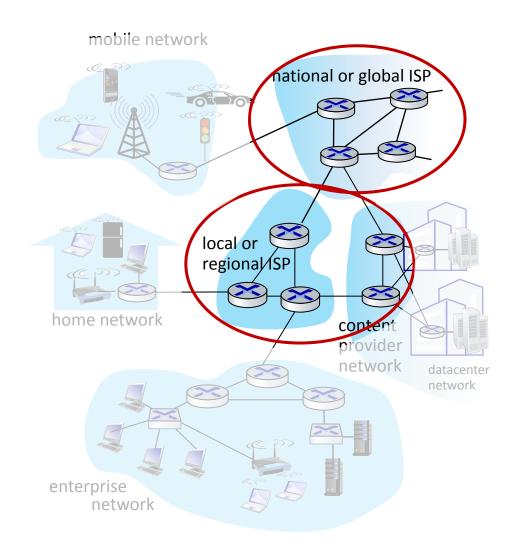


Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks (WiFi, 4G/5G)

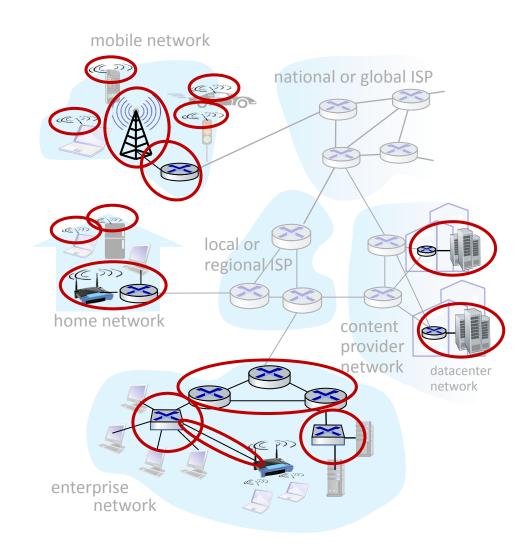


Access networks: cable-based access

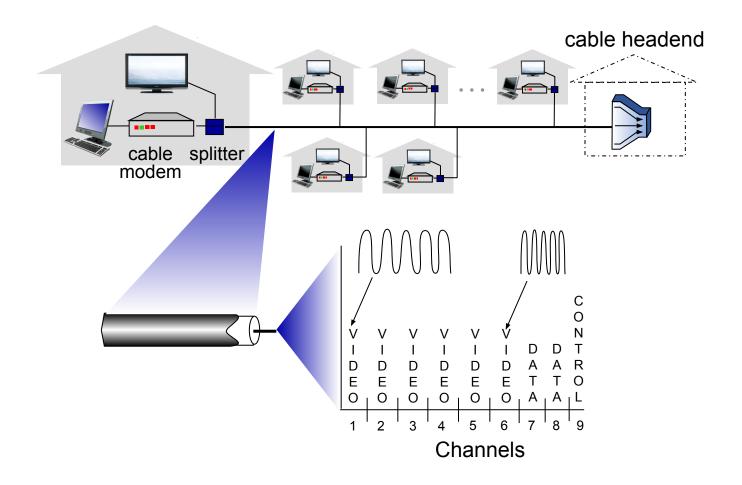


frequency division multiplexing (FDM): different channels transmitted in different frequency bands

Access networks: cable-based access

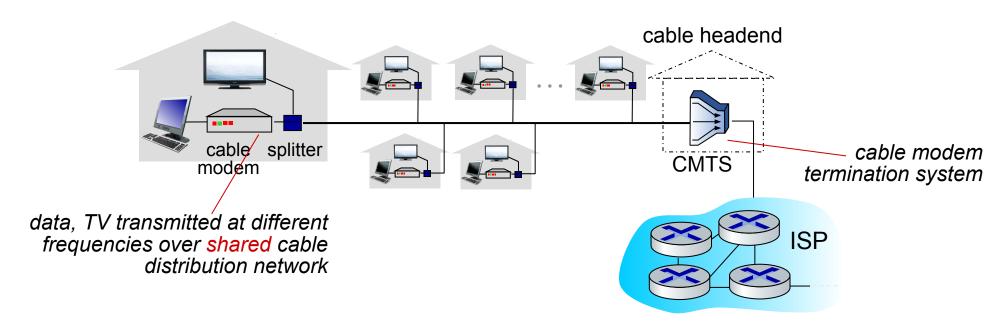


- HFC: hybrid fiber coax
 - asymmetric: up to 40 Mbps 1.2 Gbps downstream transmission rate, 30-100 Mbps upstream transmission rate
- network of cable, fiber attaches homes to ISP router
 - homes share access network to cable headend

Access networks: digital subscriber line (DSL)

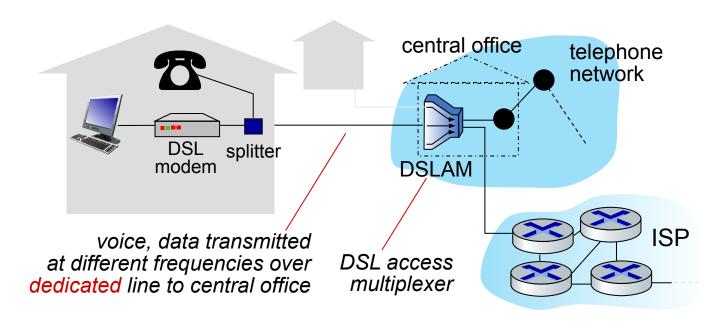

- use existing telephone line to central office DSLAM
 - data over DSL phone line goes to Internet
 - voice over DSL phone line goes to telephone net
- 24-52 Mbps dedicated downstream transmission rate
- 3.5-16 Mbps dedicated upstream transmission rate

Access networks: home networks

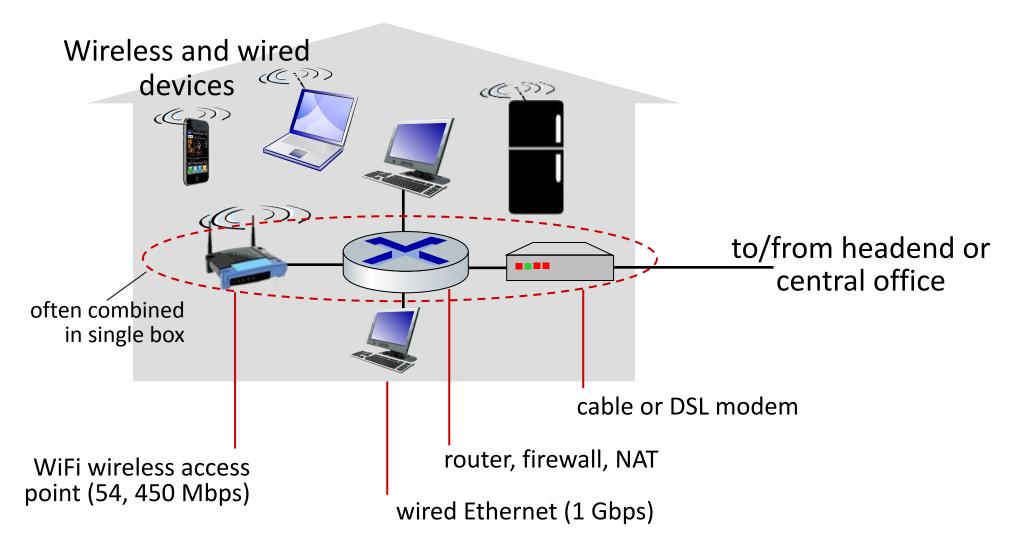


Wireless access networks

Shared wireless access network connects end system to router

via base station aka "access point"


Wireless local area networks (WLANs)

- typically within or around building (~100 ft)
- 802.11b/g/n (WiFi): 11, 54, 450
 Mbps transmission rate

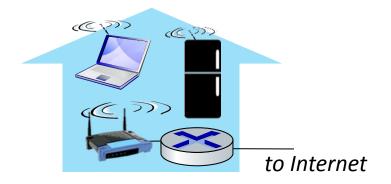


Wide-area cellular access networks

- provided by mobile, cellular network operator (10's km)
- 10's Mbps
- 5G cellular networks

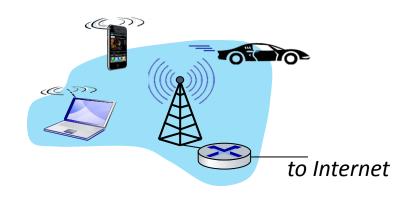

Access networks: enterprise networks

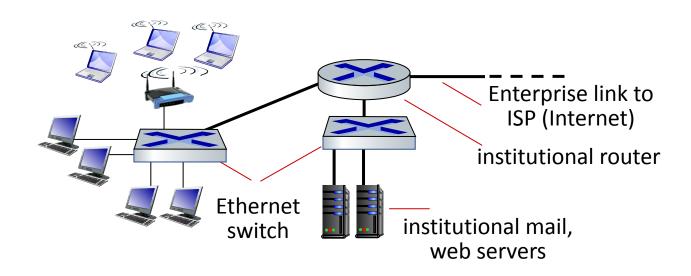


- companies, universities, etc.
- mix of wired, wireless link technologies, connecting a mix of switches and routers (we'll cover differences shortly)
 - Ethernet: wired access at 100Mbps, 1Gbps, 10Gbps
 - WiFi: wireless access points at 11, 54, 450 Mbps

Access networks: data center networks

 high-bandwidth links (10s to 100s Gbps) connect hundreds to thousands of servers together, and to Internet




Courtesy: Massachusetts Green High Performance Computing Center (mghpcc.org)

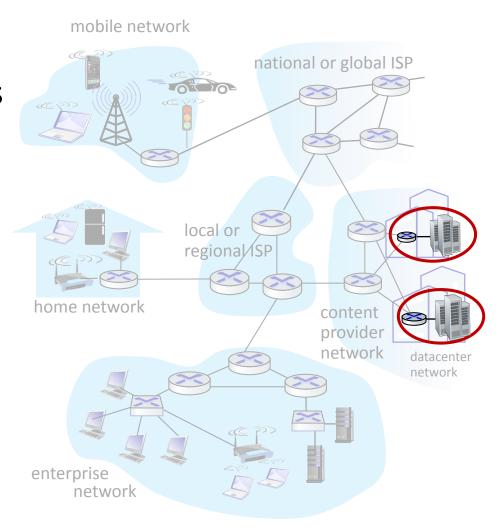

Host: sends packets of data

host sending function:

- takes application message
- breaks into smaller chunks, known as packets, of length L bits
- transmits packet into access network at transmission rate R
 - link transmission rate, aka link capacity, aka link bandwidth

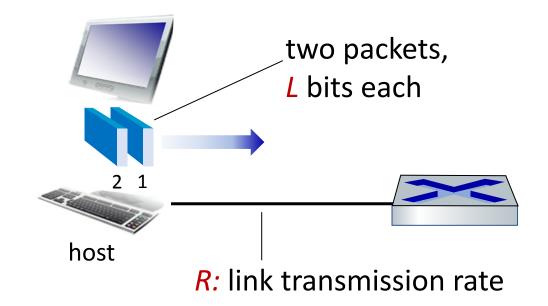


packet time needed to transmission = transmit
$$L$$
-bit = $\frac{L}{R}$ (bits/sec)

Links: physical media

- bit: propagates between transmitter/receiver pairs
- physical link: what lies between transmitter & receiver
- guided media:
 - signals propagate in solid media: copper, fiber, coax
- unguided media:
 - signals propagate freely,
 e.g., radio

Twisted pair (TP)

- two insulated copper wires
 - Category 5: 100 Mbps, 1 Gbps Ethernet
 - Category 6: 10Gbps Ethernet

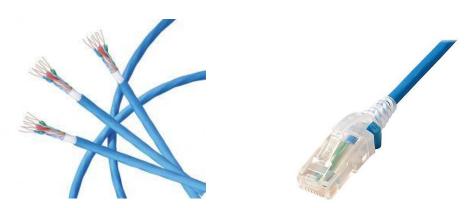

Links: physical media

Fiber optic cable:

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
 - high-speed point-to-point transmission (10's-100's Gbps)
- low error rate:
 - repeaters spaced far apart
 - immune to electromagnetic noise



Links: physical media

Wireless radio

- signal carried in various "bands" in electromagnetic spectrum
- no physical "wire"
- broadcast, "half-duplex" (sender to receiver)
- propagation environment effects:
 - reflection
 - obstruction by objects
 - Interference/noise

Radio link types:

- Wireless LAN (WiFi)
 - 10-100's Mbps; 10's of meters
- wide-area (e.g., 4G cellular)
 - 10's Mbps over ~10 Km
- Bluetooth: cable replacement
 - short distances, limited rates
- terrestrial microwave
 - point-to-point; 45 Mbps channels
- satellite
 - up to 45 Mbps per channel
 - 270 msec end-end delay


Chapter 1: roadmap

- What is the Internet?
- What is a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History



The network core


- mesh of interconnected routers
- packet-switching: hosts break application-layer messages into packets
 - network forwards packets from one router to the next, across links on path from source to destination

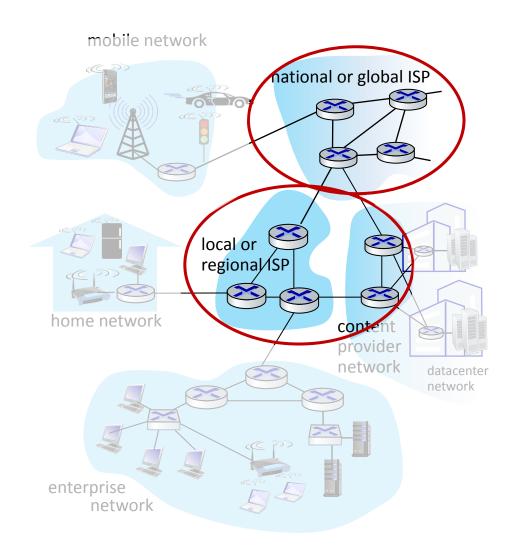

Two key network-core functions

Forwarding:

- aka "switching"
- local action: move arriving packets from router's input link to appropriate router output link

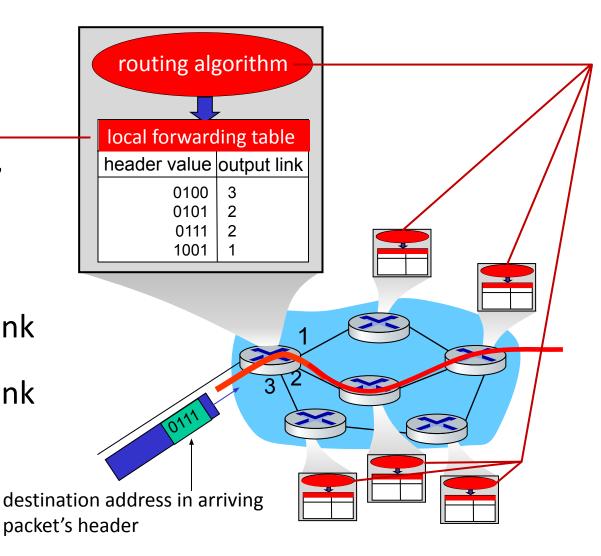


Routing:

- global action: determine source-destination paths taken by packets
- routing algorithms





Packet-switching: store-and-forward

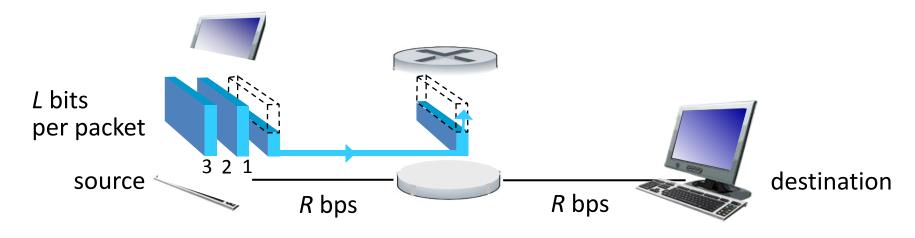


- packet transmission delay: takes L/R seconds to transmit (push out) L-bit packet into link at R bps
- store and forward: entire packet must arrive at router before it can be transmitted on next link

One-hop numerical example:

- *L* = 10 Kbits
- *R* = 100 Mbps
- one-hop transmission delay= 0.1 msec

Packet-switching: queueing

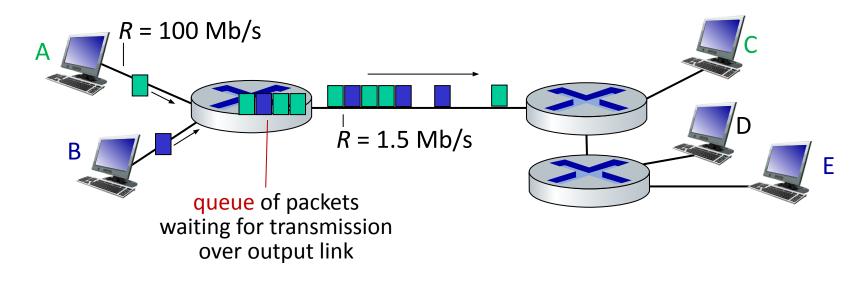


Queueing occurs when work arrives faster than it can be serviced:







Packet-switching: queueing

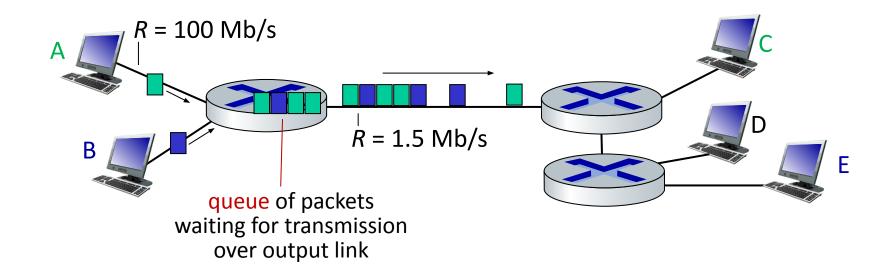


Packet queuing and loss: if arrival rate (in bps) to link exceeds transmission rate (bps) of link for some period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up

Alternative to packet switching: circuit switching

end-end resources allocated to, reserved for "call" between source and destination

- in diagram, each link has four circuits.
 - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
 - circuit-like (guaranteed) performance
- circuit segment idle if not used by call (no sharing)
- commonly used in traditional telephone networks

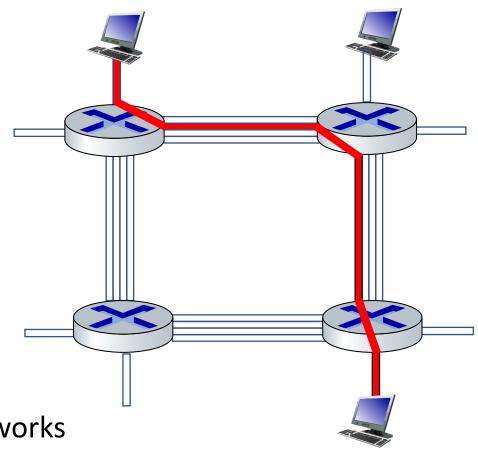

^{*} Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive


Circuit switching: FDM and TDM


Frequency Division Multiplexing (FDM)

- optical, electromagnetic frequencies divided into (narrow) frequency bands
- each call allocated its own band, can transmit at max rate of that narrow band

Time Division Multiplexing (TDM)

- time divided into slots
- each call allocated periodic slot(s), can transmit at maximum rate of (wider) frequency band (only) during its time slot(s)

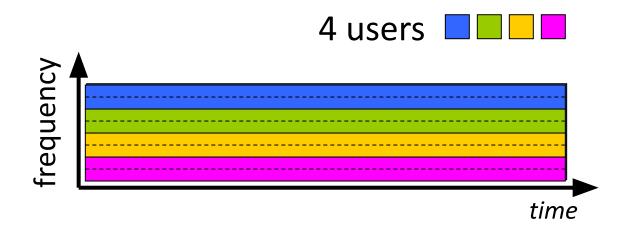


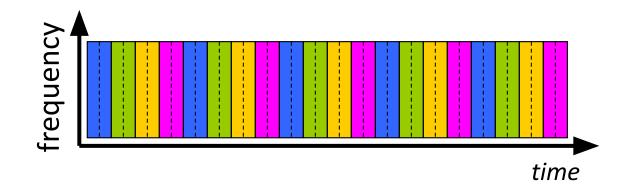

Packet switching versus circuit switching

example:

- 1 Gb/s link
- each user:
 - 100 Mb/s when "active"
 - active 10% of time

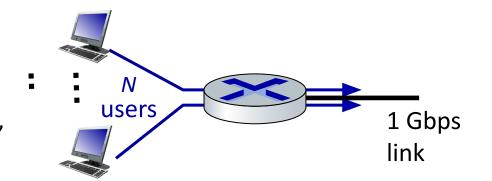

Q: how many users can use this network under circuit-switching and packet switching?

- circuit-switching: 10 users
- packet switching: with 35 users, probability > 10 active at same time is less than .0004 *

Q: how did we get value 0.0004?

A: HW problem (for those with course in probability only)

^{*} Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose ross/interactive


Packet switching versus circuit switching

Is packet switching a "slam dunk winner"?

- great for "bursty" data sometimes has data to send, but at other times not
 - resource sharing
 - simpler, no call setup
- excessive congestion possible: packet delay and loss due to buffer overflow
 - protocols needed for reliable data transfer, congestion control
- Q: How to provide circuit-like behavior with packet-switching?
 - "It's complicated." We'll study various techniques that try to make packet switching as "circuit-like" as possible.


Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet switching)?

- hosts connect to Internet via access Internet Service Providers (ISPs)
- access ISPs in turn must be interconnected
 - so that *any* two hosts (anywhere!) can send packets to each other
- resulting network of networks is very complex
 - evolution driven by economics, national policies

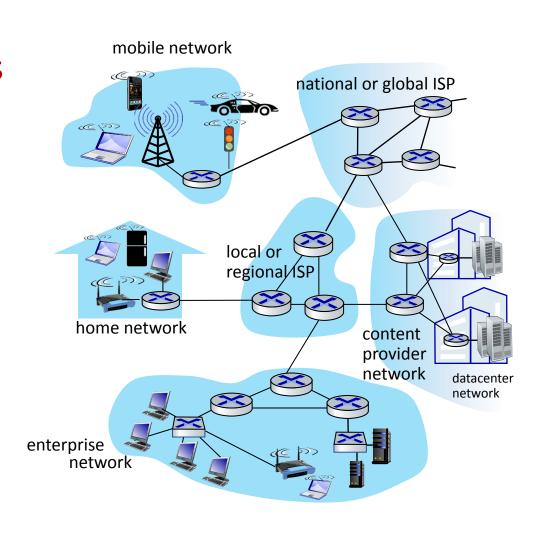


Let's take a stepwise approach to describe current Internet structure


Question: given millions of access ISPs, how to connect them together?

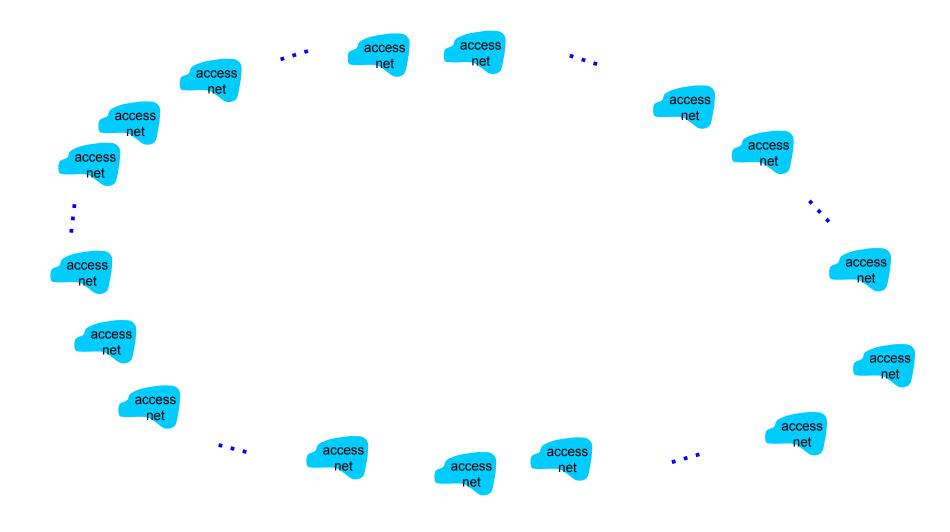


Question: given millions of access ISPs, how to connect them together?

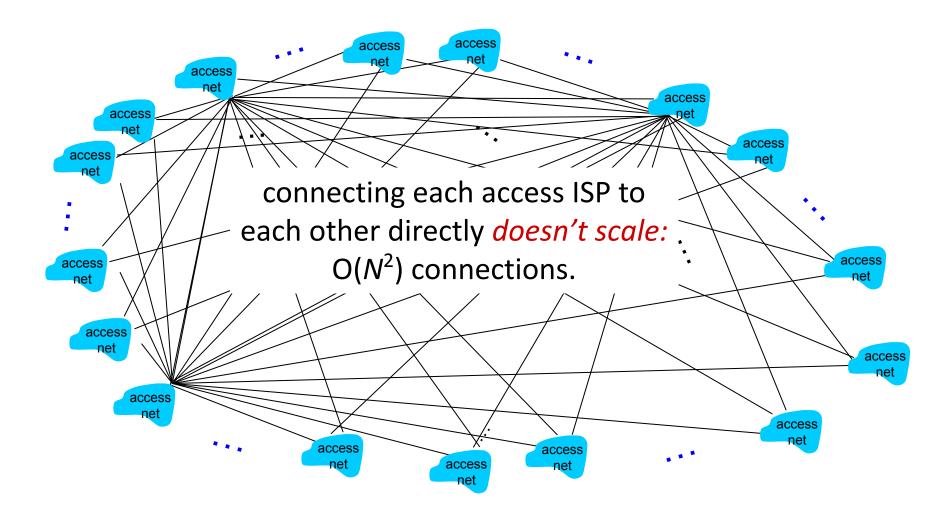


Option: connect each access ISP to one global transit ISP? Customer and provider ISPs have economic agreement.

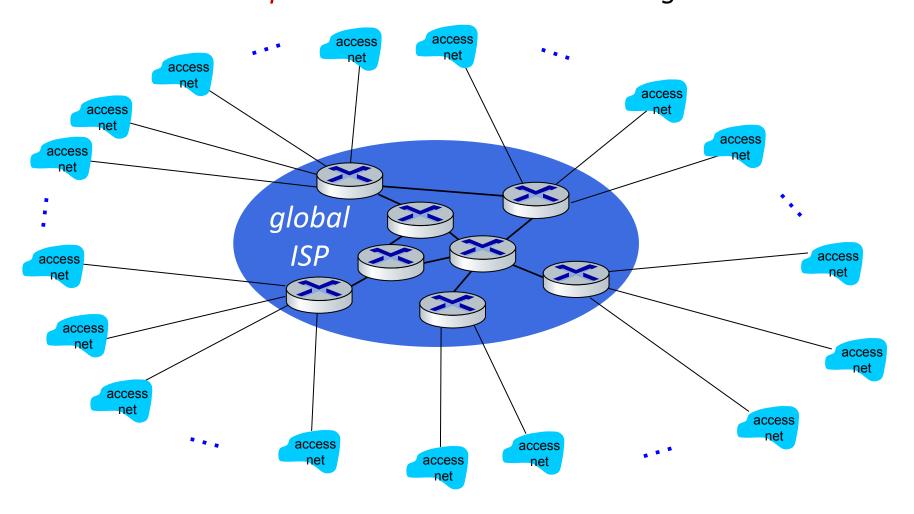


But if one global ISP is viable business, there will be competitors

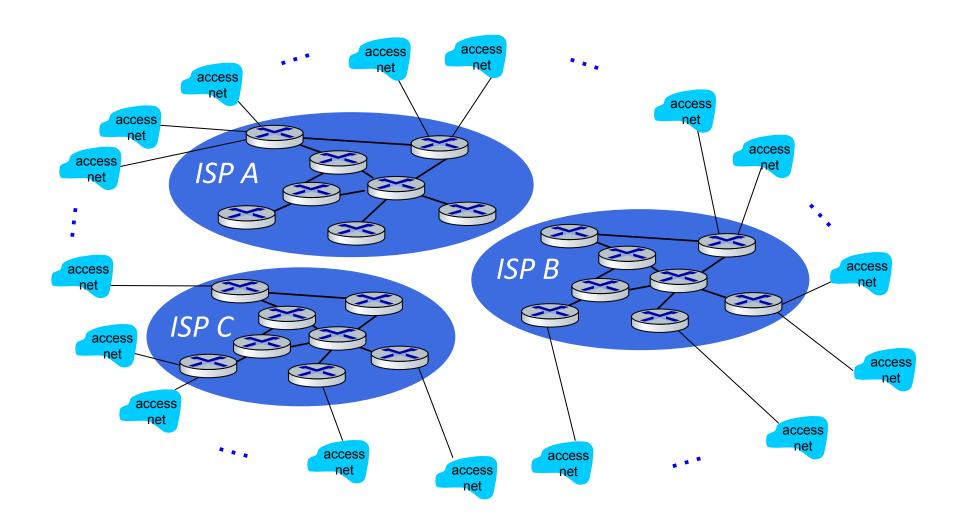


But if one global ISP is viable business, there will be competitors who will want to be connected

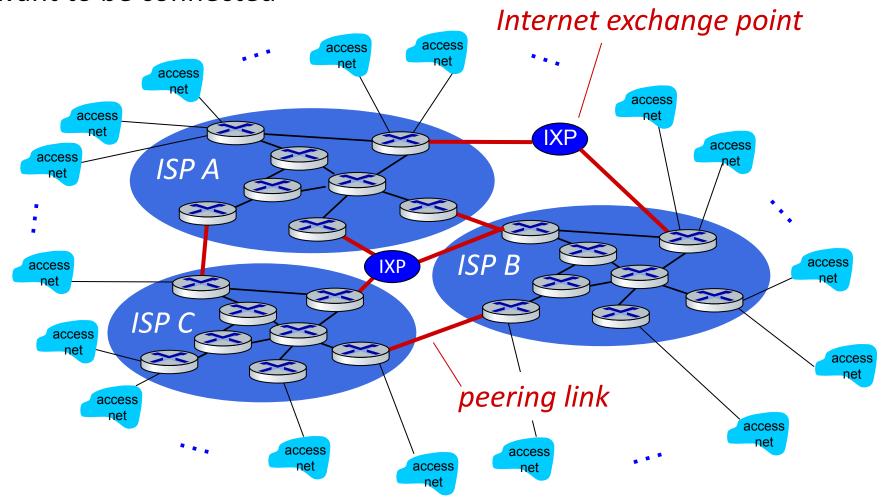


... and regional networks may arise to connect access nets to ISPs

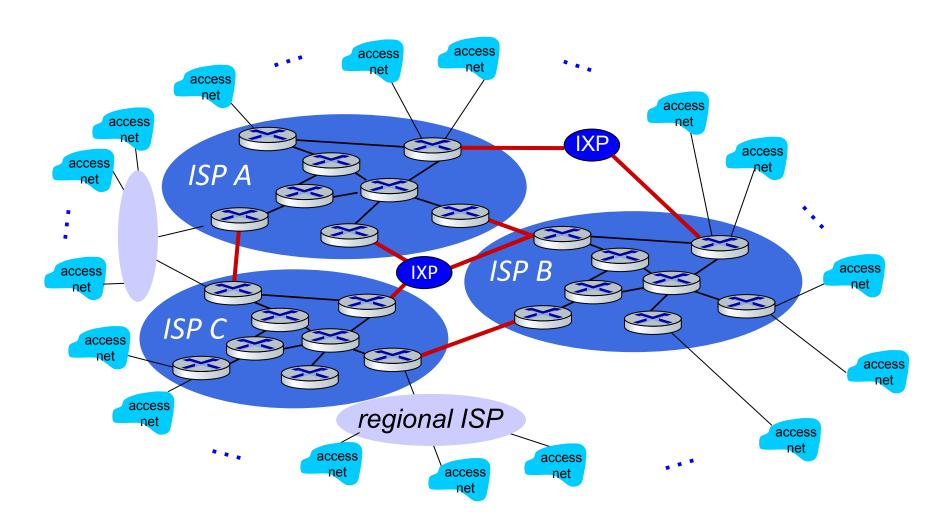

... and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

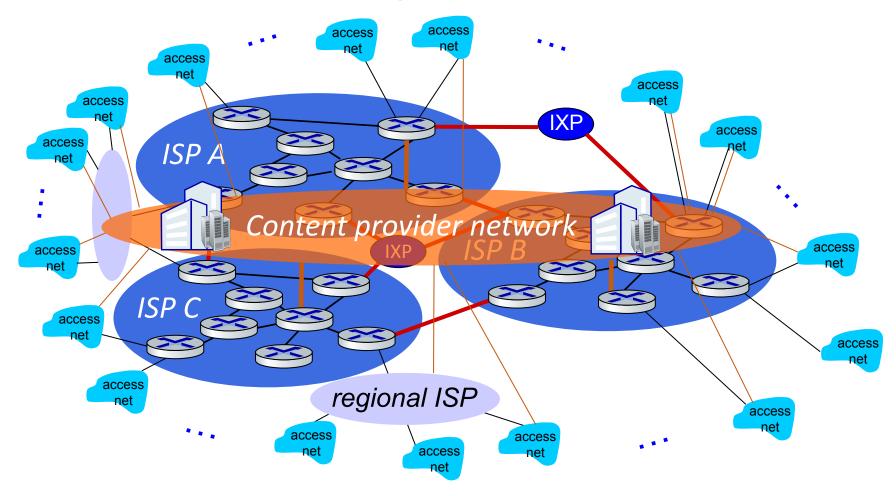

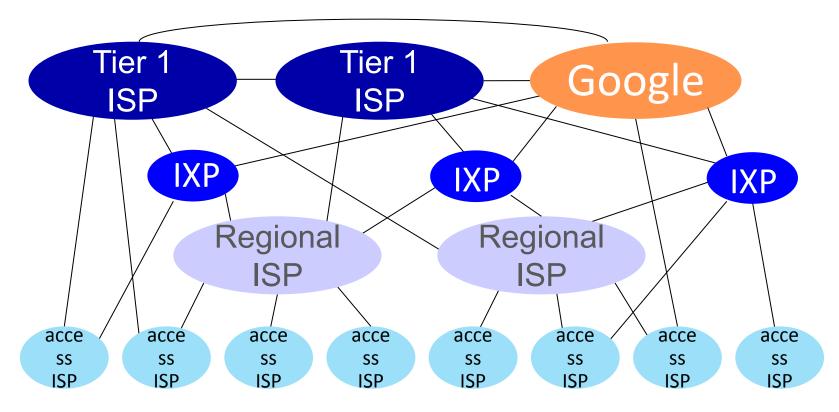

At "center": small # of well-connected large networks

- "tier-1" commercial ISPs (e.g., Airtel, Reliance, Tata comm., BSNL), national & international coverage
- content provider networks (e.g., Google, Facebook): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs