


# **OPTI-RAD Radiographic Suite**




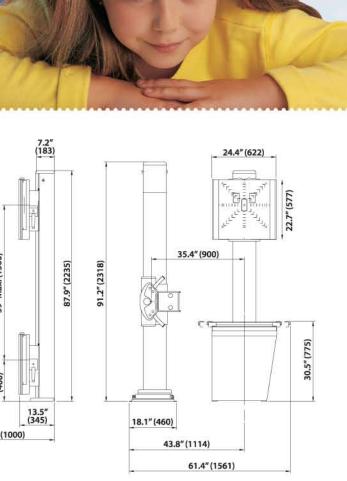

33.9" (862)

**DIMENSIONS** 

TSO EN CE TXR • 5481 Skyland Blvd., E • Cottondale, AL 35453 Phone: 205-556-3803 • Fax: 205-556-3824 • 800-897-9729 • www.txr.com • sales@txr.com COMPLIES WITH FDA AND PRODUCT SAFETY REQUIREMENTS. • SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

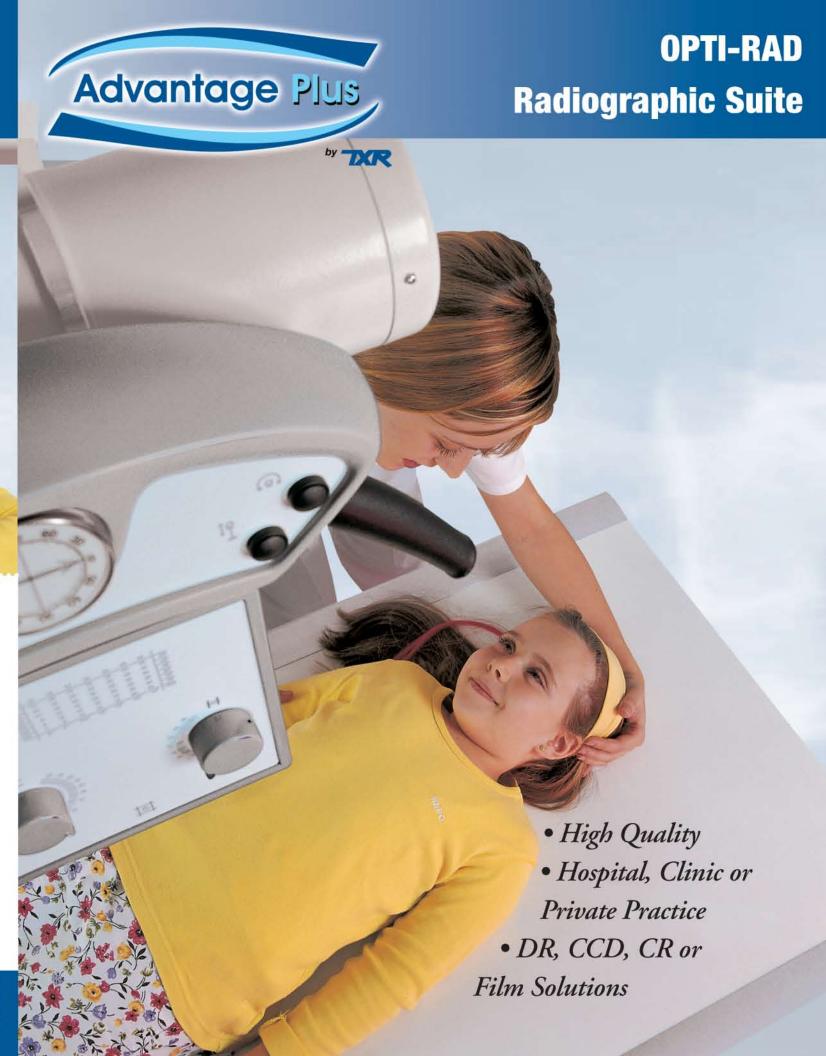



## **OPTI-RAD** Radiographic Suite

Advantage Plus

### **OPTI-RAD Radiographic Suite**

#### **OPTI-RAD**

The OPTI-RAD is an affordable general purpose radiographic system that can be configured with a choice of table and tube stand to accomplish a wide range of table, wall stand, and wheel chair examinations.


The OPTI-RAD was designed to deliver high performance imaging for a demanding environment. The solid design ensures outstanding reliability for the busy hospital and private practice settings.







The counterbalanced tube stand provides smooth vertical movement. For exposures using the wall stand, the tube column can be moved past the table on either the right or left-hand side. On either side, the vertical range of movement of the tube assembly can be lowered to a source-to-floor distance of 15.75".

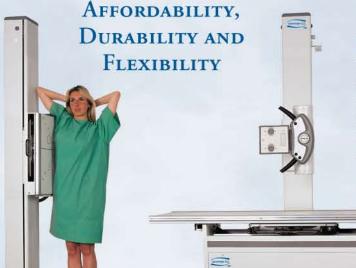

### LATERAL EXAMS

The tube stand of the OPTI-RAD can be easily moved and rotated so that the positioning for lateral exposures is very fast and accurate.





- 86.5" x 31.5" (220 cm x 80 cm) Table top
- 43.3" (110 cm) Longitudinal and 9.5" (24 cm) lateral table top movement
- 20.25" (52 cm) Vertical travel



### STANDARD FEATURES FLOOR MOUNT TUBE STAND:

- 11.8" Transverse travel
- 180° Column rotation

by TXR

- Vertical travel 15.7" to 74.75"
- Electromagnetic locks
- 86.6" Floor track provides 78.7" longitudinal tube travel

### FIXED HEIGHT 4 WAY FLOAT TOP TABLE:

- 78.75" x 28.5" Table top
- 440 Lb. patient load
- 23.5" Longitudinal and 6.7" lateral table top movement
- 20" Bucky travel
- 63.4" Radiographic coverage
- Super speed bucky with 10:1 ratio, 103 line grid
- · Electromagnetic locks

#### WALL STAND:

- Floor-to-Wall mounted
- · 15.75" to 75" Vertical travel
- · Electromagnetic locks
- · Super speed bucky with 10:1 ratio, 103 line grid

#### **OPTIONS:**

- 118" Floor track for floor mount tubestand
- Digital readout of SID and angulation on floor mount tube stand
- 750 lb. patient load elevating table
- Various grids
- · Lateral cassette holder
- Hand grips
- · Ion chambers
- DR panels

