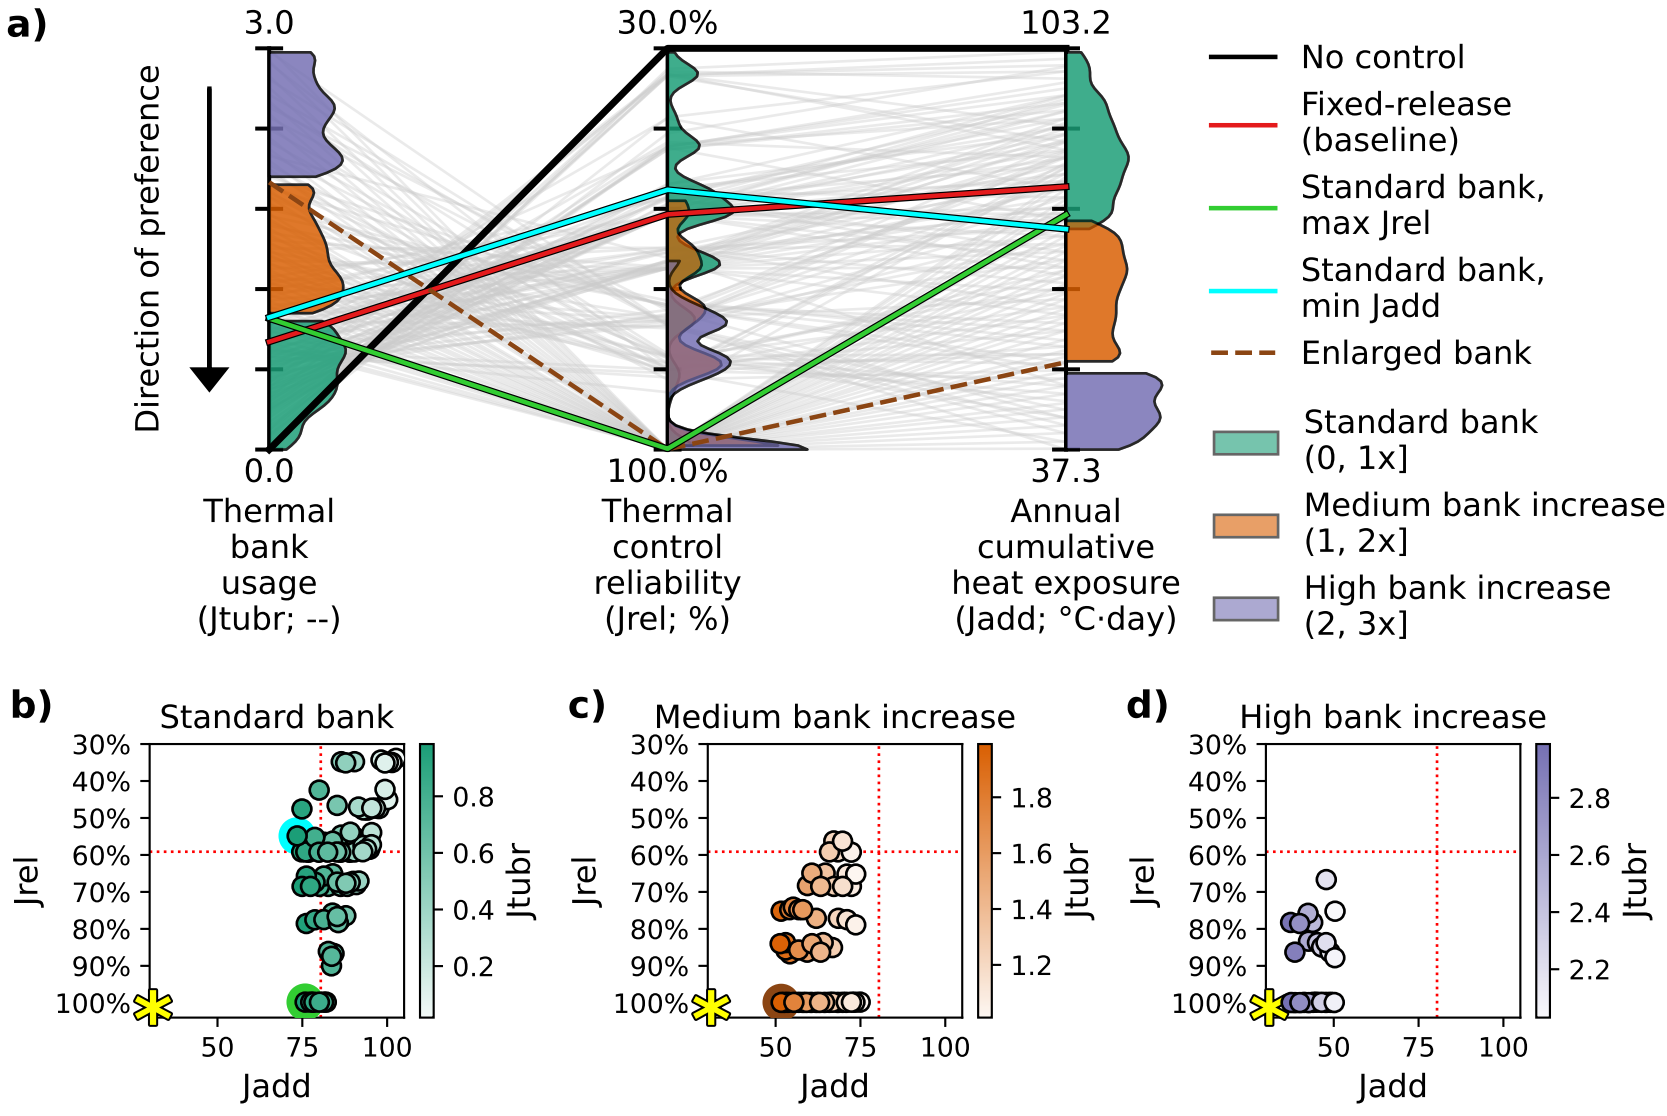
a)
3.0
30.0%
103.2
Direction of preference
0.0
100.0%
37.3
Thermal bank usage (Jtubr; --)
Thermal control reliability (Jrel; %)
Annual cumulative heat exposure (Jadd; °C·day)
No control
Fixed-release (baseline)
Standard bank, max Jrel
Standard bank, min Jadd
Enlarged bank
Standard bank (0, 1x]
Medium bank increase (1, 2x]
High bank increase (2, 3x]
b)
Standard bank
c)
Medium bank increase
d)
High bank increase
Jrel
Jadd
Jtubr
30%
40%
50%
60%
70%
80%
90%
100%
50
75
100
0.2
0.4
0.6
0.8
1.2
1.4
1.6
1.8
2.2
2.4
2.6
2.8