

# QARSHI BETON KLASTER

## Mahsulotlar katalogi

Texnik xususiyatlar va mahsulot ma'lumotlari

---



### **Qarshi shahri, Qashqadaryo viloyati**

Qarshi shahri, G'.G'ulom mahallasi,, Nasaf ko'chasi, 22-uy

+998 95 991 07 20 / +998 95 757 79 79

qarshibetonklaster.uz · mirjalolxonqilichov@gmail.com



## Fundament Φ 2-2

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament Φ 3-A

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament Φ 3-AM

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament Φ 3-2

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament Φ 4-AM

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament Φ 4-4

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament Φ-5AM

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament 5-4

Elektr uzatish liniyalari tayanchlari uchun temir-beton fundament.

- Standart: O'z DSt 3329:2018
- Turi: temir-beton fundament
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament FK4-05 (ΦK4-05)

Metall tayanch va konstruksiyalarni mustahkam o'rnatish uchun mo'ljallangan temir-beton fundament.

- Uzunlik: 2,0 m
- Kengligi: 2,0 m
- Balandligi: 1,7 m
- Beton klassi: B25
- Og'irligi: taxminan 2,9 t
- Beton hajmi: taxminan 1,16 m<sup>3</sup>
- Seriya: 3.407-115



## Fundament F5-A5 (Φ5-A5)

Metall tayanch va konstruksiyalarni mustahkam o'rnatish uchun mo'ljallangan temir-beton fundament.

- Uzunlik: 2,7 m
- Kengligi: 2,7 m
- Balandligi: 3,4 m
- Beton klassi: B30
- Og'irligi: taxminan 6,3 t
- Beton hajmi: taxminan 2,5 m<sup>3</sup>
- Seriya: 3.407-115



## Fundament F5-USU(250)

Metall tayanchlar uchun temir-beton fundament.

- Turi: F5-USU(250)
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Fundament FP5-A5 (ФП5-A5м)

Anker-burchak metall tayanchlar uchun mo'ljallangan yuqori mustahkamlikdagi temir-beton fundament.

- Uzunlik: 2,7 m
- Kengligi: 2,7 m
- Balandligi: 5,115 m
- Beton klassi: B30
- Og'irligi: 7,5 t
- Beton hajmi: 3,0 m<sup>3</sup>
- Seriya: 3.407-115



## Anker plitasi PAZ3-1 (ПА 3-1)

Elektr uzatish liniyalari metall va temir-beton tayanchlarini gruntda mustahkam va ishonchli mahkamlash uchun mo'ljallangan temir-beton anker plitasi.


- Uzunlik: 3,0 m
- Kengligi: 2,0 m
- Balandligi: 0,6 m
- Beton klassi: B22,5
- Og'irligi: taxminan 2,8 t
- Beton hajmi: 1,15 m<sup>3</sup>
- Seriya: 3.407-115, 5-sonli chiqarilish



## Anker plitasi PAZ-2

Elektr uzatish liniyalari tayanchlarini gruntda mahkamlash uchun temir-beton anker plitasi.

- Seriya: 3.407-115
- O'lchamlar, massa, beton hajmi: so'rov bo'yicha



## Rigel AP-5 (AP5)

Temir-beton tayanch va fundamentlarni mahkamlash, shuningdek, konstruksiyaning gorizontaal yuklamalarga chidamliligini oshirish uchun mo'ljallangan rigel.

- Uzunlik: 3,0 m
- Kengligi: 0,4 m
- Balandligi: 0,2 m
- Beton klassi: B22,5
- Og'irligi: taxminan 0,5 t
- Beton hajmi: 0,20 m<sup>3</sup>
- Seriya: 3.407-115, 5-sonli chiqarilish



## Plita PK-1A

Ko'p bo'shliqli temir-beton qavat plitasi.


- Turi: ПК — ko'p bo'shliqli plita
- O'lchamlar va yuk: so'rov bo'yicha



## Temir-beton plitalar

Ko'p bo'shliqli qavat plitalari va to'liq quyma plitalar — turli o'lcham va shakllarda.

- Uzunlik: 2.4 – 7.2 m
- Kengligi: 1.0 / 1.2 / 1.5 m
- Ko'p bo'shliqli (ПК) va monolit
- Yuk: 800 kg/m<sup>2</sup> gacha



## П2Г panjara panellari

To'siq uchun temir-beton panellar — korxona, ombor va uy hovlilarini o'rab olish uchun.

- Standart: 3000×2000 mm
- Qalinlik: 100–120 mm
- Beton: M250–M350
- Stoyka bilan komplekt



## Temir-beton stoykalar

Elektr uzatish tarmoqlari va to'siq uchun stoykalar. Uchi qiya yoki tekis holatda tayyorlanadi.


- To'siq stoykasi: 2.2–3.0 m
- Elektr stoykasi: CB 95 / 105 / 110
- Uchi qiya yoki tekis
- Kuchaytirilgan armatura karkasi



## Quduq halqalari va qopqoqlar

Kanalizatsiya, drenaj va suv quduqlari uchun halqa, tag plita va qopqoqlar.

- Ø 700 – 2000 mm
- Halqa, tag plita, qopqoq
- 20+ tipo'lcham
- Montaj quloqlari bilan

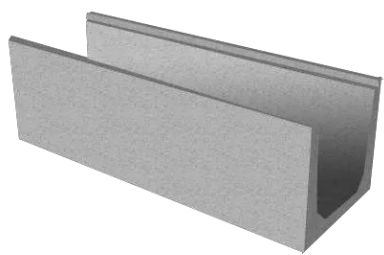

## LK kabel kanallari

Yer osti kabel tarmoqlari uchun lotok-kanallar. 10 ga yaqin tipo'lchamda.

- LK 60.45 – LK 300.120
- 10 ga yaqin tipo'lcham
- Qopqoq bilan yoki qopqoqsiz
- Beton: M300, SR variant bor



## Bordyurlar

Yo'l va trotuar bordyurlari — ko'cha, avtoturargoh va yo'lka chetlari uchun.


- Yo'l: БР 100.30.15
- Trotuar: БР 100.20.8
- Kulrang va rangli variant
- Vibropress texnologiyasi



## Trotuar plitkalari

Har xil o'lcham, shakl va rangdagi sifatli yo'lka plitkalari.

- Qalinlik: 40 / 60 / 80 mm
- "G'isht", "To'lqin", "Kvadrat"
- 5 xil rang
- Yuvilish va sovuqqa chidamli



## Lotoklar

Suv oqizish va issiqlik tarmoqlari lotoklari, panjarali yoki beton qopqoq bilan.

- Л-1 ... Л-11 tipo'lchamlar
- Suv oqizish va teploset lotoklari
- Panjarali yoki beton qopqoq
- Sulfatga chidamli variant bor

| Tur  | O'lchamlar          | Massa   | Hajm                |
|------|---------------------|---------|---------------------|
| ЛК-3 | 3000×490/340×340 mm | 770 kg  | 0,27 m <sup>3</sup> |
| ЛК-6 | 6000×490/340×340 mm | 1300 kg | 0,52 m <sup>3</sup> |




## Tovar beton

M50 dan M800 gacha barcha markalar, shu jumladan sulfatga chidamli (SR) beton.

- 15 ta marka: M50 – M800
- SR — sulfatga chidamli variant
- Mikser bilan yetkazib berish
- Laboratoriya nazorati

| Marka (sinf)   | Sulfatga chidamli variant (SFS) |
|----------------|---------------------------------|
| M-50 (B-3.5)   | M-50 (B-3.5) SFS                |
| M-75 (B-5)     | M-75 (B-5) SFS                  |
| M-100 (B-7.5)  | M-100 (B-7.5) SFS               |
| M-150 (B-12.5) | M-150 (B-12.5) SFS              |
| M-200 (B-15)   | M-200 (B-15) SFS                |
| M-250 (B-20)   | M-250 (B-20) SFS                |
| M-300 (B-22.5) | M-300 (B-22.5) SFS              |
| M-350 (B-25)   | M-350 (B-25) SFS                |
| M-400 (B-30)   | M-400 (B-30) SFS                |
| M-450 (B-35)   | M-450 (B-35) SFS                |
| M-500 (B-40)   | M-500 (B-40) SFS                |
| M-550 (B-40)   | M-550 (B-40) SFS                |
| M-600 (B-45)   | M-600 (B-45) SFS                |
| M-700 (B-50)   | M-700 (B-50) SFS                |
| M-750 (B-55)   | M-750 (B-55) SFS                |
| M-800 (B-60)   | M-800 (B-60) SFS                |



## Qum va shag'al

O'z karyerlarimizdan yuvilgan qum va fraksiyalarga ajratilgan shag'al.

- Shag'al: 0-5, 5-10, 10-20, 20-40 mm
- Yuvilgan qurilish qumi
- Kuniga 3 000 m<sup>3</sup> gacha
- Obyektga yetkazib berish